

ESET RESEARCH

# Unmasking MirrorFace: Operation LiberalFace targeting Japanese political entities

ESET researchers discovered a spearphishing campaign targeting Japanese political entities a few weeks before the House of Councillors elections, and in the process uncovered a previously undescribed MirrorFace credential stealer



Dominik Breitenbacher

14 Dec 2022 , 13 min. read



ESET researchers discovered a spearphishing campaign, launched in the weeks leading up to the [Japanese House of Councillors election](#) in July 2022, by the APT group that ESET Research tracks as MirrorFace. The campaign, which we have named Operation LiberalFace, targeted Japanese political entities; our investigation revealed that the members of a specific political party were of particular focus in this campaign. ESET Research unmasked details about this campaign and the APT group behind it at the [AVAR 2022 conference](#) at the beginning of this month.

### **Key points of the blogpost:**

- *At the end of June 2022, MirrorFace launched a campaign, which we have named Operation LiberalFace, that targeted Japanese political entities.*
- *Spearphishing email messages containing the group's flagship backdoor LODEINFO were sent to the targets.*
- *LODEINFO was used to deliver additional malware, exfiltrate the victim's credentials, and steal the victim's documents and emails.*
- *A previously undescribed credential stealer we have named MirrorStealer was used in Operation LiberalFace.*
- *ESET Research performed an analysis of the post-compromise activities, which suggests that the observed actions were carried out in a manual or semi-manual manner.*
- *Details about this campaign were shared at the [AVAR 2022 conference](#).*

MirrorFace is a Chinese-speaking threat actor targeting companies and organizations based in Japan. While there is some speculation that this threat actor might be related to APT10 ([Macnica](#), [Kaspersky](#)), ESET is unable to attribute it to any known APT group. Therefore, we are tracking it as a separate entity that we've named MirrorFace. In particular, MirrorFace

and LODEINFO, its proprietary malware used exclusively against targets in Japan, have been **reported** as targeting media, defense-related companies, think tanks, diplomatic organizations, and academic institutions. The goal of MirrorFace is espionage and exfiltration of files of interest.

We attribute Operation LiberalFace to MirrorFace based on these indicators:

- To the best of our knowledge, LODEINFO malware is exclusively used by MirrorFace.
- The targets of Operation LiberalFace align with traditional MirrorFace targeting.
- A second-stage LODEINFO malware sample contacted a C&C server that we track internally as part of MirrorFace infrastructure.

One of the spearphishing emails sent in Operation LiberalFace posed as an official communication from the PR department of a specific Japanese political party, containing a request related to the House of Councillors elections, and was purportedly sent on behalf of a prominent politician. All spearphishing emails contained a malicious attachment that upon execution deployed LODEINFO on the compromised machine.

Additionally, we discovered that MirrorFace has used previously undocumented malware, which we have named MirrorStealer, to steal its target's credentials. We believe this is the first time this malware has been publicly described.

In this blogpost, we cover the observed post-compromise activities, including the C&C commands sent to LODEINFO to carry out the actions. Based on certain activities performed on the affected machine, we think that the MirrorFace operator issued commands to LODEINFO in a manual or semi-manual manner.

## Initial access

MirrorFace started the attack on June 29<sup>th</sup>, 2022, distributing spearphishing emails with a malicious attachment to the targets. The subject of the email was <redacted>SNS用動画 拡散のお願い (translation from Google Translate: [Important] <redacted> Request for

spreading videos for SNS). Figure 1 and Figure 2 show its content.

党広報では、参院選における候補者、比例代表に対するさらなる投票促進のため、[redacted]によるSNS用動画を制作し、党公式アカウントやTVCM、WEB広告を通じ、広くPRを行っているところです。つきましては、さらなる党PRの強化に向け、各候補者にももちろんのこと、都道府県連所属の各級議員の皆様におかれましても、ご自身のSNSに[redacted] SNS動画を必ず掲載し、有権者に対し広く拡散してください。参院選必勝に向け、各位のご協力をお願い申し上げます。

- 【[redacted] SNS用動画】（候補者専用サイトに掲載）
- ① 【SNS用映像】 皆さんの暮らしを守り抜く責任 （30秒）
  - ② 【SNS用映像】 決断と実行。暮らしを守る。 A ver. （60秒）
  - ③ 【SNS用映像】 決断と実行。暮らしを守る。 B ver. （30秒）
  - ④ 【[redacted] SNS用動画】 期日前投票のお願い （34秒）
  - ⑤ 【SNS用映像】 決断と実行。暮らしを守る。 C ver. （60秒）

※本日28日から7月2日（土）にかけて、1日あたり1本ずつ、ご自身のSNSに掲載してください。

※党・参院選特設サイト「SNSで選挙に参加しよう」からでも、ツイートできます。

※今後も、[redacted] SNS用動画の制作を続けていきますので、引き続きのご協力をお願い申し上げます。

Figure 1. Original text of the email

In order to further promote votes for candidates and proportional representation in the House of Councilors election, the party's public relations department has produced a video for SNS [redacted], and is widely promoting it through the party's official account, TV commercials, and web advertisements.

Therefore, in order to further strengthen the party's PR, I would like to ask not only each candidate, but also all members of the Diet belonging to prefectural federations at various levels to post the SNS videos of [redacted] on their own SNS and spread them widely to voters.

I would like to ask for everyone's cooperation to secure victory in the House of Councilors election.

- 【[redacted] SNS video】（Posted on candidate website）
- ① 【Video for SNS】 Responsibility to protect everyone's lives (30 seconds)
  - ② 【Video for SNS】 Decision and execution. Protect your life A ver. (60 seconds)
  - ③ 【Video for SNS】 Decision and execution. Protect your life B ver. (30 seconds)
  - ④ 【[redacted] video for SNS】 Request for early voting (34 seconds)
  - ⑤ 【Video for SNS】 Decision and execution. Protect your life C ver. (60 seconds)

※ From today, the 28<sup>th</sup>, to July 2<sup>nd</sup> (Saturday), please post one video per day on your SNS.

※ You can also tweet from the party/upper house election special site "Let's participate in the election on SNS". [redacted]

※ In the future, we will continue to produce videos for SNS [redacted], so we ask for your continued cooperation.


Figure 2. Translated version

Purporting to be a Japanese political party's PR department, MirrorFace asked the recipients to distribute the attached videos on their own social media profiles (SNS – Social Network Service) to further strengthen the party's PR and to secure victory in the House of Councillors. Furthermore, the email provides clear instructions on the videos' publication strategy.

strategy.

Since the House of Councillors election was held on July 10<sup>th</sup>, 2022, this email clearly indicates that MirrorFace sought the opportunity to attack political entities. Also, specific content in the email indicates that members of a particular political party were targeted.

MirrorFace also used another spearphishing email in the campaign, where the attachment was titled 【参考】220628<redacted>発・<redacted>選挙管理委員会宛文書（添書分）.exe (translation from Google Translate: [Reference] 220628 Documents from the Ministry of <redacted> to <redacted> election administration committee (appendix) .exe). The attached decoy document (shown in Figure 3) references the House of Councillors election as well.

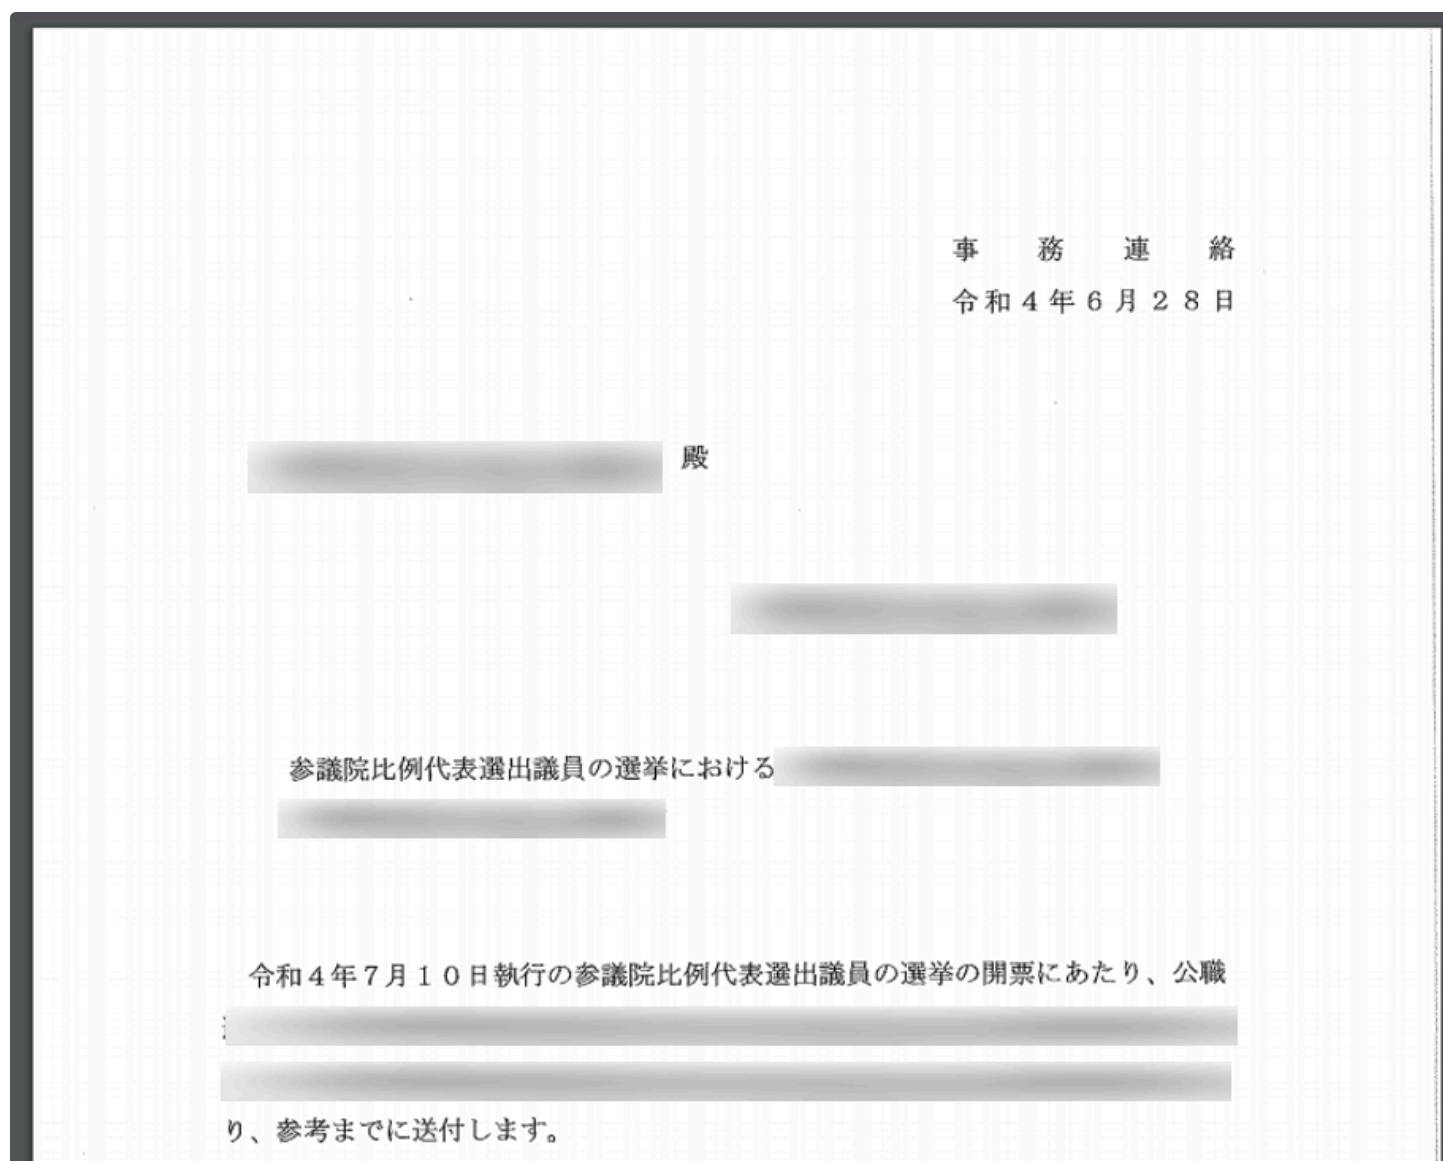

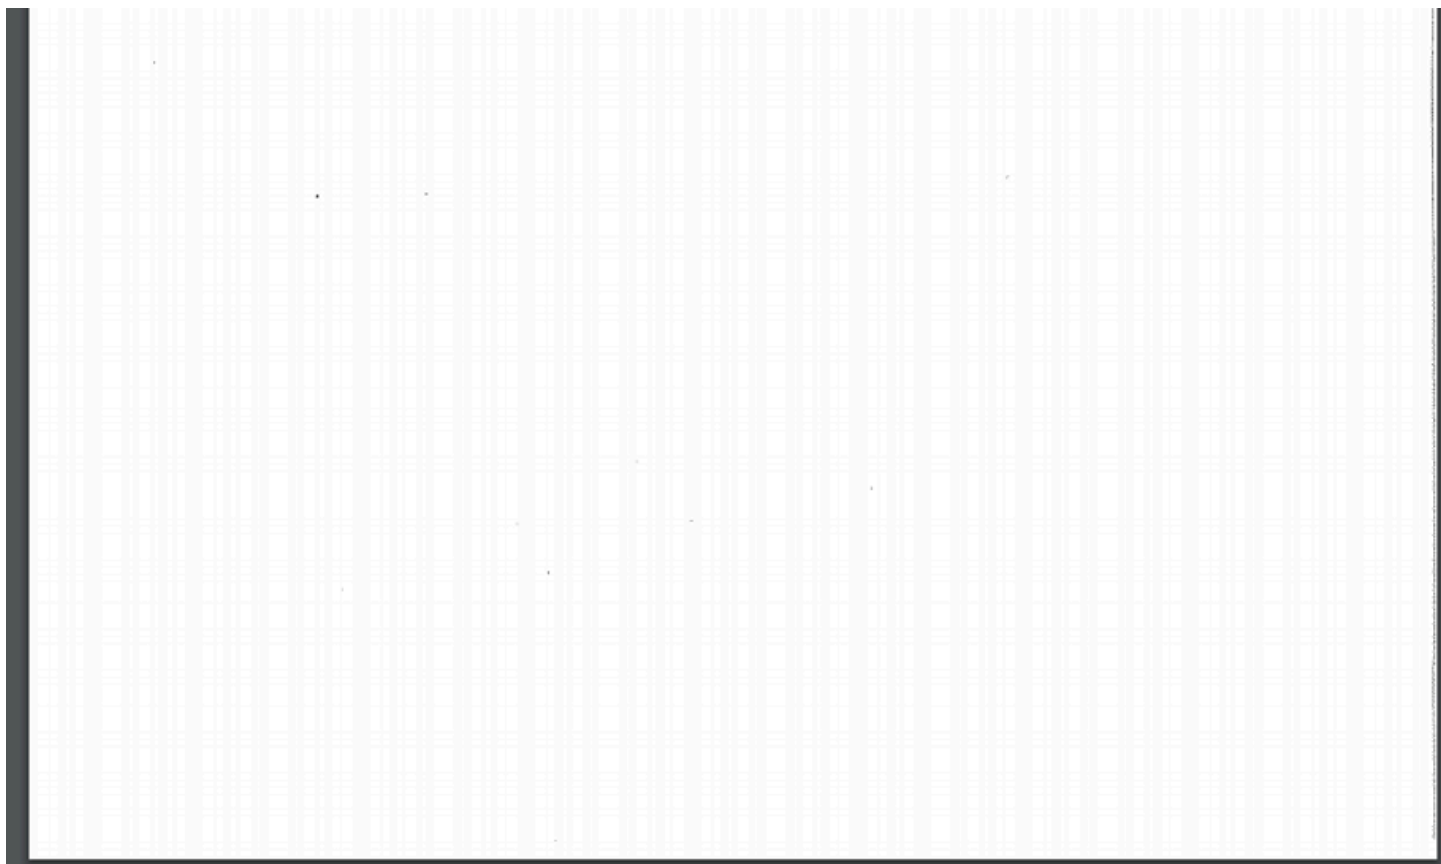


Figure 3. Decoy document shown to the target

In both cases, the emails contained malicious attachments in the form of self-extracting WinRAR archives with deceptive names <redacted>SNS用動画 拡散のお願い.exe (translation from Google Translate: <redacted> Request for spreading videos for SNS.exe) and 【参考】220628<redacted>発・<redacted>選挙管理委員会宛文書（添書分）.exe (translation from Google Translate: [Reference] 220628 Documents from the Ministry of <redacted> to <redacted> election administration committee (appendix).exe) respectively.

These EXEs extract their archived content into the %TEMP% folder. In particular, four files are extracted:

- K7SysMon.exe, a benign application developed by K7 Computing Pvt Ltd vulnerable to DLL search order hijacking

- `K7SysMn1.dll`, a malicious loader
- `K7SysMon.Exe.db`, encrypted LODEINFO malware
- A decoy document

Then, the decoy document is opened to deceive the target and to appear benign. As the last step, `K7SysMon.exe` is executed which loads the malicious loader `K7SysMn1.dll` dropped alongside it. Finally, the loader reads the content of `K7SysMon.Exe.db`, decrypts it, and then executes it. Note this approach was also observed by Kaspersky and described in their [report](#).

## Toolset

In this section, we describe the malware MirrorFace utilized in Operation LiberalFace.

## LODEINFO

LODEINFO is a MirrorFace backdoor that is under continual development. JPCERT [reported about the first version](#) of LODEINFO (v0.1.2), which appeared around December 2019; its functionality allows capturing screenshots, keylogging, killing processes, exfiltrating files, and executing additional files and commands. Since then, we have observed several changes introduced to each of its versions. For instance, version 0.3.8 (which we first detected in June 2020) added the command `ransom` (which encrypts defined files and folders), and version 0.5.6 (which we detected in July 2021) added the command `config`, which allows operators to modify its configuration stored in the registry. Besides the JPCERT reporting mentioned above, a detailed analysis of the LODEINFO backdoor was also published earlier this year by [Kaspersky](#).

In Operation LiberalFace, we observed MirrorFace operators utilizing both the regular LODEINFO and what we call the second-stage LODEINFO malware. The second-stage LODEINFO can be distinguished from the regular LODEINFO by looking at the overall



functionality. In particular, the second-stage LODEINFO accepts and runs PE binaries and shellcode outside of the implemented commands. Furthermore, the second-stage LODEINFO can process the C&C command `config`, but the functionality for the command `ransom` is missing.

Finally, the data received from the C&C server differs between the regular LODEINFO and the second-stage one. For the second-stage LODEINFO, the C&C server prepends random web page content to the actual data. See Figure 4, Figure 5, and Figure 6 depicting the received data difference. Notice the prepended code snippet differs for every received data stream from the second-stage C&C.

```
0Q1sd9iCe1n3dxoiP_n-WIGAAAA_PAu95z0fVsV-_E0xrBVhFQsq9F0e9kcyK3GTn-5grksKL0b  
97JcbNngJNHqJn2ExkqKioqJvjwmr_5aJj1-dnV308154APjViqCqTj65N0_1j4_mDwhHyLJR3P  
K0pa0q0zjBNig.
```

*Figure 4. Data received from the first-stage LODEINFO C&C*

```
<?php  
namespace ParagonIE\Sodium\Core;  
  
class X25519 extends \ParagonIE_Sodium_Core_X25519  
{  
  
}  
PrON1iVBWph72QygJCjdXcgAAACvorpI2KiLaV71DZEw0sCbuQEn8jkFV6de9HIFd_SA3fYpegWvF881G  
uDhEVM6K0Rqh0Tk5OQUX2YgKPNwtpoGirA8Yatn-Phu620j14nkNIhNS2t5rgVeJr9BYPO4VEL0PXupM6  
fhiNTQB7dqLjqIv-N-d5rODVfRTUKkXPnVQg3vv7qQi1u0p1RqpfWiUQznMFzZQvA.
```

*Figure 5. Data received from the second-stage C&C*

```
:root{--wp-admin-theme-color:#007cba;--wp-admin-theme-color--rgb:0,124,186;
--wp-admin-theme-color-darker-10:#006ba1;--wp-admin-theme-color-darker-10-
rgb:0,107,161;--wp-admin-theme-color-darker-20:#005a87;--wp-admin-theme-col
or-darker-20--rgb:0,90,135;--wp-admin-border-width-focus:2px}@media (-webki
t-min-device-pixel-ratio:2),(min-resolution:192dpi){:root{--wp-admin-border
-width-focus:1.5px}}.components-panel__header.interface-complementary-area-
header__small{background:#fff;padding-right:4px}.components-panel__header.i
nterface-complementary-area-header__small .interface-complementary-area-hea
der__small-title{overflow:hidden;text-overflow:ellipsis;white-space:nowrap;
width:100%}@media (min-width:782px){.components-panel__header.interface-com
plementary-area-header__small{display:none}}.interface-complementary-area-h
eader{background:#fff;padding-right:4px}.interface-complementary-area-heade
r .components-button.has-icon{display:none;margin-left:auto}.interface-comp
plementary-PrON1iVBWph72QygJCjdXZwAAACv9pMBs0UxAtFbSFe7yDAviJ_DMa1hOfPXJtvSO
3a1tv8KgHEe15NZ7Poo7EmCwuG21JSU1JQNtDVRCAHIqDVdX_1tkFqY1tIU6IqdUXqFoAgXjiC
YSv7XaUOq5uOE9uMZN6JU2a_hht41yzNaHFynfrrWztZ
```

Figure 6. Another data stream received from the second-stage C&C

## MirrorStealer


MirrorStealer, internally named 31558\_n.dll by MirrorFace, is a credential stealer. To the best of our knowledge, this malware has not been publicly described. In general, MirrorStealer steals credentials from various applications such as browsers and email clients. Interestingly, one of the targeted applications is [Becky!](#), an email client that is currently only available in Japan. All the stolen credentials are stored in %TEMP%\31558.txt and since MirrorStealer doesn't have the capability to exfiltrate the stolen data, it depends on other malware to do it.

## Post-compromise activities

During our research, we were able to observe some of the commands that were issued to compromised computers.

# Initial environment observation

Once LODEINFO was launched on the compromised machines and they had successfully connected to the C&C server, an operator started issuing commands (see Figure 7).

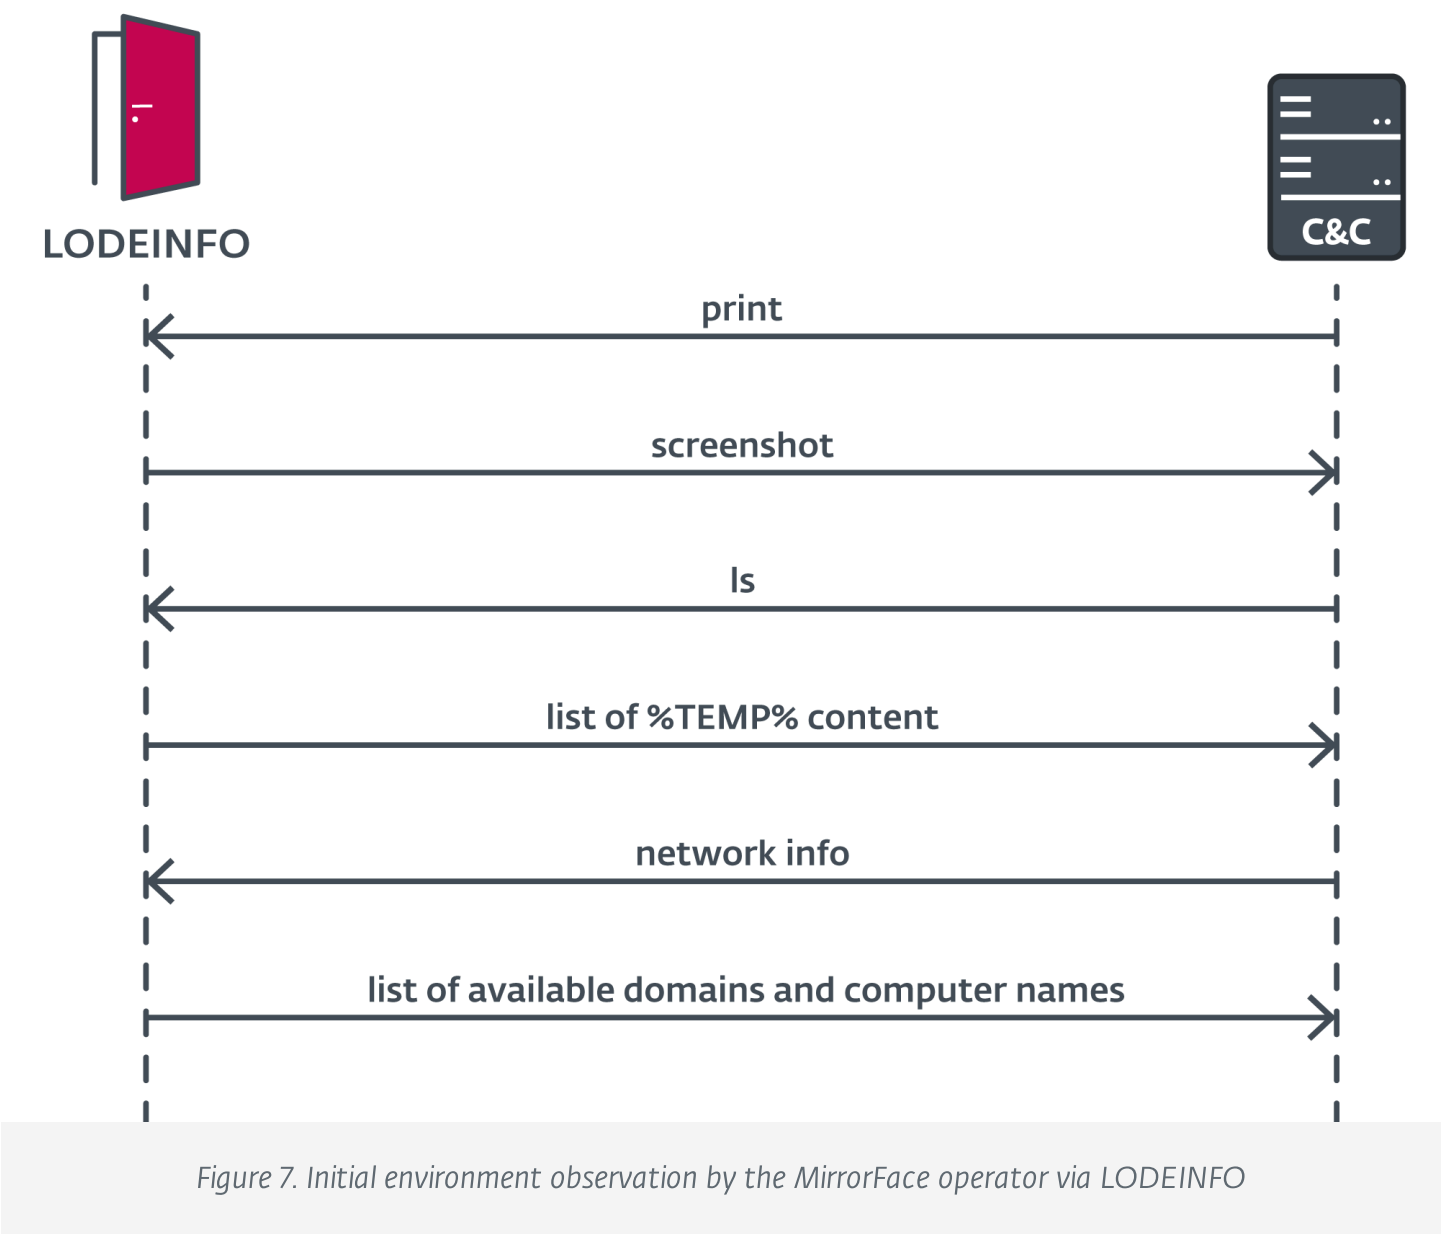

First, the operator issued one of the LODEINFO commands, `print`, to capture the screen of the compromised machine. This was followed by another command, `ls`, to see the content

the compromised machine. This was followed by another command, `ls`, to see the content of the current folder in which LODEINFO resided (i.e., `%TEMP%`). Right after that, the operator utilized LODEINFO to obtain network information by running `net view` and `net view /domain`. The first command returns the list of computers connected to the network, while the second returns the list of available domains.

## Credential and browser cookie stealing

Having collected this basic information, the operator moved to the next phase (see Figure 8).

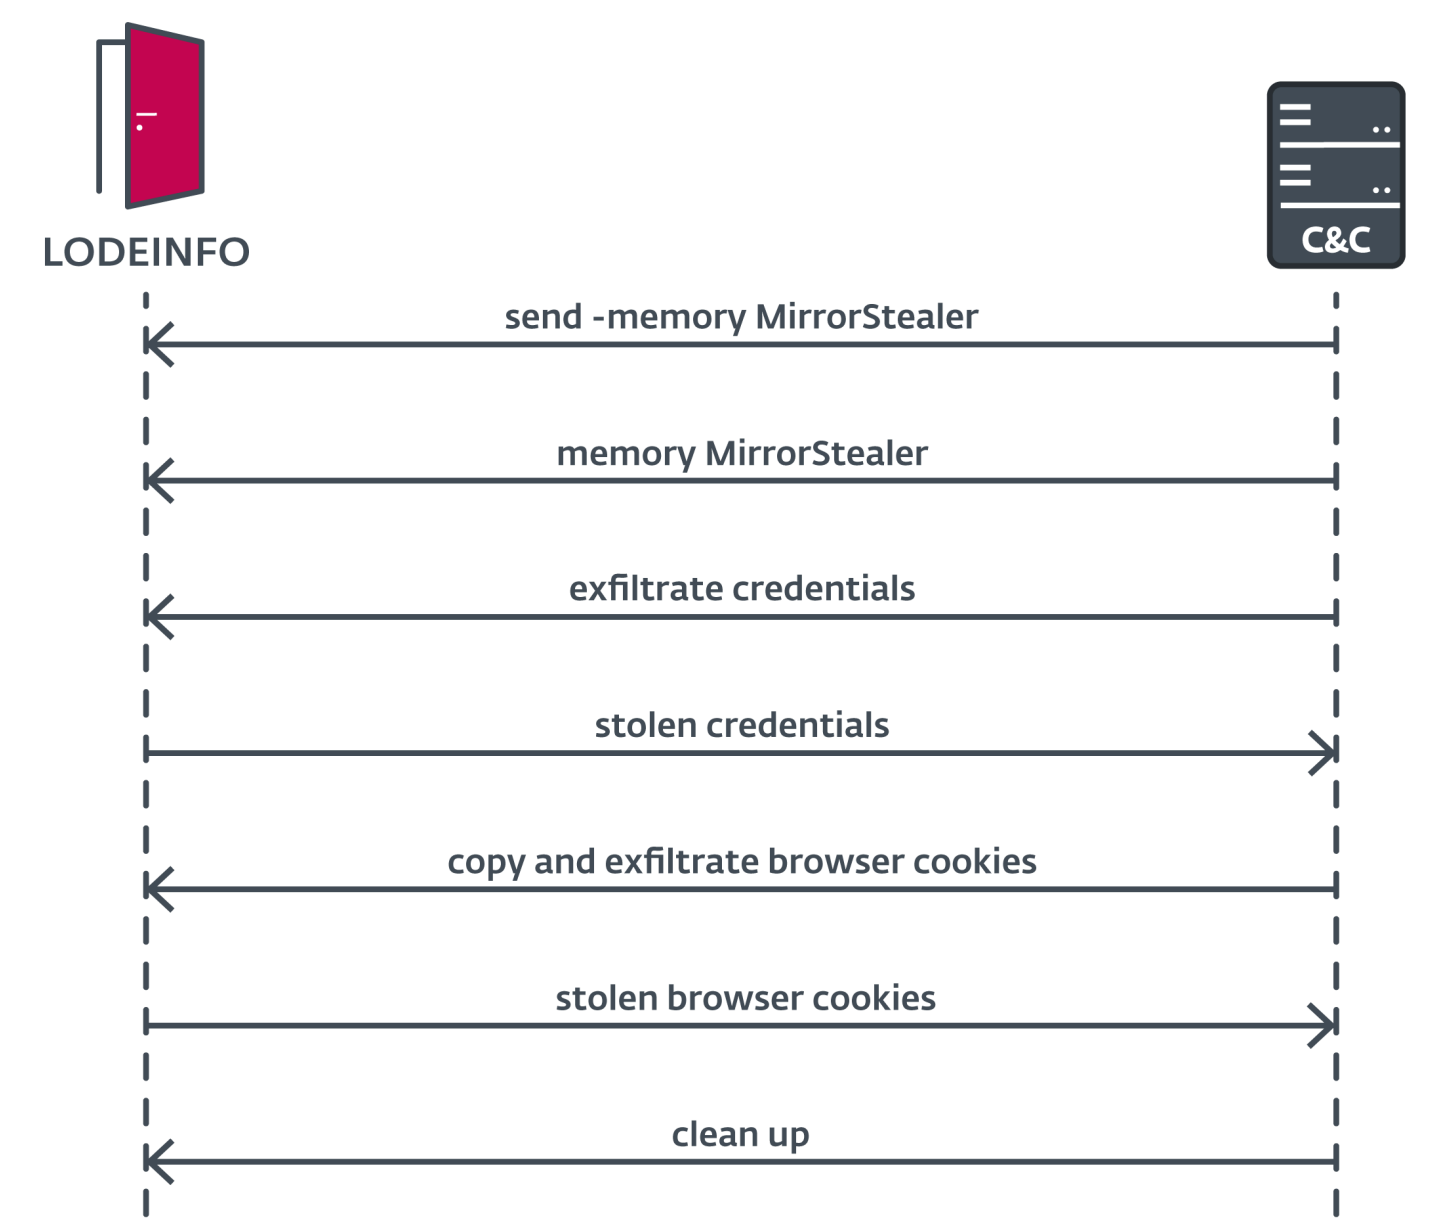


Figure 8. Flow of instructions sent to LODEINFO to deploy credential stealer, collect credentials and browser cookies, and exfiltrate them to the C&C server

The operator issued the LODEINFO command send with the subcommand `-memory` to deliver `MirrorStealer` malware to the compromised machine. The subcommand `-memory` was used to indicate to LODEINFO to keep `MirrorStealer` in its memory, meaning the `MirrorStealer` binary was never dropped on disk. Subsequently, the command `memory` was issued. This command instructed LODEINFO to take `MirrorStealer`, inject it into the spawned `cmd.exe` process, and run it.

Once `MirrorStealer` had collected the credentials and stored them in `%temp%\31558.txt`, the operator used LODEINFO to exfiltrate the credentials.

The operator was interested in the victim's browser cookies as well. However, `MirrorStealer` doesn't possess the capability to collect those. Therefore, the operator exfiltrated the cookies manually via LODEINFO. First, the operator used the LODEINFO command `dir` to list the contents of the folders `%LocalAppData%\Google\Chrome\User Data\` and `%LocalAppData%\Microsoft\Edge\User Data\`. Then, the operator copied all the identified cookie files into the `%TEMP%` folder. Next, the operator exfiltrated all the collected cookie files using the LODEINFO command `recv`. Finally, the operator deleted the copied cookie files from the `%TEMP%` folder in an attempt to remove the traces.

## Document and email stealing

In the next step, the operator exfiltrated documents of various kinds as well as stored emails (see Figure 9).



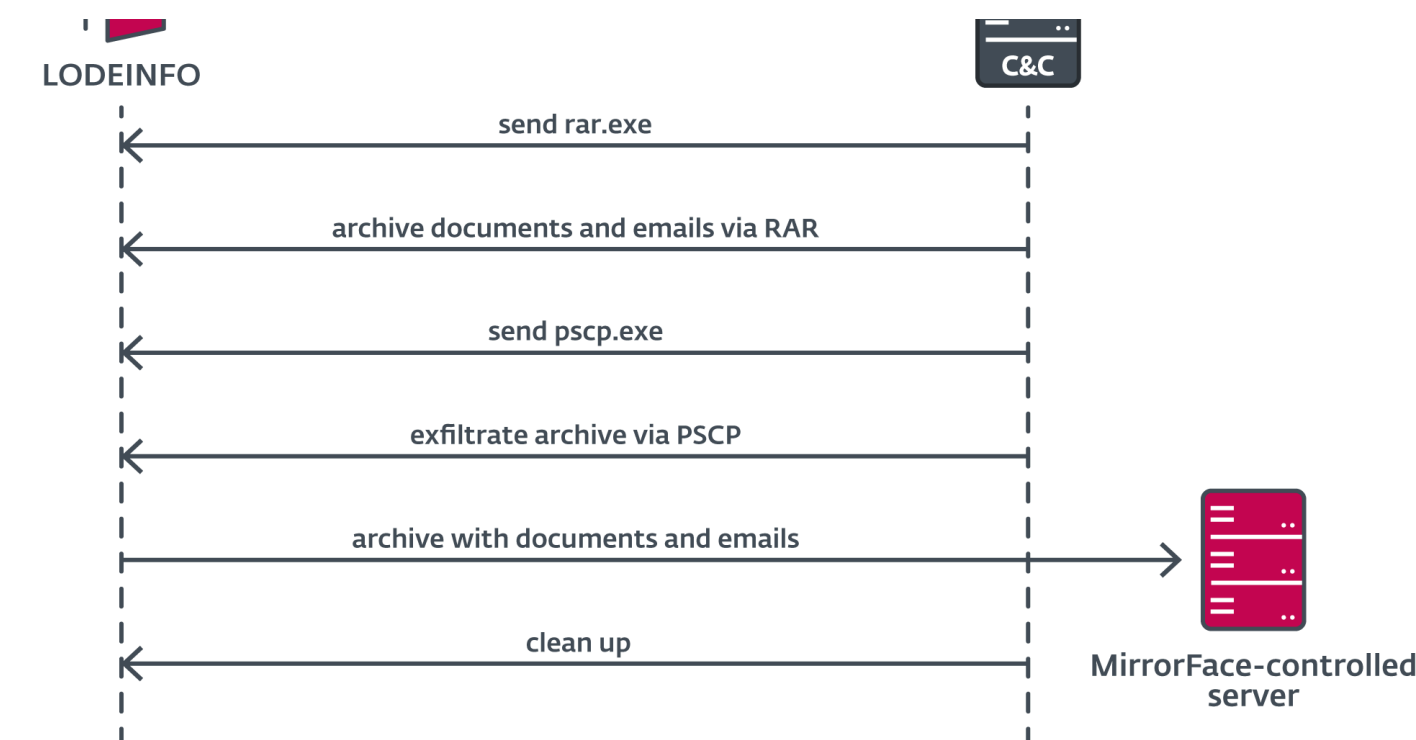


Figure 9. Flow of the instructions sent to LODEINFO to exfiltrate files of interest


For that, the operator first utilized LODEINFO to deliver the WinRAR archiver (`rar.exe`). Using `rar.exe`, the operator collected and archived files of interest that were modified after 2022-01-01 from the folders `%USERPROFILE%\` and `C:\$Recycle.Bin\`. The operator was interested in all such files with the extensions `.doc*`, `.ppt*`, `.xls*`, `.jtd`, `.eml`, `.*xps`, and `.pdf`.

Notice that besides the common document types, MirrorFace was also interested in files with the `.jtd` extension. This represents documents of the Japanese word processor [Ichitaro](#) developed by JustSystems.

Once the archive was created, the operator delivered the Secure Copy Protocol (SCP) client from the [PuTTY](#) suite (`pscp.exe`) and then used it to exfiltrate the just-created RAR archive to the server at `45.32.13[.]180`. This IP address had not been observed in previous MirrorFace activity and had not been used as a C&C server in any LODEINFO malware that we have observed. Right after the archive was exfiltrated, the operator deleted `rar.exe`, `pscp.exe`, and the RAR archive to clean up the traces of the activity.

# Deployment of second-stage LODEINFO

The last step we observed was delivering the second-stage LODEINFO (see Figure 10).

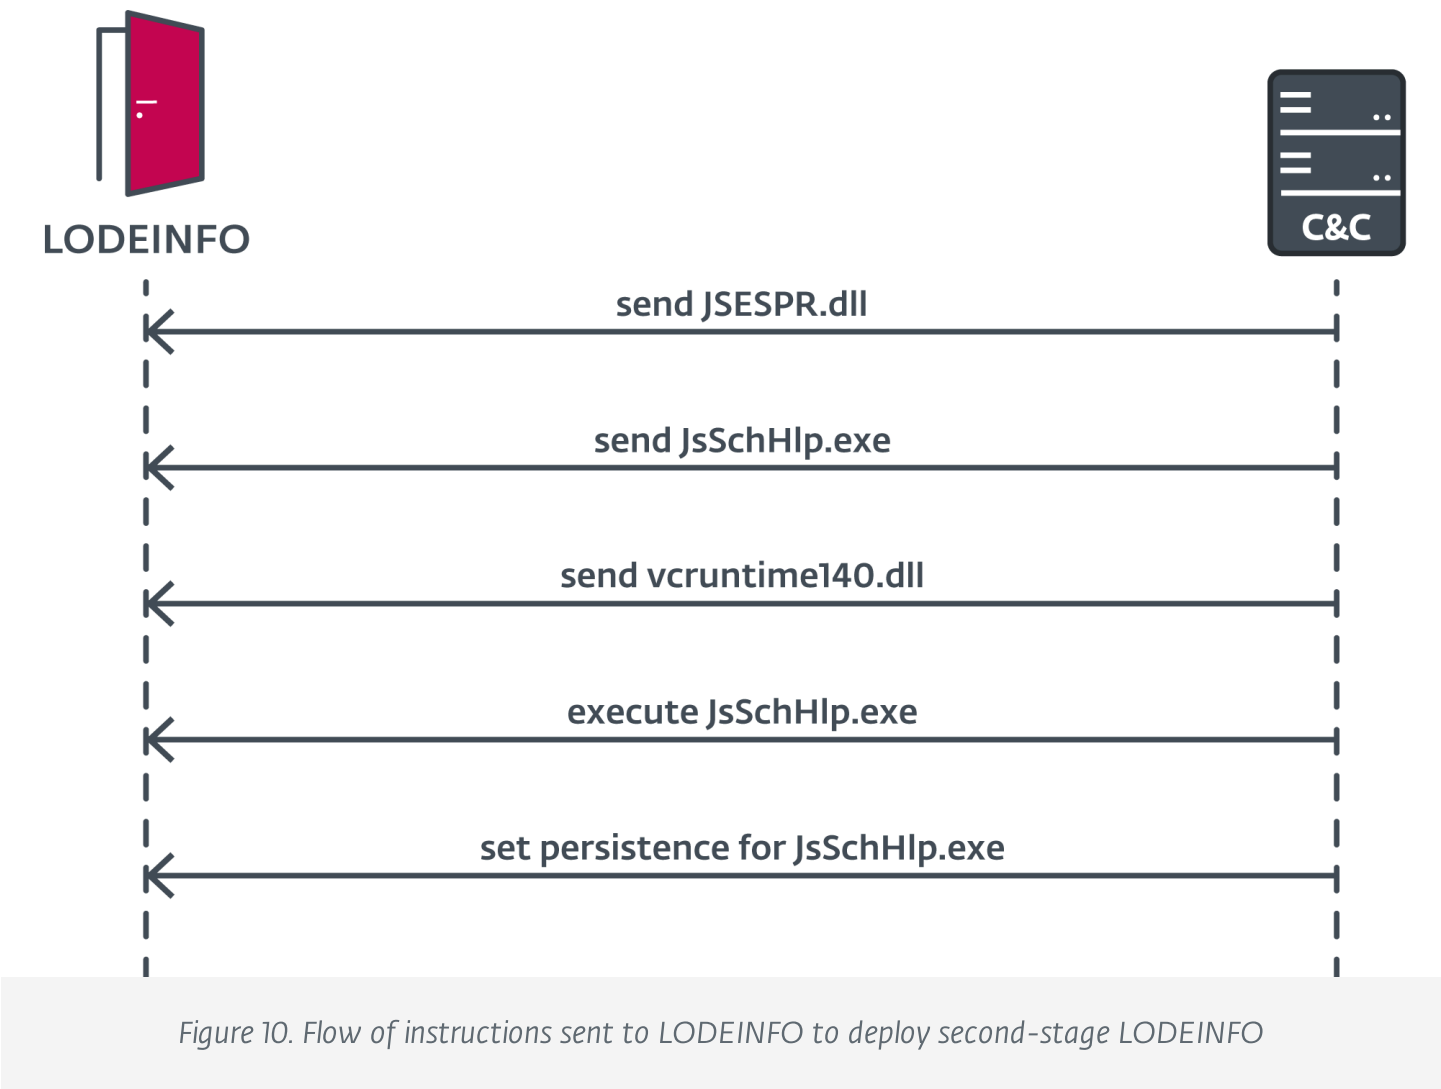

The operator delivered the following binaries: JSESPR.dll, JsSchHlp.exe, and vcruntime140.dll to the compromised machine. The original JsSchHlp.exe is a benign application signed by JUSTSYSTEMS CORPORATION (makers of the previously mentioned Japanese word processor, Ichitaro). However, in this case the MirrorFace operator abused a

known Microsoft digital signature verification [issue](#) and appended RC4 encrypted data to the JsSchHlp.exe digital signature. Because of the mentioned issue, Windows still considers the modified JsSchHlp.exe to be validly signed.

JsSchHlp.exe is also susceptible to DLL side-loading. Therefore, upon execution, the planted JSESPR.dll is loaded (see Figure 11).

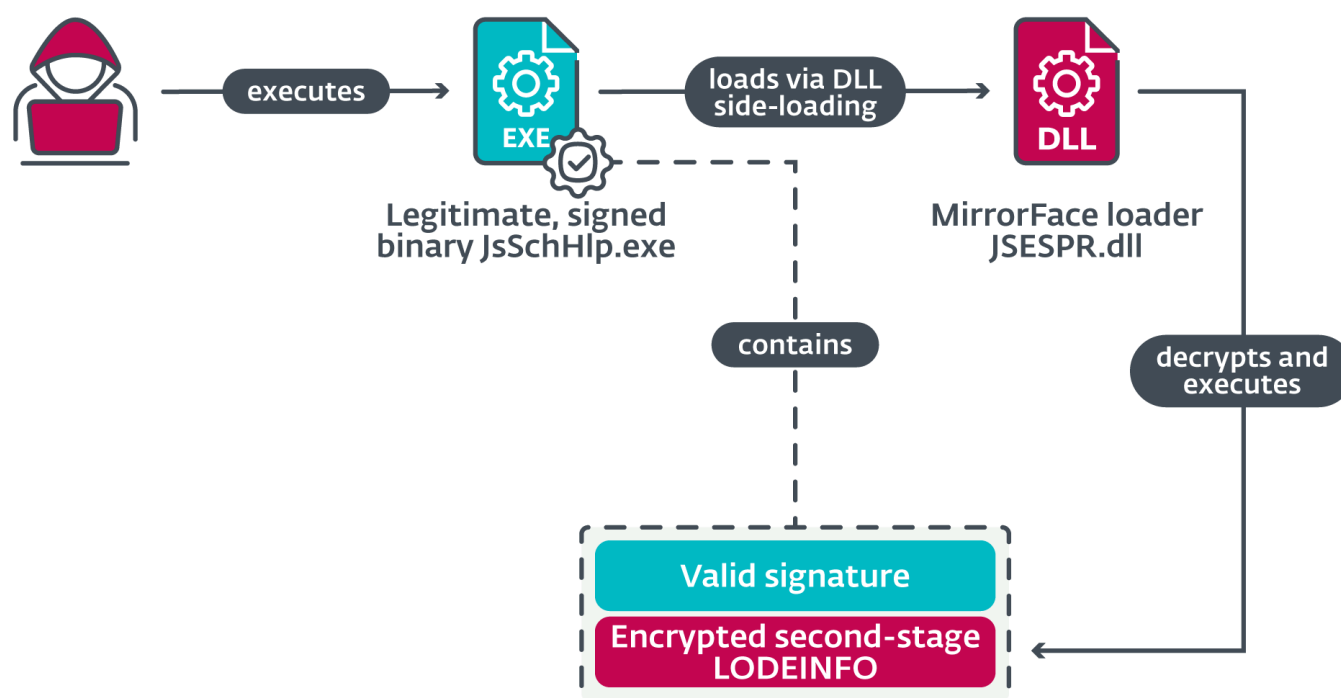


Figure 11. Execution flow of second-stage LODEINFO

JSESPR.dll is a malicious loader that reads the appended payload from JsSchHlp.exe, decrypts it, and runs it. The payload is the second-stage LODEINFO, and once running, the operator utilized the regular LODEINFO to set the persistence for the second-stage one. In particular, the operator ran the reg.exe utility to add a value named JsSchHlp to the Run registry key holding the path to JsSchHlp.exe.

However, it appears to us the operator didn't manage to make the second-stage LODEINFO communicate properly with the C&C server. Therefore, any further steps of the operator utilizing the second-stage LODEINFO remain unknown to us.



utilizing the second-stage LODEINFO remain unknown to us.

## Interesting observations

During the investigation, we made a few interesting observations. One of them is that the operator made a few errors and typos when issuing commands to LODEINFO. For example, the operator sent the string `cmd /c dir "c:\use\"` to LODEINFO, which most likely was supposed to be `cmd /c dir "c:\users\"`.

This suggests the operator is issuing commands to LODEINFO in a manual or semi-manual manner.

Our next observation is that even though the operator performed a few cleanups to remove traces of the compromise, the operator forgot to delete `%temp%\31558.txt` – the log containing the stolen credentials. Thus, at least this trace remained on the compromised machine and it shows us that the operator was not thorough in the cleanup process.

## Conclusion

MirrorFace continues to aim for high-value targets in Japan. In Operation LiberalFace, it specifically targeted political entities using the then-upcoming House of Councillors election to its advantage. More interestingly, our findings indicate MirrorFace particularly focused on the members of a specific political party.

During the Operation LiberalFace investigation, we managed to uncover further MirrorFace TTPs, such as the deployment and utilization of additional malware and tools to collect and exfiltrate valuable data from victims. Moreover, our investigation revealed that the MirrorFace operators are somewhat careless, leaving traces and making various mistakes.

*For any inquiries about our research published on WeLiveSecurity, please contact us at [threatintel@eset.com](mailto:threatintel@eset.com).*

*ESET Research also offers private APT intelligence reports and data feeds. For any inquiries about this service, visit the [ESET Threat Intelligence](#) page.*



IoCs

Files

SHA-1	Filename	ESET detection name	
F4691FF3B3ACD15653684F372285CAC36C8D0AEF	K7SysMn1.dll	Win32/Agent.ACLP	I
DB81C8719DDAAE40C8D9B9CA103BBE77BE4FCE6C	K7SysMon.Exe.db	N/A	I
A8D2BE15085061B753FDEBBDB08D301A034CE1D5	JsSchHlp.exe	Win32/Agent.ACLP	5
0AB7BB3FF583E50FBF28B288E71D3BB57F9D1395	JSESPR.dll	Win32/Agent.ACLP	5
E888A552B00D810B5521002304D4F11BC249D8ED	31558_n.dll	Win32/Agent.ACLP	I

Network

IP	Provider	First Seen	Details
----	----------	------------	---------

5.8.95[.]174	G-Core Labs S.A.	2022-06-13	LODEINFO C&C server.
45.32.13[.]180	AS-CHOOPA	2022-06-29	Server for data exfiltration.
103.175.16[.]39	Gigabit Hosting Sdn Bhd	2022-06-13	LODEINFO C&C server.
167.179.116[.]56	AS-CHOOPA	2021-10-20	www.ninesmn[.]com, second-stage LODEINFO C&C server.
172.105.217[.]233	Linode, LLC	2021-11-14	www.aesorunwe[.]com, second-stage LODEINFO C&C server.

## MITRE ATT&CK techniques

This table was built using [version 12](#) of the MITRE ATT&CK framework.

Note that although this blogpost does not provide a complete overview of LODEINFO capabilities because this information is already available in other publications, the MITRE ATT&CK table below contains all techniques associated with it.


Tactic	ID	Name	Description
Initial Access	<a href="#">T1566.001</a>	Phishing: Spearphishing Attachment	A malicious WinRAR SFX archive is attached to a spearphishing email.
	<a href="#">T1106</a>	Native API	LODEINFO can execute files using the <code>CreateProcessA</code> API.

MirrorFace operators rely on a victim

Execution	T1204.002	User Execution: Malicious File	MirrorFace operators may send messages opening a malicious attachment sent via email.
	T1559.001	Inter-Process Communication: Component Object Model	LODEINFO can execute commands via Component Object Model.
Persistence	T1547.001	Boot or Logon Autostart Execution: Registry Run Keys / Startup Folder	LODEINFO adds an entry to the <code>HKCU\Run</code> key to ensure persistence.  We observed MirrorFace operators manually adding an entry to the <code>HKCU\Run</code> key to ensure persistence for the second-stage LODEINFO.
Defense Evasion	T1112	Modify Registry	LODEINFO can store its configuration in the registry.
	T1055	Process Injection	LODEINFO can inject shellcode into <code>cmd.exe</code> .
	T1140	Deobfuscate/Decode Files or Information	LODEINFO loader decrypts a payload using a single-byte XOR or RC4.
	T1574.002	Hijack Execution Flow: DLL Side-Loading	MirrorFace side-loads LODEINFO by dropping a malicious library and a legitimate executable (e.g., <code>K7SysMon.exe</code> ).
	T1082	System Information Discovery	LODEINFO fingerprints the compromised machine.

	Technique	Observed Activity
Discovery	T1083	File and Directory Discovery
		LODEINFO can obtain file and directory listings.
	T1057	Process Discovery
		LODEINFO can list running processes.
	T1033	System Owner/User Discovery
		LODEINFO can obtain the victim's username.
	T1614.001	System Location Discovery: System Language Discovery
		LODEINFO checks the system language to verify that it is not running on a machine set to use the English language.
Collection	T1560.001	Archive Collected Data: Archive via Utility
		We observed MirrorFace operators archiving collected data using the RAR archiver.
	T1114.001	Email Collection: Local Email Collection
		We observed MirrorFace operators collecting stored email messages.
	T1056.001	Input Capture: Keylogging
		LODEINFO performs keylogging.
	T1113	Screen Capture
		LODEINFO can obtain a screenshot.
	T1005	Data from Local System
		We observed MirrorFace operators collecting and exfiltrating data of interest.
	T1071.001	Application Layer Protocol: Web Protocols
		LODEINFO uses the HTTP protocol to communicate with its C&C server

		WEB PROTOCOLS	COMMUNICATE WITH ITS C&C SERVER
Command and Control	T1132.001	Data Encoding: Standard Encoding	LODEINFO uses URL-safe base64 to encode its C&C traffic.
	T1573.001	Encrypted Channel: Symmetric Cryptography	LODEINFO uses AES-256-CBC to encrypt C&C traffic.
	T1001.001	Data Obfuscation: Junk Data	Second-stage LODEINFO C&C prepends junk to sent data.
Exfiltration	T1041	Exfiltration Over C2 Channel	LODEINFO can exfiltrate files to the C&C server.
	T1071.002	Application Layer Protocol: File Transfer Protocols	We observed MirrorFace using Secure Copy Protocol (SCP) to exfiltrate collected data.
Impact	T1486	Data Encrypted for Impact	LODEINFO can encrypt files on the victim's machine.

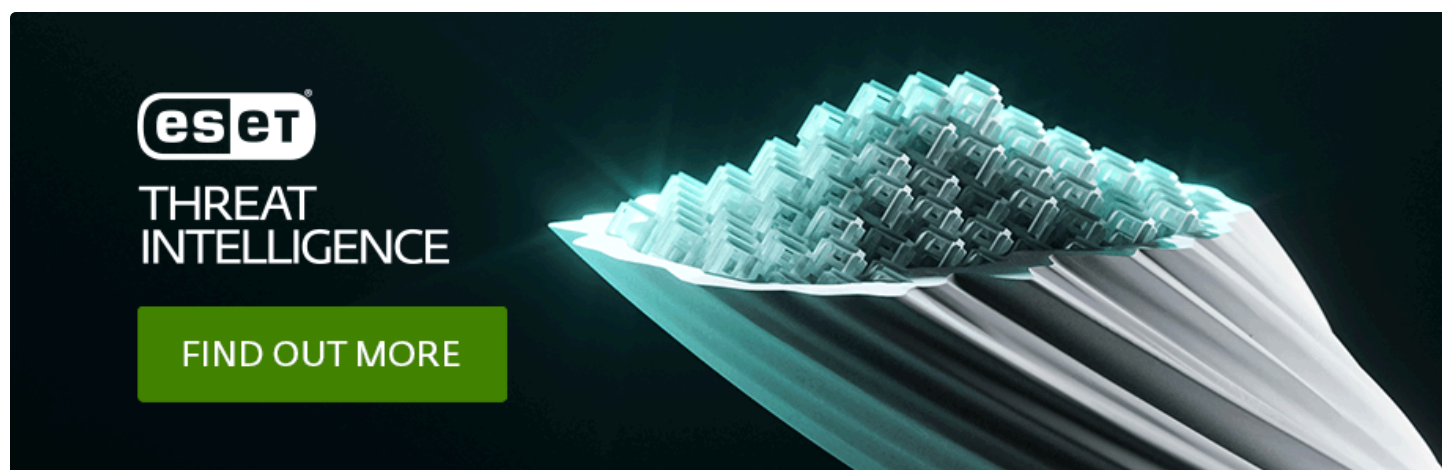

## Let us keep you up to date

Sign up for our newsletters

- ☐ Ukraine Crisis newsletter
- ☐ Regular weekly newsletter

**Subscribe**

### Related Articles

**ESET RESEARCH**

**CloudScout: Evasive Panda scouting cloud services**

**ESET RESEARCH**

**ESET Research Podcast: CosmicBeetle**

ESET RESEARCH

Embargo ransomware: Rock’n’Rust

Discussion



Award-winning news, views, and insight from the ESET security community

About us

Contact us

Legal

Information

RSS Feed

ESET

Privacy Policy

Manage Cookies





Copyright © ESET, All Rights Reserved