

-
- Bitbucket Data Center 9.3 (Latest)
Documentation
- › Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ Administer Bitbucket Data Center
 - Users and groups
 - Advanced repository management
 - › External user directories
 - Global permissions
 - Setting up your mail server
 - › Integrate with Atlassian applications
 - › Connect Bitbucket to an external database
 - Migrating Bitbucket Data Center to another server
 - Migrate Bitbucket Server from Windows to Linux
 - › Run Bitbucket in AWS


Administer Bitbucket Data Center

Cloud

Data Center 9.3 ▼

View the audit log

Bitbucket Data Center, allowing you to see what is being used. The audit log shows authorized and unauthorized activity. The audit log details, along with utilizing

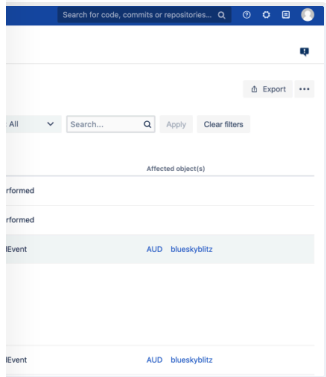

View your instance

In this section

- Audit log events
- Audit log integrations
- Push logs

Related content

- Right to erasure in Bitbucket Server and Data Center
- Configuration properties
- Right to rectification in Bitbucket Server and Data Center
- Users and groups

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur Gérer les préférences. Sinon, cliquez sur Accepter tous les cookies pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur Rejeter tous les cookies signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

Gérer les préférences


Rejeter tous les cookies

Accepter tous les cookies

Change Bitbucket's context path

› Data recovery and backups

←

Bitbucket Data Center 9.3 (Latest)
Documentation

› Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

Users and groups

Advanced repository management

› External user directories

Global permissions

Setting up your mail server

› Integrate with Atlassian applications

› Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

› Run Bitbucket in AWS

AUD blueskyblitz

CreatedEvent AUD

```
"displayName": "BUGFIX", "enabled": true, "prefix": "feature/" }, { "id": "HOTFIX", "displayName": "RELEASE", "enabled": true, "prefix": "releas
```

Still need help?

The Atlassian Community is here for you.

Ask the community

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. [Cliquer sur Rejeter tous les cookies signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil.](#) [Avis relatif aux cookies et au suivi d'Atlassian](#)

Change Bitbucket's context path

› Data recovery and backups



Bitbucket Data Center 9.3 (Latest)
Documentation

› Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ **Administer Bitbucket Data Center**

Users and groups

Advanced repository management

› External user directories

Global permissions

Setting up your mail server

› Integrate with Atlassian applications

› Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

› Run Bitbucket in AWS

Configure the Bitbucket Data Center URL

log file is used primarily for

information about the log file.

database. There is a
the database. When that
be deleted as

us versions of

ed to Bitbucket 7.x:

ask completes in the

list

, and Method

I selecting

ing you want to retain the
m which you want to

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

Change Bitbucket's context path

> Data recovery and backups

defined in the audit log



Bitbucket Data Center 9.3 (Latest)

Documentation

> Get started with Bitbucket Data Center

> Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

Users and groups

Advanced repository management

> External user directories

Global permissions

Setting up your mail server

> Integrate with Atlassian applications

> Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

> Run Bitbucket in AWS

Categories that belong to
ted events are logged in
to the Global
For all coverage areas and

10,000,000 records. Check our documentation to

ched. You should allocate enough disk space to

Coverage level ⓘ

es or upgrades to global

Base

Base

update group

Base

s to a repository.

Base

Base

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

Change Bitbucket's context path

> Data recovery and backups

onal events where

lvanced, plus additional



Bitbucket Data Center 9.3 (Latest)
Documentation

> Get started with Bitbucket Data Center

> Use Bitbucket Data Center

▼ Administer Bitbucket Data Center

Users and groups

Advanced repository management

> External user directories

Global permissions

Setting up your mail server

> Integrate with Atlassian applications

> Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

> Run Bitbucket in AWS

ile. If you have more
ts are included in the
xport up to 100k filtered

or the **Latest 100k**

e in the local home
) files. Make sure you've
pecially if you have set the

stored and select **Save**.

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)

Change Bitbucket's context path

› Data recovery and backups



Bitbucket Data Center 9.3 (Latest)

Documentation

› Get started with Bitbucket Data Center

› Use Bitbucket Data Center

▼ **Administer Bitbucket Data Center**

Users and groups

Advanced repository management

› External user directories

Global permissions

Setting up your mail server

› Integrate with Atlassian applications

› Connect Bitbucket to an external database

Migrating Bitbucket Data Center to another server

Migrate Bitbucket Server from Windows to Linux

› Run Bitbucket in AWS

Configure the Bitbucket Data Center URL

Ce site utilise des cookies pour améliorer votre expérience de navigation, effectuer des analyses et des recherches, et cibler la publicité. Pour modifier vos préférences, cliquez sur [Gérer les préférences](#). Sinon, cliquez sur [Accepter tous les cookies](#) pour indiquer que vous consentez à leur utilisation sur votre appareil. Cliquez sur [Rejeter tous les cookies](#) signifie que vous n'acceptez pas que nous utilisions des cookies qui ne sont pas strictement nécessaires sur votre appareil. [Avis relatif aux cookies et au suivi d'Atlassian](#)