




Settings



Post




Nasreddine Bencherchali 
@nas_bench



Here is how you can use/hijack a VSCode workspace for [#persistence](#).

Look for ".code-workspace" on the file system and add a runOn "folderOpen" task with your payload and Turn on "allowAutomaticTasks".

You can also add this task to a "tasks.json" inside a ".vscode" folder :)

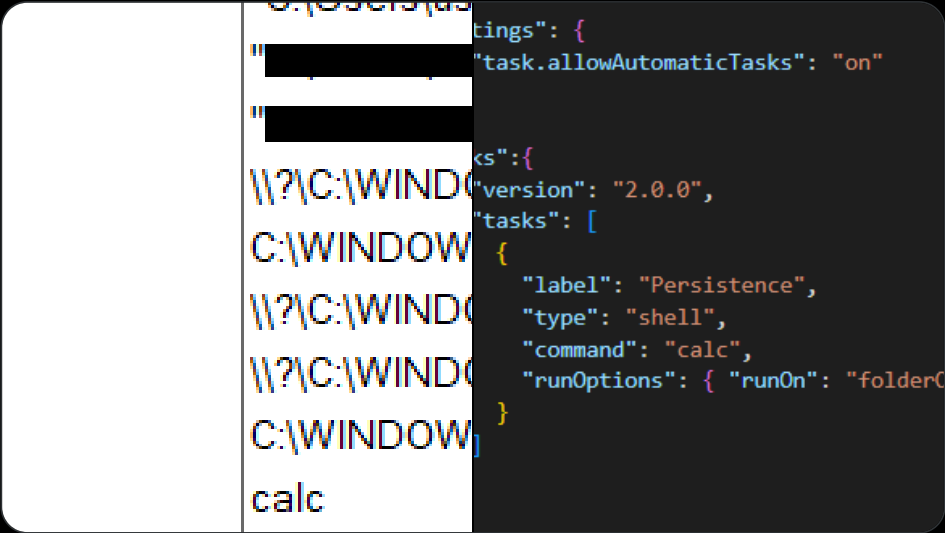

12:02 AM · Jan 25, 2023 · **17.7K** Views

37 Reposts **1** Quote **117** Likes **39** Bookmarks



39



Don't miss what's happening

People on X are the first to know.

Log in

Sign up

Welcome to x.com!



We are letting you know that we are changing our URL, but your privacy and data protection settings remain the same.
For more details, see our Privacy Policy: <https://x.com/en/privacy>.

Did someone say ... cookies?

X and its partners use cookies to provide you with a better, safer and faster service and to support our business. Some cookies are necessary to use our services, improve our services, and make sure they work properly. [Show more about your choices.](#)

Accept all cookies

Refuse non-essential cookies