

BlackByte is a ransomware group that has been building a name for itself since 2021. Like its contemporaries, it has gone after critical infrastructure for a higher chance of a getting a payout. What techniques set it apart?

BlackByte debuted in July 2021. Its first year of activity garnered the attention of the Federal Bureau of Investigation (FBI) and the US Secret Service (USS). According to a joint advisory by






Q



NOVEITIDEL ZUZT.

This advisory shows just how BlackByte was actively establishing itself as a new noteworthy <u>ransomware</u> variant. On October 2021, Trustwave released a publicly available <u>decrypter</u> for BlackByte. This however did not stop BlackByte as developers released newer versions that used multiple keys and <u>ramped up</u> operations, going as far as to warn their victims against using the available decrypter on their website.



BlackByte's emergence could be part of a larger scheme. With the purported shut down of <u>Conti</u>, researchers from AdvIntel surmise that BlackByte is one of the chief new ransomware variants <u>part of its rebranding</u>.

At present, BlackByte continues to target organizations from all over the world. However, like <u>LockBit</u>, <u>RansomEXX</u>, and many other ransomware families, BlackByte avoids attacking Russia-based entities.

What do organizations need to know about BlackByte?

While BlackByte operators use their piece of ransomware in attacks for their own gain, they also run on a ransomware-as-a-service (RaaS) model for their affiliates. We have listed down the key highlights of BlackByte here:

 Initial versions used symmetric keys. The earlier variant of BlackByte used the same key in each campaign to encrypt files. It also used AES, a symmetric key algorithm. This allowed researchers to create a decrypter to help BlackByte

Q

Operators then released two Go-based variants. The more recent Go-variant was introduced around February 2022 and sported modifications particularly in its encryption algorithm.

- Archives files using WinRAR. In BlackByte campaigns data exfiltration is done before the ransomware is deployed. This is because the BlackByte ransomware is incapable of exfiltrating data, instead it archives files using WinRAR then uploads the file to sharing sites.
- Uses trojanized <u>legitimate tools</u>. Like most modern ransomware variants,
 BlackByte uses living-off-the-land binaries. For example, it uses the remote tool AnyDesk to gain further control over a system and for lateral movement.
- Involves phishing emails or a known ProxyShell vulnerability for initial access.
 BlackByte has been known to use phishing emails or exploit unpatched
 ProxyShell vulnerability in Microsoft Exchange Servers to gain initial access into a system.


BlackByte trajectory seems to point to continuing activity. In fact, reports indicate that BlackByte is among the ransomware operations that have set their sights on <u>Latin</u> <u>American governments</u> in May 2022. This report is reflected in our own telemetry data as seen in the next section.

Top affected industries and countries

The data used in this section represent the count of unique machines where BlackByte-related activity had been detected. Based on our telemetry data, BlackByte showed a fairly consistent Based on our telemetry data from April 30, 2021 to May 31, 2022, we detected BlackByte activity all over the globe. However, after the spike in activity in May, Peru outstripped other countries

⊘TREND Business Q <u>=</u>

number.



BlackByte was also reportedly among those that targeted the region.



Figure 1. BlackByte monthly unique detections (October 1, 2021 to May 31, 2022)

Source: Trend Micro™ Smart Protection

Network™

Figure 2. Countries with the highest number of attack attempts for the BlackByte ransomware (April 30, 2021 to May 30, 2022)

Source: Trend Micro Smart Protection Network

Up to the end of April 2022, the technology sector saw the most BlackByte detections, however, in May, detections in the government sector also shot up.



One way to interpret these observations is that the drastic increase stemmed from a single attack that affected several machines. Aside from the reports on ransomware groups targeting Latin America, this explanation is also based on the report that, by their own claim, BlackByte operators had compromised a Peruvian government entity around the time of the increased activity.

Targeted regions and sectors according to BlackByte leaksite

In addition to these detections, we delved into BlackByte's leak site to see the number of attacks recorded there. We looked at data from August 1, 2021 to May 31, 2022. Based on what we found in the site, BlackByte's victims were composed mostly of small size businesses. The activity peaked in November 2021.

Overall, the leak site has yet to reflect the focused attack on Latin American governments. The distribution of their attacks per region showed, instead, a proclivity for targeting entities based in North America and Europe. Based on the leak site data alone,
BlackByte operators and their affiliates
have yet to show a marked interest in
any one sector. We found a relatively
even distribution of attacks across
industries, which included the
following:

- Construction
- Materials
- Healthcare
- Retail
- Transportation
- Energy & Utilities
- Manufacturing
- Professional services




Figure 4. Regional distribution of BlackByte victims according to the group's leak site (August 1, 2021 to May 31, 2022)

- Foods & Staples
- Real Estate
- Government
- o IT
- Legal services
- Media and entertainment

Comparing the leak site data of BlackByte to other ransomware families, shows that from January 1, 2022 to May 31, 2022, BlackByte was among the 10 ransomware groups with the greatest number of self-reported victims.

Figure 5. Top ransomware groups with the greatest number of listed victims in their respective leak sites (January 1, 2022 to May 31, 2022)

The data seems to show that BlackByte's operation is beginning to build a name for itself in the threat landscape while still building momentum. The following section shows how it works and how it

Infection chain and techniques

Given that BlackByte operates on the RaaS model, its infection chain can vary depending on the target.


Figure 6. BlackByte infection chain



TREND

Business





- After the initial access into the system, the attackers use Certutil to download and execute the components that it needs to propagate in the network.
- After the deployment of Cobeacon, it is then used to execute BlackByte ransomware.

environment.

- After network reconnaissance, the attackers deploy AnyDesk in the system for an additional level of control over the system. The attackers repeat this process of discovery and deployment of Cobeacon and AnyDesk until it achieves its goals.
- During the execution of BlackByte, it terminates certain processes and services related to security application to evade detection.




Exfiltration

 Once the attackers have sufficiently infiltrated into the victim's network and identified valuable files, it exfiltrates them using WinRar to archive the files and upload them into file sharing sites such as anonymfiles[.]com and file[.]io.

Impact

Once the ransomware is executed, it terminates certain services and processes related to security application to evade detections. It also connects to its C&C server where it looks for a certain PNG file that contains information critical to encryption and is used to derive the AES128 key. This key is then protected using an embedded RSA key which will then become undecryptable without the private key. The

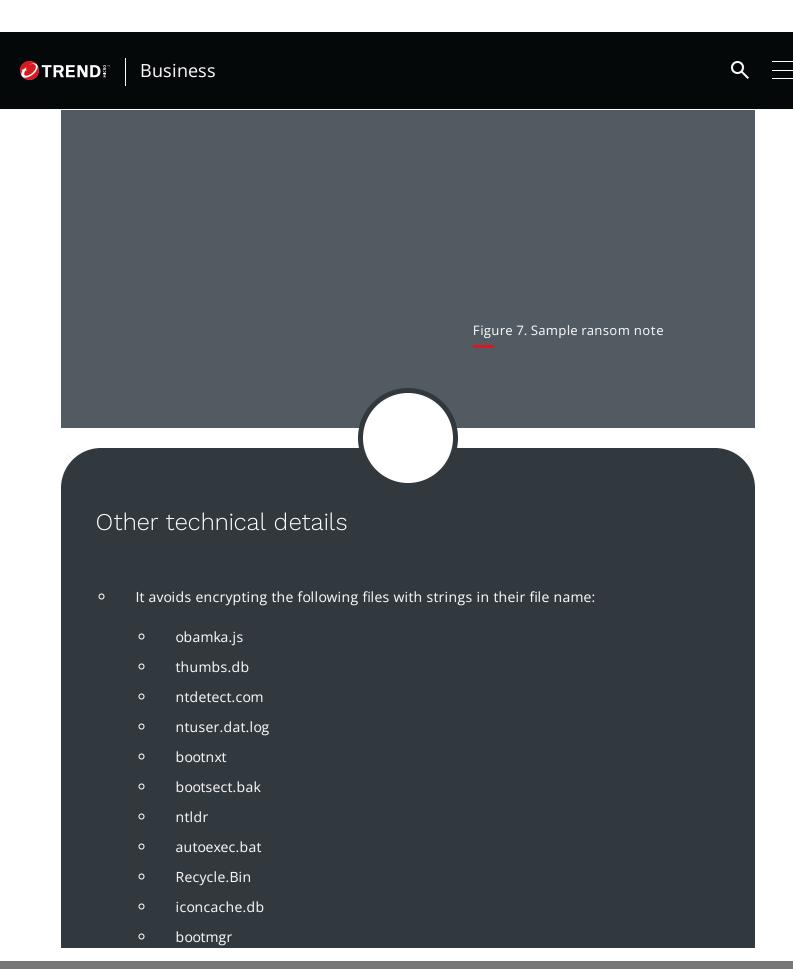

TREND

Business


o it avoids encrypting files with the following extensions.							
	0	msilog	0	deskthemepac	0	cab	
	0	log		k	0	exe	
	0	ldf	0	nomedia	0	diagpkg	
	0	lock	0	msu	0	icl	
	0	theme	0	rtp	0	OCX	
0	0	msi	0	msp	0	rom	
	0	sys	0	idx	0	prf	
	0	wpx	0	ani	0	themepack	
	0	cpl	0	386	0	msstyles	
	0	adv	0	diagcfg	0	icns	
	0	msc	0	bin	0	mpa	
	0	scr	0	mod	0	drv	
	0	key	0	ics	0	cur	
	0	ico	0	com	0	diagcab	
	0	dll	0	hlp	0	cmd	
	0	hta	0	spl	0	shs	
	ŭ	iita	0	nls			
0	It ter	minates the following	servi	ces:			
	0	SQLTELEMETR	0	SQLTELEMETR Y\$ECWDB2	0	SstpSvc	
		Υ	0		0	MBAMService	
			Ü	SQLWriter	0	wuauserv	
0	It ter	minates the following	proce	esses if found in the a	ffecte	ed system's memory:	
	0	agntsvc	0	Ntrtscan	0	thunderbird	
	0	CNTAoSMgr	0	ocautoupds	0	tmlisten	
	0	dbeng50	0	ocomm	0	visio	
			0	ocssd	0	winword	



					· ·
0	firefox	0	outlook	0	zoolz
0	firefoxconfig	0	PccNTMon	0	anydesk
0	infopath	0	powerpnt	0	chrome
0	isqlplussvc	0	sqbcoreservic	0	opera
0	mbamtray		е	0	msedge
0	msaccess	0	sql	0	firefox
0	msftesql	0	sqlagent	0	iexplore
0	mspub	0	sqlbrowser	0	explorer
0		0	sqlservr	0	winlogon
	mydesktopqos	0	sqlwriter	0	SearchIndexer
0	mydesktopser vice	0	steam	0	wininit
0	mysqld	0	synctime	0	SearchApp
0	mysqld-nt	0	tbirdconfig	0	SearchUl
0	mysqld-opt	0	thebat	0	Powershel
	As described	0	thebat64		

MITRE tactics and techniques

Initial Access	Persistence	Privilege Escalation	Defense Evasion		
T1190 - Exploit Public-Facing Application	T1053.005 - Scheduled Task/Job: Scheduled Task	T1134 - Access Token Manipulation	T1140 - Deobfuscate/Decode Files or Information		
It has been observed to be using the ProxyShell exploit to deliver China Chopper web shell as its initial arrival.	It creates a scheduled task to execute its java script to proceed with its routine on bootup. Task Name: Joke Trigger: Once, at 00:00	This ransomware modifies the registry to elevate local privilege and enable linked connections.	It initially arrives as an obfuscated Java Script file which will be decoded upon execution.		

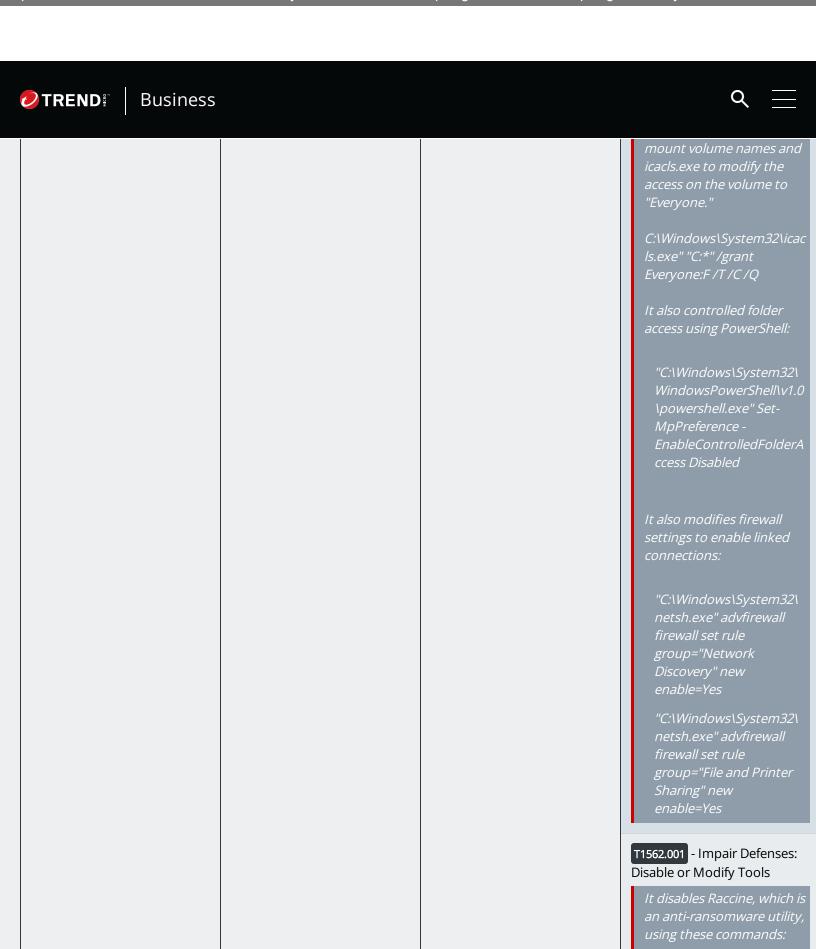



Summary of malware, tools, and exploits used

Security teams can watch for the presence of the following malware tools and exploits that are typically used in BlackByte attacks:

Initial Access	Execution	Discovery	Lateral Movement
o ProxyShell	o Certutil	o NetScan	o AnyDesk
China Chopper web shell	o Cobeacon		o Cobeacon

Recommendations





variants that are just entering the fray. Like many newer ransomware families, BlackByte is readying itself to take the spot of any big-game ransomware operation in decline. However, underneath it all could be a more intricate scheme of threat groups dispersing under new monikers.

As with the case of BlackByte, knowing its notable tactics, while also staying knowledgeable of bigger trends can help organizations create an effective strategy for ransomware attacks. In the case of BlackByte, prevention is key by keeping employees wary of phishing tactics and keeping up with security patches such as those for ProxyShell vulnerabilities.

To help defend systems against similar threats, organizations can establish security frameworks that can allocate resources systematically for establishing solid defenses against ransomware.

Here are some best practices that can be included in these frameworks:




Audit and inventory

- Take an inventory of assets and data
- Identify authorized and unauthorized devices and software
- Make an audit of event and incident logs



Configure and monitor

- Manage hardware and software configurations
- Grant admin privileges and access only when necessary to an employee's role
- Monitor network ports, protocols, and services

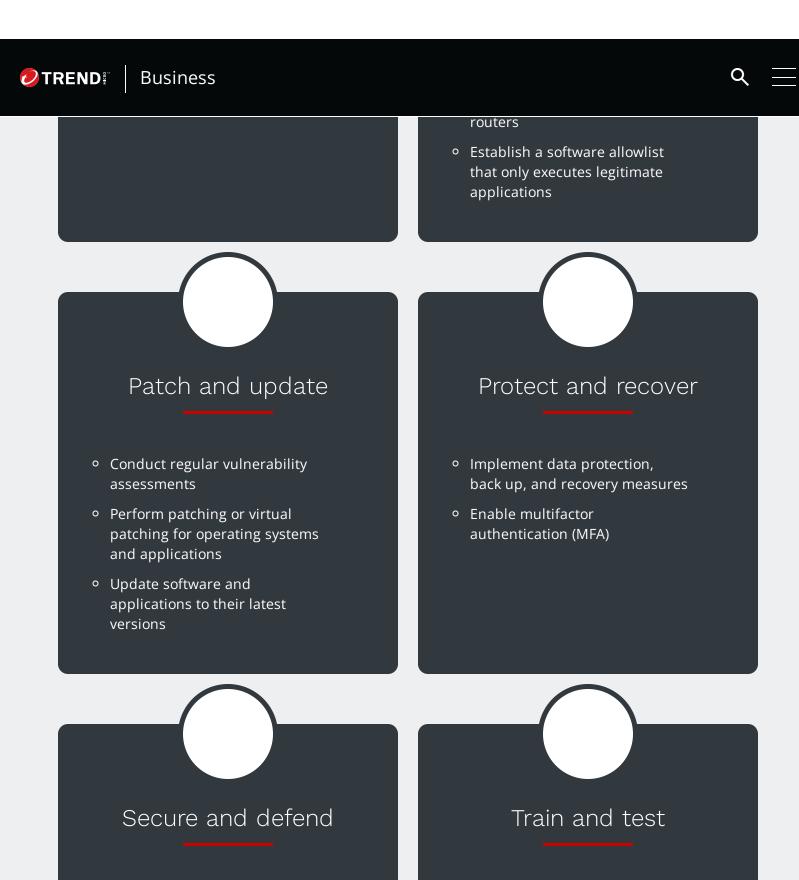

Page 16 of 20

Regularly train and assess

employees' security skills

Conduct red-team exercises and

Employ sandbox analysis to

Deploy the latest versions of

block malicious emails

⊘TREND Business Q =

- Detect early signs of an attack such as the presence of suspicious tools in the system
- Use advanced detection technologies such as those powered by Al and machine learning

A multilayered approach can help organizations guard possible entry points into the system (endpoint, email, web, and network). Security solutions that can detect malicious components and suspicious behavior can also help protect enterprises.

- o <u>Trend Micro Vision One™</u> provides multilayered protection and behavior detection, which helps block questionable behavior and tools early on before the ransomware can do irreversible damage to the system.
- Trend Micro Cloud One™ Workload Security protects systems against both known and unknown threats that exploit vulnerabilities. This protection is made possible through techniques such as virtual patching and machine learning.
- Trend Micro™ Deep Discovery™ Email Inspector employs custom sandboxing and advanced analysis techniques to effectively block malicious emails, including phishing emails that can serve as entry points for ransomware.
- Trend Micro Apex One™ offers next-level automated threat detection and response against advanced concerns such as fileless threats and ransomware, ensuring the protection of endpoints.

Indicators of Compromise (IOCs)

The IOCs for this article can be found here. Actual indicators might vary per attack



Q

Posted in Ransomware Spotlight, Ransomware

We Recommend

Cellular IoT Vulnerabilities: Another Door to Cellular Networks

UNWIRED: Understanding the Unforeseen Risks in Evolving Communication Channels

Why Quantum
Computing Discussions
Can No Longer Be
Ignored

Today's Cloud and Container Misconfigurations Are Tomorrow's Critical Vulnerabilities

Uncover Cloud Attacks with Trend Vision One and CloudTrail

Leaky Labels: Bypassing Traefik Proxy Leveraging cAdvisor Metrics Ransomware Spotlight: INC

Phobos Emerges as a Formidable Threat in Q1 2024, LockBit Stays in the Top Spot: Ransomware in Q1 2024

Ransomware Spotlight: LockBit

The Realities of Quantum Machine Learning

API Security Exposed: The Role of API Vulnerabilities in Real-World Data Breaches

Post-Quantum
Cryptography: Migrating
to Quantum Resistant
Cryptography

