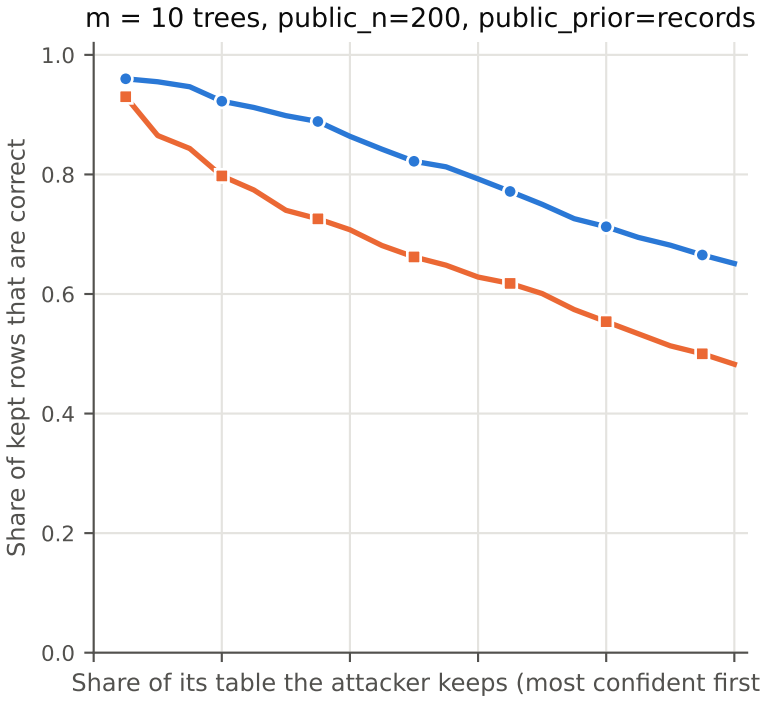
m = 10 trees, public_n=200, public_prior=records
Share of kept rows that are correct
1.0
0.8
0.6
0.4
0.2
0.0
Share of its table the attacker keeps (most confident first)

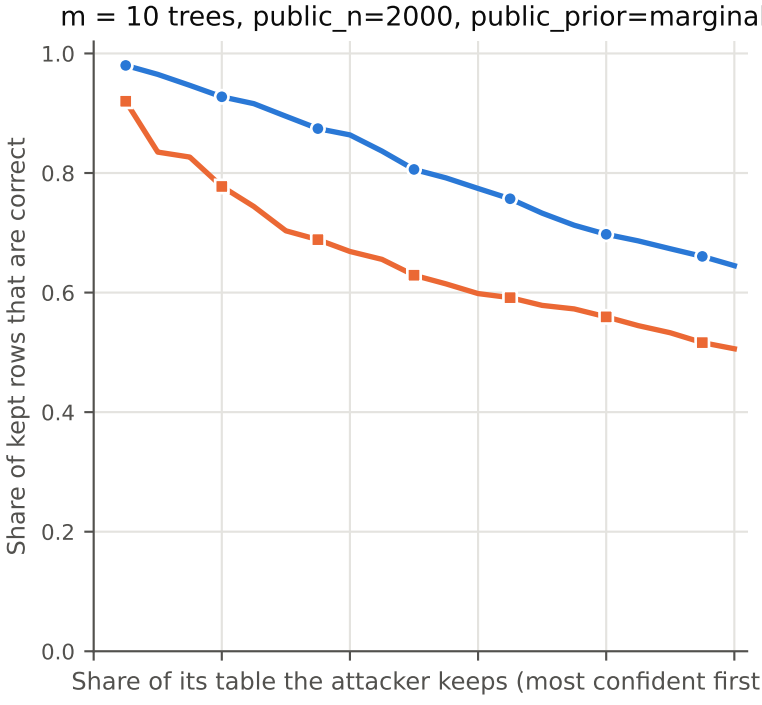
m = 10 trees, public_n=2000, public_prior=marginals
Share of kept rows that are correct
1.0
0.8
0.6
0.4
0.2
0.0
Share of its table the attacker keeps (most confident first)

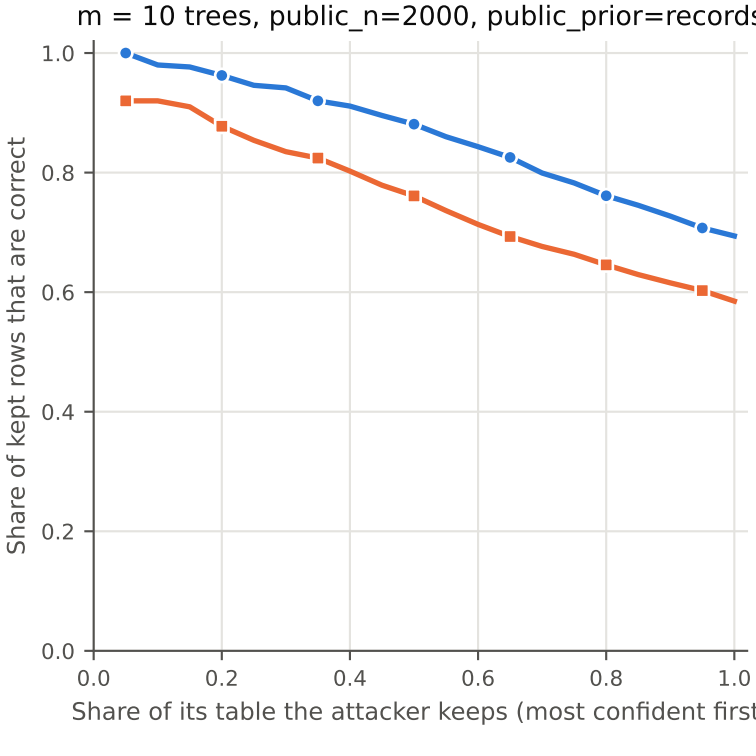
m = 10 trees, public_n=2000, public_prior=records
Share of kept rows that are correct
1.0
0.8
0.6
0.4
0.2
0.0
0.0
0.2
0.4
0.6
0.8
1.0
Share of its table the attacker keeps (most confident first)

Prior-guided sampling
Public statistics only (no trees)