

Manual of the LaTeX template for conference proceedings (XIII SIPA ver.)

Véliz-Romero, Francisco Gerardo

2026-10-09

Introduction

This is the author's Manual to configurate the Conference Proceedings Template (XIII SIPA version)

Although the LaTeX template has its own annotations, the way they are written can make it difficult to understand. Thereby, this manual was created in order to describe in a more efficient way what every code inside the **.tex** documents do, and how to fix some bugs that may happen when customizing the template.

However, if someone is more interested to understand the **.cls** and **.sty** documents' codes, don't worry, they have more simplified and understandable annotations than the **.tex** documents.

Table of content

Introduction.....	1
Document's general configurations	4
<i>Proceedings' main configurations</i>	4
<i>Customization of header's subtitles</i>	5
"yes" option	5
"no" option	5
"alone" option	6
<i>Part and Chapter titles in single pages</i>	7
<i>Page inner titles</i>	8
Main centered page title	8
Main centered page subtitle.....	8
<i>Bookmarks for Browser and Viewer TOCS</i>	9
Introduction and pre-TOC content.....	10
<i>Include pre-content pdfs</i>	10
<i>Organizing committee</i>	10
<i>keynote lectures' and Discussion semblance's boxes</i>	12
Document keynote lecture box.....	12
Discussion forum semblance box.....	14
Proceeding's inner documents (keynotes, abstracts, etc.)	15
<i>Steps prior to writing a document</i>	15
TexWorks helper	15
Bibliography.....	15
<i>Document's writing</i>	18
Document's main information (header)	18
Document's abstract and keywords	19
Tables.....	20
Figures	21
<i>Add images to document</i>	22
How to bypass the proceedings' TOC and bookmark's rules?	24
<i>Add a different TOC, document and bookmark content for the same entry</i>	24
<i>Add a section title that behaves as a chapter one</i>	24
<i>Add only an author's name in TOC</i>	24
<i>Add a numbered section title without author</i>	25

<i>Add the author's name as a bookmark instead of it's work title</i>	<i>25</i>
Acknowledgments	25
References	26

Document's general configurations

Proceedings' main configurations

The template is fully customizable, and you can rewrite literally everything inside of it.

The functions showed in the following code chart allows you to specify the congress number (*numero*), title (*titulo*), title's abbreviation (*titulocorto*) – which is going to be shown in the pages' header – subtitle (*subtitulo*) and date (*fecha*).

```
\numero{}  
\titulo{}  
\titulocorto{}  
\fecha{}  
\titulodos{}
```

Moreover, you can also declare the authors, editors, compilers or translators involved in the creation of the document.

It might be preferable to write the authors' names inside a “{}” in order to avoid trouble, and the Orcid identifier must be written after a “,”. Moreover, every author must be separated by “;”.

As it's evidenced in the example document showed in the GitHub repository, you can leave in blank the Orcid identifier if the author doesn't have one.

```
\authors{  
  {Author's name},Orcid identifier;  
  {Francisco Véliz},0000-0002-3456-7890;  
}
```

The authors' specific job can be changed from “Editores” to anything you want via the **sipa-cover-sub.sty** document.

As it's shown in the following “hypersetup”, the functions “\eventnumber”, “\eventtitle” and “\eventsubtitle” saves the information of the proceedings and allows it to be shown in the document's tags. The function “\eventnumber” was elaborated in order to be able to show the event's number in roman number, instead of printing it in Arabic ones.

```
\hypersetup{  
  pdftitle={Proceedings of the \eventnumber\space\eventtitle: \eventsubtitle},  
  pdfauthor={Author 1; Author 2},  
  pdfproducer={LaTeX with TeXworks},  
  pdfcreator={Creator},  
  pdfcreationdate = {D:20261002},  
  pdfmoddate = {D:20260930},  
  pdflang = {es-MX},  
  pdfsubject = {XIII SIPA},  
  pdfkeywords = {XIII; SIPA; proceedings}  
}
```

Customization of header's subtitles

The **pagenblanc** function reads only three options: “yes”, “no” and “alone”.

The function must be declared at the beginning after a “\newpage” command, so it won't interfere with other header subtitle function..

```
\pagenblanc{}
```

However, once you declared an option you'll have to fill the corresponding function, or it'll cause some trouble.

The header doesn't delete the corresponding function once it's declared, so if you want to change it in a specific page, you'll have to declare it in the document or place you want to change.

“yes” option

Selecting “yes” creates a page header with space for a custom subtitle

Figure 1. Header with a custom header subtitle



The custom title can be declared using the function:


```
\nombsec{Custom title}
```

This function will print the custom title exactly as you write it inside the {}.

“no” option

Selecting “no” creates a page header with space for the abbreviated name of the main author of the article/keynote/poster or other document showed in the proceedings

Figure 2. Header with the author's abbreviated name as a subtitle

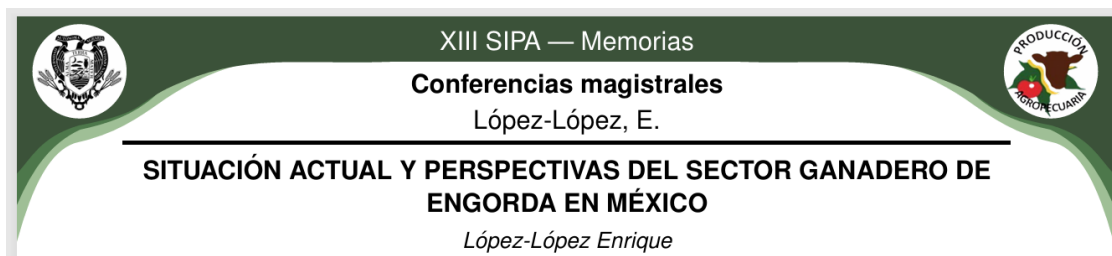

The abbreviated name can be declared using the function:


```
\abbrevnoms{Surnames}{Name}{Name}{Name}
```

This function accepts hyphenated names such as “NameA-NameB” inside each {}, and if you leave blank the {} it wont print anything, so feel free to place even a single name on it. Moreover, the surnames placed in “{Surname}” will be printed without changes.

“alone” option

Selecting “alone” creates a page header empty, with only the title of the part in which the page is located

Figure 3. Header without a custom header subtitle

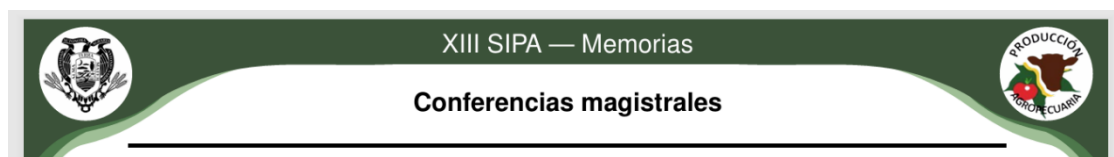

Note: It seems that this option is highly sensible to previously undefined “yes” and “no” headers’ subtitles in the pages before, so be careful


Part and Chapter titles in single pages

Parts are reconfigured to start in a single page, although it's recommended to place a “\newpage” after the command in order to avoid trouble with other page links in TOC

On the other hand, in order to place a Chapter in a single page, you can use the custom functions:

```
\mychapter{Chapter title}  
\mychaptertwo{Chapter title in TOC}{Chapter title in the document}
```

Figure 4. Chapter after page in single-page format

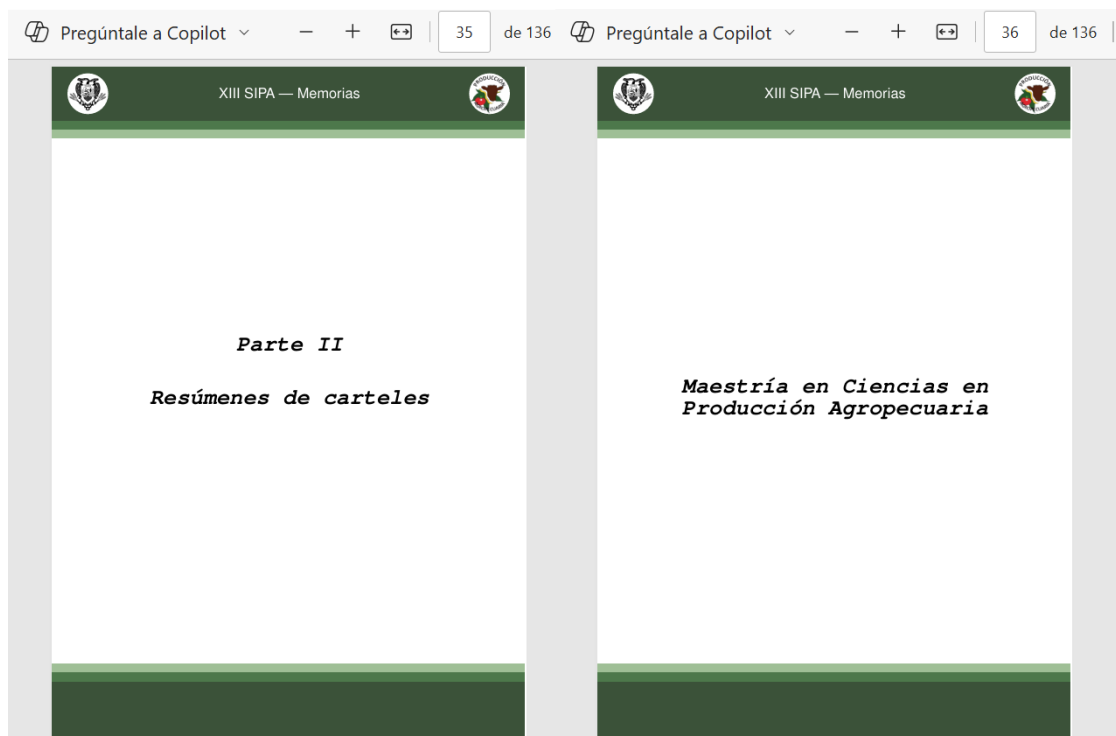

Page inner titles


Aside from the Part and Chapter titles, you can declare two additional main titles that will be placed centered with respect the text area

Main centered page title

The “subsection” (*main title*) serves to place an inner centered title that you can use to declare things such as the “Committees” or “Organization chart” of the proceedings

```
\subseccion{prólogo}
```

Figure 5. “subsection” title declared at the top of a *multicols* environment

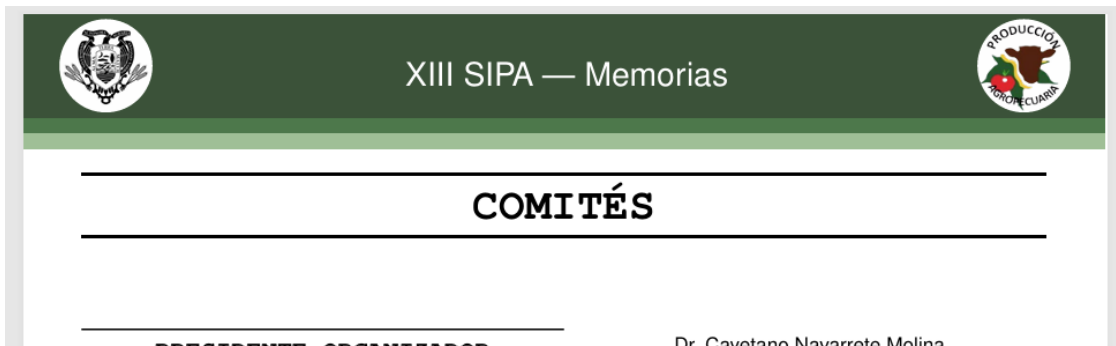


The title is centered between two rules that extend to the page’s or minipage’s width, so be careful in what you declare it

Main centered page subtitle

The “subtitulos” (*subtitle*) serves to place an inner centered subtitle that you can use to declare things such as the “Proceedings editorial committee” or “Posters Evaluation Committee” of the proceedings

```
\subtitulos{Presidente organizador}
```

Figure 6. “subtitulos” title declared inside a *multicols* environment

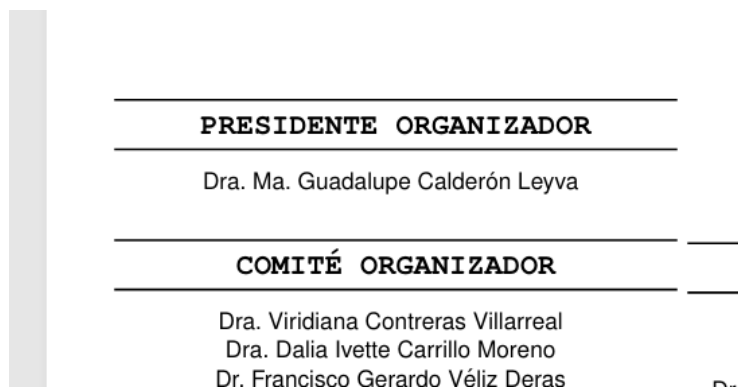

In this subtitle, the rule is set to be half of the main text area, and the font size is lower than the main title

Bookmarks for Browser and Viewer TOCS

Given that although all the titles of the inner documents are written in section format, they are still read as chapter in the Browser and Viewer TOCs, thereby, it's necessary to change their bookmark format in order to fix their position

The change can be performed via the “browserSubsections” environment:

```
\begin{browserSubsections}
\mychapter{Maestría en Ciencias en Producción Agropecuaria}

\newpage
\input{contenido/mcpa/cuarto}

\end{browserSubsections}


\begin{browserSubsections}
\mychapter{Doctorado en Ciencias en Producción Agropecuaria}

\newpage
\input{contenido/dcpa/segundo}

\end{browserSubsections}
```

The “browserSubsections” environment lowers the bookmark of all the documents inside of it, but leaves the bookmark of the first chapter declared in the environment

Figure 7. Bookmarks of the document with and without “browserSubsections” environment

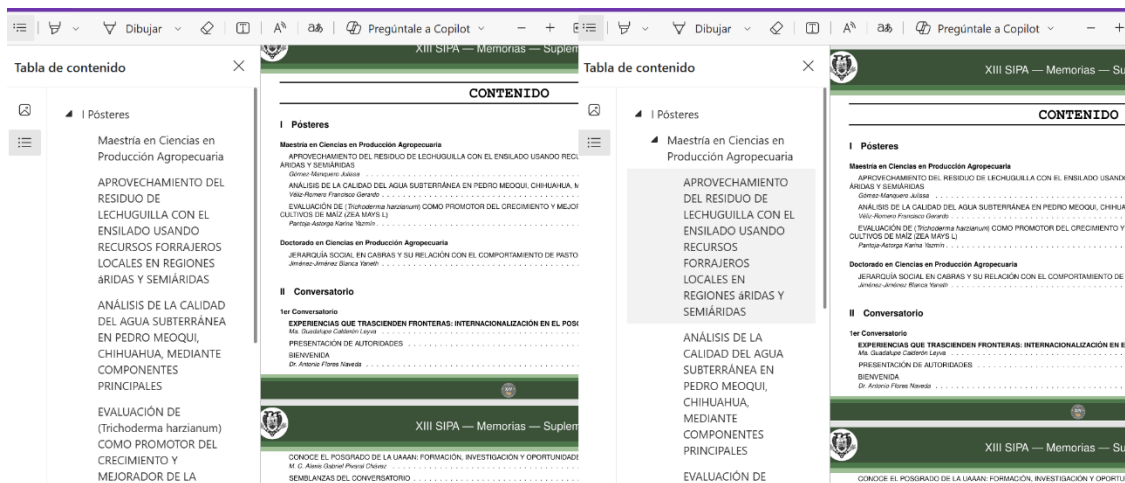

Note: The documents in the left image are not placed under a “browserSubsections” environment, but the documents in the right image are placed inside the aforementioned environment

As it's possible to see in the image, the code does not modify anything from the main document, but changes the bookmarks shown in the Viewer and Browsers TOCS, which makes the document easier to navigate.

Introduction and pre-TOC content

Include pre-content pdfs

The introduction part serves to place the committees established to organize the congress or event to which the proceedings belongs to.

You can include **.pdf** documents with the command:

```
{\hoffset=0pt
\includepdf[fitpaper=true,pages=-,width=\paperwidth]{pdf link}
}
```

The “\hoffset=0pt” is highly important, given that the cover’s geometry is set to -0.5in. So, if you don’t add it, it’ll place the pdf to the right page side and will leave a white line.

once you’ve included all the pdf content that will be placed between the cover and sub-cover pages and the rest of the proceedings, you can declare the document’s inner geometry and format with.

```
\bookbodygeometry
\pagenumbering{roman}
\pagestyle{preindex}
\setcounter{page}{number of page you'll start with}
```

Those codes will turn automatically the page numbers into Arabic ones, and it’ll set the page style into “preindex” one.

Organizing committee

You can place the main “Organization Chart”, consisting of a small number of names inside an horizontally-centered environment with the following code:

```
\vspace*{\fill}
\begin{center}
  \fontsize{13}{16}\selectfont

  \textbf{CEO}

  Name

  \textbf{Regional CEO}

  Name

\end{center}
\vspace*{\fill}
```

Or a two column “Organization Chart” with the possibility to include a main title and subtitle centered with respect the page before the columns

```
\makebox[\textwidth][c]{%
\begin{minipage}{1.1\textwidth}
```

```

\begin{multicols}{2}
[ \subseccion{Main title} \vspace{.3cm} \subtitulos{Main subtitle} \vspace*{.5cm}]
\centering
Lic. Francisco Gerardo Véliz

Name

Name

Name

X

Lic. Francisco Gerardo Véliz
\end{multicols}
\end{minipage}
}

```

And a simple two column environment where you can also include subtitles inside the text

```

\makebox[\textwidth][c]{%
\begin{minipage}{1.1\textwidth}
\begin{multicols}{2}
[ \subseccion{Comités} \vspace*{1cm}]
\centering
\vspace*{-.8cm}
\subtitulos{Proceeding's editor committee}
Lic. Francisco Gerardo Véliz

\subtitulos{Other committee}
Lic. Francisco Gerardo Véliz

Lic. Francisco Gerardo Véliz
\subtitulos{Colaborators}
Lic. Francisco Gerardo Véliz

Lic. Francisco Gerardo Véliz
\end{multicols}
\end{minipage}
}

```

keynote lectures' and Discussion semblance's boxes

The semblance boxes for keynote lectures and the discussion members in this proceedings are based on the same code. The sole difference is that keynote lecture boxes have a small part where you can place the Author's organization logo.

But before filling it, the following codes print the Orcid, Researchgate and Scholar Google Profile logos with the hyperlink to the author's profile, and will be shown in the boxes as {Orcid}, {Researchgate} and {Google Scholar}.

```
\href{https://scholar.google.com/citations?user=Author's identifier}{\aiGoogleScholar}  
\href{https://www.researchgate.net/profile/Author's identifier}{\aiResearchGate}  
\href{https://orcid.org/Author's identifier}{\aiOrcid}
```

Document keynote lecture box

In order to fill the Keynote lecture's semblance box originally used in the proceedings document you can use the code in the following box.

Inside the code you can write multiple Author's information such as:

- **\bandera:** If you leave this place in blank it wont print anything, so dont worry. This function works with the wordflags package (<https://ctan.org/pkg/worldflags>)
- **\confname:** It prints the author's name, although you should avoid extremely long names
- **\confsch:** The author's school or workplace it comes from
- **\conffac:** If necessary, you can write the faculty or satellite work location
- **\confjob:** The author's job. Moreover, in this place you can also write the author's {Orcid}, {Researchgate} or {Scholar Google} identifier, alongside the lint to the conference/discussion video available online, or any other thing you may think it could be necessary to place
- **\confimgone:** A picture of the author, preferably in a height-shorter 3:4 format
- **\confimgtwo:** The workplace/faculty/school logo, preferably an image that matches the logo, leaving as little white space as possible at the side edges
- **\confcontext{1}{2}{3}:** the confcontext allows you to print the author's semblance or whatever you want in the box, and the numbers inside the {} are the lines which are going to be cut to allow the images to be seen. Inside the {1} you can write the number of lines that the logo spans, inside the {2} you can place the remaining number of lines that the author's image spans. The {3}, it's a wild cart that restores the text line format, so it's Ok if you simply leave 1 on it.

```
\bandera{Wordflags identifier}  
\confname{Dra. Cristina González Montelongo}  
\confsch{Universidad de La Laguna}  
\conffac{Facultad de Ciencias Químicas}  
\confjob{Profesora e investigadora\, {Orcid}/{Researchgate}{Scholar Google}\, \href  
{video link}{\faTv}}
```

```

\confimgone{images/speakers/Author}
\confimgtwo{images/speakers/logo}
\conftext{4}{3}{1}{%
    Text.%
}

\conference

```

Bug solving

However, it seems that the first box has a bug where it places the text too low with respect the author's picture. For that reason, i used this code to solve it:

```

\conftext{4}{3}{1}{%
    \vspace{-12mm}%
    \raisebox{-4.5mm}{\\}\newline
    El Ing. Romeo Velasco Santiago.%
}

```

Although i couldn't fin a way to solve the bug, the vspace and raisebox codes allows to rise the text lines to force the text to be wher it should be in the firs place. If you find a way to solve this thing, you can write it in a forum or idk where.

Discussion forum semblance box

In order to fill the Discussion Forum's semblance box used in the proceedings document you can use the code in the following box.

Inside the code you can write multiple Author's information such as:

- **\bandera:** If you leave this place in blank it wont print anything, so dont worry. This function works with the wordflags package (<https://ctan.org/pkg/worldflags>)
- **\confname:** It prints the author's name, although you should avoid extremely long names
- **\confsch:** The author's school/Faculty/Workplace, in the case of this proceedings i wrote the author's master's degree program
- **\confimgone:** A picture of the author, preferably in a height-shorter 3:4 format
- **\confcontext{1}{2}:** the confcontext allows you to print the author's semblance or whatever you want in the box, and the numbers inside the {} are the lines which are going to be cut to allow the images to be seen. Inside the {1} you can write the number of lines that the author's image spans. The {2}, it's a wild card that restores the text line format, so it's Ok if you simply leave 1 on it.

```
\bandera{worldflags code}
\confname{Lic. Francisco Véliz}
\confsch{Maestría en Ciencias en Producción Agropecuaria}
\confimgone{images/semblance/Author's image}
\semblancetext{7}{1}{%
  Text.%
}

\semblance
```

Bug solving

However, as it happened in the keynote lectures' semblance boxes it seems that the first box has a bug where it places the text too low with respect the author's picture. For that reason, i used the same code to solve it:

```
\semblancetext{7}{1}{%
  \vspace{-12mm}%
  \raisebox{-4.5mm}{\\}\newline
  El Ing. Romeo Velasco Santiago.%
}
```

Although i couldn't find a way to solve the bug, the vspace and raisebox codes allows to rise the text lines to force the text to be where it should be in the first place. If you find a way to solve this thing, you can write it in an issue, forum or idk.

Proceeding's inner documents (keynotes, abstracts, etc.)

Steps prior to writing a document

Before starting to write the documents inside the proceedings, there are some codes it might be useful to take into account.

TexWorks helper

If you also have the program **TexWorks**, placing this code in the **.tex** file can allow you to identify the specific documents you're working with.

The “wrap” environment hides everything inside it, without needing to remove it from the file

```
\begin{wrap}  
  \chapter{Identifier}  
\end{wrap}
```

Bibliography

The biblatex “refsection” environment allows you to write the specific references of the document you're working with. You only need to write everything, including the “\printbibliography” inside the environment.

Don't forget to add “\parshape 0” to force the references to be inside the text margins

```
\begin{refsection}  
  Anything you want to write with specific references  
\end{refsection}
```

Also, depending on how you want the inner document's sections to appear, there are different tools you can work with.

```
\parshape 0  
\printbibliography[heading={subbibintoc,misubseccion}]
```

The “subbibintoc” option allows you to print the Bibliography name in TOC, whereas the “misubseccion” option hides the Bibliography title from TOC

Figure 8. Bibliography’s title shown in TOC

CONTENIDO	
I Conferencias magistrales	1
EL HERBARIO COMO HERRAMIENTA PARA ESTUDIOS HISTÓRICOS, ACTUALES Y FUTUROS EN AGRONOMÍA	
<i>González-Montelongo Cristina</i>	3
SITUACIÓN ACTUAL Y PERSPECTIVAS DEL SECTOR GANADERO DE ENGORDA EN MÉXICO	
<i>López-López Enrique</i>	8
Referencias	11

Note: document from Gonzalez-Montelongo has the “misubseccion” option, and document from López-López has the “subbibintoc” option.

Although unused in this proceedings document, its possible to change the way the references are printed in the document.

The option “env=numberedbibliography” numbers the bibliography but doesn’t affect the order, in order to get a natbib-like bibliography, you’ll have to load the cites inside a \newrefcontext environment.

If you’re using only the \nocite command, you can place it after the environment, but if it is an ordinary document with cite commands, you’ll have to write it at the beginning of the document.

With this option, you will need to compile the document from scratch for the references to appear. Likewise, if you make any changes in the .bib file, you’ll also need to compile the document from scratch.

Numbered but ordered Bibliography

```
\parshape 0
\printbibliography[env=numberedbibliography]
```

Numbered and unordered Bibliography

```
\newrefcontext[sorting=none]
\parshape 0
\printbibliography[env=numberedbibliography]
\endrefcontext
```

Figure 9. Unordered and Ordered numbered references.



Note: The references in the upper image (inside the “newrefcontext” environment) are numbered and placed as the text cited them; while the references in the lower image are numbered but ordered based on author’s name, date and work’s title.

Inner document's writing

Once you've decided how you're going to write the document and the main formats, the time comes to write the inner documents on the proceedings.

Document's main information (header)

The document's main information can be filled using the following commands. Although some of the commands can be omitted based on the Header Customization you've selected.

- **\abbrevnombs** and **\nombsec** can be filled or omitted depending on what option you choose for the header's title
- **\tocauthor**: prints the name as you write it on it in the TOC under the work's title, the dotted line and page number is printed alongside the name.
- **\author**: Prints the author or authors names in the text, all the names are going to be printed on the same line unless you declare a row change (**** or **\newline**).
- **\affiliation**: Prints the author or authors affiliations
- **\corresponding**{Additional text}{email}: Prints the email and any additional text you want. The code prints automatically an space between the text and the email. If for some reason you have to write multiple mails, you can use the function

```
\href{mailto:example@gmail.com}{\nolinkurl{example@gmail.com}}
```

- **\title**: Prints the work's title

```
\cero
\abbrevnombs{Véliz-Romero}{Francsico}{Gerardo}{}
\nombsec{Custom section's title}
\tocauthor{Véliz-Romero, Francisco Gerardo}
\author{%
  Véliz-Romero Francisco Gerardo \textsuperscript{1} \orcidlink{0000-0001-9236-89
0X} *,
  Véliz-Romero Francisco Gerardo \textsuperscript{2} \orcidlink{0000-0001-9236-89
0X}.,
}
\affiliation{%
  \textsuperscript{1} Universidad Autónoma Agraria Antonio Narro.,
  \textsuperscript{2} Universidad Juárez del Estado de Durango
}
\corresponding{* Correspondence author}{example@gmail.com}
\title{Work's title}

\maketitle
```

Figure 10. Proceedings' inner document's header



The header is supposed to work without affiliations and correspondence author's mail, however, any printing error can be easily solved with a "`\vspace{-.5cm}`" before the abstract

If you're interested in how to print the document's title without some of its parts, or how to remove specific things like the author's name or the title from TOC, see the discussion section

Document's abstract and keywords

Currently, two types of abstracts and keywords environment are declared in the document. One is in Spanish and the other is in English. However, they are quite simple to configure, so you can easily create another or modify one them.

```
\begin{resumen}
  Text
\end{resumen}

\pclave{key, words}
```

```
\begin{abstract}
  Text
\end{abstract}

\keywords{key, words}
```

The words inside the keywords environment are separated by comma, and doesn't have any actual limit. Though it's not recommended to print more than 10 words

Tables

The table environment used in this proceedings have special centered cells in which you can configure the width:

```
\begin{table}[H]
  \caption{Caption}
  \label{tab:table 1}
  \begin{adjustbox}{center}
    \resizebox{\textwidth}{!}{
      \begin{tabular}{@{}%
        C{0.2\textwidth}
        C{0.2\textwidth}
        C{0.25\textwidth}
        C{0.35\textwidth}%
        @{}
        \hline
        \textbf{Column 1} & \textbf{Column 2} & \textbf{Column 3} & \textbf{
{Column 4} \\
        \hline
        Text & Text & Text & Text \\
        Text & Text & Text & Text \\
        \hline
      \end{tabular}
    }
  \end{adjustbox}
\end{table}
```

In this specific table, the *adjustbox* and *resizebox* commands were employed to re-scale the table and center it with respect the text, the **C{width}** reate columns of specific width, in which the text is centered both horizontally and vertically.

The table caption name can be changed using the code:

```
\renewcommand{\tablename}{Table}
```

Figures

The figures in this proceedings didn't have any changes, although it's possible to add footnotes to them via the following code:

```
\begin{englishfigure}[H]
  \caption{Figure Title}
  \label{fig:figure 1}
  \centering
  \begin{adjustbox}{center}
    \begin{minipage}{\textwidth}
      \includegraphics[width=\textwidth]{figure}
      {\footnotesize \textit{Note.} This is a figure's footnote.\par}
    \end{minipage}
  \end{adjustbox}
\end{englishfigure}
```

You can also include sub-figures using the *subcaptionbox* environment:

```
\begin{figure}[t!]
  %\centering
  \caption{Caption}~\label{fig:figure label}
  \hbox to \textwidth{%
    \hfill
    \subcaptionbox{Sub-figure caption~\label{fig:subfigure label}}{%
      {\includegraphics[width=.48\textwidth, height=.35\textwidth]{image}}%
    \hspace{0.019\textwidth}%
    \subcaptionbox{Sub-figure caption~\label{fig:subfigure label}}{%
      {\includegraphics[width=.5\textwidth, height=.35\textwidth]{image}}%
    \hfill
  }
  \vspace{1mm}
  \hbox to \textwidth{%
    \hfill
    \subcaptionbox{Big sub-figure caption~\label{fig:subfigure label}}{%
      {\includegraphics[width=\textwidth]{image}}%
    \hfill
  }
}
\end{figure}
```

However, in the case of figures, it seems that Babel package disables or prevents the caption name change, so the only way it to force it is to create another figure environment:

```
\begin{englishfigure}[H]
  \caption{Figure Title}
  \label{fig:figure 1}
  \includegraphics[width=\textwidth]{figure}
\end{englishfigure}
```

Add images to document

This LaTeX template has four specific commands to include images within the text, which can be used to show viewers specific moments that occurred during the event or congress to which the proceedings belong.


The *rightimage* and *leftimage* functions allows you to print an image next to a text, and are declared with the following entries:

- **image minipage width** and **text minipage width**: Sets the width of the space where the image and the text are going to be printed, it can be filled with values between 0 and 1, as it's declared with respect the text width
- **height**: Sets the image height in cm
- **width**: Sets the image width, it can be filled with values between 0 and 1, as it's declared with respect the line width.

```
\rightimage{image minipage width}{image}{height}{width}{text minipage width}{Text}
```

```
\leftimage{image minipage width}{image}{height}{width}{text minipage width}{Text}
```

Figure 11. Right and Left images functions

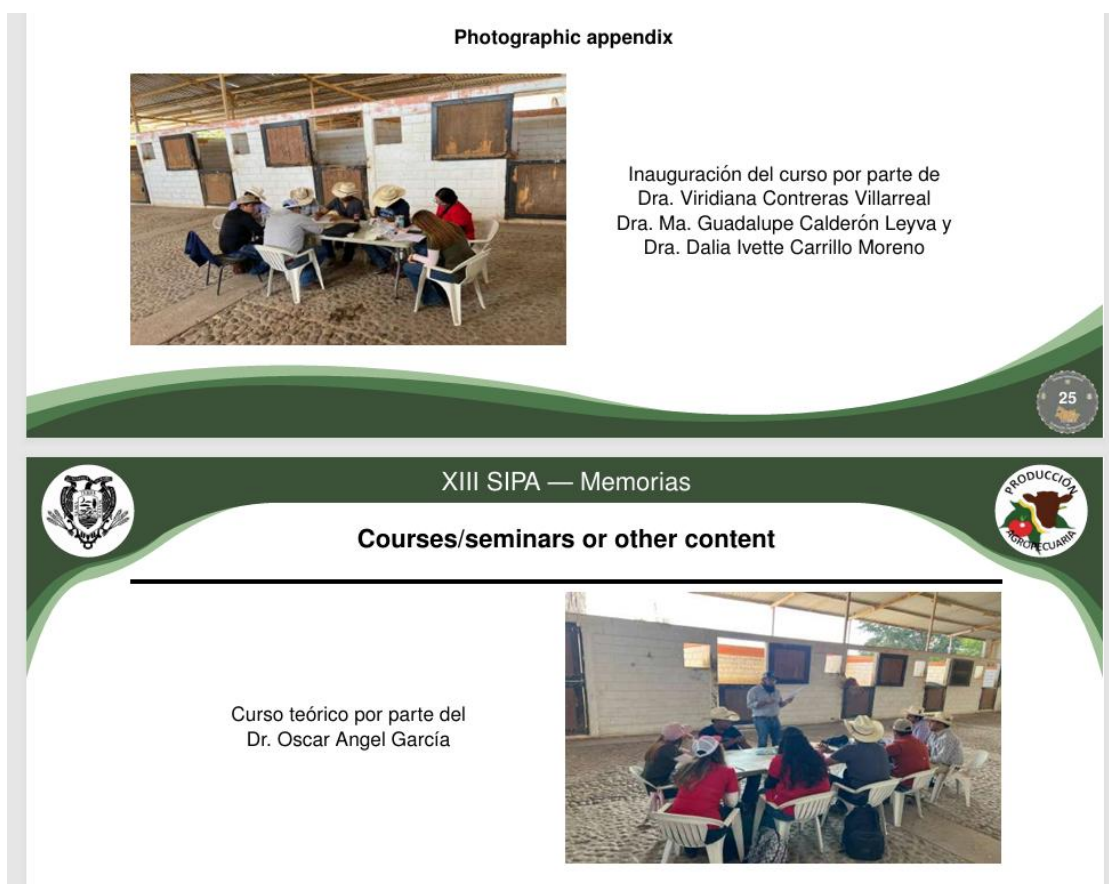

The *images* and *bigimage* functions allows you to print two images side by side and a big image in the text, and they are declared with the following entries:

- **minipage width:** Sets the width of the space where the images are going to be printed, it can be filled with values between 0 and 1, as it's declared with respect the text width
- **height:** Sets the image height in cm
- **width:** Sets the image width, it can be filled with values between 0 and 1, as it's declared with respect the line width

In the case off *bigimage*, the image width is declared with respect the text width

```
\images{minipage width}{image}{height}{width}{minipage width}{image}{height}{width}  
\bigimage{image}{height}{width}
```

Figure 12. Two image and centered image environments



How to bypass the proceedings' TOC and bookmark's rules?

The proceedings' template was created in order to follow a determined TOC and bookmark format. However, we are all aware that there might be some works where it's necessary to overrule the main format's rules.

This section was specifically created to show how you can bypass the TOC and bookmark format in the proceedings; however, given that these codes were employed in a very specific chapter of the document, there could be some places or codes that could clash with them.

Add a different TOC, document and bookmark content for the same entry

The following function uses the “\texorpdfstring” function to print different content in the bookmark and TOC, while the “\mychaptertwo” code prints a different content in the document and TOC:

```
\mychaptertwo{\texorpdfstring{TOC text}{Bookmark text}}{Document text}
```

Add a section title that behaves as a chapter one

If for some reason you need a inner document title being shown up as a chapter title in TOC, you can use the following code:

```
\cftsetindents{section}{0.5cm}{2cm}
\phantomsection
\cftaddtitleline{toc}{section*}{%
  \hspace{0.49cm}\textbf{\MakeUppercase{Title}}\vspace{-2.5mm}%
}{}
\cftsetindents{section}{1.5cm}{2cm}
```

This code alters the indent for the section title to mask it as a chapter, and restores the indentation for the following entries. Moreover, it removes the page number and adds a “\vspace” after the title to allows you to print an author name for the entry.

Add only an author's name in TOC

Although this code works as an additional line for the code above, you can actually use it to print only an Author's name in the text and TOC – altogether with it's affiliation and email – while reducing the space to place it under the title, and mask it as an ordinary document's header in the proceedings:

```
\phantomsection
\pdfbookmark[0]{\MakeUppercase{Bookmark title}}{}
\section*{\MakeUppercase{Title}}

\vspace{-0.2cm}
\tocauthor{Ma. Guadalupe Calderón Leyva}
\author{%
  Ma. Guadalupe Calderón Leyva
}
\affiliation{%
  Jefa del postgrado en Ciencias en Producción Agropecuaria
}
\corresponding{}}{}}
```

```
\title{\vspace{-5mm}}

\begingroup
\authorbookmarkfalse
\maketitle
\endgroup
```

As you can see, you need to add two different “\vspace” functions, given that the TOC entries have a different in-line length than the document’s text.

The “\pdfbookmark[0]{**bookmark text**}” function allows you to print a chapter bookmark different.

The “\authorbookmarkfalse” function prevents “\maketitle” to print a bookmark

Add a numbered section title without author

If you want to add only a title in the document and TOC without an author, the following code can help you to do that:

```
\phantomsection
\section*{Title}
\addcontentsline{toc}{section}{\hspace{-0.1cm}\texorpdfstring{\MakeUppercase{TOC Title}}{\MakeUppercase{Bookmark Title}}}
\vspace{1.5cm}
```

The code adds the title both as a bookmark and in TOC. Don’t forget to add a “\phantomsection” before every “\addcontentsline” to allow TOC jump to that specific line.

Add the author’s name as a bookmark instead of it’s work title

The proceedings places the author’s work as a bookmark instead of it’s name. However, if you want to print it’s name instead of the title, all you need to do is change the following lines in the **sipa-documents.sty** file:

```
\addcontentsline{toc}{chapterwithsub}{%
\texorpdfstring{\textit{\@tocauthor}}{\MakeUppercase{\@title}}}%
}%
```

For the following lines:

```
\addcontentsline{toc}{chapterwithsub}{%
\texorpdfstring{\textit{\@tocauthor}}{\MakeUppercase{\@tocauthor}}}%
}%
```

Acknowledgments

I would like to thank the authors the following latex tempaltes, since these were the works I used as a basis to create this document:

- **Official Leiden Observatory thesis style**
- **IJSmartGrid Template**

References

Eyecioglu, Önder (2026). *LaTeX template for The International Journal of Smart Grid (ijSmartGrid)*. Overleaf journal templates. <https://es.overleaf.com/latex/templates/ijsmartgrid-template/wjhztbghfdgb>

Van Capelleveen, Richelle F. (2023). *Official Leiden Observatory thesis style*. GitHub repository. https://github.com/richellevc/observatory_thesis_style