INSTALLATION GUIDE


# Install the To Do App in your own Salesforce org

A step-by-step guide to putting this personal task manager in a free Salesforce Trailhead Playground or Developer Edition org, from scratch. You don't need any Salesforce development experience.

**~15 minutes**
start to finish

**Free**
every tool used here costs nothing

**Mac or Windows**
the commands are the same

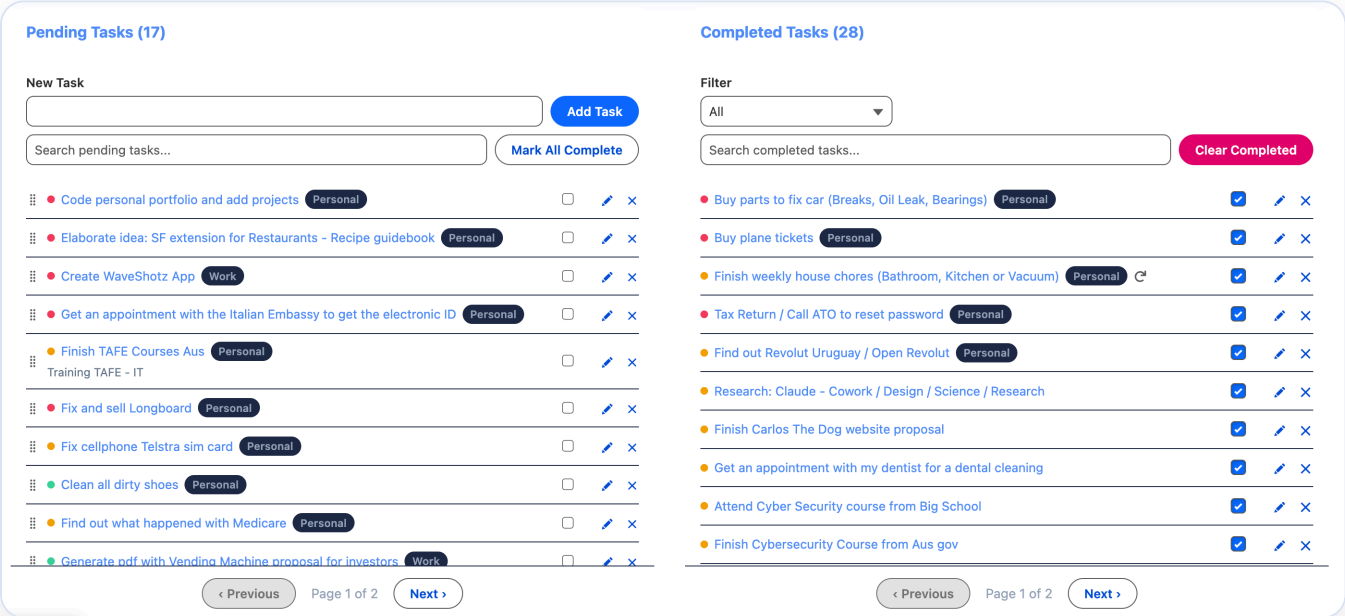



What you'll have at the end: the app running in your org, ready for your own tasks.



MIT License

# How it works

The app is a set of files on GitHub. You download them to your computer, then a free tool called the **Salesforce CLI** sends them to your Salesforce org. That's it: no coding and no clicking through Setup.

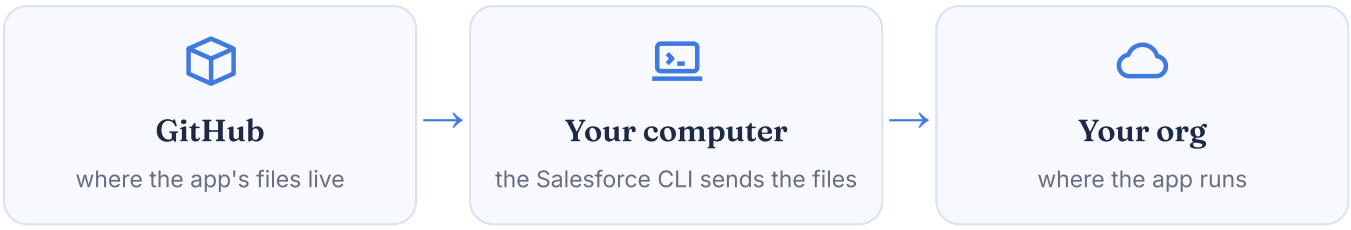


## Before you start

- [ ] **A Salesforce org to install into.** Use a **Trailhead Playground** (create one at trailhead.salesforce.com from any hands-on challenge) or a free **Developer Edition** org (developer.salesforce.com/signup).
- [ ] **That org's username and password.** Step 4 explains how to find them for a Playground.
- [ ] **About 15 minutes** and an internet connection.

> **Use a practice org, not a real business org**
> Install this in a Playground or Developer Edition org. The app adds its own objects, pages and code.

> **The app starts empty**
> There is no sample data to load. Your list is private to you: add your first task as soon as the app opens.


## The steps at a glance

| # | STEP | WHAT YOU DO |
|---|---|---|
| 1 | Install the Salesforce CLI | Download and run an installer |
| 2 | Download the app | Download a ZIP file from GitHub and unzip it |
| 3 | Open a terminal in the app's folder | One small trick, shown for Mac and Windows |
| 4 | Connect your org | Log in once through your browser |
| 5 | Deploy the app | One command |
| 6 | Give yourself access | One command |
| 7 | Open the app | One command, then the App Launcher |

# 1 Install the Salesforce CLI

The Salesforce CLI is the free, official tool that sends the app to your org.

1. Go to developer.salesforce.com/tools/salesforcecli.
2. Under **Choose your operating system**, click the download for your computer.
3. Open the downloaded file and follow the installer, accepting the defaults.

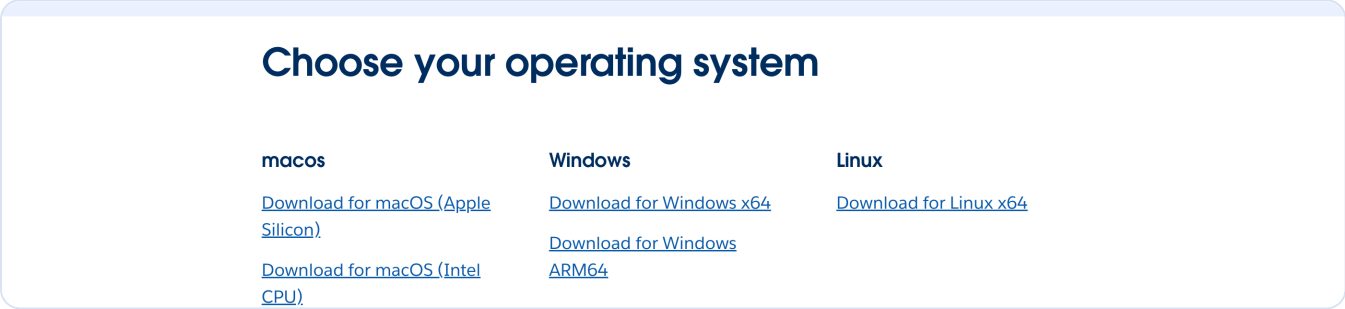


**Which Mac download?**
Click the Apple menu → **About This Mac**. If it says **Apple M1, M2, M3...**, choose *Apple Silicon*. If it says **Intel**, choose *Intel CPU*.

### Check that it worked

Open a terminal: on Mac, open the **Terminal** app (search for it with ⌘ + Space). On Windows, open **PowerShell** from the Start menu. Then type this and press **Enter**:

```
TYPE  sf --version
```

You should see a version number, similar to this:


```
Terminal

$ sf --version
@salesforce/cli/2.150.6 darwin-x64 node-v24.15.0
```

Your numbers will be different, and that's fine. If you see *command not found*, close the terminal, open a new one and try again.


# 2 Download the app

1. Go to [github.com/francoansaldi7/salesforce-todo-app](github.com/francoansaldi7/salesforce-todo-app).
2. Click the green **Code** button.

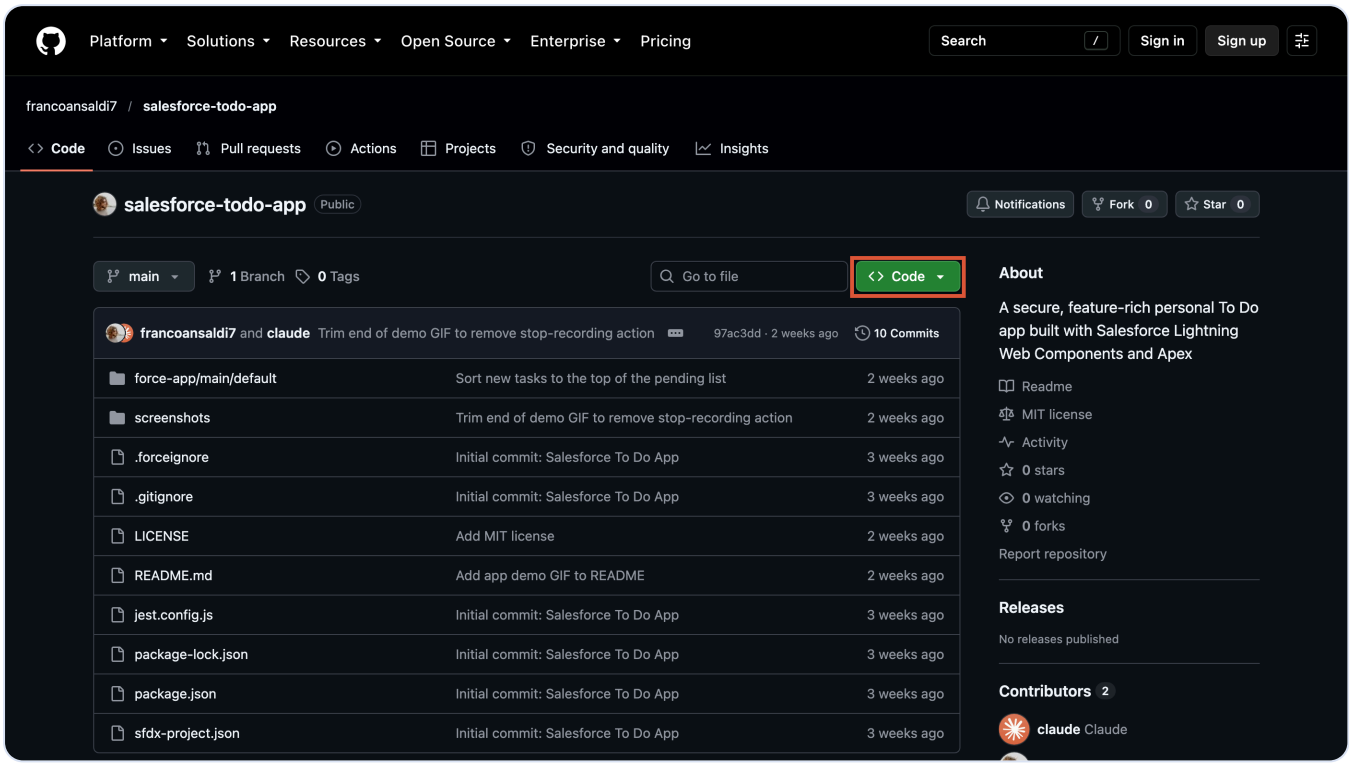


3. In the menu that opens, click **Download ZIP**.
4. Unzip the file:
   - **Mac:** double-click it in Downloads. Safari often unzips it for you.
   - **Windows:** right-click it → **Extract All...** → **Extract**.

You now have a folder called `salesforce-todo-app-main`.

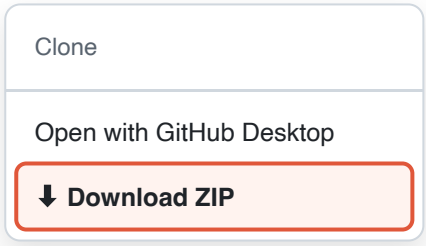


Simplified sketch of the menu

> **How to know you have the right folder**
> Open it. You should see a folder named `force-app` and a file named `sfdx-project.json`. On Windows, the unzipped folder sometimes contains *another* folder with the same name. If so, go inside it until you see `force-app`.

Know Git? You can run `git clone https://github.com/francoansaldi7/salesforce-todo-app.git` instead.

## 3 Open a terminal in the app's folder

The commands in the next steps must run **inside** the app's folder (the one with `force-app` in it).

### On Mac

1. Open **Terminal**.
2. Type `cd` followed by a **space**. Don't press Enter yet.
3. Drag the folder from Finder onto the Terminal window. Its location appears after `cd `.
4. Press **Enter**.

### On Windows

1. Open the folder in File Explorer.
2. Click the address bar at the top, type `powershell` and press **Enter**. A PowerShell window opens, already in that folder.




Optional check: type `ls` (Mac) or `dir` (Windows) and press Enter. If you see `force-app` in the list, you're in the right place.

# 4 Connect your org


This tells the CLI which org to install into. You only do it once.

### First, get your login details

**Developer Edition org:** use the username and password you chose when you signed up. Your username looks like an email address, but it isn't always your real email.

**Trailhead Playground:** Playgrounds don't show you a password, so you need to get one:

1. Open your Playground from Trailhead (**Launch** on any hands-on challenge).
2. Click the **App Launcher** (the 9-dot grid, top left), search for **Playground Starter** and open it.
3. Open the **Get Your Login Credentials** tab. Copy your **username**, then click **Reset My Password** and set a password from the email you receive.

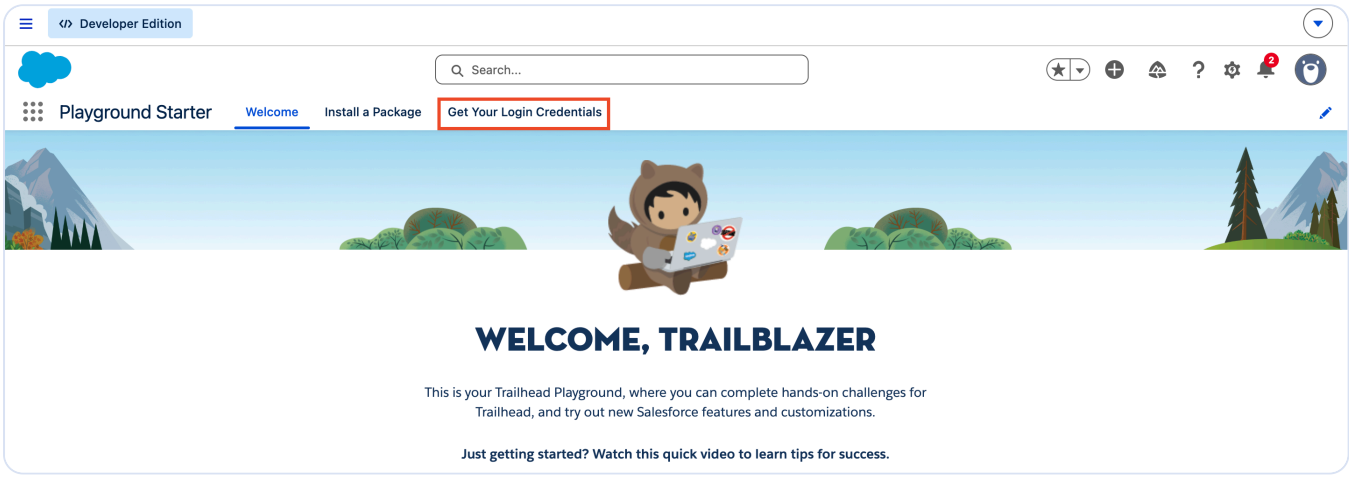


### Then connect

In your terminal (still in the app's folder), type:

```
TYPE  sf org login web --alias todoOrg
```

1. Your browser opens a Salesforce login page. Log in with the username and password from above.
2. If Salesforce asks you to **Allow** access, click **Allow**.
3. Go back to the terminal. You'll see a success message:

```
Terminal

$ sf org login web --alias todoOrg
Successfully authorized you@yourplayground.com with org ID 00D…
```

> **What is `--alias todoOrg` ?**
> It's a nickname for your org, so you don't have to type the long username in every command. The rest of this guide uses `todoOrg` .

## 5 Deploy the app

This sends every part of the app to your org: the task object, the pages, the components and the tests. Type:

TYPE `sf project deploy start --source-dir force-app --target-org todoOrg`

Wait about 30 seconds to a minute. When it finishes, you'll see **Status: Succeeded** followed by a list of the 27 parts that were created:

Terminal

```
$ sf project deploy start --source-dir force-app --target-org todoOrg

 ———————— Deploying Metadata ————————

 ✔ Preparing
 ✔ Waiting for the org to respond
 ✔ Deploying Metadata
   ▸ Components: 27/27 (100%)
 ✔ Done

 Status: Succeeded
 Target Org: you@yourplayground.com

Deployed Source
 State    Name                 Type
 Created  TaskController       ApexClass
 Created  TO_DO_App            CustomApplication
 Created  todoApp              LightningComponentBundle
 …        (27 components in total)
```

If you see *Failed* instead, check the Troubleshooting page at the end of this guide.

## 6 Give yourself access

Salesforce hides new apps until a user is given permission. The app includes a **permission set** (a bundle of permissions) called `To_Do_App_Access`. Assign it to yourself:

TYPE `sf org assign permset --name To_Do_App_Access --target-org todoOrg`

Terminal

```
$ sf org assign permset --name To_Do_App_Access --target-org todoOrg
Permsets Assigned
 Username                Permission Set Assignment
 you@yourplayground.com  To_Do_App_Access
```


This gives you the app, its tabs, and access to your tasks and all their fields.

## 7 Open the app

TYPE `sf org open --target-org todoOrg`

Your org opens in the browser, already logged in. Then:

1. Click the **App Launcher** (the 9-dot grid, top left).
2. Type **TO DO** in the search box.
3. Under **Apps**, click **TO DO App**.
4. Click the **To Do App** tab, the first one in the navigation bar, to see your task list.

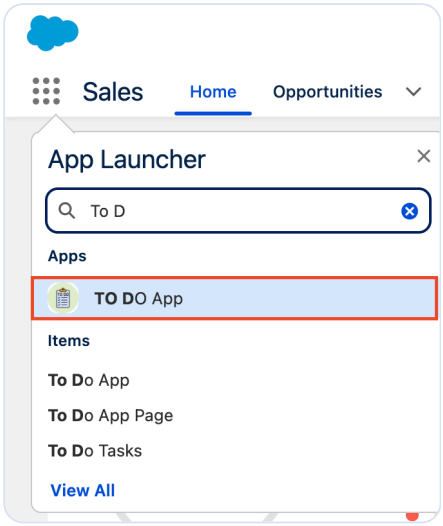


Don't see the app? Refresh the page once. More help is on the Troubleshooting page.

### Things to try

| WHAT | HOW |
|---|---|
| **Add a task** | Type a name and press Enter. Give it a priority (High, Medium, Low) and a category. |
| **Reorder** | Drag a pending task up or down. The order is saved. |
| **Recurring tasks** | Set a task to repeat daily, weekly or monthly, then complete it: the next one is created for you. |
| **Search** | Type in the search box above either list to find a task by name. |
| **Clear Completed** | Archives your completed tasks. Switch the filter to *Archived* to restore them. |
| **Undo delete** | Delete a task and use the 5-second *Undo* bar to bring it back. |

## + Run the tests OPTIONAL

Want to confirm everything works in your org? The app includes automated Apex tests. This takes a minute or two:

TYPE `sf apex run test --class-names TaskControllerTest --code-coverage --result-format human --target-org todoOrg`

Look for **Outcome: Passed** and **Pass Rate: 100%** in the summary at the end.

# Troubleshooting

| YOU SEE... | WHAT TO DO |
|---|---|
| `command not found: sf` or *'sf' is not recognized* | The CLI isn't installed yet, or the terminal was open during the install. Close the terminal, open a new one and try again. If it still fails, reinstall (step 1). |
| *No authorization information found for todoOrg* | The org isn't connected yet, or the alias is spelled differently. Repeat step 4 and use exactly `--alias todoOrg`. |
| *This directory does not contain a valid Salesforce DX project* | The terminal isn't in the app's folder. Repeat step 3 and make sure you can see `force-app` in that folder. |
| The browser login in step 4 says your password is wrong | For a Playground, reset the password from *Playground Starter* (step 4). Check that you're using the **username**, not your email address. |
| Step 5 says *Failed* | Read the error lines in the table it prints. The most common cause is installing into an org that already has a different app with the same object names. Use a fresh Playground. |
| *Duplicate PermissionSetAssignment* in step 6 | Nothing to fix: the permission set is already assigned to you. |
| The app isn't in the App Launcher | Refresh the page. Salesforce sometimes takes a moment to show a newly assigned app. If it's still missing, repeat step 6. |
| The app opens on a different tab | Salesforce reopens the last tab you visited. Click **To Do App**, the first tab, and it will open there next time. |

## Words used in this guide

| | |
|---|---|
| **Org** | Your own Salesforce environment, with its own data, users and apps. |
| **Trailhead Playground** | A free practice org that Trailhead creates for you. |
| **Salesforce CLI** | The official command-line tool for working with orgs. `sf` is its command. |
| **Terminal** | The window where you type commands: *Terminal* on Mac, *PowerShell* on Windows. |
| **Deploy** | To send the app's files from your computer to your org. |
| **Permission set** | A bundle of permissions you assign to a user to give access to an app. |
| **Alias** | A short nickname for an org, used in commands instead of its username. |

### That's it

You now have To Do App running in your own org. To learn how it's built (its components, security model and design decisions), read the **README** on GitHub.