INSTALLATION GUIDE


Install the To Do App in your own Salesforce org

A step-by-step guide to putting this personal task manager in a free Salesforce Trailhead Playground or Developer Edition org, from scratch. You don't need any Salesforce development experience.

~15 minutes
start to finish

Free
every tool used here costs nothing

Mac or Windows
the commands are the same

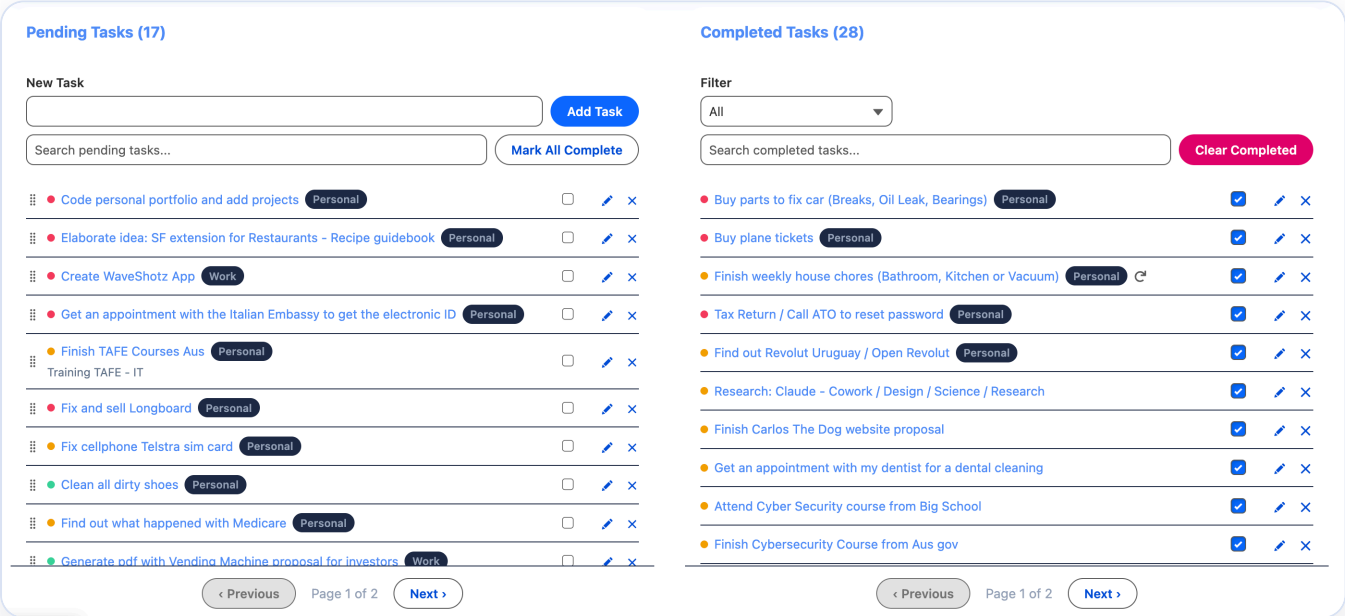


What you'll have at the end: the app running in your org, ready for your own tasks.

MIT License

How it works

The app is a set of files on GitHub. You download them to your computer, then a free tool called the **Salesforce CLI** sends them to your Salesforce org. That's it: no coding and no clicking through Setup.

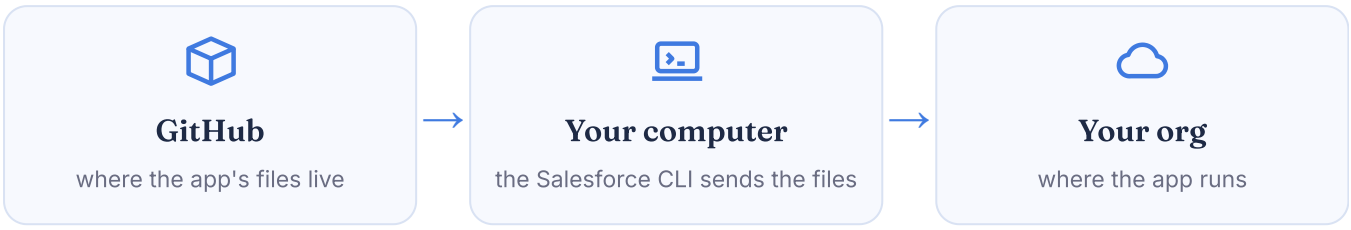

Before you start

- [ ] **A Salesforce org to install into.** Use a **Trailhead Playground** (create one at trailhead.salesforce.com from any hands-on challenge) or a free **Developer Edition** org (developer.salesforce.com/signup).
- [ ] **That org's username and password.** Step 4 explains how to find them for a Playground.
- [ ] **About 15 minutes** and an internet connection.

> **Use a practice org, not a real business org**
> Install this in a Playground or Developer Edition org. The app adds its own objects, pages and code.

> **The app starts empty**
> There is no sample data to load. Your list is private to you: add your first task as soon as the app opens.


The steps at a glance

#	STEP	WHAT YOU DO
1	Install the Salesforce CLI	Download and run an installer
2	Download the app	Download a ZIP file from GitHub and unzip it
3	Open a terminal in the app's folder	One small trick, shown for Mac and Windows
4	Connect your org	Log in once through your browser
5	Deploy the app	One command
6	Give yourself access	One command
7	Open the app	One command, then the App Launcher

1 Install the Salesforce CLI

The Salesforce CLI is the free, official tool that sends the app to your org.

1. Go to developer.salesforce.com/tools/salesforcecli.
2. Under **Choose your operating system**, click the download for your computer.
3. Open the downloaded file and follow the installer, accepting the defaults.

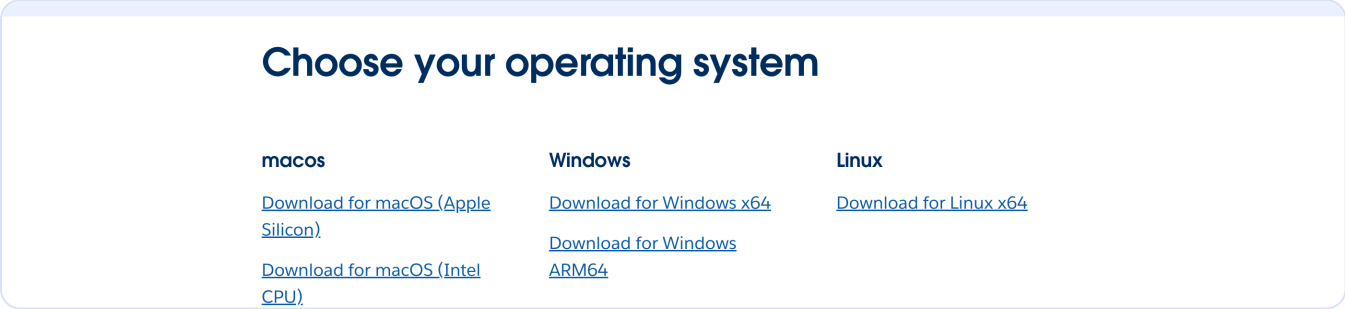

Which Mac download?
Click the Apple menu → **About This Mac**. If it says **Apple M1, M2, M3...**, choose *Apple Silicon*. If it says **Intel**, choose *Intel CPU*.

Check that it worked

Open a terminal: on Mac, open the **Terminal** app (search for it with ⌘ + Space). On Windows, open **PowerShell** from the Start menu. Then type this and press **Enter**:

```
TYPE  sf --version
```

You should see a version number, similar to this:


```
Terminal

$ sf --version
@salesforce/cli/2.150.6 darwin-x64 node-v24.15.0
```

Your numbers will be different, and that's fine. If you see *command not found*, close the terminal, open a new one and try again.


2 Download the app

1. Go to github.com/francoansaldi7/salesforce-todo-app.
2. Click the green **Code** button.

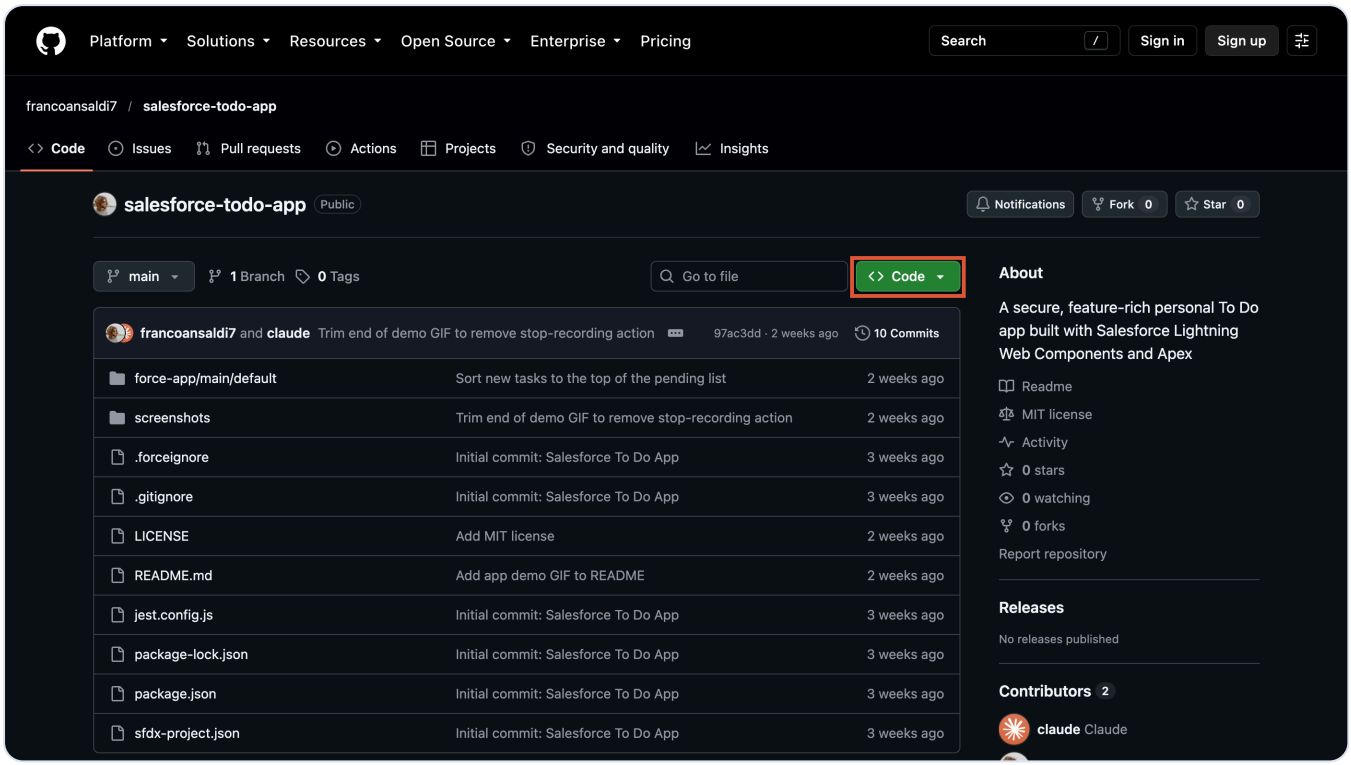

3. In the menu that opens, click **Download ZIP**.
4. Unzip the file:
   - **Mac:** double-click it in Downloads. Safari often unzips it for you.
   - **Windows:** right-click it → **Extract All...** → **Extract**.

You now have a folder called `salesforce-todo-app-main`.

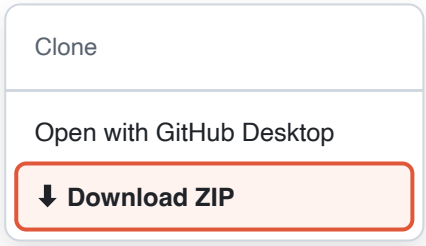

Simplified sketch of the menu

> **How to know you have the right folder**
> Open it. You should see a folder named `force-app` and a file named `sfdx-project.json`. On Windows, the unzipped folder sometimes contains *another* folder with the same name. If so, go inside it until you see `force-app`.

Know Git? You can run `git clone https://github.com/francoansaldi7/salesforce-todo-app.git` instead.

3 Open a terminal in the app's folder

The commands in the next steps must run **inside** the app's folder (the one with `force-app` in it).

On Mac

1. Open **Terminal**.
2. Type `cd` followed by a **space**. Don't press Enter yet.
3. Drag the folder from Finder onto the Terminal window. Its location appears after `cd `.
4. Press **Enter**.

On Windows

1. Open the folder in File Explorer.
2. Click the address bar at the top, type `powershell` and press **Enter**. A PowerShell window opens, already in that folder.



Optional check: type `ls` (Mac) or `dir` (Windows) and press Enter. If you see `force-app` in the list, you're in the right place.

4 Connect your org


This tells the CLI which org to install into. You only do it once.

First, get your login details

Developer Edition org: use the username and password you chose when you signed up. Your username looks like an email address, but it isn't always your real email.

Trailhead Playground: Playgrounds don't show you a password, so you need to get one:

1. Open your Playground from Trailhead (**Launch** on any hands-on challenge).
2. Click the **App Launcher** (the 9-dot grid, top left), search for **Playground Starter** and open it.
3. Open the **Get Your Login Credentials** tab. Copy your **username**, then click **Reset My Password** and set a password from the email you receive.

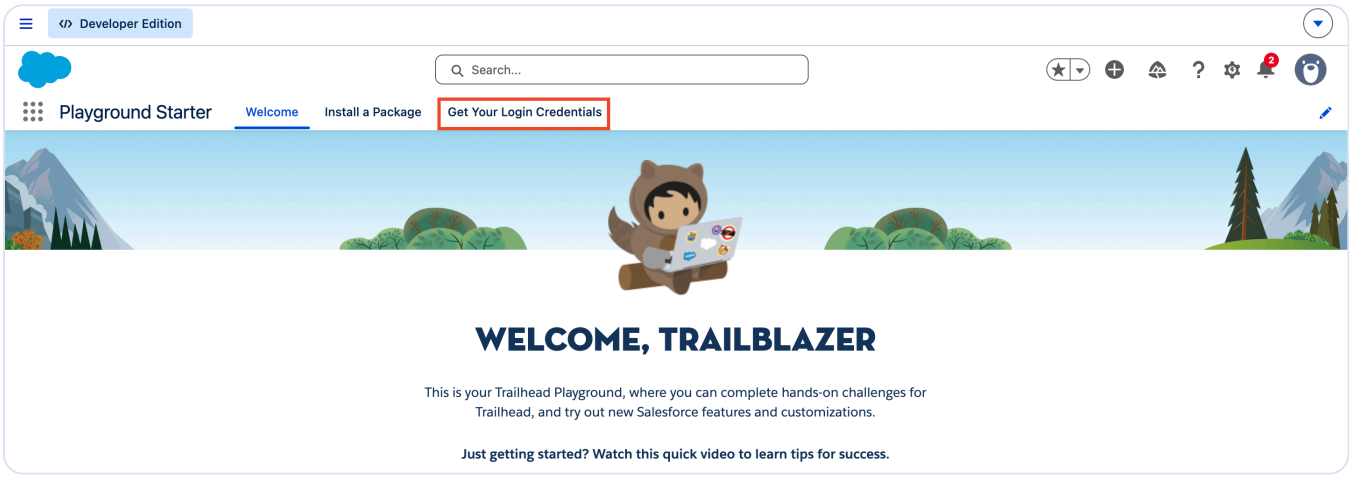

Then connect

In your terminal (still in the app's folder), type:

```
TYPE  sf org login web --alias todoOrg
```

1. Your browser opens a Salesforce login page. Log in with the username and password from above.
2. If Salesforce asks you to **Allow** access, click **Allow**.
3. Go back to the terminal. You'll see a success message:

```
Terminal

$ sf org login web --alias todoOrg
Successfully authorized you@yourplayground.com with org ID 00D…
```

> **What is `--alias todoOrg` ?**
> It's a nickname for your org, so you don't have to type the long username in every command. The rest of this guide uses `todoOrg` .

5 Deploy the app

This sends every part of the app to your org: the task object, the pages, the components and the tests. Type:

TYPE `sf project deploy start --source-dir force-app --target-org todoOrg`

Wait about 30 seconds to a minute. When it finishes, you'll see **Status: Succeeded** followed by a list of the 27 parts that were created:

Terminal

```
$ sf project deploy start --source-dir force-app --target-org todoOrg

 ———————— Deploying Metadata ————————

 ✔ Preparing
 ✔ Waiting for the org to respond
 ✔ Deploying Metadata
   ▸ Components: 27/27 (100%)
 ✔ Done

 Status: Succeeded
 Target Org: you@yourplayground.com

Deployed Source
 State    Name                 Type
 Created  TaskController       ApexClass
 Created  TO_DO_App            CustomApplication
 Created  todoApp              LightningComponentBundle
 …        (27 components in total)
```

If you see *Failed* instead, check the Troubleshooting page at the end of this guide.

6 Give yourself access

Salesforce hides new apps until a user is given permission. The app includes a **permission set** (a bundle of permissions) called `To_Do_App_Access`. Assign it to yourself:

TYPE `sf org assign permset --name To_Do_App_Access --target-org todoOrg`

Terminal

```
$ sf org assign permset --name To_Do_App_Access --target-org todoOrg
Permsets Assigned
 Username                Permission Set Assignment
 you@yourplayground.com  To_Do_App_Access
```

This gives you the app, its tabs, and access to your tasks and all their fields.

7 Open the app

TYPE `sf org open --target-org todoOrg`

Your org opens in the browser, already logged in. Then:

1. Click the **App Launcher** (the 9-dot grid, top left).
2. Type **TO DO** in the search box.
3. Under **Apps**, click **TO DO App**.
4. Click the **To Do App** tab, the first one in the navigation bar, to see your task list.

Don't see the app? Refresh the page once. More help is on the Troubleshooting page.

Things to try

WHAT	HOW
Add a task	Type a name and press Enter. Give it a priority (High, Medium, Low) and a category.
Reorder	Drag a pending task up or down. The order is saved.
Recurring tasks	Set a task to repeat daily, weekly or monthly, then complete it: the next one is created for you.
Search	Type in the search box above either list to find a task by name.
Clear Completed	Archives your completed tasks. Switch the filter to *Archived* to restore them.
Undo delete	Delete a task and use the 5-second *Undo* bar to bring it back.

+ Run the tests OPTIONAL

Want to confirm everything works in your org? The app includes automated Apex tests. This takes a minute or two:

TYPE `sf apex run test --class-names TaskControllerTest --code-coverage --result-format human --target-org todoOrg`

Look for **Outcome: Passed** and **Pass Rate: 100%** in the summary at the end.

Troubleshooting

YOU SEE...	WHAT TO DO
`command not found: sf` or *'sf' is not recognized*	The CLI isn't installed yet, or the terminal was open during the install. Close the terminal, open a new one and try again. If it still fails, reinstall (step 1).
No authorization information found for todoOrg	The org isn't connected yet, or the alias is spelled differently. Repeat step 4 and use exactly `--alias todoOrg`.
This directory does not contain a valid Salesforce DX project	The terminal isn't in the app's folder. Repeat step 3 and make sure you can see `force-app` in that folder.
The browser login in step 4 says your password is wrong	For a Playground, reset the password from *Playground Starter* (step 4). Check that you're using the **username**, not your email address.
Step 5 says *Failed*	Read the error lines in the table it prints. The most common cause is installing into an org that already has a different app with the same object names. Use a fresh Playground.
Duplicate PermissionSetAssignment in step 6	Nothing to fix: the permission set is already assigned to you.
The app isn't in the App Launcher	Refresh the page. Salesforce sometimes takes a moment to show a newly assigned app. If it's still missing, repeat step 6.
The app opens on a different tab	Salesforce reopens the last tab you visited. Click **To Do App**, the first tab, and it will open there next time.

Words used in this guide

Org	Your own Salesforce environment, with its own data, users and apps.
Trailhead Playground	A free practice org that Trailhead creates for you.
Salesforce CLI	The official command-line tool for working with orgs. `sf` is its command.
Terminal	The window where you type commands: *Terminal* on Mac, *PowerShell* on Windows.
Deploy	To send the app's files from your computer to your org.
Permission set	A bundle of permissions you assign to a user to give access to an app.
Alias	A short nickname for an org, used in commands instead of its username.

That's it

You now have To Do App running in your own org. To learn how it's built (its components, security model and design decisions), read the **README** on GitHub.