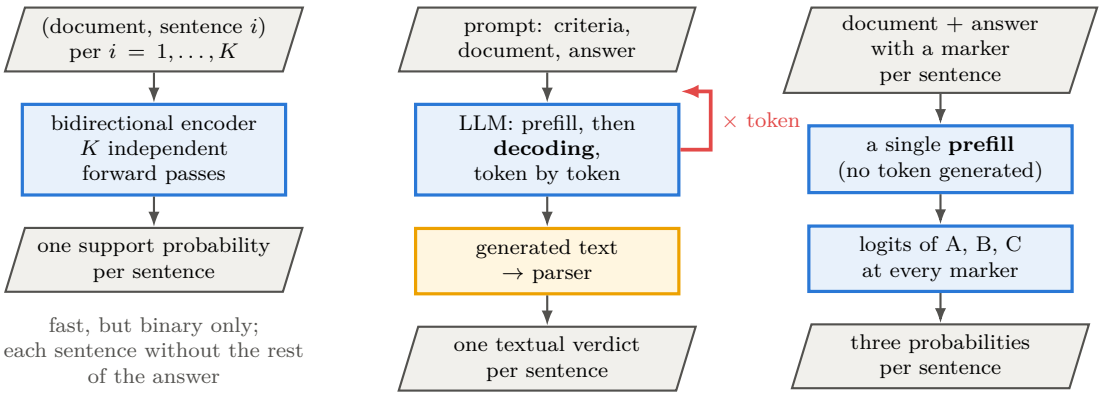

Specialised encoder
(MiniCheck, HHEM)
(document, sentence i)
per $i = 1, \ldots, K$
bidirectional encoder
K independent
forward passes
one support probability
per sentence
fast, but binary only;
each sentence without the rest
of the answer
LLM judge
(LLM-as-a-judge)
prompt: criteria,
document, answer
LLM: prefill, then
decoding,
token by token
× token
generated text
→ parser
one textual verdict
per sentence
flexible, but cost grows
with the text written; format
errors in small models
Specialist decision model
(GroundOne)
document + answer
with a marker
per sentence
a single **prefill**
(no token generated)
logits of A, B, C
at every marker
three probabilities
per sentence
cost almost independent of K;
three classes and
calibratable probabilities