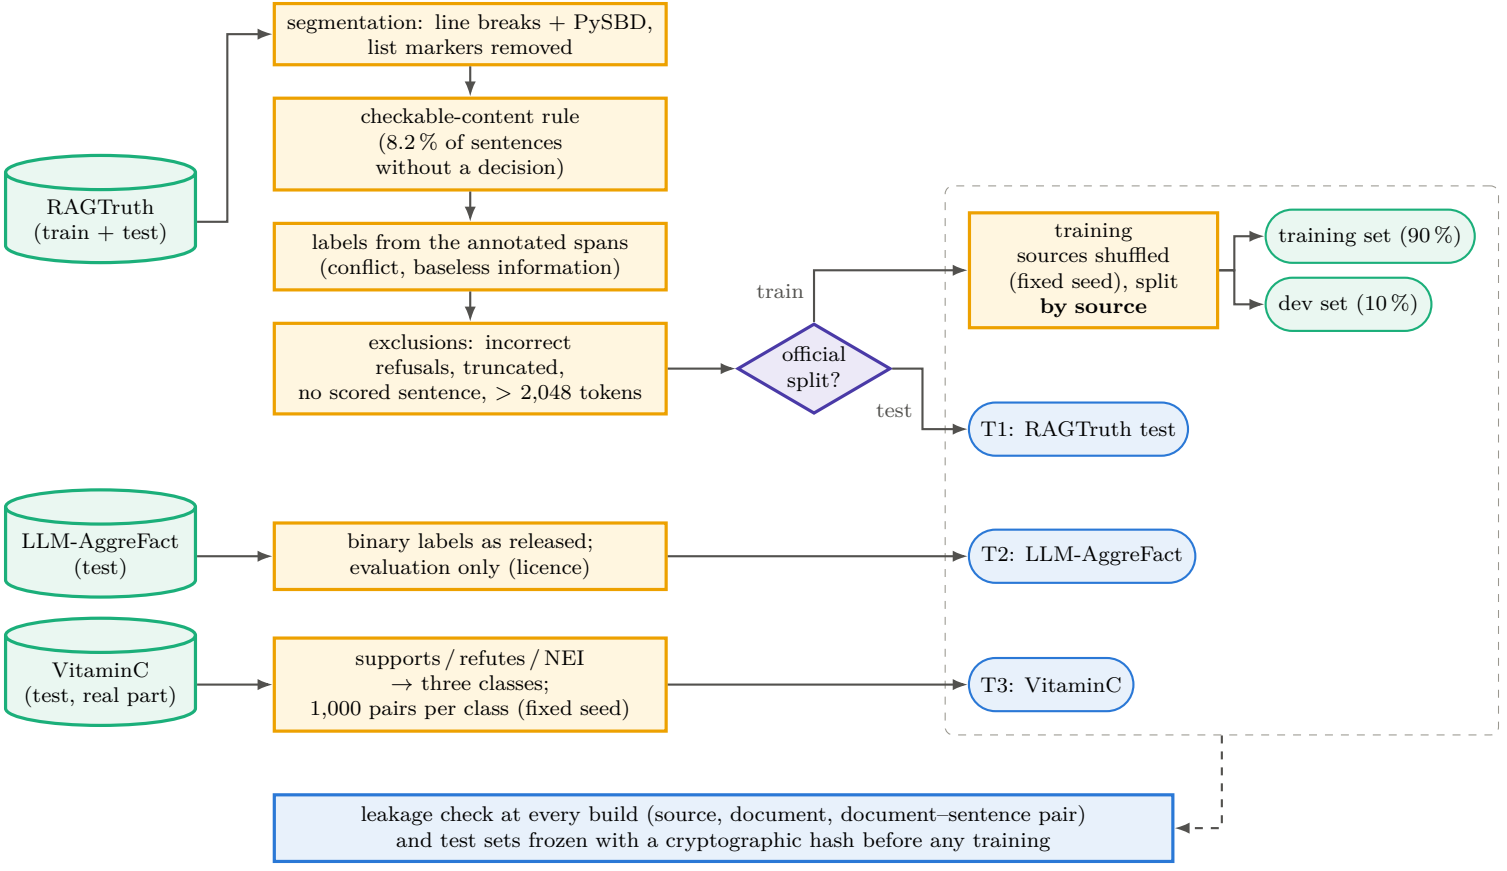

RAGTruth
(train + test)
segmentation: line breaks + PySBD,
list markers removed
checkable-content rule
(8.2 % of sentences
without a decision)
labels from the annotated spans
(conflict, baseless information)
exclusions: incorrect
refusals, truncated,
no scored sentence, > 2,048 tokens
official
split?
train
test
training
sources shuffled
(fixed seed), split
by source
training set (90 %)
dev set (10 %)
T1: RAGTruth test
LLM-AggreFact
(test)
binary labels as released;
evaluation only (licence)
T2: LLM-AggreFact
VitaminC
(test, real part)
supports / refutes / NEI
→ three classes;
1,000 pairs per class (fixed seed)
T3: VitaminC
leakage check at every build (source, document, document–sentence pair)
and test sets frozen with a cryptographic hash before any training