



1. Docker in LXC

1.1 Access the Proxmox node CLI

1. In the Proxmox interface, click on your node

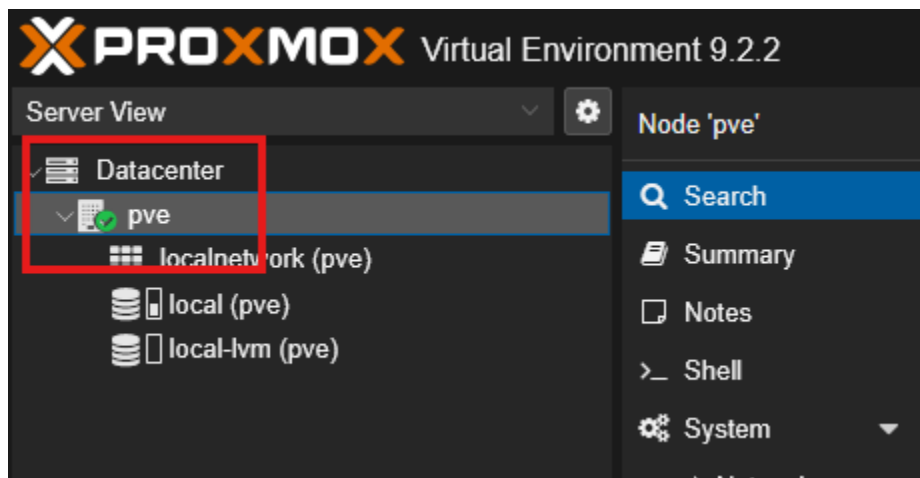

2. In the top right, select the Shell icon.

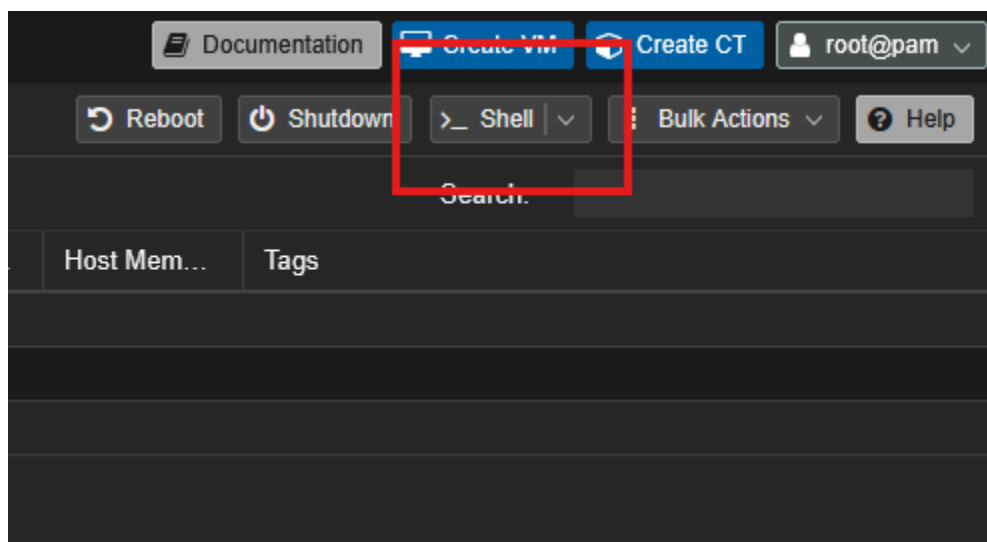

3. You should now be in your Proxmox node shell.

```
pve - Proxmox Console — Zen Browser
192.168.129.149:8006/?console=shell&xtermjs=1&vmid=0&vmname=&node=pve&cmd=
Linux pve 7.0.2-6-pve #1 SMP PREEMPT_DYNAMIC PMX 7.0.2-6 (2026-05-20T08:55Z) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
root@pve:~#
```

1.2 Locate the Proxmox Helper Script for Docker in LXC

1. The script can be found here: <https://community-scripts.org/scripts/docker>. Copy the command given by clicking on it.

 **Docker** LXC Updateable
Containers & Docker

[About](#) [Install](#) [Changelog](#) [Details](#)


ABOUT
Docker is an open-source project for automating the deployment of applications as portable, self-sufficient containers.

NOTES
⚠ WARNINGS
The update function may modify or recreate Portainer containers (portainer/portainer-ce), even if they were created manually.

INSTALL Updateable
[GitHub](#) [Gitea](#) | [Default](#) [Alpine](#) [Advanced](#)
Run the command below in the Proxmox VE Shell to install Docker.

```
bash -c "$(curl -fsSL https://raw.githubusercontent.com/community-scripts/ProxmoxVE/main/ct/docker.sh)"
```

2. Paste it in your Proxmox node shell and press Enter.

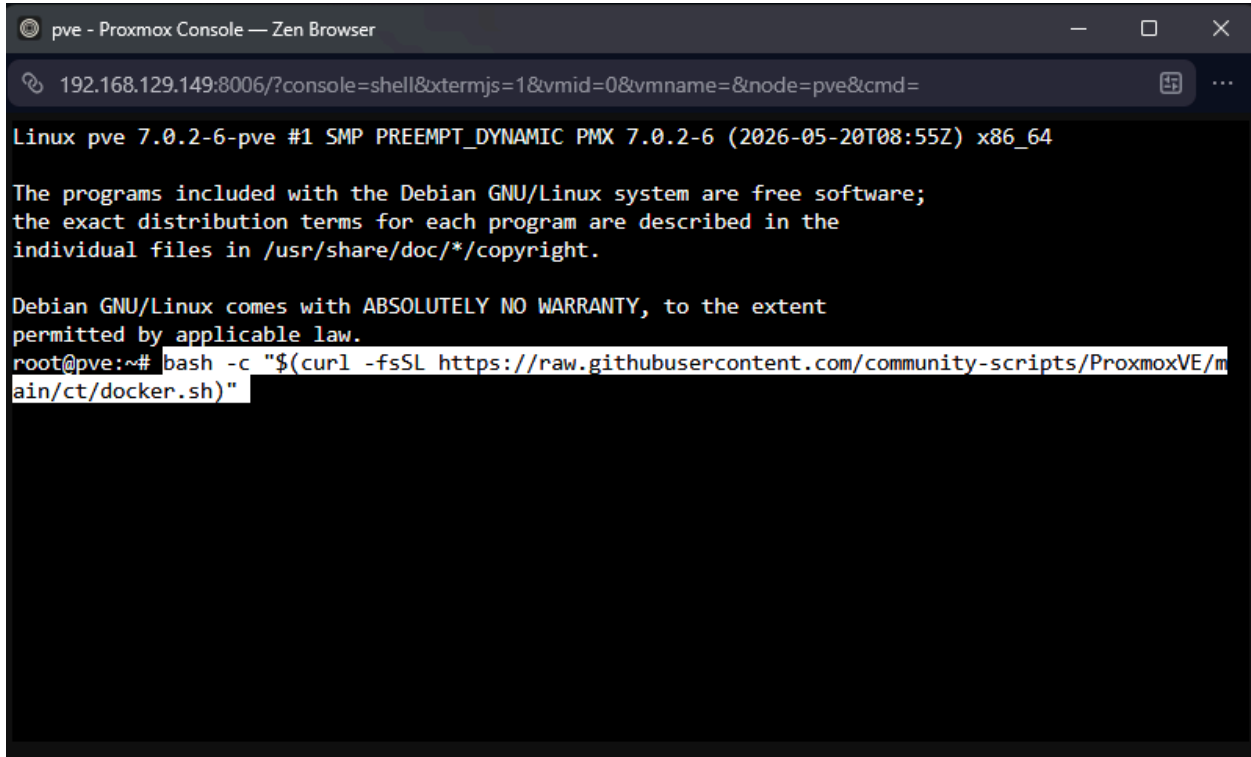


The screenshot shows a web browser window titled "pve - Proxmox Console — Zen Browser". The address bar contains the URL "192.168.129.149:8006/?console=shell&xtermjs=1&vmid=0&vmname=&node=pve&cmd=". The main content area displays a Linux terminal session. The prompt is "root@pve:~#". The command being entered is "bash -c \"\$(curl -fsSL https://raw.githubusercontent.com/community-scripts/ProxmoxVE/main/ct/docker.sh)\"". The terminal output shows the Linux version "Linux pve 7.0.2-6-pve #1 SMP PREEMPT_DYNAMIC PMX 7.0.2-6 (2026-05-20T08:55Z) x86_64" and the Debian GNU/Linux license text.

```
pve - Proxmox Console — Zen Browser
192.168.129.149:8006/?console=shell&xtermjs=1&vmid=0&vmname=&node=pve&cmd=
Linux pve 7.0.2-6-pve #1 SMP PREEMPT_DYNAMIC PMX 7.0.2-6 (2026-05-20T08:55Z) x86_64


The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
root@pve:~# bash -c "$(curl -fsSL https://raw.githubusercontent.com/community-scripts/ProxmoxVE/main/ct/docker.sh)"
```

3. Select Default Installation

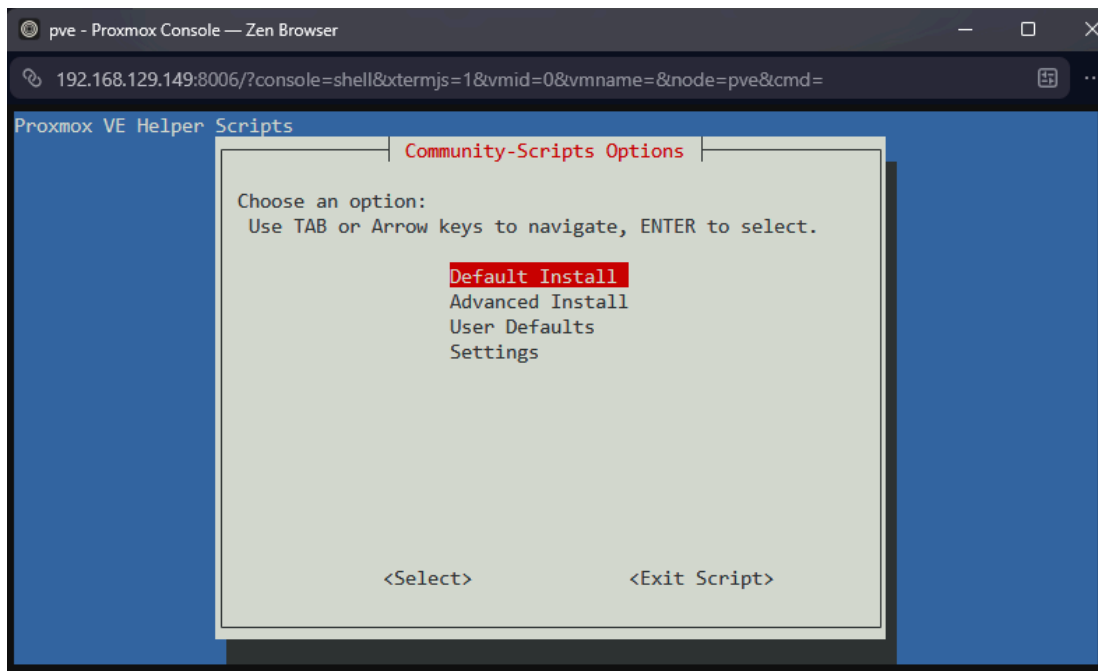

4. Type 'N' when prompted to add Portainer and install the Portainer Agent.

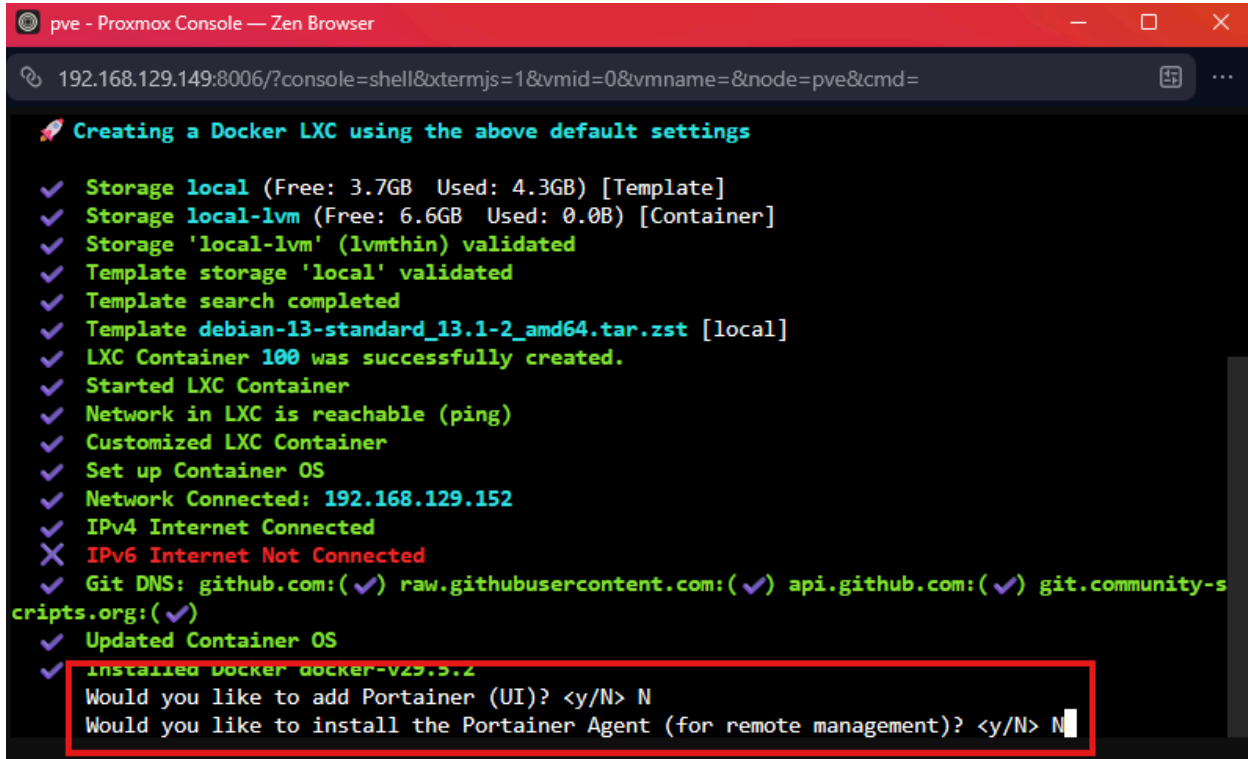


```
pve - Proxmox Console — Zen Browser
192.168.129.149:8006/?console=shell&xtermjs=1&vmid=0&vmname=&node=pve&cmd=

🚀 Creating a Docker LXC using the above default settings

✓ Storage local (Free: 3.7GB Used: 4.3GB) [Template]
✓ Storage local-lvm (Free: 6.6GB Used: 0.0B) [Container]
✓ Storage 'local-lvm' (lvmthin) validated
✓ Template storage 'local' validated
✓ Template search completed
✓ Template debian-13-standard_13.1-2_amd64.tar.zst [local]
✓ LXC Container 100 was successfully created.
✓ Started LXC Container
✓ Network in LXC is reachable (ping)
✓ Customized LXC Container
✓ Set up Container OS
✓ Network Connected: 192.168.129.152
✓ IPv4 Internet Connected
✗ IPv6 Internet Not Connected
✓ Git DNS: github.com:(✓) raw.githubusercontent.com:(✓) api.github.com:(✓) git.community-s
cripts.org:(✓)
✓ Updated Container OS
✓ Installed Docker docker-v29.5.2
Would you like to add Portainer (UI)? <y/N> N
Would you like to install the Portainer Agent (for remote management)? <y/N> N
```


5. Select Local only (127.0.0.1) by typing 1 and pressing enter.

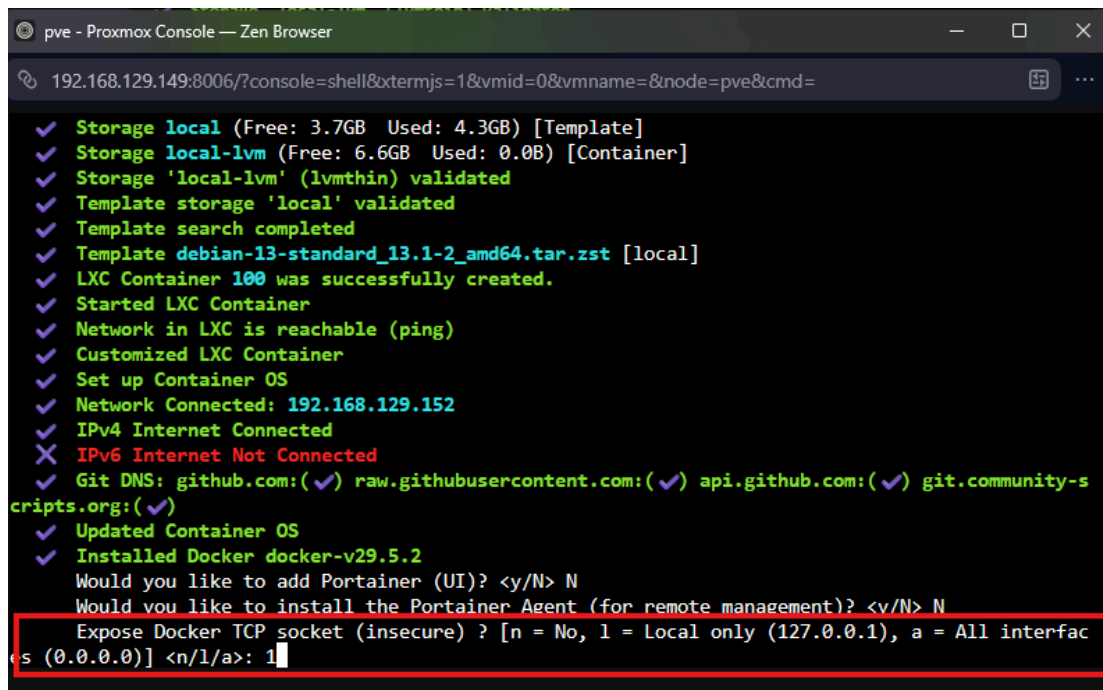

```
pve - Proxmox Console — Zen Browser
192.168.129.149:8006/?console=shell&xtermjs=1&vmid=0&vmname=&node=pve&cmd=


✓ Storage local (Free: 3.7GB Used: 4.3GB) [Template]
✓ Storage local-lvm (Free: 6.6GB Used: 0.0B) [Container]
✓ Storage 'local-lvm' (lvmthin) validated
✓ Template storage 'local' validated
✓ Template search completed
✓ Template debian-13-standard_13.1-2_amd64.tar.zst [local]
✓ LXC Container 100 was successfully created.
✓ Started LXC Container
✓ Network in LXC is reachable (ping)
✓ Customized LXC Container
✓ Set up Container OS
✓ Network Connected: 192.168.129.152
✓ IPv4 Internet Connected
✗ IPv6 Internet Not Connected
✓ Git DNS: github.com:(✓) raw.githubusercontent.com:(✓) api.github.com:(✓) git.community-s
cripts.org:(✓)
✓ Updated Container OS
✓ Installed Docker docker-v29.5.2
Would you like to add Portainer (UI)? <y/N> N
Would you like to install the Portainer Agent (for remote management)? <y/N> N
Expose Docker TCP socket (insecure) ? [n = No, 1 = Local only (127.0.0.1), a = All interfac
es (0.0.0.0)] <n/1/a>: 1
```

Success, you now have an LXC that contains docker. It now should appear in your Proxmox panel.

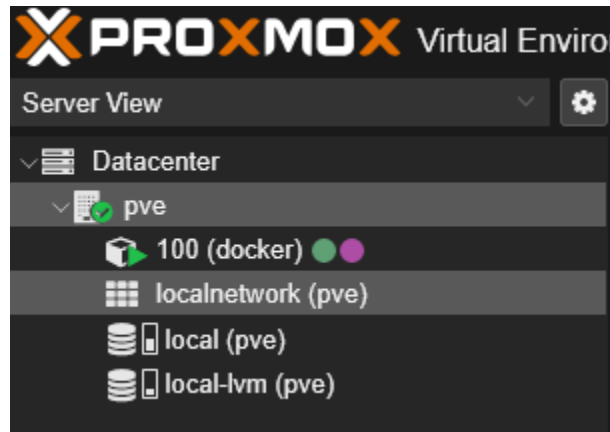


1.3 Increase resource allocation


1. In the proxmox web console, click on the newly created docker LXC, and click on the resources tab

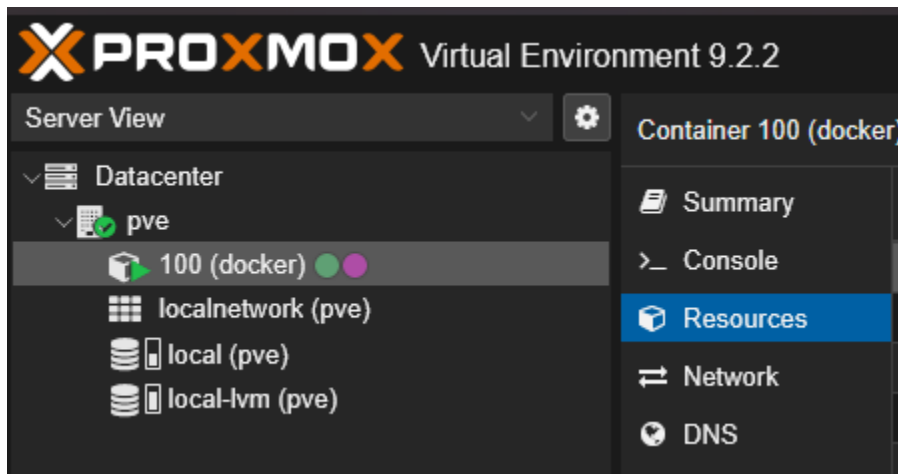


2. Click Memory, followed by Edit

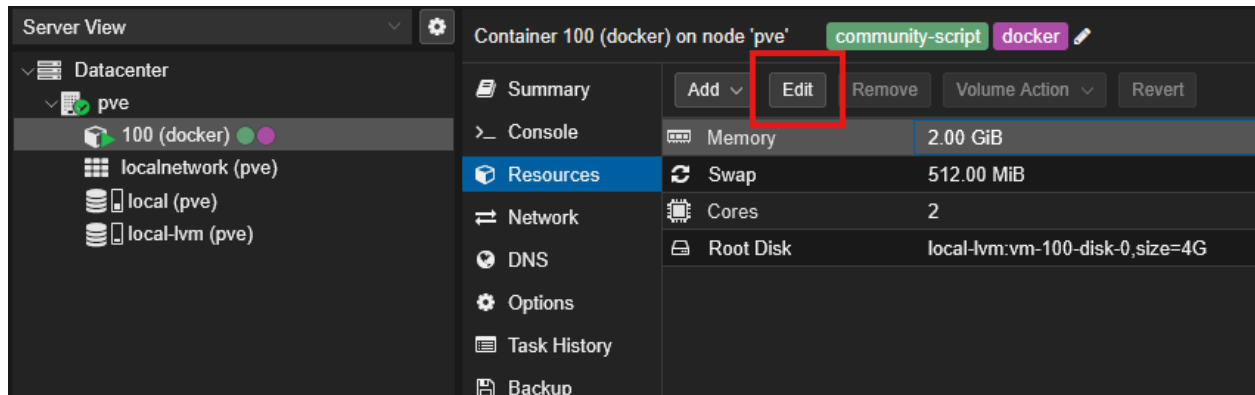


3. Increase the amount of memory allocated to 4096 MiB

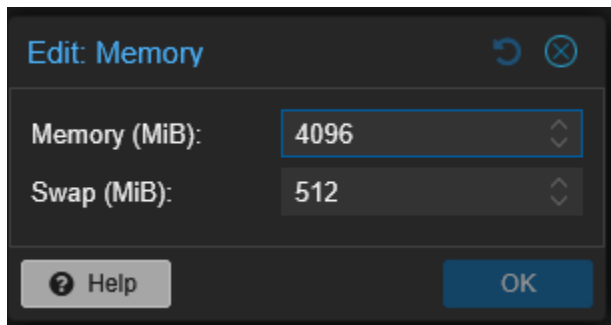

4. Click on Root Disk > Volume Action > Resize

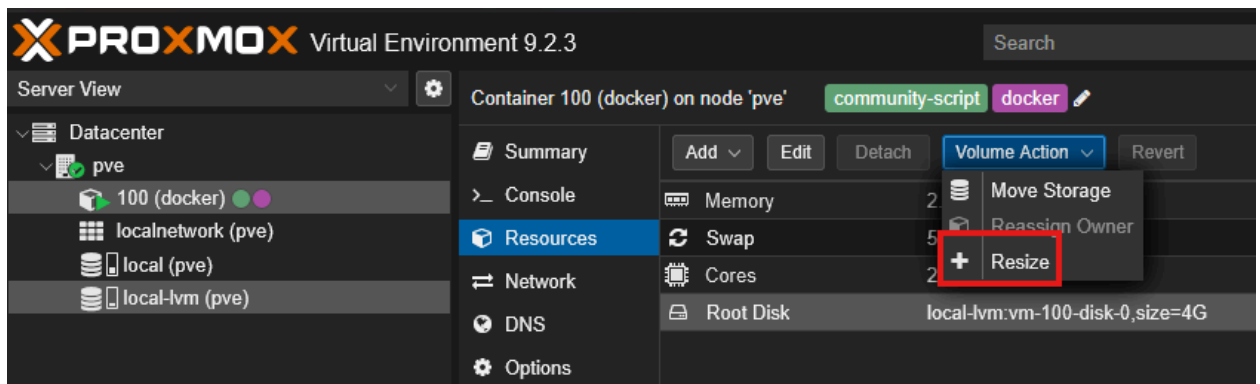


5. Increase the size of the root disk by 4 GiB

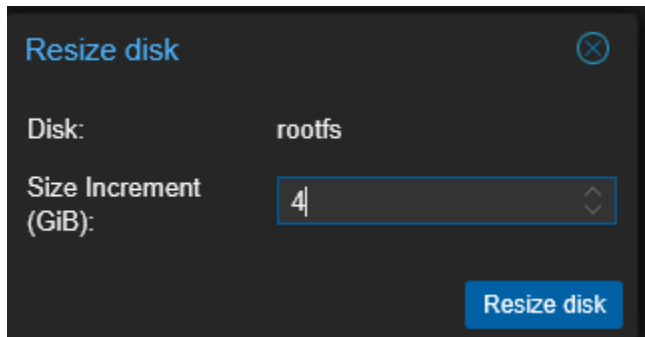


2. Install Dockge

2.1 Access the console of the Docker LXC

1. In the proxmox web console, click on the newly created docker LXC.

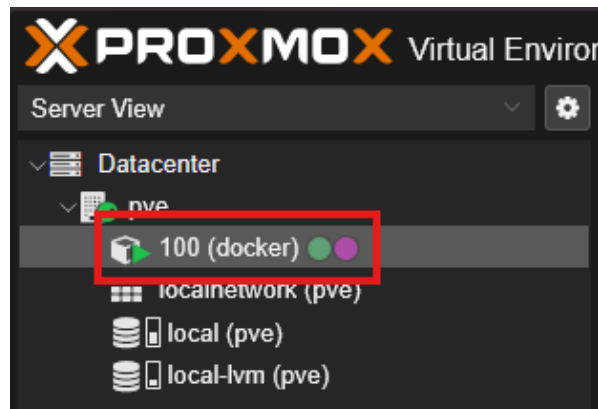

2. Click on console in the top right corner

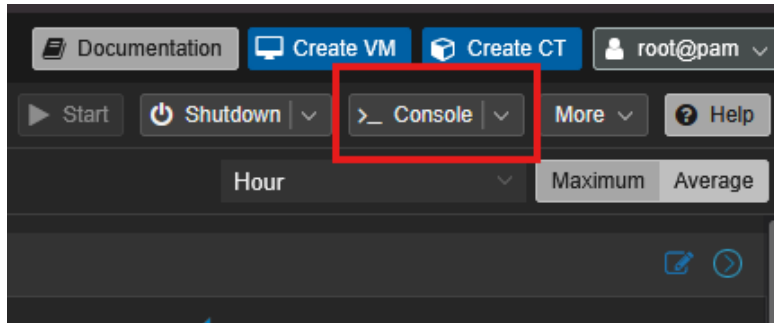

3. You now have console access to the LXC that we spun up in the previous section.

A screenshot of a Proxmox console window. The window title is 'pve - Proxmox Console — Zen Browser'. The address bar shows a URL: '192.168.129.149:8006/?console=lxc&xtermjs=1&vmid=100&vmname=docker&node=pve&cmd='. The console output shows the following text:

```
docker login:
Debian GNU/Linux 13 docker tty1

docker login: root (automatic login)


The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.


Docker LXC Container
  Provided by: community-scripts ORG | GitHub: https://github.com/community-scripts/Proxmox
VE
  OS: Debian GNU/Linux 13 (trixie)
  Hostname: docker
  IP Address: 192.168.129.152
root@docker:~#
```

2.2 Install Dockge using the Proxmox Helper script


1. Locate the helper script to install Dockge in the LXC:
<https://community-scripts.org/scripts/dockge>
2. Copy the install script by clicking on it.

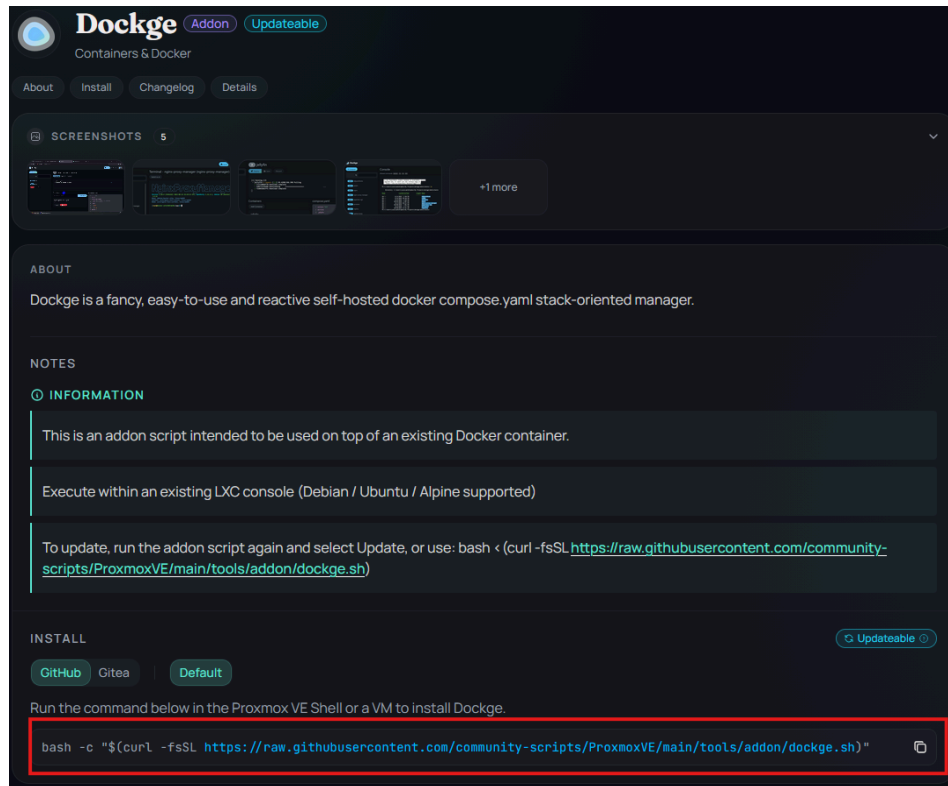

3. Paste it in the terminal and press enter to execute the script.
4. Type y when prompted to install Dockge.

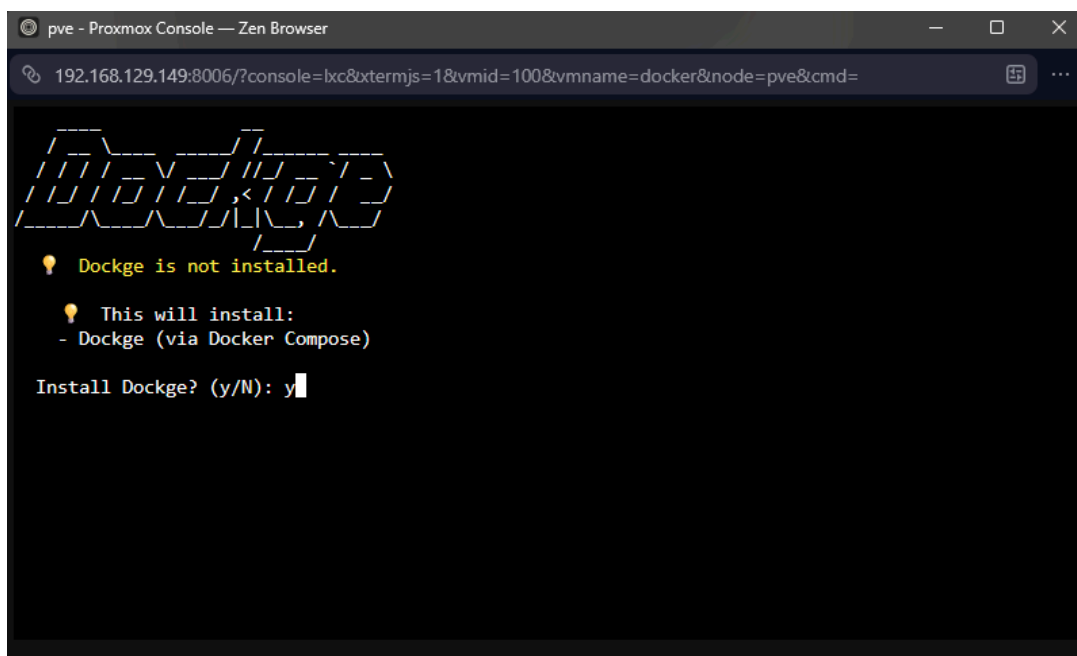

5. After installation, visit the IP address given using your host device.

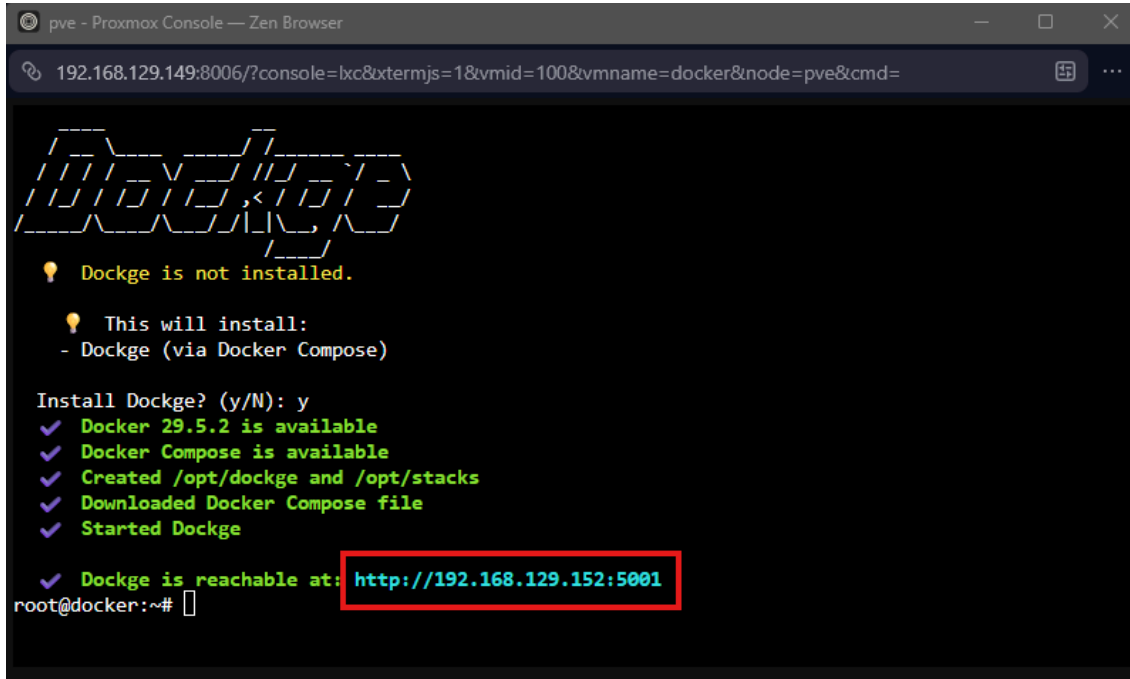

6. Create an account by typing in your desired credentials.



Dockge

Create your admin account

Language

English

▼


Username

Password

Repeat Password

Create

7. You should now see your Dockge dashboard!

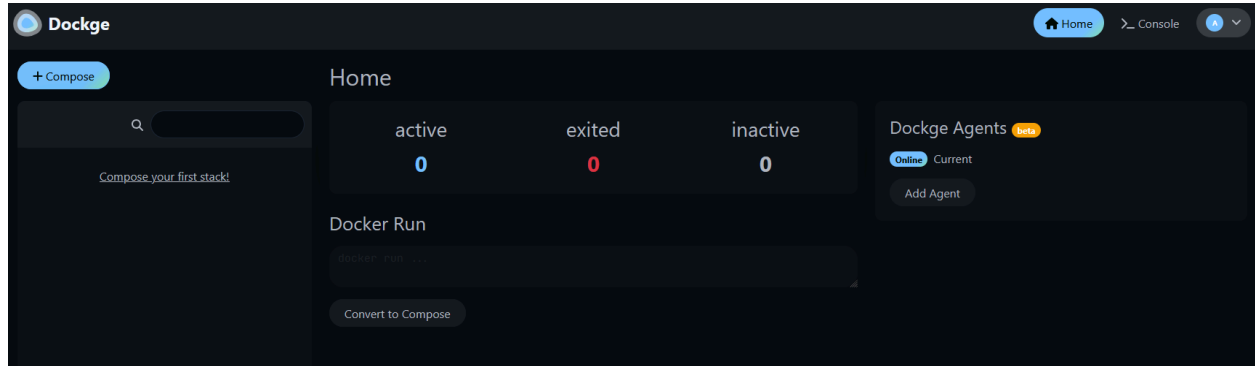

Next step: [Part 2.2 - Self Host a DNS server](#)