

Self-Motivated Growing Neural Network for Adaptive Architecture via Local Structural Plasticity

Yiyang Jia, Chengxu Zhou

Abstract—Control policies are often implemented with fixed-capacity multilayer perceptrons trained by backpropagation, which require architecture selection in advance and cannot adapt their capacity during learning. This paper introduces the Self-Motivated Growing Neural Network (SMGrNN), a gradient-trained controller whose topology evolves online through a local Structural Plasticity Module (SPM). The SPM monitors edge-wise weight update statistics over short temporal windows and uses these local signals to trigger neuron insertion and pruning, while synaptic weights are optimized by a standard gradient-based optimizer. This allows network capacity to be adjusted during learning without manual architectural tuning.

SMGrNN is evaluated on control benchmarks via policy distillation. Compared with multilayer perceptron baselines, it achieves similar or higher returns, lower variance, and task-appropriate network sizes. Ablation studies with growth disabled and growth-only variants isolate the role of structural plasticity, showing that adaptive growth improves reward stability while pruning prevents uncontrolled expansion and supports compact network formation. These results establish the independent value of local structural plasticity within gradient-trained networks and motivate future investigation of whether similar structural rules can be extended to more local or spike-based learning settings.

Index Terms—local structural plasticity, growing neural networks, policy distillation, reinforcement learning control, adaptive network capacity

I. INTRODUCTION

A. Research Background and Significance

DEEP neural networks have become standard tools for learning control policies, yet most practical architectures are still designed with *fixed capacity* and trained with *task-specific supervision*. In typical deep reinforcement learning pipelines, controllers are implemented as multilayer perceptrons with a pre-specified number of neurons and optimized end-to-end by backpropagation under carefully engineered reward signals. This combination of fixed capacity and reliance on global error information leads to two interrelated limitations.

First, traditional paradigms rely heavily on external reward signals or manually labeled data, which are costly to obtain and difficult to generalize across tasks. Deep learning typically depends on backpropagation, a non-local mechanism that requires propagating global error gradients through all layers [1], [2]; even in reinforcement learning, controllers require carefully designed reward functions [3], [4]. Human-in-the-loop approaches can mitigate some of these issues but still

presuppose external guidance. Biological systems, in contrast, adapt through local learning rules that update synapses based on locally available signals such as pre-post activity correlations [5]. Recent work has shown that Hebbian-style rules can train deep networks or shape useful representations without explicit global error propagation [6], [7]. Taken together, these observations highlight *local interaction rules* as a core organizing principle: synaptic strengths and connectivity motifs are shaped by correlations in neural activity rather than by global error signals. This perspective motivates control architectures whose connectivity is governed by local structural signals, while synaptic weights are still optimized by conventional gradient-based methods.

Second, fixed architectures constrain long-term adaptation and can exacerbate catastrophic forgetting in non-stationary environments [8]–[11]. Biological networks exhibit structural plasticity, reorganizing neurons and synapses throughout life [12], while most artificial networks, in contrast, remain static and brittle in the face of changing conditions [13]. The need to predefine network capacity often leads to under-utilized resources when overparameterized, or loss of performance and interference once capacity is saturated [14]–[16]. Existing continual learning methods can expand capacity [17], [18], but expansions are typically manual or governed by hand-designed rules rather than emerging from the dynamics of learning itself. These limitations motivate neural controllers in which architectural growth and pruning are driven by internal edge-wise weight-update statistics, allowing capacity to self-adjust to task demands.

The Self-Motivated Growing Neural Network (SMGrNN) is introduced as a gradient-trained neural controller whose topology evolves online through a structural plasticity module (SPM). Here, “self-motivated” means that structural changes are driven by internally available edge-local statistics rather than by task-specific growth schedules or manually specified architecture updates. In the current formulation, synaptic weights are optimized by standard backpropagation, while the SPM regulates architectural capacity during training through local structural decisions. The purpose of this design is not to claim fully local learning, but to isolate and evaluate the independent role of local structural plasticity within a standard gradient-trained setting. This separation allows the present study to ask whether local structural adaptation alone can improve stability and match network capacity to task demands within a single task.

The authors are with the Department of Computer Science, University College London, United Kingdom (yiyang.jia.24@ucl.ac.uk; chengxu.zhou@ucl.ac.uk).

B. Research Objectives

This study aims to examine the role of local structural plasticity in gradient-trained neural controllers, with a focus on within-task capacity adaptation rather than continual learning across task sequences. The specific objectives are threefold. First, to formulate a Structural Plasticity Module (SPM) that uses local edge-level statistics to decide when and where to grow or prune neurons and connections. Second, to instantiate the SPM within SMGrNN and systematically evaluate its effect on policy distillation for control benchmarks, including comparisons with fixed-capacity multilayer perceptrons and ablations with growth disabled or restricted to growth-only settings. Third, to clarify the separation between structural plasticity and synaptic optimization in the current framework, thereby identifying what can already be established in a gradient-trained setting and what remains for future local-learning extensions.

By addressing these objectives, SMGrNN is intended to clarify the independent contribution of local structural plasticity to learning stability, compactness, and task-matched capacity adaptation within gradient-trained networks.

II. RELATED WORKS

This section reviews work on structural adaptation and neural architecture growth, as well as biologically motivated local learning algorithms, and identifies the gaps that motivate the proposed SMGrNN framework.

A. Literature Review

1) Structural Adaptation in Continual Learning Models:

Over the past decade, dynamic neural architectures have been explored in continual and sequential learning settings as a way to allocate new capacity rather than overwrite existing parameters. Progressive Neural Networks (PNN) [19] freeze old parameters and add new columns per task, avoiding forgetting but requiring task boundaries and growing unboundedly. Later methods improved efficiency: Dynamically Expandable Networks (DEN) [20] selectively add and prune neurons based on utility, while Neurogenesis Deep Learning [21] inserts neurons for novel classes inspired by adult neurogenesis.

More recent work refines expansion without explicit task boundaries. The Self-Controlled Dynamic Expansion Model (SCDEM) [22] spawns lightweight task-specific experts with collaborative optimization across backbones, while the Self-Evolved Dynamic Expansion Model (SEDEM) [23] instantiates new experts when novelty exceeds a threshold, reusing prior features via dynamic masks. Both highlight data-driven criteria for when and how much to expand.

Other approaches focus on modularity and compression. The Modular Dynamic Neural Network (MDNN) [24] grows a tree of sub-networks to localize changes and reduce interference. Yet unbounded growth remains a challenge: DEN, SCDEM, and SEDEM mitigate it through selective expansion and pruning, while PNN and naive modular networks grow linearly. Compression-based methods such as Progress & Compress [25] and Bayesian non-parametric models [26] aim for bounded or sublinear scaling.

Finally, in neuromorphic systems, DSD-SNN [27] demonstrates that growth and pruning of spiking neurons also improve performance in continual learning settings, underscoring architectural plasticity as a principle bridging machine and biological networks.

2) *Growing and Self-Assembling Neural Networks:* Early evidence that structure can be learned comes from neuro-evolution: NeuroEvolution of Augmenting Topologies (NEAT) [28] evolves both weights and topology from minimal seeds via mutations. While effective, such methods are typically offline and evaluation-heavy, limiting practicality for online adaptation.

More recent, biologically motivated work treats growth as a decentralized developmental process. HyperNCA [29] and NDP [30] use local rules to self-assemble functional architectures; however, growth usually occurs in an initial phase and task learning proceeds with a fixed structure thereafter.

LNDP [31] extends NDPs to ongoing plasticity throughout the agent’s lifetime, adding and removing synaptic connections based on local neuronal activity and a global reinforcement signal. It achieves dynamic structural adaptation for sequential control and outperforms fixed-topology baselines, but relies on meta-optimized growth and pruning policies and performs only limited pruning, which may complicate interpretation and raise concerns about long-horizon scalability.

Relatedly, Growing Neural Cellular Automata [32] shows that complex global patterns can emerge from learned local rules, suggesting that open-ended architectural growth is feasible provided growth remains goal-directed and computationally tractable.

3) *Hebbian Learning in Deep Networks:* Backpropagation depends on global error transport, whereas biological systems rely on local updates. Recent work shows that local rules can scale to deep models: SoftHebb [6] trains networks with layer-wise Hebbian objectives and achieves competitive classification, while the Forward-Forward (FF) algorithm [33] uses positive and negative passes with local “goodness” signals. Theoretically, Hebbian self-organization with synaptic turnover yields heavy-tailed connectivity like that observed in brains [34], suggesting that local plasticity not only learns representations but also shapes network structure. These results indicate that synaptic learning rules need not rely exclusively on global error signals and motivate structural plasticity mechanisms that are likewise local and compatible with Hebbian or spike-based updates, even when gradient-based optimization is used in practice.

B. Research Gap and Proposed Contribution

In summary, the literature confirms two points: (1) allowing a network’s architecture to expand or reconfigure over time is an effective way to adapt capacity and reduce interference across tasks or data regimes [19], [20], [24], [27], [31]; (2) learning algorithms with reduced dependence on global error signals—such as Hebbian or layer-local objectives—are viable and biologically motivated [6], [33], [34]. However, existing dynamic architecture methods (e.g., PNN, DEN, SCDEM, SEDEM) still rely on backpropagation within each module

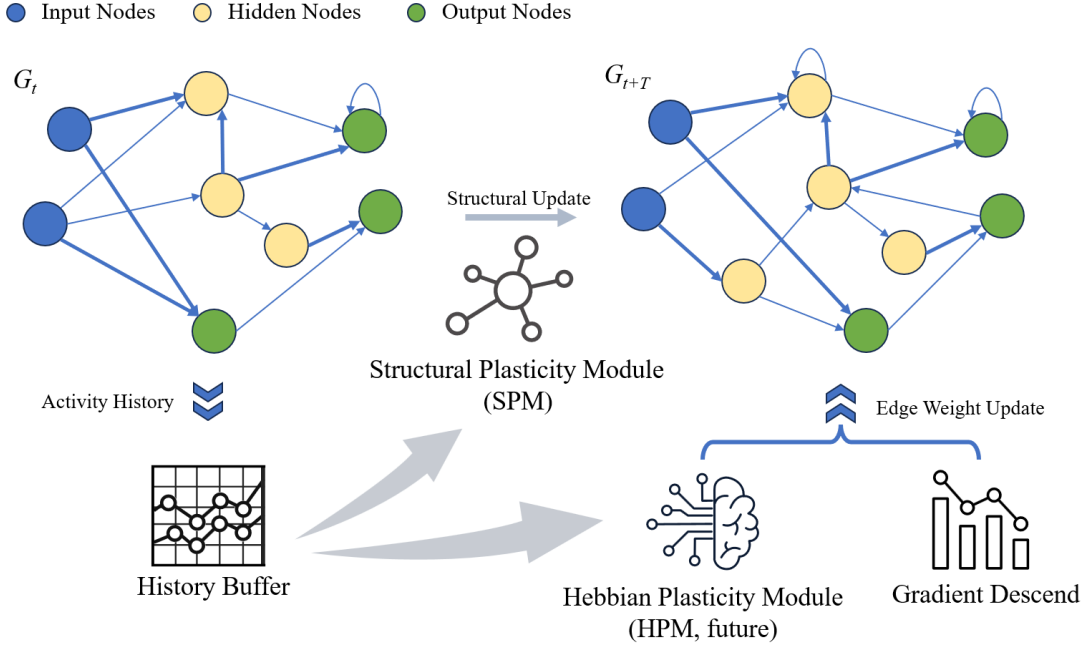


Fig. 1: Overview of the SMGrNN. The current graph G_t receives local update statistics from history buffers, which are processed by the SPM to produce an updated graph (denoted G^* in the figure). Synaptic weights are updated by a gradient-based optimizer on the right. The figure emphasizes the separation between local structural adaptation and gradient-based synaptic optimization in the current work. Any future local synaptic plasticity module is outside the scope of the experiments reported here.

and typically decide when and where to expand based on task boundaries, global performance criteria, or hand-designed heuristics rather than purely local edge-wise update statistics. Conversely, purely Hebbian or feedback-free approaches generally assume fixed architectures and rarely analyze how structural adaptation interacts with policy learning, particularly in control settings. The present work therefore focuses on within-task capacity adaptation, rather than on mitigating catastrophic forgetting across task sequences; explicit continual learning is left to future work.

The proposed SMGrNN framework addresses this gap by introducing a local SPM that grows and prunes neurons based solely on short-term edge-local statistics of weight change. This module is instantiated within a gradient-trained policy network and evaluated on control benchmarks to quantify its impact on reward stability, variance, compactness, and discovered network size relative to fixed-capacity multilayer perceptrons and ablated variants. The central contribution of the present work is therefore not a fully local learning system, but a demonstration that local structural plasticity can already provide measurable benefits within a standard gradient-trained framework. In this sense, the paper focuses on within-task adaptive capacity control as an independent result, while future combinations with more local synaptic learning rules are left for subsequent work.

III. METHODOLOGY

The SMGrNN is a directed graph $G_t = (V_t, E_t)$ whose nodes are neurons and whose directed, weighted edges are

synapses. Unlike fixed multilayer perceptrons, G_t changes during training: edges are added or removed and hidden nodes are inserted or deleted by a SPM, while synaptic weights are updated by a standard gradient-based optimizer. Short, rolling history buffers store recent edge-wise weight updates; the resulting local temporal statistics drive structural decisions in the SPM. This section formalizes the control setting, the SMGrNN architecture, the SPM rules, and the training procedure used in the experiments. Fig. 1 summarizes the separation between local structural adaptation in the SPM and gradient-based synaptic optimization in the current implementation.

A. Control Setting and Policy Representation

Consider a Markov decision process with state $s_t \in \mathcal{S}$ and action $a_t \in \mathcal{A}$. A fixed expert policy $\pi_E(a | s)$ is implemented by a pre-trained multilayer perceptron (MLP). The objective is to learn a student policy $\pi_\theta(a | s)$ parameterized by SMGrNN that imitates the expert while autonomously adjusting its own capacity.

At each interaction step, the environment state s_t is written to the input nodes of the current graph G_t . The graph then performs K synchronous message-passing iterations, producing an output action $\hat{a}_t = \pi_\theta(s_t)$ from the output nodes after the final iteration. A supervised loss $L_t(\theta)$ penalizes the deviation between the student and expert actions, for example as a mean-squared error for continuous actions or a cross-entropy for discrete action distributions. Parameters θ (edge weights) are updated by a gradient-based optimizer through the computation graph induced by these K explicit propagation

steps, while the SPM monitors local edge-wise weight-update statistics to decide when and where to grow or prune the architecture.

B. Self-Motivated Growing Neural Network

SMGrNN is instantiated as a directed graph whose nodes are functionally grouped into input, hidden, and output sets. Let V_t denote the node set at step t , $E_t \subseteq V_t \times V_t$ the directed edge set, and $w_k^{(t)}$ the scalar weight on edge $k \equiv (i \rightarrow j) \in E_t$. Input and output nodes are fixed, whereas hidden nodes may be inserted or removed during training.

The graph is not restricted to a layered multilayer-perceptron topology. In the current implementation, skip connections and feedback edges may emerge as structural plasticity edits accumulate. Accordingly, forward propagation is not defined by a single topological pass. Instead, SMGrNN is treated as a graph-state system whose node states are updated through a fixed number of synchronous message-passing iterations.

Let $\mathbf{x}_t^{(0)} \in \mathbb{R}^{|V_t| \times F}$ denote the current node-state matrix at training step t , after clamping the input-node states to the external observation. For iteration $r = 0, \dots, K - 1$, the network computes

$$\mathbf{m}_t^{(r+1)} = \text{Propagate}(E_t, \mathbf{x}_t^{(r)}, \mathbf{w}_t),$$

and then updates non-input nodes synchronously as

$$\mathbf{x}_{t,i}^{(r+1)} = \begin{cases} \mathbf{x}_{t,i}^{(r)}, & i \in V_{\text{in}}, \\ \phi_{\text{out}}(\mathbf{m}_{t,i}^{(r+1)}), & i \in V_{\text{out}}, \\ \phi(\mathbf{m}_{t,i}^{(r+1)}), & i \in V_{\text{hid}}, \end{cases}$$

where ϕ is the hidden-node activation function and ϕ_{out} is the output-node activation function. In this way, cycles are handled implicitly through iterative state updates rather than through an acyclic evaluation order.

After K iterations, the output-node states are taken as the student-policy output. The resulting node states are written back into the graph as the internal state for the next call, but they are detached from the autograd graph after each forward pass. Therefore, gradients are propagated through the K explicitly unrolled message-passing iterations within one forward call, but not across multiple forward calls over time.

C. Structural Plasticity Module (SPM)

1) *Edge-Driven Growth*: For each edge $k \equiv (i \rightarrow j)$ with weight w_k , let $\Delta w_{k,t}$ denote its instantaneous update at step t as produced by the gradient-based optimizer. Over a sliding window of T steps, the SPM maintains the sample mean and variance

$$\begin{aligned} \mu_k^\Delta &= \frac{1}{T} \sum_{\tau=t-T+1}^t \Delta w_{k,\tau}, \\ (\sigma_k^\Delta)^2 &= \frac{1}{T} \sum_{\tau=t-T+1}^t (\Delta w_{k,\tau} - \mu_k^\Delta)^2. \end{aligned} \quad (1)$$

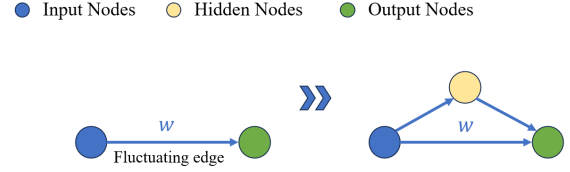


Fig. 2: Relay-node insertion on an unstable edge in a minimal network. Left: a single input–output connection whose update direction remains unresolved over the observation window and whose normalized fluctuation satisfies Eq. (4). Right: when the edge is flagged as unstable, the SPM inserts a new relay node and a two-step pathway, while retaining the original edge. The example shows a one-input, one-output network for clarity, but the same mechanism can be applied to any edge in a larger SMGrNN graph that satisfies Eq. (4).

To detect edges whose update direction remains unresolved over the observation window, define the local fluctuation interval

$$I_k^\Delta = [\mu_k^\Delta - \lambda \sigma_k^\Delta, \mu_k^\Delta + \lambda \sigma_k^\Delta], \quad (2)$$

where $\lambda > 0$ controls the width of the interval. The condition $0 \in I_k^\Delta$ indicates that the update direction fluctuates around zero rather than settling on a clear positive or negative trend.

To distinguish meaningful fluctuation from negligible optimizer noise, the standard deviation is further normalized by a regularized local update scale:

$$\tilde{w}_k = |\mu_k^\Delta| + \epsilon, \quad \tilde{\sigma}_k^\Delta = \frac{\sigma_k^\Delta}{\tilde{w}_k}, \quad (3)$$

where $\epsilon > 0$ is a small constant that keeps the denominator well-defined when the mean update is close to zero. An edge is then flagged as unstable if

$$0 \in I_k^\Delta \quad \wedge \quad (\tilde{\sigma}_k^\Delta)^2 > \theta_{\text{var}}, \quad (4)$$

where $\theta_{\text{var}} > 0$ is a threshold on the normalized fluctuation magnitude. The first condition identifies edges whose update direction remains unresolved, while the second requires that this fluctuation be sufficiently large relative to the local update scale.

When Eq. (4) holds, the SPM inserts a new relay node h_{new} and adds a parallel two-step pathway $i \rightarrow h_{\text{new}} \rightarrow j$ alongside the original edge. The new weights are initialized with small magnitude $|w_{\text{init}}| \ll 1$ so that the added path does not disrupt behavior at insertion time. The original edge $i \rightarrow j$ is retained, allowing both direct and relay-mediated signal propagation. In this way, SMGrNN locally increases representational capacity where the update statistics indicate persistent structural uncertainty. As illustrated in Fig. 2, the relay node is introduced on a fluctuating edge in a minimal one-input/one-output example, but the same operation can be applied to any edge in G_t that satisfies Eq. (4).

The relay insertion operator is chosen as a simple and conservative local capacity-increase mechanism. Because the instability signal is detected on a specific edge, the structural edit is also applied locally around that same edge by adding a parallel two-step pathway $i \rightarrow h_{\text{new}} \rightarrow j$ while retaining the

original edge $i \rightarrow j$. This design has two practical motivations. First, it is a minimal local edit aligned with the edge-local trigger itself, rather than a more global rewiring operation. Second, by preserving the original edge and initializing the new pathway with small weights, the model can increase representational capacity without abruptly disrupting the existing signal path at insertion time.

2) *Random Exploratory Growth*: Edge-driven growth reacts only to edges that already exist. To explore alternative connectivity patterns and avoid getting trapped in suboptimal local structures, the SPM also performs occasional random exploratory growth.

Let $N_t = |V_t|$, where V_t and E_t denote the node and edge sets at step t . The SPM first samples a Bernoulli trigger $B_t \sim \text{Bernoulli}(p_{\text{rand}})$, and forces $B_t = 1$ if no criterion-driven growth candidates exist. Here, criterion-driven growth candidates refer to edges that satisfy the edge-driven instability criterion in Eq. (4). When $B_t = 1$, it proposes

$$m_t = \max(\lfloor \rho_{\text{rand}} N_t \rfloor, 1) \quad (5)$$

new edges by drawing pairs without replacement from a candidate pool S_t , defined as

$$S_t = \{(u, v) \in V_t \times V_t : u \neq v, (u, v) \notin E_t\}. \quad (6)$$

The proposed edges $E_t^+ = \{(u_\ell \rightarrow v_\ell)\}_{\ell=1}^{m_t}$ are then sampled from S_t and added with weights initialized to w_{init} . The hyperparameters $p_{\text{rand}} \in (0, 1)$ and $\rho_{\text{rand}} \in (0, 1)$ control the frequency and batch size of exploratory growth. In expectation, $\mathbb{E}[m_t B_t] \approx \rho_{\text{rand}} N_t p_{\text{rand}}$ when criterion-driven growth is available.

3) *Pruning and Orphan Removal*: To prevent unbounded expansion and remove ineffective connections, the SPM performs weight-based pruning. For each edge k , the module defines a candidate removal set

$$W_t = \left\{ k : |w_k^{(t)}| \leq \tau_w \wedge |\mu_k^\Delta| \leq \tau_\Delta \right\}, \quad (7)$$

where $\tau_w > 0$ suppresses weights with small magnitude and $\tau_\Delta > 0$ removes edges whose updates have effectively stalled. From W_t , only a fraction $\eta_{\text{prune}} \in (0, 1]$ is actually deleted at each pruning step, chosen uniformly at random to avoid abrupt structural changes.

Pruning edges may leave hidden nodes with zero in-degree or zero out-degree. Let $\deg_t^{\text{in}}(i)$ and $\deg_t^{\text{out}}(i)$ denote the in- and out-degrees of node i at step t , and let $H \subseteq V_t$ be the set of hidden nodes. The SPM removes orphan nodes via

$$U_t = \left\{ i \in H : \deg_t^{\text{in}}(i) = 0 \vee \deg_t^{\text{out}}(i) = 0 \right\}, \quad (8)$$

deleting U_t and all incident edges. This maintains a compact active subgraph and ensures that hidden units contribute either to processing inputs or to driving outputs.

4) *Schedule and Net Growth Metrics*: Growth and pruning are interleaved according to a simple schedule. At each step t , the SPM selects

$$\Sigma(t) = \begin{cases} \text{prune}, & t \equiv 0 \pmod{s}, \\ \text{grow}, & \text{otherwise}, \end{cases} \quad (9)$$

where $s \in \mathbb{N}$ is a pruning period. During growth steps the edge-driven and exploratory mechanisms are applied; during pruning steps Eqs. (7)–(8) are used to trim weak or inactive structure.

Let $\Delta N_t = |V_{t+1}| - |V_t|$ and $\Delta M_t = |E_{t+1}| - |E_t|$ denote the per-step change in node and edge counts. Net growth over a training run is reported as

$$\text{NetGrowth}_{\text{nodes}} = \sum_t \Delta N_t, \quad \text{NetGrowth}_{\text{edges}} = \sum_t \Delta M_t, \quad (10)$$

which summarizes the total structural expansion induced by the SPM.

D. History Buffers and Local Statistics

The SPM relies on short-term temporal statistics rather than instantaneous values. To this end, SMGrNN maintains rolling buffers for edge-wise weight updates. For each edge k , the buffer stores recent update increments $\Delta w_{k,t}$ over the last T steps. These buffers are updated online after each parameter update and reset whenever a structural edit modifies the edge indexing. Local statistics such as μ_k^Δ and $(\sigma_k^\Delta)^2$ are computed directly from the buffers, providing the SPM with an intrinsic view of which connections are stable, unstable, or inactive, without accessing any global loss information.

E. Training Procedure

Training proceeds as online policy distillation in Gym control environments. At each episode, the current SMGrNN policy interacts with the environment, generating a trajectory (s_t, a_t) . For each visited state s_t , the expert MLP produces a reference action $a_t^E = \pi_E(s_t)$, and SMGrNN produces $\hat{a}_t = \pi_\theta(s_t)$ after K synchronous message-passing iterations of the current graph G_t . A supervised loss $L_t(\theta)$ is computed between a_t^E and $\hat{a}_t$ and used to update the trainable weights by backpropagation through the K explicitly unrolled propagation steps.

Importantly, the node states produced at the end of a forward call are stored as the graph’s internal state for the next call, but are detached from the autograd graph before reuse. Thus, the current implementation performs backpropagation only through the finite set of propagation iterations within each forward call, rather than full backpropagation through time across multiple interaction steps.

The SPM is invoked according to the structural schedule $\Sigma(t)$ to adjust the graph based on the latest local statistics from the history buffers. In the experiments, the same training procedure is applied across tasks, with differences only in environment dynamics and expert policies.

F. Implications for Local Synaptic Plasticity

The current experiments do not validate SMGrNN under Hebbian, spike-timing-dependent, or other fully local synaptic learning rules. In this work, synaptic weights are optimized by backpropagation, and the empirical contribution is limited to showing that local structural plasticity can be studied independently within a gradient-trained network.

The separation between structural adaptation and synaptic optimization nevertheless provides a useful conceptual boundary for future work. Because the SPM operates on locally available edge-level statistics, one may ask whether similar structural rules could be reformulated for settings with more local synaptic updates. However, such an extension is not guaranteed. In particular, the meaning of weight-change statistics may differ substantially between gradient-based learning and Hebbian or spike-based plasticity; in spiking systems, variability in local updates may also reflect encoding stochasticity rather than unresolved representation. Accordingly, the present paper does not claim compatibility in a validated sense, but only identifies a possible direction for future investigation.

IV. EXPERIMENTS

A. Experimental Setup

1) *Tasks and expert policies:* Three classic control environments from the Gym suite are considered for the main policy-distillation experiments: CartPole-v1, Acrobot-v1, and LunarLander-v3. In addition, a simple XOR classification task is included in the task-difficulty scaling analysis as a minimal non-control reference.

For the three control environments, a pre-trained multilayer perceptron (MLP) serves as a fixed expert policy $\pi_E(a | s)$ and provides target actions for policy distillation; the expert never acts on the environment during student training. In the current implementation, each expert is a single-hidden-layer ReLU MLP with 2048 hidden units and one output per discrete action. Expert models are trained separately using a DQN-style procedure with Adam optimization (learning rate 10^{-3}), discount factor $\gamma = 0.99$, ϵ -greedy exploration, a replay buffer of size 10,000, batch size 64, and parameter updates every 4 environment steps. The best expert checkpoint is then frozen and used for subsequent student distillation. During distillation, the expert’s greedy action is obtained by $\arg \max$ over its action scores and converted into the target action label for the student. The student policy π_θ is parameterized either by SMGrNN or by a static MLP baseline.

The XOR task is not used for expert distillation. Instead, it is treated as a small supervised problem used only in the task-difficulty scaling analysis, where the objective is to examine how the learned network size changes from a trivial classification task to progressively harder control tasks.

Unless noted otherwise, each control-task condition is trained for 2000 episodes at an initial connection density of 0.8 and is repeated with 10 random seeds. During training, the following quantities are recorded:

- 1) episodic return (mean with across-run variability);
- 2) network size trajectory (number of hidden nodes and edges);
- 3) convergence episode to a preset reward threshold for each environment; and
- 4) late-training return, defined as the average reward over the final quarter of episodes.

2) *SMGrNN configuration:* SMGrNN is initialized with fixed input and output nodes matching the state and action dimensions of each environment. Unless otherwise stated,

the hidden-node count is initialized to zero, so the initial architecture contains only direct connections between inputs and outputs. Edges are instantiated with a target connection density of 0.8 over allowed node pairs, and all neurons use a tanh nonlinearity. Weights are drawn from a zero-mean Gaussian with small variance.

In the control experiments reported here, each forward call uses the conservative setting $K = 1$ synchronous message-passing iteration. The node-state feature dimension is $F = 1$, so each node maintains a scalar internal state. The regularization constant in Eq. (3) is set to $\epsilon = 10^{-8}$ to avoid division by zero when the mean edge update is close to zero. With $K = 1$, feedback edges and cycles are not evaluated by solving a fixed point within a single forward call. Instead, their effect enters through the carried node states across successive calls. At the beginning of each episode, hidden and output node states are reset to zero. Within an episode, the node states produced at the end of a forward call are stored as the graph’s internal state for the next call, but are detached from the autograd graph before reuse. Therefore, gradients are propagated only through the single synchronous message-passing step within each forward call, not through the full sequence of environment interactions.

For the XOR experiment, we use $K = 3$. This is because XOR is evaluated as a single-step forward computation with node states reset at the start, so cross-call state carry-over is unavailable and limited within-call iterative propagation is needed instead. The present paper therefore covers two limited regimes: $K = 1$ for the control tasks, where recurrent connectivity is mediated mainly through cross-call state, and $K = 3$ for XOR, where a small amount of within-call propagation is used in the absence of such state carry-over. This is a deliberate engineering choice for the present study, rather than a claim to solve unrestricted recurrent credit assignment on arbitrary graphs.

Unless otherwise stated, all gradient-trained student models in the main experiments use the same optimizer configuration, namely Adam with learning rate 0.01, so that structural comparisons are not confounded by differences in optimizer choice or learning-rate scale across conditions. A small CartPole-v1 sensitivity study on optimizer and learning-rate choice is reported in Appendix A. In brief, growth and pruning remain active across the tested optimizers and learning rates, while optimizer choice and learning-rate scale mainly affect the magnitude and stability of structural adaptation.

3) *SPM hyperparameter selection:* The SPM uses a temporal window of length T to compute local statistics of edge-wise weight updates. Edge-driven growth is governed by the instability criterion in Eq. (4), which depends on λ and θ_{var} . Random exploratory growth is controlled by p_{rand} and ρ_{rand} , while pruning is controlled by τ_w , τ_Δ , η_{prune} , and s . The numerical values used in the main experiments are listed in Table A.III.

To make hyperparameter selection reproducible, we used a two-stage protocol. First, a 3^4 grid search on CartPole-v1 tuned the four primary SPM parameters (T , λ , θ_{var} , p_{rand}). The remaining SPM hyperparameters were held fixed at conservative defaults because they mainly regulate secondary aspects

of structural editing, such as pruning frequency, pruning aggressiveness, and random-growth batch size.

Second, one-factor-at-a-time sensitivity analyses were performed on CartPole-v1 and Acrobot-v1 around the tuned region. These experiments showed that T had the clearest task dependence, whereas θ_{var} mainly controlled the compactness of the final network. The final shared defaults used in the main experiments were therefore chosen as a practical cross-task compromise rather than as the single-task optimum found on CartPole-v1. Full search ranges, selection criteria, and additional sensitivity results are provided in Appendix B.

4) *Baseline configurations:* We compare SMGrNN against both fixed-topology and dynamic-topology baselines. The fixed-topology baselines include Static-SMGrNN and parameter-matched MLPs. Static-SMGrNN shares the same initialization and training hyperparameters as SMGrNN but disables the SPM, so no structural edits occur during training. The MLP baselines are conventional single-hidden-layer networks constructed with environment-specific hidden widths corresponding approximately to fixed parameter budgets relative to the final SMGrNN size.

To strengthen the comparison with existing dynamic architecture methods, we additionally implement two representative dynamic-topology baselines: NEAT and a Neural Developmental Program (NDP) baseline. NEAT represents an evolutionary approach that jointly optimizes network topology and weights, whereas NDP represents a developmental growth process that constructs network structure through repeated local development steps. Both baselines are adapted to the same control benchmark tasks and evaluated on CartPole-v1, Acrobot-v1, and LunarLander-v3 using 10 random seeds.

For budget control, all methods are allocated the same total number of environment interaction rollouts per seed. Gradient-trained student models are trained for 2000 online episodes, whereas NEAT and NDP are evaluated with a population size of 50 for 40 generations, corresponding to $50 \times 40 = 2000$ candidate-policy evaluation rollouts per seed. For NDP, each candidate policy is generated with 6 developmental steps before evaluation. Because NEAT and NDP are evolutionary or developmental methods rather than gradient-trained online distillation models, their evaluation curves are reported differently from those of SMGrNN and the MLP baselines. For SMGrNN and MLPs, curves represent online reward trajectories during gradient-based student training. For NEAT and NDP, cross markers denote the performance of the best individual selected in each evolutionary generation, and the accompanying smoothed curves are used only to visualize the overall search/evaluation trend. Therefore, these dynamic-topology baselines should be interpreted as adapted comparisons under the same benchmark tasks, rather than as full reproductions of their original experimental protocols or as optimization trajectories directly equivalent to online distillation.

B. Comparison with Fixed and Dynamic Topology Baselines

To evaluate whether the benefits of SMGrNN arise from adaptive structural plasticity rather than from parameter count

or dynamic topology alone, we compare it with both fixed-topology and dynamic-topology baselines. The fixed-topology baselines include parameter-matched MLPs with approximately 100% and 200% of the final SMGrNN parameter budget. The dynamic-topology baselines include NEAT and NDP, which represent evolutionary topology optimization and developmental network growth, respectively. All methods are evaluated on CartPole-v1, Acrobot-v1, and LunarLander-v3 using 10 random seeds under the same 2000 episode-equivalent rollout budget per seed.

Fig. 3 summarizes reward evolution and network-size evolution across fixed-topology and dynamic-topology baselines. The dynamic-topology baselines should be interpreted with care because NEAT and NDP are evolutionary or developmental methods rather than gradient-trained online distillation models. For SMGrNN and the MLP baselines, the curves represent online training trajectories under the distillation objective. For NEAT and NDP, the cross markers provide the more relevant view of search progress, since they indicate the performance of the best individual selected in each evolutionary generation. The comparison is therefore intended to assess whether representative topology-search and developmental-growth baselines can discover competitive controllers under the same benchmark tasks, rather than to impose identical optimization dynamics across all methods.

On CartPole-v1, SMGrNN rapidly reaches and maintains near-optimal return. The fixed MLP baselines also improve, but MLP(100%) converges more slowly and MLP(200%) requires a larger fixed parameter budget to approach similar performance. NEAT is able to discover near-optimal individuals in several generations, as shown by generation-best markers close to the task maximum. However, these high-performing individuals arise through evolutionary selection rather than through a continuous online policy-improvement trajectory. NDP shows occasional improvement but does not reliably produce generation-best individuals in the same high-return regime. Thus, on the simplest task, dynamic topology search can discover strong candidates, while SMGrNN provides a continuously trained policy that reaches and maintains high return with adaptive structural growth.

On Acrobot-v1, SMGrNN again reaches a stable high-return regime under online training. The fixed MLP baselines improve rapidly at the beginning but settle at lower return levels than SMGrNN. NEAT also discovers competitive individuals in some generations, with several generation-best markers approaching the return range achieved by SMGrNN. This indicates that evolutionary topology search can identify useful candidate structures on this task. However, these candidates are selected at the generation level and do not correspond to a sustained online training trajectory. NDP produces larger and more variable developmental structures, but its generation-best performance is less consistently competitive. These results suggest that dynamic topology can be useful, but the way structural changes are coupled to learning strongly affects whether discovered structures lead to stable control performance.

LunarLander-v3 presents a more challenging setting. SMGrNN enters the positive-reward regime early and reaches

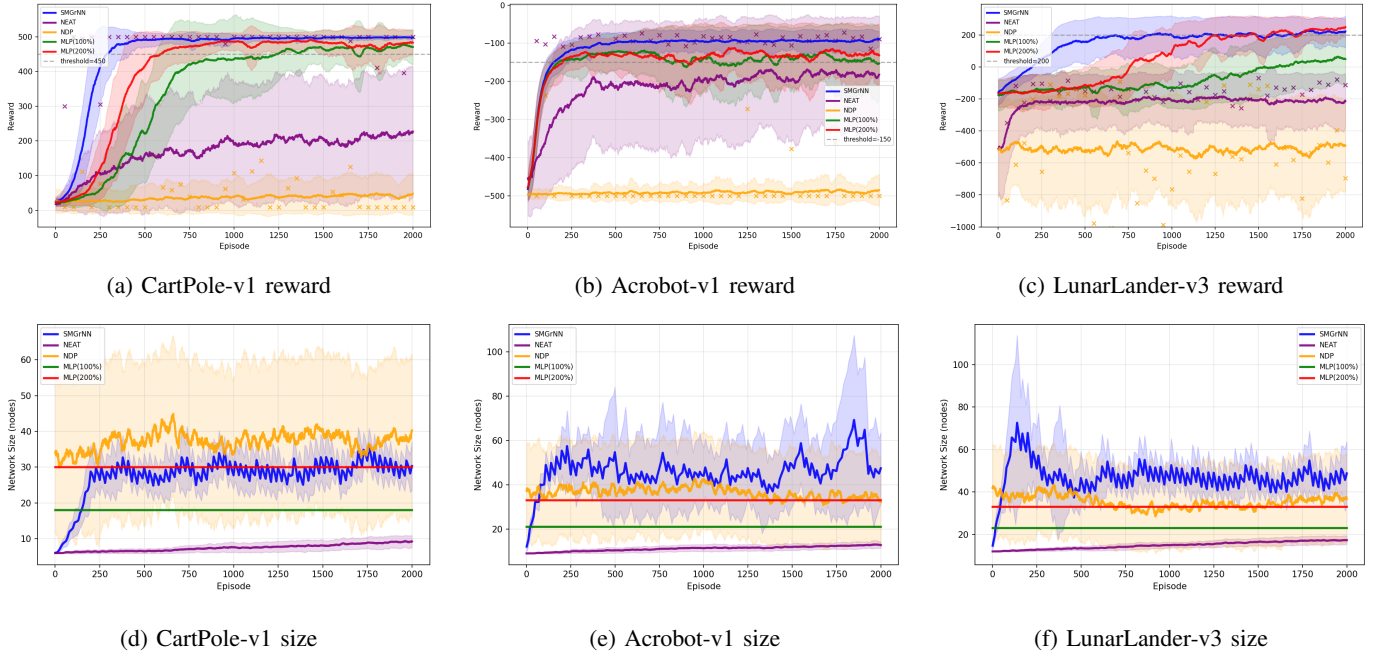


Fig. 3: Comparison with fixed-topology and dynamic-topology baselines. Top row: reward evolution for SMGrNN, MLP baselines, NEAT, and NDP. Solid curves show smoothed mean returns over 10 seeds for the gradient-trained models and the smoothed evaluation trajectory for the evolutionary baselines. Shaded regions indicate across-seed variability, and dashed horizontal lines mark task-specific reward thresholds. For NEAT and NDP, cross markers indicate the performance of the best individual selected in each evolutionary generation. Bottom row: network-size evolution and final network sizes. SMGrNN expands to task-dependent graph sizes; NEAT exhibits approximately linear structural growth; NDP often produces larger and more variable structures. MLP baselines have fixed sizes by construction.

high returns substantially earlier than the fixed MLP baselines. The widest fixed baseline, MLP(200%), attains slightly higher late-stage performance, showing that increased fixed capacity remains a strong baseline on the most difficult task. However, this model uses a larger fixed parameter budget and does not provide adaptive capacity control. In contrast to the simpler tasks, the generation-best markers of NEAT and NDP do not consistently approach the high-return regime reached by SMGrNN and MLP(200%). This suggests that generic topology evolution or developmental growth is less effective on the harder control problem under the present adapted protocol.

The network-size results further clarify the difference between the methods. SMGrNN shows task-dependent expansion followed by stabilization: CartPole-v1 induces a relatively small final graph, whereas Acrobot-v1 and LunarLander-v3 lead to larger structures. This indicates that the SPM does not simply accumulate parameters, but regulates capacity through growth and pruning as training proceeds. NEAT exhibits approximately linear structural growth with relatively small final network sizes. This growth is sufficient to discover strong individuals on some simpler tasks, but does not scale to consistently high-performing individuals on LunarLander-v3. NDP often generates larger and more variable structures, but these structures do not reliably translate into competitive selected individuals. Static MLPs have fixed sizes by construction and therefore cannot adjust their capacity during learning.

Taken together, these results show that dynamic topology alone is not sufficient to explain the behavior of SMGrNN.

Evolutionary and developmental baselines can occasionally discover high-performing individuals, especially on simpler tasks, but SMGrNN couples local structural plasticity directly with online gradient-based policy optimization. This coupling enables sustained high-return behavior together with task-dependent capacity regulation, which is the main empirical advantage of the proposed SPM in the present benchmark protocol.

C. Ablation on structural plasticity

This section studies the contribution of structural plasticity by ablating growth and pruning components of the SPM. All models in this ablation start with zero hidden nodes and identical initial graphs.

1) *Effect of growth*: The experimental configuration is summarized in Table I; quantitative results are reported in Appendix Table A.IV, while reward and network size dynamics are visualized in Fig. 4. In the *growth-enabled* condition, the Structural Plasticity Module (SPM) performs edge-driven and random exploratory growth together with periodic pruning, as described in Section III-C. In the *static* condition, the SPM is disabled and the graph remains fixed; only synaptic weights are updated by gradient descent.

Across CartPole-v1, Acrobot-v1, and LunarLander-v3, enabling structural growth consistently improves reward stability and reduces run-to-run variance, most prominently on LunarLander-v3. Harder tasks also induce larger final architectures under SPM control (e.g., tens of hidden nodes versus only

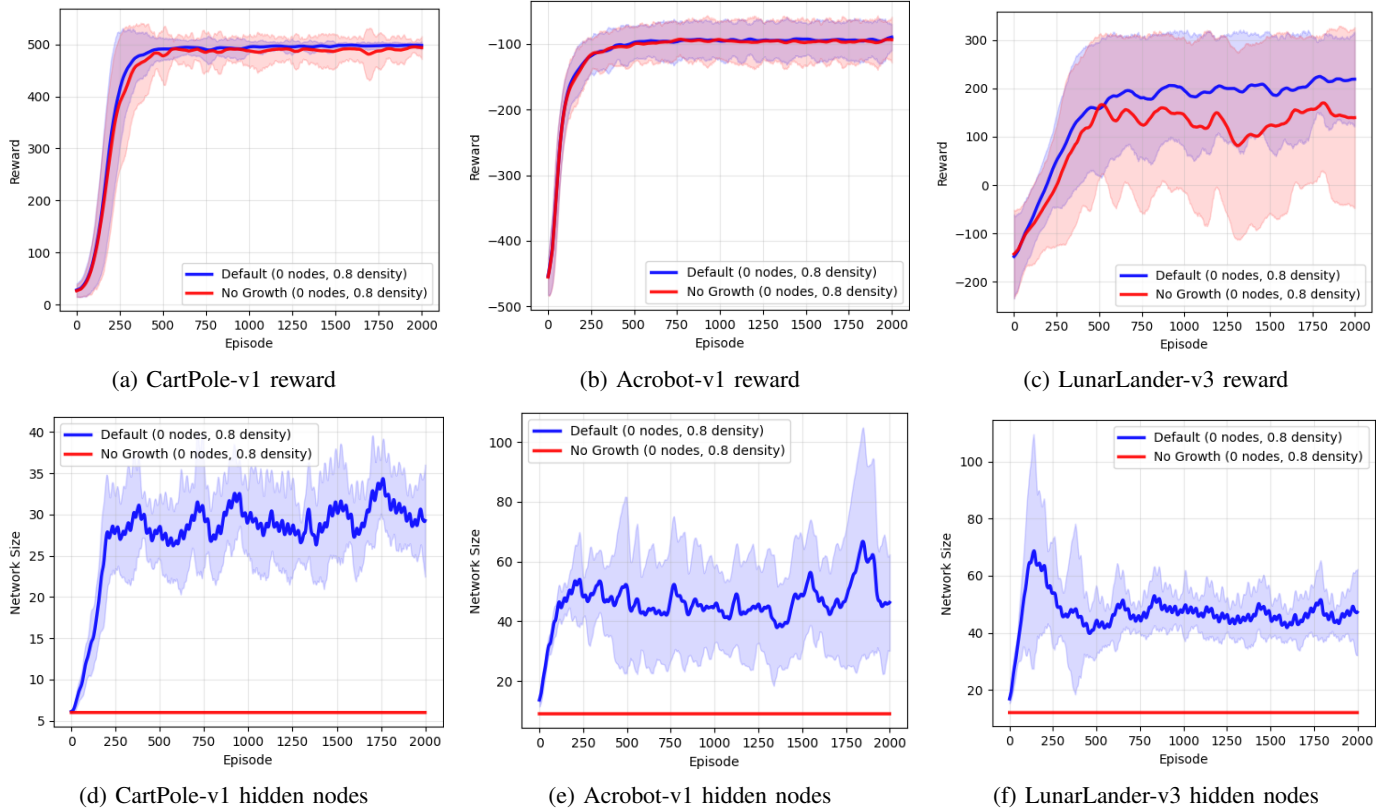


Fig. 4: Ablation on structural growth. Each panel compares SMGrNN (growth enabled) with a static graph in which the Structural Plasticity Module is disabled. Top row: episodic return over training; bottom row: number of hidden nodes. Solid curves show smoothed means, and shaded regions span all 10 runs.

TABLE I: Ablation setup (10 runs per condition).

Env.	Episodes	Init hidden	Density	Growth
CartPole	2000	0	0.8	Enabled / Disabled
Acrobot	2000	0	0.8	Enabled / Disabled
LunarLander	2000	0	0.8	Enabled / Disabled

a small handful in the static case), indicating that the network expands capacity in response to task difficulty. Convergence speed is similar on average between the two conditions but more consistent when growth is enabled, as reflected in the narrower spread of convergence episodes in Appendix Table A.IV. These results suggest that structural growth is an effective mechanism for matching network capacity to task demands without manual architectural tuning.

2) *Effect of pruning*: To assess the role of pruning more reliably, an additional *growth-only* variant is considered in which the SPM performs edge-driven and random growth but pruning of weak edges and orphan nodes is disabled. Both the standard SMGrNN and the growth-only variant are evaluated over 10 independent runs. This allows us to distinguish the effect of pruning on task performance from its effect on structural compactness.

Table II summarizes the results and compares the growth-only variant with the standard SMGrNN configuration.

Across all three tasks, the growth-only variant achieves late-training rewards, best rewards, and convergence episodes that are broadly comparable to those of standard SMGrNN. On

CartPole-v1, both variants reach the maximum episodic return during training, and their late-training rewards differ only slightly. On Acrobot-v1, the growth-only variant achieves a slightly higher late-training reward while reaching essentially the same best reward. On LunarLander-v3, the two variants also remain in a comparable performance range, although the growth-only model reaches the task threshold slightly later and attains a slightly lower best reward.

However, this comparable task performance comes at the cost of explosive structural expansion. On CartPole-v1, disabling pruning increases the final parameter count from 84 ± 16 to 6128 ± 1108 , while net growth rises from 24.2 to 1891.4. On Acrobot-v1, the final parameter count increases from 119 ± 39 to 6761 ± 998 , with net growth increasing from 35.4 to 2408.7. The effect is even stronger on LunarLander-v3, where the growth-only variant reaches 16707 ± 4846 parameters and a net growth of 5535.3, compared with only 140 ± 40 parameters and a net growth of 34.0 for standard SMGrNN.

Fig. 5 shows how this excess capacity arises: panel 5a reveals unchecked growth in the number of hidden nodes, and the CartPole-v1 weight distributions in panels 5b–5d indicate a much broader spectrum of weights with many small-magnitude connections under growth-only training. In contrast, standard SMGrNN prunes low-impact edges and removes orphan nodes, concentrating capacity on a more compact active subgraph. These results indicate that pruning is not primarily required to make learning possible; rather, it

TABLE II: Growth-only variant vs. standard SMGrNN over 10 runs. Late reward is the average return over the final quarter of training; Best reward is the best episodic return observed during training; Conv. episode is the first episode at which the task-specific reward threshold is reached; Net growth is the increase in hidden-node count relative to initialization; Parameters is the final number of trainable parameters.

Env.	Model	Late reward	Best	Conv. Ep.	Growth	Params
CartPole	Standard	497.7 ± 1.8	500.0 ± 0.0	147 ± 15	24.2	84 ± 16
	No-prune	493.6 ± 3.6	500.0 ± 0.0	151 ± 11	1891.4	6128 ± 1108
Acrobot	Standard	-94.0 ± 1.9	-62.3 ± 0.5	80 ± 12	35.4	119 ± 39
	No-prune	-90.6 ± 1.6	-62.4 ± 0.8	83 ± 13	2408.7	6761 ± 998
LunarLander	Standard	207.6 ± 33.3	321.1 ± 5.3	231 ± 16	34.0	140 ± 40
	No-prune	211.3 ± 36.7	315.7 ± 6.0	245 ± 22	5535.3	16707 ± 4846

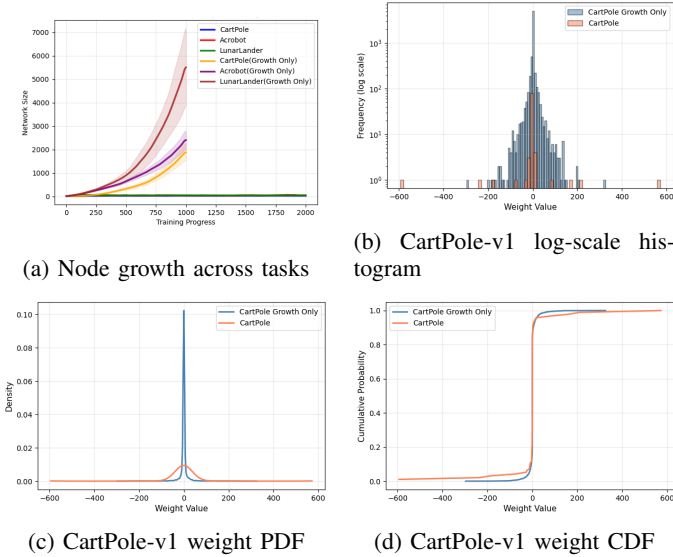


Fig. 5: Growth-only variant vs. SMGrNN. Panel (a) shows the number of nodes over training for all environments. Panels (b)–(d) show final weight distributions on CartPole-v1: log-scale histogram, probability density function (PDF), and cumulative distribution function (CDF).

TABLE III: Setup for the initial-topology sensitivity experiment (10 runs per configuration).

Environment	Episodes	Initial hidden	Edge density	Growth
CartPole	2000	0 / 5 / 10	0.8	Enabled
Acrobot	2000	0 / 5 / 10	0.8	Enabled
LunarLander	2000	0 / 5 / 10	0.8	Enabled

is critical for preventing uncontrolled network expansion and for keeping structural plasticity compact and computationally tractable while preserving comparable control performance.

3) *Sensitivity to initial topology*: Sensitivity to the initial graph is examined by varying the initial hidden-node count in $\{0, 5, 10\}$ while keeping the SPM and all other hyperparameters fixed. Table III summarizes the configuration, aggregate metrics are reported in Appendix Table A.V, and Fig. 6 shows the evolution of network size and average growth over training.

Larger initial capacity induces *less* additional growth, and sparser initial graphs trigger stronger early expansion. Across initializations, final hidden-node counts partially converge to a similar range in each environment, indicating compensatory scaling by the SPM. Late-training rewards are nearly identical on CartPole-v1 and Acrobot-v1, and only modest gains are

observed for richer initial topologies on the more challenging LunarLander-v3 (see Appendix Table A.V). Overall, SMGrNN shows low sensitivity to the initial hidden size, as over- and under-parameterized starting graphs are corrected online by growth and pruning.

4) *Task difficulty and structural scaling*: Structural scaling with task difficulty is investigated by training SMGrNN on four tasks under identical SPM hyperparameters: a trivial supervised XOR classification problem, CartPole-v1 (easy), Acrobot-v1 (moderate), and LunarLander-v3 (harder). Fig. 7 shows the evolution of hidden-node counts and the corresponding final sizes, and Appendix Table A.VI reports numerical summaries.

Structural scale follows task complexity. On the XOR problem the network grows minimally and quickly stabilizes at a very small size, reflecting the low representational demand. On CartPole-v1 the topology expands moderately from its minimal seed and stabilizes at a small network. On Acrobot-v1 the architecture grows further and settles at an intermediate scale. On LunarLander-v3 the network continues to grow for longer and converges to the largest size among the four tasks (Appendix Table A.VI). These patterns indicate that, under a single set of SPM hyperparameters, SMGrNN allocates capacity in proportion to task difficulty without manual adjustment of the architecture.

D. Qualitative analysis of final topologies

To qualitatively illustrate the structures produced by on-line structural plasticity, Fig. 8 shows representative final topologies learned by SMGrNN on CartPole-v1, Acrobot-v1, and LunarLander-v3. These graphs are no longer layerwise multilayer perceptrons: relay-node insertion, exploratory edge growth, and pruning produce sparse directed topologies with skip connections, feedback edges, and task-dependent connectivity patterns.

Several qualitative trends are visible. First, the learned structures are sparse rather than densely layered, indicating that the SPM does not simply accumulate parameters but selectively preserves a compact active subgraph. Second, the final topologies differ substantially across tasks, which is consistent with the quantitative network-size scaling reported in Fig. 7. Simpler tasks such as CartPole-v1 tend to yield smaller and more centralized structures, whereas more challenging tasks such as Acrobot-v1 and LunarLander-v3 produce larger graphs with richer long-range connectivity. Third, the final networks

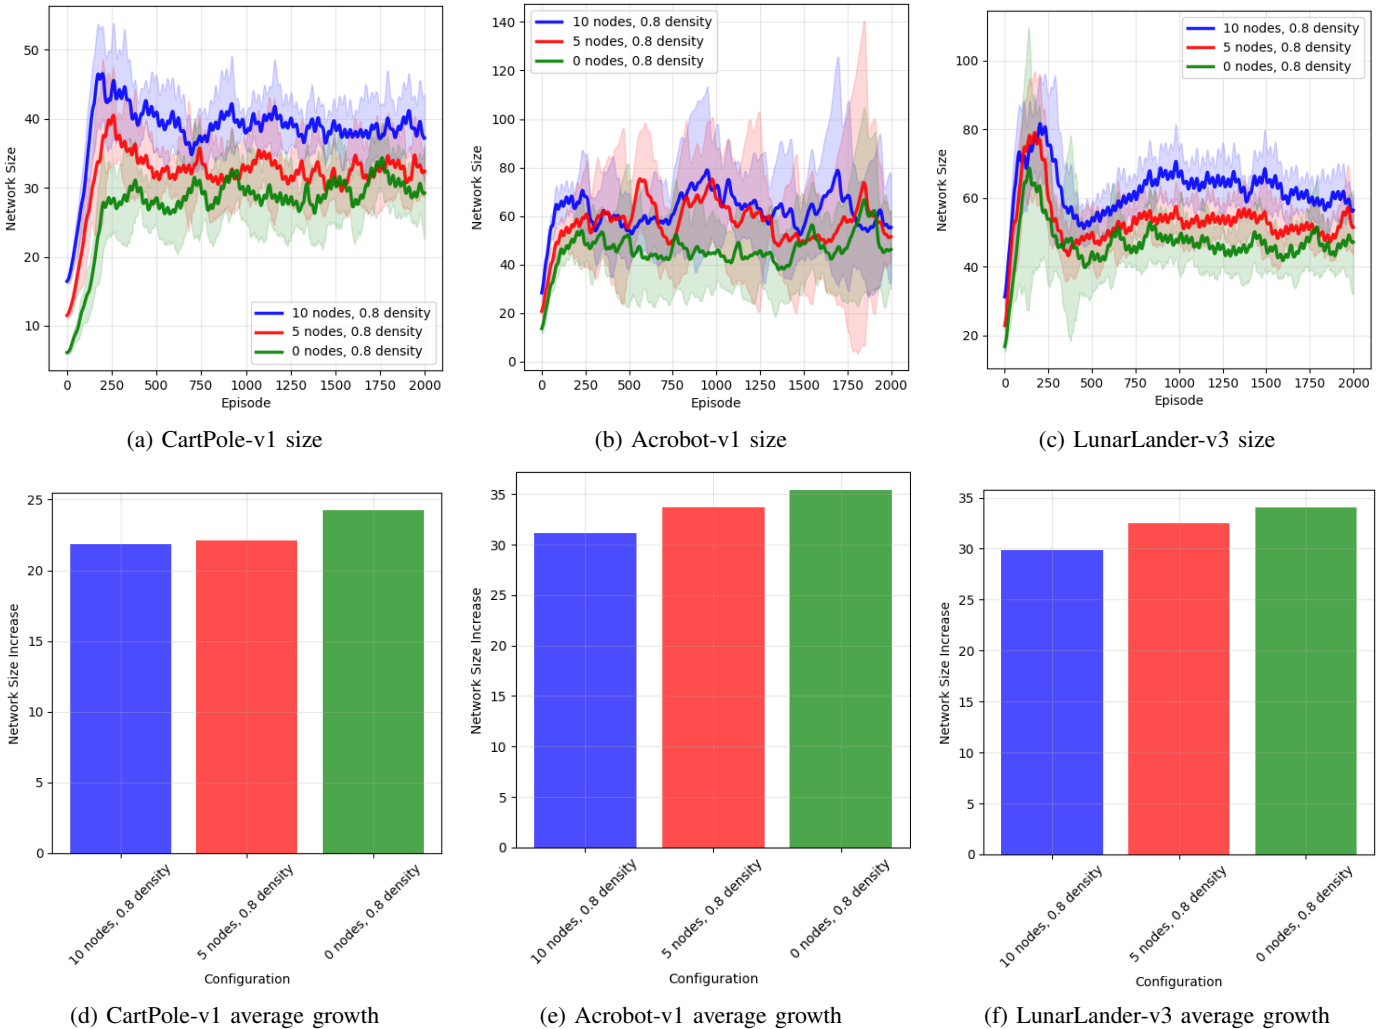


Fig. 6: Sensitivity to initial topology. Each panel averages over 10 runs with initial hidden-node counts 0, 5, and 10 under identical SPM hyperparameters. Top row: number of hidden nodes over training; bottom row: average growth per episode.

contain motifs that cannot be represented as a standard single-hidden-layer MLP, including relay-mediated pathways, non-layered directed links, and feedback connections.

These visualizations complement the quantitative analyses in Sections 4.2–4.3 by showing directly that the resulting architectures are task-dependent, non-layered, and shaped by the combined action of growth and pruning.

V. DISCUSSION

A. Summary of contributions and empirical findings

The present study investigated a simple form of local structural plasticity for control policies, instantiated in the SMGrNN. SMGrNN augments a standard, gradient-trained policy network with a SPM that adjusts the graph topology during training based on short-term statistics of edge-wise weight updates and derivatives. The SPM uses only locally available information collected in rolling history buffers to decide when and where to grow or prune hidden nodes and connections, while synaptic weights are optimized by conventional gradient descent.

Experiments on three benchmark control tasks showed that this form of local structural plasticity provides competitive performance relative to both fixed-topology and adapted dynamic-topology baselines. With a single set of SPM hyperparameters, SMGrNN matches or exceeds the returns of parameter-matched static MLPs on CartPole-v1 and Acrobot-v1, while reaching strong performance earlier than the wider MLP baseline on LunarLander-v3 (Fig. 3). The added NEAT and NDP comparisons further show that dynamic topology alone does not fully explain the observed behavior. Evolutionary and developmental baselines can discover strong individuals in simpler tasks, but SMGrNN couples structural adaptation with online gradient-based policy optimization, yielding sustained high-return behavior together with task-dependent capacity regulation (Fig. 3).

Ablation studies further clarified the role of structural plasticity. Disabling growth and pruning reduces SMGrNN to a fixed graph and yields more fragile performance that is sensitive to the initial architecture (Fig. 4, Table A.IV). Conversely, a growth-only variant that removes pruning achieves comparable late-training rewards but allows the network to

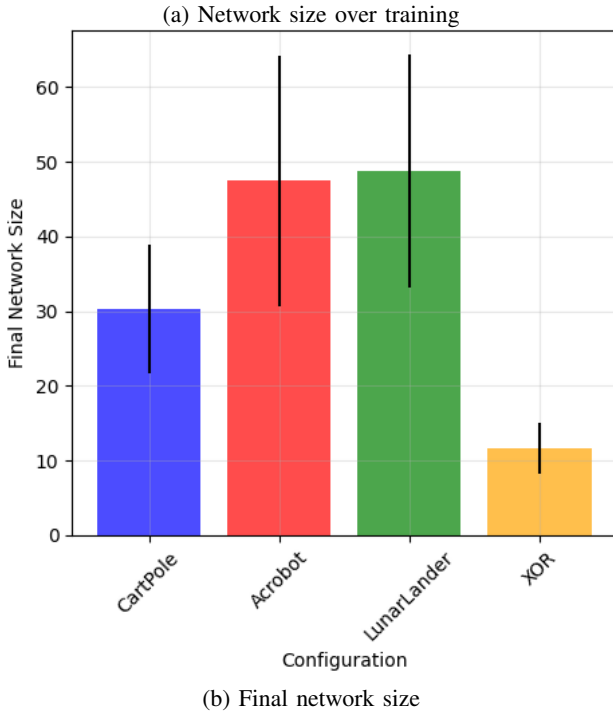
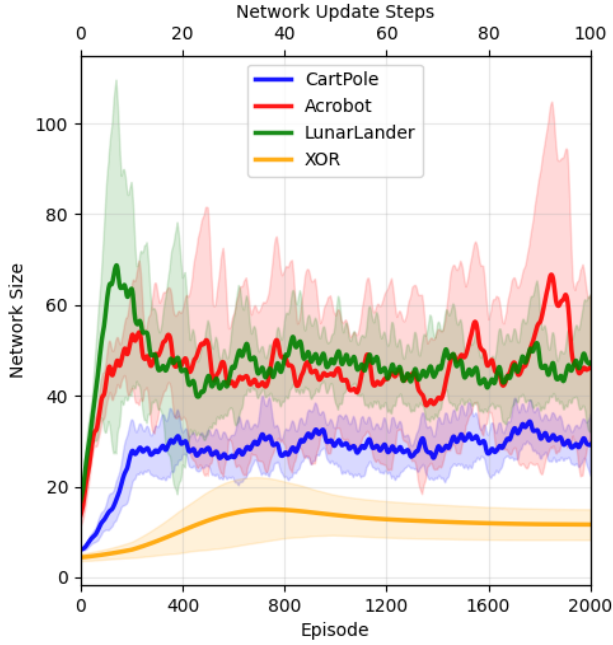


Fig. 7: Scaling of SMGrNN capacity with task difficulty. Left: hidden-node trajectories; right: final hidden-node counts.

expand to orders of magnitude more parameters, producing broad weight distributions with many small-magnitude connections (Fig. 5, Table II). Additional analyses showed that SMGrNN is robust to the initial number of hidden nodes, with final capacities partially converging across initializations (Fig. 6, Table A.V), and that emergent network size scales systematically with task difficulty across XOR, CartPole-v1, Acrobot-v1, and LunarLander-v3 (Fig. 7, Table A.VI). Taken together, these results indicate that the SPM enables a single

controller to self-adjust its effective capacity to task demands, with minimal manual tuning of architectural hyperparameters.

B. Role of local structural plasticity

The proposed SPM implements structural plasticity through local statistical signals rather than explicit global objectives. Decisions to grow or prune structure are based on edge-wise update statistics within a short temporal window, without direct access to the global reinforcement signal or the full loss landscape. In particular, edge-driven growth is triggered by fluctuating derivatives, suggesting insufficiently resolved structure along certain paths, whereas pruning targets weak and near-static edges and removes orphan nodes. This separates the *structural* rule, which acts on intrinsic signals, from the *synaptic* rule, which in this work is provided by backpropagation.

This separation places SMGrNN in a distinct position relative to most dynamic architectures in continual and multi-task learning, where capacity expansion is often orchestrated at the task level or via heuristics tied to validation performance. Here, structural adaptation proceeds continuously and at a finer granularity, with small changes accumulated over time as the policy trains. In the present work, this separation should be interpreted conservatively. The experiments only establish that local structural adaptation can be beneficial when combined with standard gradient-based synaptic optimization. They do not show that the same structural rules remain effective under Hebbian, spike-based, or other fully local synaptic learning rules. The main significance of the current result is therefore the independent contribution of local structural plasticity within a conventional training setting, rather than a validated general framework for all local learning regimes.

C. Limitations and future directions

Several limitations of the current study delimit the scope of the conclusions.

First, the evaluation is restricted to single-task policy distillation and simple supervised classification (XOR), rather than full continual learning benchmarks involving sequences of distinct tasks or explicit tests of catastrophic forgetting. The reported structural adaptation therefore reflects within-task capacity adjustment, not long-term maintenance of multiple skills. In other words, the focus here is on within-task capacity adaptation, not on catastrophic forgetting across task sequences; explicit continual learning is left to future work.

Second, although structural edits may produce feedback edges and other non-layered motifs, the current implementation handles such topologies through a fixed number of synchronous message-passing iterations within each forward call, with gradients propagated only through this finite unrolling. The empirical evaluation in this paper covers two limited regimes: $K = 1$ for the control tasks, where recurrent connectivity is mediated mainly through cross-call state, and $K = 3$ for the XOR task, where limited within-call iterative propagation is used because no cross-call state is available. The present study therefore does not provide a general treatment of arbitrary graph topologies under unrestricted recurrent

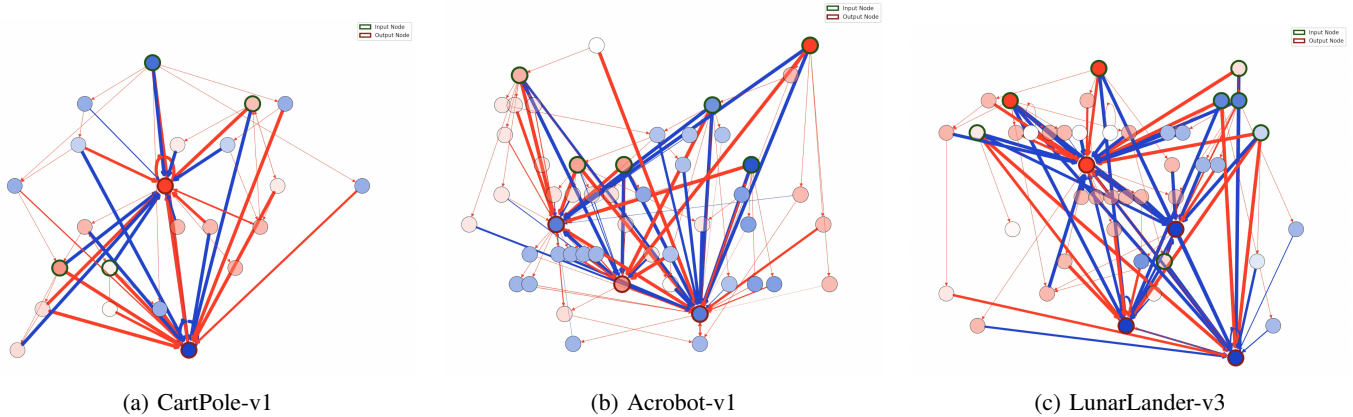


Fig. 8: Representative final SMGrNN topologies after training on CartPole-v1, Acrobot-v1, and LunarLander-v3. Input nodes are outlined in green and output nodes in red. Edge color and width indicate signed weight magnitude. The learned graphs are sparse, directed, and non-layered, illustrating how local structural plasticity produces task-dependent topologies that differ substantially from a fixed multilayer perceptron.

credit assignment; rather, it studies local structural plasticity in a graph-state network under these restricted computational settings.

Third, the SPM itself is hand-designed. Its thresholds, sampling ratios, and update schedules are selected by preliminary tuning on a small set of environments rather than learned automatically. Although the final configuration is shared across tasks in the present experiments, the current study does not provide an adaptive mechanism for selecting these structural hyperparameters. Learning or meta-optimizing the growth and pruning policy remains an important direction for future work.

Fourth, the current implementation is not optimized for computational efficiency. Graph-state message passing, history-buffer maintenance, and structural editing are implemented in a prototype form rather than as fully vectorized or batched operations. Preliminary timing checks indicate that the main overhead arises from graph execution and SPM structural updates rather than from the backward pass itself. More efficient vectorized graph execution, batched structural updates, and optimized history-buffer management remain future engineering directions.

A further limitation is that the present study does not isolate the contribution of criterion-driven relay insertion from that of random exploratory growth, nor does it compare relay insertion against alternative local structural edit operators. A systematic comparison among different edit operators remains for future work.

These limitations point to several natural directions for future work. A first step would be to replace or augment gradient-based synaptic updates with local learning rules, such as Hebbian or forward-forward style objectives in rate-based networks, or spike-timing-dependent plasticity in spiking implementations. Because the SPM operates purely on local edge-wise update statistics, the same structural mechanism could, in principle, be combined with such rules to obtain controllers in which both structure and weights are governed by local plasticity modules. A second direction is to move from single-task distillation to settings with explicit task sequences

or non-stationary environments, in order to test whether SPM-driven growth and pruning can allocate and preserve substructures that support multiple skills while mitigating interference. A third avenue is to make the SPM itself adaptive, for example by meta-learning or reinforcement learning over growth and pruning hyperparameters, so that structural policies are tuned by performance signals rather than fixed by hand. Exploring these directions may help to turn local structural plasticity from a useful architectural heuristic into a more general principle for adaptive, resource-aware control.

REFERENCES

- [1] M. Konishi, K. M. Igarashi, and K. Miura, “Biologically plausible local synaptic learning rules robustly implement deep supervised learning,” *Frontiers in Neuroscience*, vol. 17, p. 1160899, 2023.
- [2] Y. Bengio, D.-H. Lee, J. Bornschein, T. Mesnard, and Z. Lin, “Towards biologically plausible deep learning,” *arXiv preprint arXiv:1502.04156*, 2015.
- [3] T. Stegmaier, “Biologically plausible reinforcement learning,” 2023.
- [4] K. Doya, “Reinforcement learning: Computational theory and biological mechanisms,” *HFSP journal*, vol. 1, no. 1, p. 30, 2007.
- [5] D. O. Hebb, *The organization of behavior: A neuropsychological theory*. Psychology press, 2005.
- [6] A. Journé, H. G. Rodriguez, Q. Guo, and T. Moraitis, “Hebbian deep learning without feedback,” *arXiv preprint arXiv:2209.11883*, 2022.
- [7] J. Talloen, J. Dambre, and A. Vandesompele, “Pytorch-Hebbian: facilitating local learning in a deep learning framework,” *arXiv preprint arXiv:2102.00428*, 2021.
- [8] G. I. Parisi, R. Kemker, J. L. Part, C. Kanan, and S. Wermter, “Continual lifelong learning with neural networks: A review,” *Neural networks*, vol. 113, pp. 54–71, 2019.
- [9] G. M. van de Ven, N. Soares, and D. Kudithipudi, “Continual learning and catastrophic forgetting,” *arXiv preprint arXiv:2403.05175*, 2024.
- [10] J. Kirkpatrick, R. Pascanu, N. Rabinowitz, J. Veness, G. Desjardins, A. A. Rusu, K. Milan, J. Quan, T. Ramalho, A. Grabska-Barwinska et al., “Overcoming catastrophic forgetting in neural networks,” *Proceedings of the national academy of sciences*, vol. 114, no. 13, pp. 3521–3526, 2017.
- [11] Z. Wang, E. Yang, L. Shen, and H. Huang, “A comprehensive survey of forgetting in deep learning beyond continual learning,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2024.
- [12] P. Marzola, T. Melzer, E. Pavese, J. Gil-Mohapel, and P. S. Brocardo, “Exploring the role of neuroplasticity in development, aging, and neurodegeneration,” *Brain sciences*, vol. 13, no. 12, p. 1610, 2023.
- [13] H. Markram, W. Gerstner, and P. J. Sjöström, “A history of spike-timing-dependent plasticity,” *Frontiers in synaptic neuroscience*, vol. 3, p. 4, 2011.

- [14] S. Sodhani, S. Chandar, and Y. Bengio, “Toward training recurrent neural networks for lifelong learning,” *Neural computation*, vol. 32, no. 1, pp. 1–35, 2020.
- [15] Z. Chen and B. Liu, *Lifelong machine learning*. Morgan & Claypool Publishers, 2018.
- [16] S. Huang, V. Francois-Lavet, and G. Rabusseau, “Understanding capacity saturation in incremental learning,” in *Canadian AI*, 2021.
- [17] M. Rostami, S. Kolouri, and P. K. Pilly, “Complementary learning for overcoming catastrophic forgetting using experience replay,” *arXiv preprint arXiv:1903.04566*, 2019.
- [18] D. Rolnick, A. Ahuja, J. Schwarz, T. Lillicrap, and G. Wayne, “Experience replay for continual learning,” *Advances in neural information processing systems*, vol. 32, 2019.
- [19] A. A. Rusu, N. C. Rabinowitz, G. Desjardins, H. Soyer, J. Kirkpatrick, K. Kavukcuoglu, R. Pascanu, and R. Hadsell, “Progressive neural networks,” *arXiv preprint arXiv:1606.04671*, 2016.
- [20] J. Yoon, E. Yang, J. Lee, and S. J. Hwang, “Lifelong learning with dynamically expandable networks,” *arXiv preprint arXiv:1708.01561*, 2017.
- [21] T. J. Draelos, N. E. Miner, C. C. Lamb, J. A. Cox, C. M. Vineyard, K. D. Carlson, W. M. Severa, C. D. James, and J. B. Aimone, “Neurogenesis deep learning: Extending deep networks to accommodate new classes,” in *2017 international joint conference on neural networks (IJCNN)*. IEEE, 2017, pp. 526–533.
- [22] R. Wu, K. Huang, H. Zhang, and F. Ye, “Self-controlled dynamic expansion model for continual learning,” *arXiv preprint arXiv:2504.10561*, 2025.
- [23] F. Ye and A. G. Bors, “Self-evolved dynamic expansion model for task-free continual learning,” in *Proceedings of the IEEE/CVF international conference on computer vision*, 2023, pp. 22 102–22 112.
- [24] D. Turner, P. J. Cardoso, and J. M. Rodrigues, “Modular dynamic neural network: A continual learning architecture,” *Applied Sciences*, vol. 11, no. 24, p. 12078, 2021.
- [25] J. Schwarz, W. Czarnecki, J. Luketina, A. Grabska-Barwinska, Y. W. Teh, R. Pascanu, and R. Hadsell, “Progress & compress: A scalable framework for continual learning,” in *International conference on machine learning*. PMLR, 2018, pp. 4528–4537.
- [26] S. Lee, J. Ha, D. Zhang, and G. Kim, “A neural dirichlet process mixture model for task-free continual learning,” *arXiv preprint arXiv:2001.00689*, 2020.
- [27] B. Han, F. Zhao, Y. Zeng, W. Pan, and G. Shen, “Enhancing efficient continual learning with dynamic structure development of spiking neural networks,” *arXiv preprint arXiv:2308.04749*, 2023.
- [28] K. O. Stanley and R. Miikkulainen, “Evolving neural networks through augmenting topologies,” *Evolutionary computation*, vol. 10, no. 2, pp. 99–127, 2002.
- [29] E. Najarro, S. Sudhakaran, C. Glanois, and S. Risi, “Hypernea: Growing developmental networks with neural cellular automata,” *arXiv preprint arXiv:2204.11674*, 2022.
- [30] E. Najarro, S. Sudhakaran, and S. Risi, “Towards self-assembling artificial neural networks through neural developmental programs,” in *Artificial Life Conference Proceedings 35*, vol. 2023, no. 1. MIT Press One Rogers Street, Cambridge, MA 02142-1209, USA journals-info ..., 2023, p. 80.
- [31] E. Plantec, J. W. Pedersen, M. L. Montero, E. Nisioti, and S. Risi, “Evolving self-assembling neural networks: From spontaneous activity to experience-dependent learning,” in *ALIFE 2024: Proceedings of the 2024 Artificial Life Conference*. MIT Press, 2024.
- [32] A. Mordvintsev, E. Randazzo, E. Niklasson, and M. Levin, “Growing neural cellular automata,” *Distill*, vol. 5, no. 2, p. e23, 2020.
- [33] G. Hinton, “The forward-forward algorithm: Some preliminary investigations,” *arXiv preprint arXiv:2212.13345*, vol. 2, no. 3, p. 5, 2022.
- [34] C. W. Lynn, C. M. Holmes, and S. E. Palmer, “Heavy-tailed neuronal connectivity arises from Hebbian self-organization,” *Nature Physics*, vol. 20, no. 3, pp. 484–491, 2024.

APPENDIX

This appendix provides supplementary materials supporting the analyses in the main text, including hyperparameter settings, hyperparameter selection protocols, sensitivity analyses, and additional quantitative results. Unless otherwise noted, all statistics are averaged over multiple runs with different random seeds.

A. Optimizer and learning-rate sensitivity

To examine whether the normalized instability criterion is purely an optimizer-scale artifact, we performed a small sensitivity study on CartPole-v1 while keeping all SPM hyperparameters fixed to the paper defaults. Each setting was evaluated with 5 random seeds and 1000 episodes per seed. We first compared several optimizers at a fixed learning rate of 0.01, and then varied the learning rate of Adam over $\{0.001, 0.003, 0.01, 0.03\}$.

Across all tested optimizers, growth and pruning remained active, indicating that replacing the optimizer does not disable the SPM trigger. However, optimizer choice does affect the magnitude and stability of structural adaptation. In particular, RMSprop produces excessive structural expansion and very high turnover relative to Adam. Under Adam, varying the learning rate from 0.001 to 0.03 also preserves active structural adaptation, but larger learning rates increase final network size and churn. Overall, these results suggest that the normalized instability criterion is functional under optimizer and learning-rate changes, while Adam with a moderate learning rate provides the most stable performance–structure trade-off in this study.

Here, the churn ratio is defined as the total number of structural add/remove operations divided by the magnitude of the final net structural change. A larger churn ratio therefore indicates greater structural turnover relative to the final retained topology.

B. Hyperparameter selection and sensitivity

This subsection summarizes the Structural Plasticity Module (SPM) hyperparameters used in the main experiments, together with the protocol used to select them. The same final configuration is applied across tasks in order to highlight how structural adaptation emerges from local statistics rather than from task-specific tuning. The numerical values of the final shared defaults are listed in Table A.III.

Only the four primary SPM hyperparameters $(T, \lambda, \theta_{\text{var}}, p_{\text{rand}})$ were included in the actual tuning search. These parameters were selected because they directly determine the temporal sensitivity of the update statistics, the instability criterion for edge-driven growth, and the frequency of exploratory growth, and therefore define the core structural adaptation behaviour of the SPM. The remaining SPM hyperparameters $(\rho_{\text{rand}}, \eta_{\text{prune}}, s, \tau_w, \tau_{\Delta})$ were held fixed at conservative defaults because they mainly regulate secondary aspects of structural editing, such as pruning frequency, pruning aggressiveness, and random-growth batch size.

Phase 1 used a full 3^4 grid search on CartPole-v1 over $T \in \{50, 100, 200\}$, $\lambda \in \{0.25, 0.5, 1.0\}$, $\theta_{\text{var}} \in \{0.05, 0.1, 0.2\}$, and $p_{\text{rand}} \in \{0.1, 0.25, 0.5\}$. Each configuration was evaluated with 5 random seeds over 500 episodes and ranked by late-training reward, defined as the mean episodic return over the final quarter of training, with ties broken first by lower across-seed variance and then by smaller final network size. Under this protocol, the best CartPole-v1 configuration was $T = 50$, $\lambda = 0.5$, $\theta_{\text{var}} = 0.05$, and $p_{\text{rand}} = 0.25$, achieving a late-training reward of 494.26 ± 3.57 .

TABLE A.I: CartPole-v1 optimizer sensitivity of the SPM (5 seeds, 1000 episodes per setting). All runs use the paper-default SPM hyperparameters and a fixed learning rate of 0.01.

Optimizer	Late return	Final nodes	Churn ratio
Adam	495.61 ± 1.44	29.80 ± 5.71	44.08 ± 9.06
AdamW	477.93 ± 3.19	32.20 ± 3.60	50.15 ± 5.57
RMSprop	484.76 ± 3.42	814.80 ± 498.08	68.57 ± 36.56
SGD ($m = 0.9$)	471.99 ± 9.84	50.40 ± 7.91	58.20 ± 5.49

TABLE A.II: CartPole-v1 learning-rate sensitivity of the SPM under Adam (5 seeds, 1000 episodes per setting).

Learning rate	Late return	Final nodes	Churn ratio
0.001	496.61 ± 0.92	12.80 ± 0.40	36.09 ± 4.00
0.003	498.46 ± 0.23	18.60 ± 4.76	36.72 ± 11.50
0.01	494.60 ± 2.74	31.20 ± 3.97	41.60 ± 6.65
0.03	489.36 ± 6.73	49.60 ± 4.45	52.07 ± 6.62

TABLE A.III: Hyperparameters of the SPM used in all experiments.

Symbol	Name	Value
T	Temporal window length (steps)	100
p_{rand}	Random growth probability	0.25
ρ_{rand}	Random growth ratio	0.01
η_{prune}	Pruned weak-edge fraction	0.8
s	Pruning period (steps)	30
τ_w	Weight threshold for weak edges	0.1
τ_{Δ}	Derivative threshold for static edges	10^{-4}
λ	Zero-crossing interval width	0.5
θ_{var}	Threshold for normalized fluctuation magnitude	0.1

Phase 2 performed one-factor-at-a-time sensitivity analyses on CartPole-v1 and Acrobot-v1 using 5 random seeds and 1000 episodes per setting. Among the tested primary hyperparameters, T showed the clearest task dependence. CartPole-v1 preferred shorter update windows, whereas Acrobot-v1 preferred larger windows, although the latter also produced substantially larger final network sizes. By contrast, θ_{var} primarily controlled the compactness of the final architecture: increasing θ_{var} markedly reduced final network size on both tasks while only modestly changing late-training reward. The sensitivity trends for λ and p_{rand} were weaker and did not exhibit an equally clear cross-task pattern.

Based on these results, the final shared defaults in Table A.III were chosen as a practical cross-task compromise rather than as a single-task optimum. In particular, $T = 100$ was retained as an intermediate setting, and $\theta_{\text{var}} = 0.1$ was retained as a balanced compactness setting.

Fig. A.1 reports the one-factor-at-a-time sensitivity curves for the four primary SPM hyperparameters. Consistent with the summary above, T shows the clearest task dependence, whereas θ_{var} mainly controls the compactness of the final network. The effects of λ and p_{rand} are comparatively weaker and do not exhibit an equally clear cross-task pattern.

C. Ablation on structural growth

Table A.IV complements the main ablation figure by reporting detailed statistics for the growth-enabled and static variants. Across environments, enabling structural growth consistently reduces variance and, on the more difficult tasks, yields higher late-training rewards and larger final hidden layers than the fixed-topology baseline.

D. Additional growth-only weight distributions

Fig. A.2 extends the growth-only analysis to Acrobot-v1 and LunarLander-v3. Log-scale histograms, PDFs, and CDFs show that the growth-only variant produces very broad weight spectra with many low-magnitude connections, whereas SM-GrNN concentrates weight mass on a more compact set of edges, consistent with the effect of pruning.

E. Initial-topology sensitivity

Table A.V reports detailed statistics for the initial-topology sensitivity experiment. Across initial hidden sizes in $\{0, 5, 10\}$, late rewards and convergence episodes remain very similar, while net growth compensates for the initial capacity: sparser initial graphs exhibit slightly larger net increases in hidden-node count. These results support the conclusion that SM-GrNN is relatively robust to the choice of initial hidden-layer size.

F. Task-difficulty scaling

Table A.VI summarizes how emergent network size depends on task difficulty. The trivial XOR task stabilizes at the smallest hidden layer, CartPole-v1 converges to a modest size, and Acrobot-v1 and LunarLander-v3 yield the largest final networks and net growth. This ordering mirrors the qualitative difficulty of the tasks and reinforces the observation that, under fixed SPM hyperparameters, SMGrNN allocates capacity in proportion to task demands.

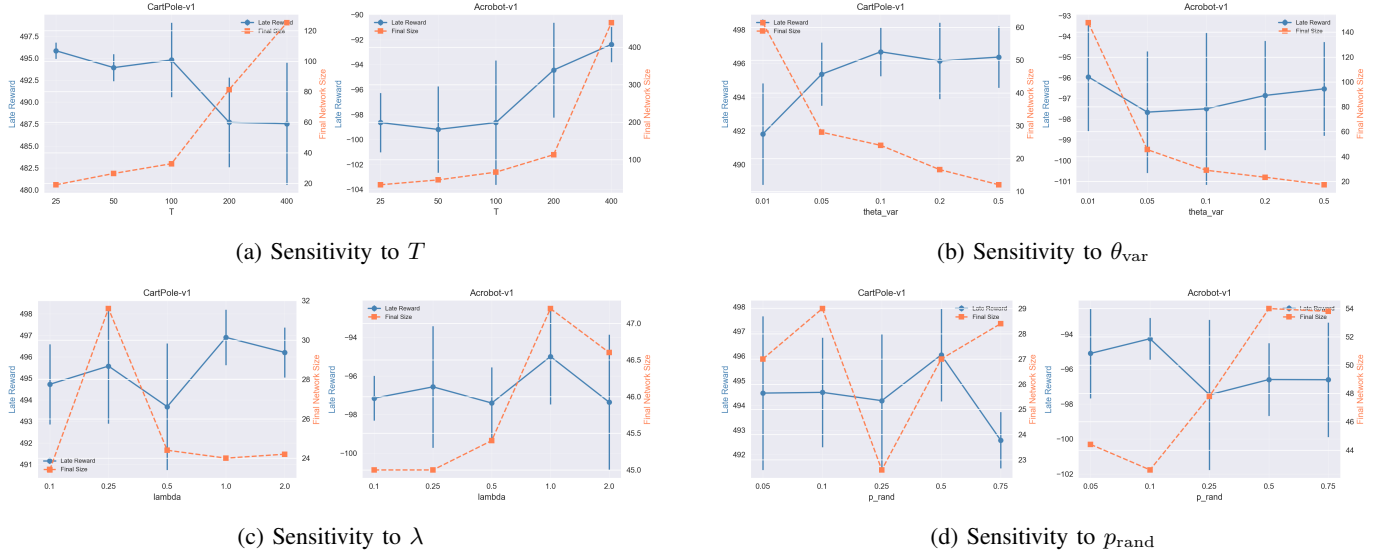


Fig. A.1: One-factor-at-a-time sensitivity curves for the four primary SPM hyperparameters on CartPole-v1 and Acrobot-v1. Error bars indicate across-seed variability. Across the tested parameters, T exhibits the clearest task dependence, while θ_{var} most directly controls final network compactness.

TABLE A.IV: Ablation on structural growth in SMGrNN (mean $\pm$ std over 10 runs). Late reward is the average return over the final quarter of episodes; Conv. episodes is the number of episodes to reach the task-specific reward threshold; Final size is the final number of hidden nodes.

Env.	Growth	Late reward	Conv. episodes	Final size
CartPole	Enabled	497.7 ± 1.8	147 ± 15	30.3
	Disabled	489.8 ± 12.1	152 ± 17	6.0
Acrobot	Enabled	-94.0 ± 1.9	80 ± 12	47.5
	Disabled	-95.9 ± 5.5	80 ± 12	9.0
LunarLander	Enabled	207.6 ± 33.3	231 ± 16	48.8
	Disabled	145.7 ± 130.5	234 ± 38	12.0

TABLE A.V: Initial-topology sensitivity of SMGrNN (mean $\pm$ std over 10 runs). Late reward is the average return over the final quarter of episodes; Conv. episodes is the number of episodes to reach the task-specific reward threshold; Net growth is the average increase in hidden-node count relative to the initial topology.

Env.	Init nodes	Late reward	Conv. episodes	Net growth
CartPole	10	495.2 ± 2.6	142 ± 14	21.9
	5	496.1 ± 1.7	153 ± 18	22.1
	0	497.7 ± 1.8	147 ± 15	24.2
Acrobot	10	-95.0 ± 2.2	84 ± 12	31.1
	5	-95.0 ± 3.6	82 ± 12	33.7
	0	-94.0 ± 1.9	80 ± 12	35.4
LunarLander	10	232.2 ± 31.2	231 ± 27	29.8
	5	222.4 ± 34.1	240 ± 21	32.5
	0	207.6 ± 33.3	231 ± 16	34.0

TABLE A.VI: Final network size and net growth vs. task difficulty (mean $\pm$ std over 10 runs). Final size is the number of hidden nodes at the end of training; Net growth is the average increase in hidden-node count relative to the initial topology.

Task	Final size	Net growth
XOR	11.6 ± 2.0	7.9
CartPole-v1	30.3 ± 5.6	24.2
Acrobot-v1	47.5 ± 9.0	35.4
LunarLander-v3	48.8 ± 14.0	34.0

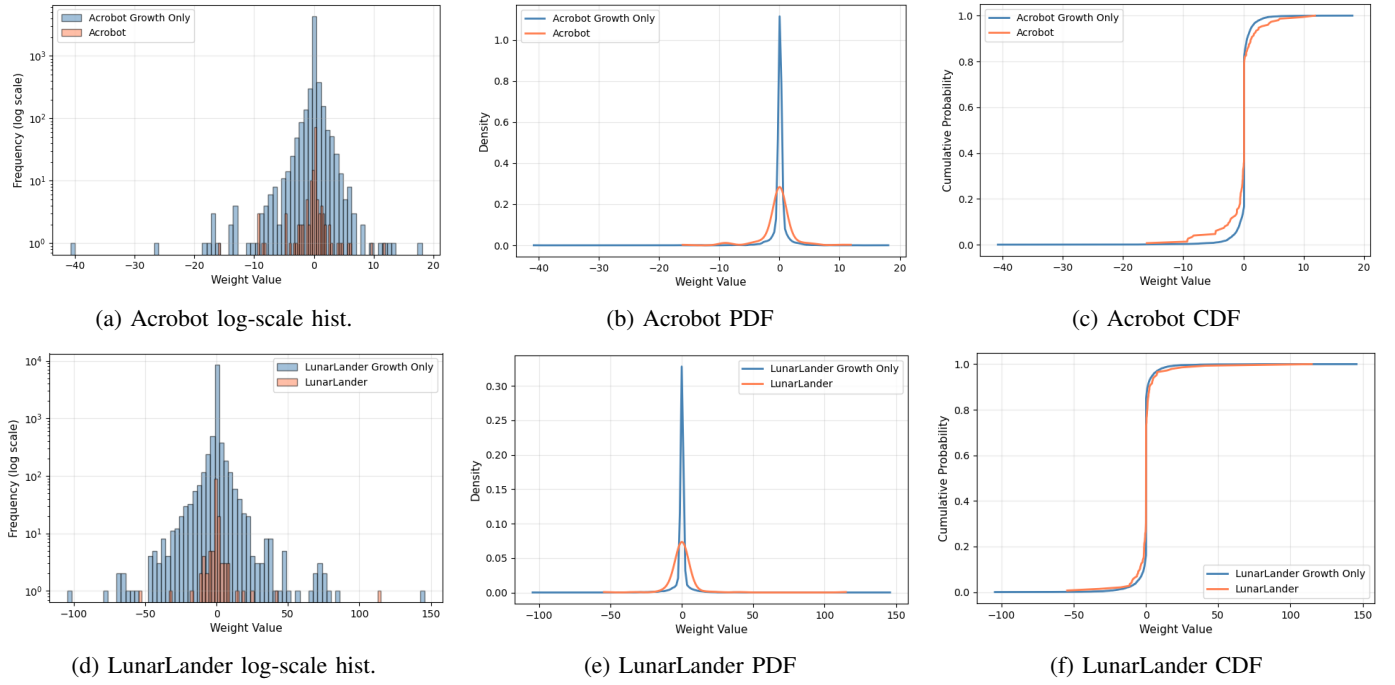


Fig. A.2: Additional weight distributions for the growth-only and SMGrNN configurations on Acrobot-v1 and LunarLander-v3.