GETTING STARTED

From the disk image to your first tethered frame.

Everything you need to run a real session in RawStage: open a folder, cull it, develop it, put a second screen to work, build a look, and shoot straight into it with a Fujifilm body. Twenty minutes, read once.

This describes beta 0.9 (build 21) on macOS 14 or later. Nothing here is aspirational — every menu item, key and field below is in the build you downloaded.
rawstage.app/start.html

WHAT'S HERE

01 Install and first launch
02 The folder is the session
03 Culling with one hand
04 The develop panel
05 The two studio windows
06 MOOD — a look in one gesture
07 A tethered session with a Fuji
08 Any other camera brand
09 Export
10 The beta period, and what happens after
11 Every keyboard shortcut
12 When something goes wrong

01

Install and first launch

RawStage is signed with an Apple Developer ID and notarized by Apple, so macOS opens it without an argument and without a trip to System Settings.

1. Open **RawStage-beta.dmg** and drag **RawStage** into your **Applications** folder.
2. Eject the disk image, then launch RawStage from Applications.
3. The first launch shows the standard macOS confirmation that the app was downloaded from the internet. Click **Open**. It never asks again.

> **THERE IS NO LICENCE KEY**
>
> Nothing to activate, no account, no sign-in. Each beta build has a fixed expiry date — this one runs until 31 January 2027 — and every tool, Pro included, is open until then. See section 10 for exactly what changes when it ends.

02

The folder is the session

There is no catalog and no import. A session is a folder on your disk, and RawStage writes what you do into small JSON sidecar files next to your RAWs. Move the folder, archive it, open it in ten years — everything travels with the photographs.

- ⌘O **Open Session…** — point it at a folder that already has photographs in it. That is the whole import step.
- ⌘N **New Session…** — creates an empty folder ready to receive frames. You choose a name, a location and a capture naming pattern here.
- ⇧⌘N **Start Tether Session…** — the same thing, but it opens straight into the Tether room waiting for the camera. See section 07.
- **File → Open Recent** keeps the last sessions. A folder that moved or was deleted shows dimmed rather than disappearing.
- You can also **drag a folder onto the window** at any moment. That opens it as a session.

Once a session is open, the window has three rooms and you move between them with ⌘1 ⌘2 ⌘3 — or simply G, D, T for Grid, Develop and Tether. **File → Reveal Session in Finder** takes you to the

folder itself whenever you want to see what is actually on disk.

03

Culling with one hand

The grid is built to be driven from the keyboard while the other hand holds a coffee or a camera. Every key below works in the grid and in Develop.


- `←` `→` move through the session.
- `1`–`5` set a star rating, `0` clears it.
- `P` picks, `X` rejects. `⇧P` switches the grid to **picks only**.
- `⌥1`–`⌥5` filter by rating (≥ that many stars); **View → Filter by Rating → Off** clears it.
- **Photo → Color Tag** adds a colour label when stars and picks are not enough.
- `⌘+` and `⌘−` grow and shrink the thumbnails.
- `⌘A` selects everything visible, `⇧⌘A` deselects.

> NOTHING IS MOVED OR DELETED
>
> A rejection is a flag in a sidecar, not a file operation. RawStage never moves, renames or deletes your photographs.

04

The develop panel

Press `D` (or `⌘2`) on any photograph. The panel on the right is the classic darkroom set, top to bottom, in the order you actually work: **Histogram**, **White Balance**, **Exposure**, **Color**, **Color Grading**, **Palette**, **Clarity**, **Curve**, **Levels**, **Detail** and **Geometry**.

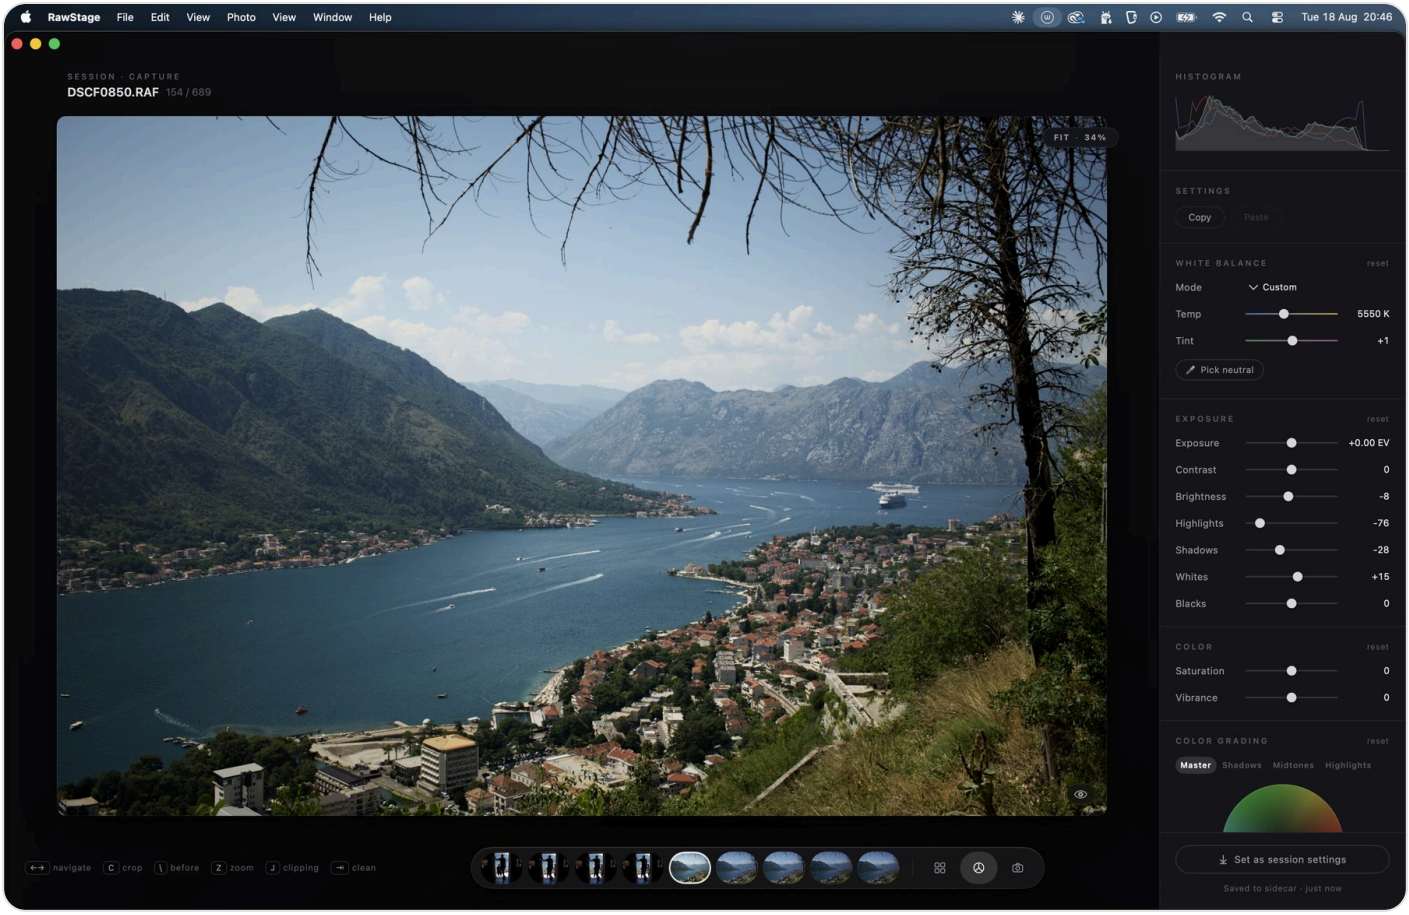

The develop room. The photograph is the only bright thing on the screen — that is deliberate, and it is why the panel is grey.

Four habits are worth building on day one:

- **Hold \ to see the file underneath.** Press and hold anywhere in the viewer and the photograph reverts to the RAW as shot; release and your edit comes back. **View → Show Original** does the same as a toggle.
- **Every module has an eye.** The small eye beside a section title bypasses that section alone, so you can ask "is my Clarity actually helping?" without undoing anything.
- **J shows clipping.** Hold it and blown highlights and crushed shadows are marked on the photograph.
- **R resets the edit** on the current photograph, and the **reset** beside each section title resets just that section.

To carry an edit across the session: ⇧⌘C copies the settings, select the photographs you want and ⇧⌘V pastes them. ⌘Z undoes the paste if it went somewhere you did not mean. Geometry — crop, rotation, straightening — is never included: framing is per photograph.

Two more keys that earn their place: C opens the crop with ratio presets and corner rotation, and ⇥ hides all the chrome so the photograph is alone on the screen. Z toggles zoom, and **View → Zoom 100%** and **Zoom to Fit** are there when you want to be precise about it.

05

The two studio windows

Both live in the **Window** menu, both are free, and both are real windows — drag them to a second screen and leave them there.

Viewer — ⌥⌘V

A window with nothing in it but the photograph: no panel, no filmstrip, no title. It is what you turn towards the client or the art director. **Window → Viewer Source** decides what it shows:

- **Current Selection** — it follows you as you navigate. Use this when you are reviewing together.
- **Last Capture** — it always shows the newest frame off the camera. Use this while you are shooting, so the client sees the shot you just took while you are still working on an earlier one.




The Viewer on a second screen. Nothing to explain, nothing to accidentally click.

Focus Check — ⌥⌘F

The instrument that answers the one question you cannot fix later: was it the eye, or the eyelash?

- It opens at **100%** and steps through **50% · 100% · 200% · 400%**. With the Focus Check window in front, ⌘+ and ⌘– step the zoom instead of the thumbnails.
- Drag inside it to pan. The window is resizable — make it as big as the screen you put it on.
- The **Peaking** switch in the floating control paints magenta over the detail that is genuinely sharp, and the slider beside it sets how fussy that judgement is.

> **WHY PEAKING SOMETIMES WAITS**
>
> Peaking only draws at 100% and above, and only once the sharp render has arrived. An overlay computed on a scaled-down preview measures detail the scaling already destroyed — it would light up a soft frame and tell you it was sharp. Below 1:1 the switch stays quiet on purpose. The resolution of the overlay is the resolution of the answer.

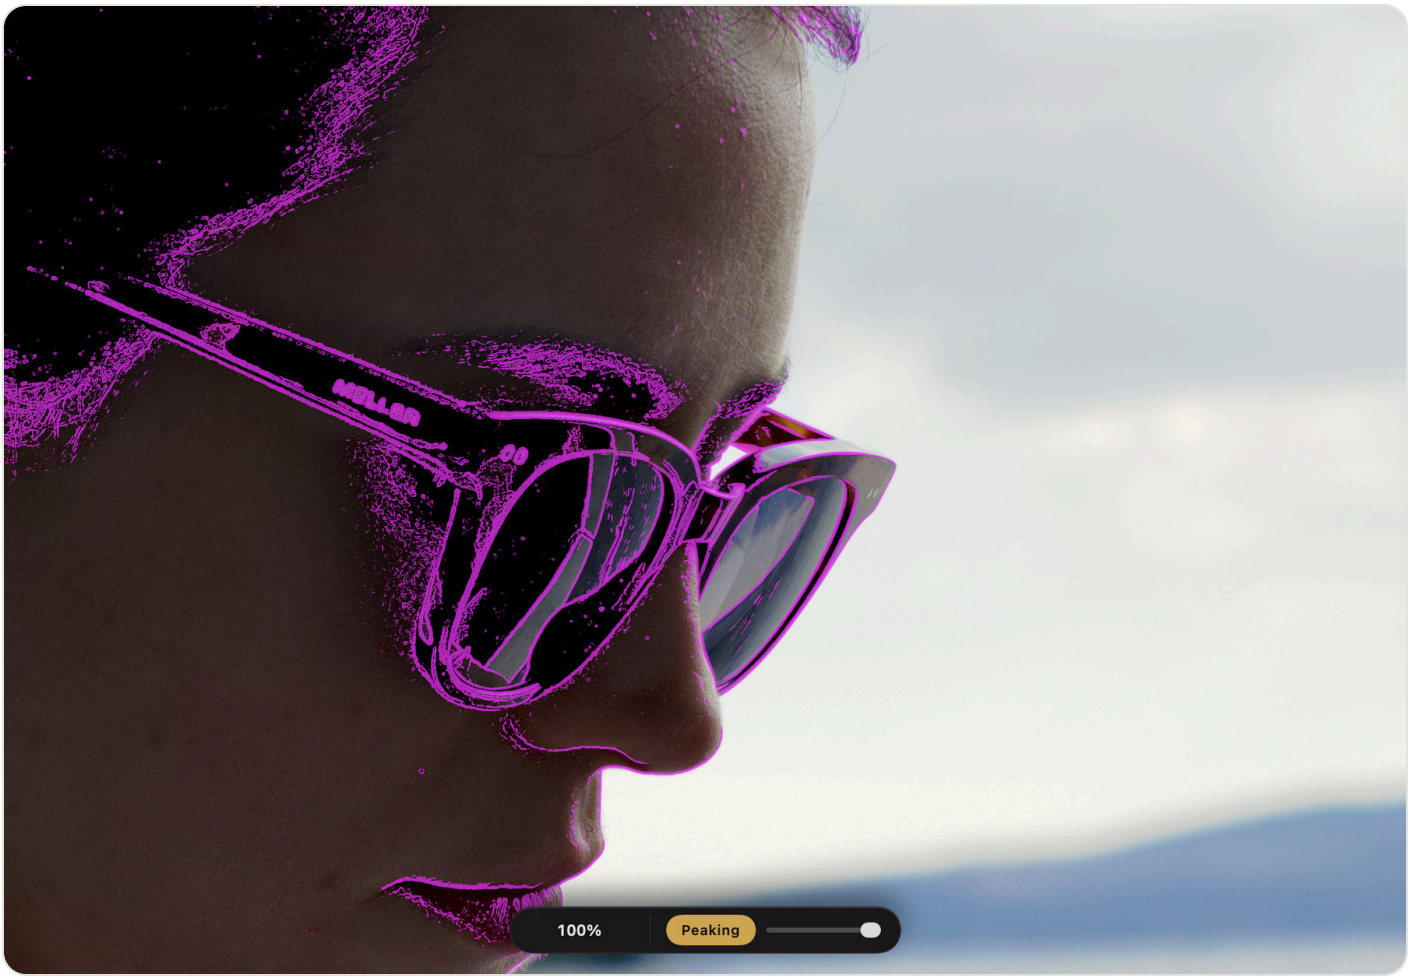

Focus Check at 100% with peaking on. The glasses, the lashes and the lip are lit; the cheek falling away is not.

06

MOOD — a look in one gesture


The **Palette** section has two modes, and they answer two different questions. **Image** adjusts the colours the photograph already has. **MOOD** imposes colours on it, one per tonal band. Grading wheels push tones around; MOOD decides what colour the shadows, the midtones and the highlights *are*.

To turn it on: in the develop panel, find **PALETTE** and click the **Mood** tab. That is the whole activation — there is no separate module to enable.

What you then have, top to bottom:

- **Color · Soft Light · Screen** — how the imposed colour composites onto the photograph. **Color** is a veil: hue and chroma only, tone untouched. **Soft Light** and **Screen** move the tone along with the colour, the way a gel or a lifted black would.

- **Shadows**, **Midtones**, **Highlights**, **General Tone** — four rows. Click the colour well on the right of a row and the hue disc opens: drag the puck to choose the colour, further from the centre for more chroma. The **Strength** slider under it (0–100) says how much of that colour lands. General Tone acts everywhere and its slider is called **Amount**.
- **Tone** (–100 to +100) is the mood's own contrast. It lives inside the module — the section's reset and its bypass eye cover it, and it never writes into your Curve.
- **From Image…** reads another photograph's palette and plants it in the four targets. You can also drop an image file straight onto the button. It is a seed, not a link: the image is read once, its colours are planted, and nothing about it is kept.
- **Show Mask** paints the pixels the active band is holding, so you can see what you are colouring before you commit to it.

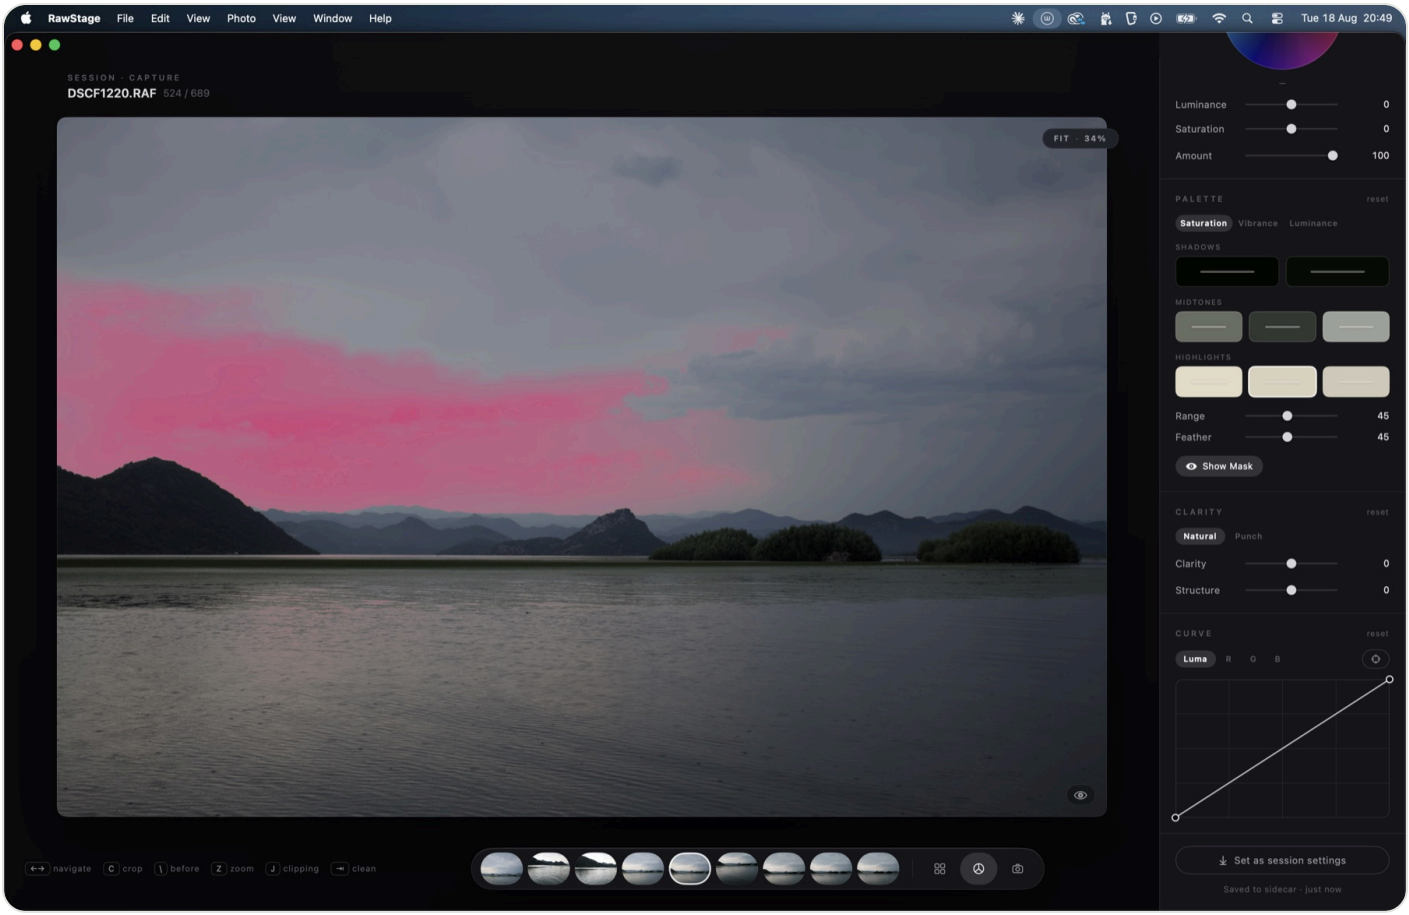

Show Mask. The pink is not the edit — it is the selection, so you stop guessing why the sky moved.

A WORKING ORDER

Get exposure and white balance right first, then reach for MOOD, then refine individual colours in **Image** mode on top. MOOD is applied first in the engine and the swatch adjustments refine what it produced — working in that order means the panel behaves the way the picture does.

07

A tethered session with a Fujifilm camera

Fujifilm X and GFX bodies talk to RawStage directly — no X Acquire, no Capture One, nothing else running. Frames land in the session in roughly a third of a second.

On the camera

1. Set the USB mode to **USB TETHER SHOOTING AUTO**. On most X and GFX bodies that is **SET UP → CONNECTION SETTING → USB MODE** (some bodies call it **PC CONNECTION MODE**). This is the one camera setting that matters.
2. Use a cable that carries data. A charging-only USB-C cable will power the camera and never appear on the Mac — it is the single most common reason a tether "doesn't work".
3. Plug the camera into the Mac directly if you can. Hubs work, but they are the first thing to remove when something is flaky.

In RawStage

1. Press ⇧⌘N — **Start Tether Session…**. Name the session, choose where it lives, and set a capture naming pattern if you want one (a prefix and a counter, for example **MARG-0001**).
2. If the camera is already connected, **Start tethered capture** is on by default and the panel tells you which body it found.
3. You land in the Tether room. The pill at the top right is the HUD: the camera's name, the number of captures, and the milliseconds from the last shutter click to the picture appearing.
4. Shoot. Each frame arrives, develops with the session's settings, and is ready to judge. ← → review, P and X pick and reject, Z zooms, ⇥ clears the chrome.



The session, mid-flight. Every capture arrives already carrying the session's settings.

Session settings — the part that makes tethering worth it

At the bottom of the develop panel is a button with three states. Press it to move through them:

- **Set as session settings** — off. New captures inherit nothing.
- **Session settings: following** — what is on screen *is* what the next capture will inherit, and every adjustment you make updates it. Light the first frame, get it right, and the rest of the session arrives already looking like that.
- **Session settings: frozen** — the current settings keep being inherited but stop following your adjustments. Reopening a session always returns it frozen, so nothing changes behind your back.

Only *adjustments* move the settings. Walking through the session with follow on changes nothing — that was a deliberate fix, because otherwise a pass through the culling would contaminate the whole shoot. And geometry is never inherited: crop and rotation are composition, per frame.

THE TRICK WORTH KNOWING

Open **Focus Check** (⌥⌘F), zoom to 100% and put it on the model's eye. With tethering live, every new capture keeps that zoom and that pan — so each shot lands on the same point and you can see the focus fall, frame after frame, without touching anything.

Unplug the camera, let it sleep, pull the cable by accident — the session does not care. Reconnect and captures resume where they left off.

08

Any other camera brand

Native tethering is Fujifilm-first today. Every other brand gets there through a **hot folder**, and the experience inside RawStage is identical once the file lands.

1. Start your camera maker's own tether utility and point its download folder at the session folder.
2. Start a tether session in RawStage on that same folder.
3. Shoot. Files appear in the session as they arrive — RawStage waits until a file has finished copying before it touches it, and reads the camera's name out of the file's own EXIF, so the HUD says something like **Sony α7R III · hot folder** rather than a generic label.

SONY OWNERS: ONE MEASUREMENT, NOT A PROMISE

A Sony α7R IV has fed RawStage directly, with no Sony software running — one body, one session, four frames. If you want to try it: **PC Remote: Off** and **USB Connection: MTP** (not Auto). PC Remote switched on is what stops it, and the "PC" that then appears on the camera's screen is the failure, not the confirmation. Canon is next on the bench. If you have a body that isn't a Fuji, **Help → Export Logs** and a note about what happened is the most useful thing you can send us.

09

Export

⌘E opens the export panel over whatever you have selected.

- **Source** — Selected, Picks, Filtered or All, each with its count beside it. If you are in picks-only view, Picks is already chosen.
- **Format** — JPEG and PNG are free. TIFF (8 and 16-bit) and HEIC are Pro, and open during the beta.

- **Size** — Original, long edge in pixels, exact width × height, or **print in centimetres at a DPI**, with the resulting pixels calculated in front of you.
- **Color space** — sRGB by default; Display P3 and Adobe RGB are Pro.
- **Destination** — an **Export** subfolder inside the session by default, so the output travels with the session, or any folder you choose.
- **Presets** — Instagram post, square and story, Facebook, web, full-resolution JPEG, print at 300 DPI, and a Photoshop-ready 16-bit TIFF.

Exports run in the background with a progress pill in the chrome, and you can carry on working — or cancel.

10

The beta period, and what happens after

This build has everything unlocked until 31 January 2027. It matters more what happens at the end than what happens now, so here it is plainly.

What keeps working, free, forever: culling, tethered capture, both studio windows, the whole classic develop panel — white balance, exposure, curves, levels, clarity, vignette, sharpening, noise reduction, crop and geometry — copy and paste settings, and export to JPEG and PNG.

What locks: the colour grading wheels, the Palette editor and MOOD, LUTs and saved presets, and the professional export formats — 16-bit TIFF, HEIC, print sizing, Display P3 and Adobe RGB.

> NOTHING YOU MADE IS TAKEN BACK
>
> The Pro settings already saved in your sidecars stay exactly where they are. They keep rendering on screen and they keep coming out in your exports — you simply stop being able to change them until you buy Pro. Loading preserves; applying creates. That distinction is written into the app, and it is the reason a session you shot during the beta is still a session you can deliver afterwards.

11

Every keyboard shortcut

The same list lives in the app under **Help → Keyboard Shortcuts**, and the hints along the bottom of the window are the short version.

SESSION

⌘N	New Session…
⇧⌘N	Start Tether Session…
⌘O	Open Session…
⌘E	Export…

VIEW

⌘1 ⌘2 ⌘3	Grid, Develop, Tether
G D T	Grid, Develop, Tether
Z	Zoom
⇥	Clean view
J	Clipping warnings
\	Show the original
⌘+ ⌘–	Thumbnail size — or Focus Check zoom

CULLING

1–5	Rating
0	No rating
P	Pick
X	Reject
⇧P	Picks only
⌥1–⌥5	Filter by rating
←→	Navigate

EDITING

⇧⌘C	Copy settings
⇧⌘V	Paste settings
⌘Z	Undo paste
⌘A	Select all
⇧⌘A	Deselect all
C	Crop
⌘[⌘]	Rotate left / right
R	Reset edits

WINDOWS

⌥⌘V	Viewer window
⌥⌘F	Focus Check

12

When something goes wrong

This is a beta and you are one of the people it is for. Two items in the **Help** menu are the whole reporting workflow:

- **Help → Send Feedback…** opens a message with the build number already filled in. Tell us what you were doing and what happened.
- **Help → Export Logs…** writes the technical story to a single file. Attaching it turns "the tether stopped" into something we can actually fix.

The single most useful report you can send: plug in your camera, tell us the model name, and say whether tethering worked. Then run one real session end to end — shoot, cull, develop, export — and tell us what stuttered or surprised you.

That's the whole app.

Open a folder and shoot something. If a step here doesn't match what you see on screen, that is a bug in this page and we want to hear about it.

Opens RAW files from all major camera brands (RAF, ARW, CR3, NEF, DNG and more). Native tethered capture is compatible with Fujifilm X and GFX cameras; any camera that can write to a watched folder works via hot folder. Requires macOS 14 or later; Apple silicon recommended (all performance figures are M-series), Intel untested.

RawStage is an independent product and is not affiliated with or endorsed by Fujifilm, Sony, Canon or any camera manufacturer.