



FABRIC ATLAS

Fabric Atlas turns Fabric metadata into a shared working catalog.


Development, architecture and implementation choices

React + Rayfin Functions · Fabric SQL · minimal Python compatibility

Connect → Discover → Collect → Validate → Publish

12 slides · October 2026 · Fabric Atlas 2.0.0


One validated snapshot powers every selected workspace view.

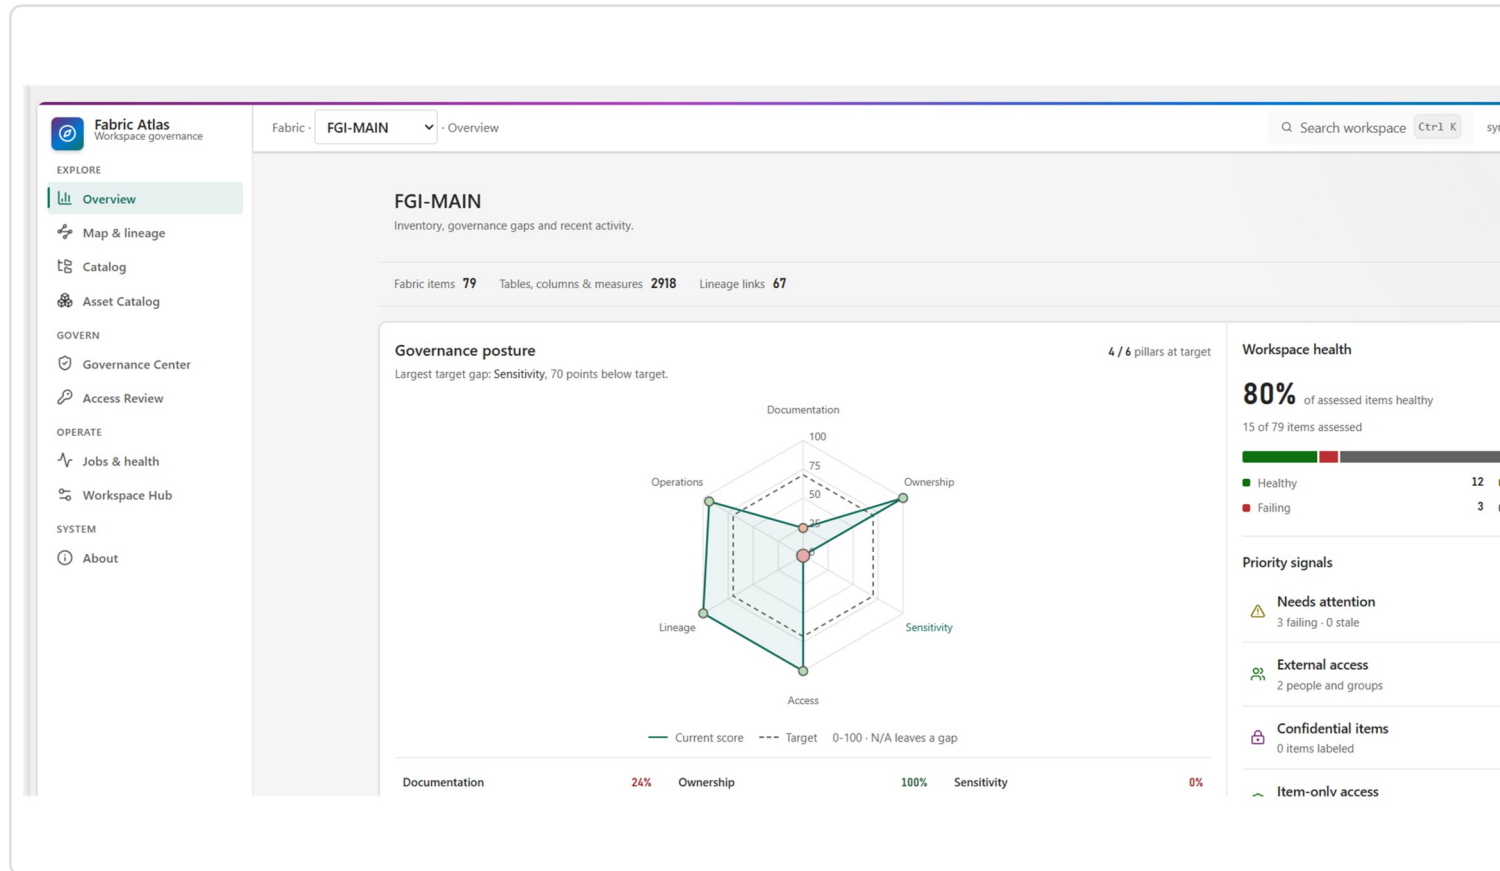

- Multi-workspace catalog and active-workspace switching.
- Catalog, lineage, access, governance and recent jobs.
- Semantic X-Ray, Item Relations Preview and change history.
- Pages read the validated snapshot; they do not rescan Fabric.

Fabric Atlas 2.0 Overview; workspace figures are live evidence, not defaults.

Rayfin Functions collect. The browser validates and publishes.

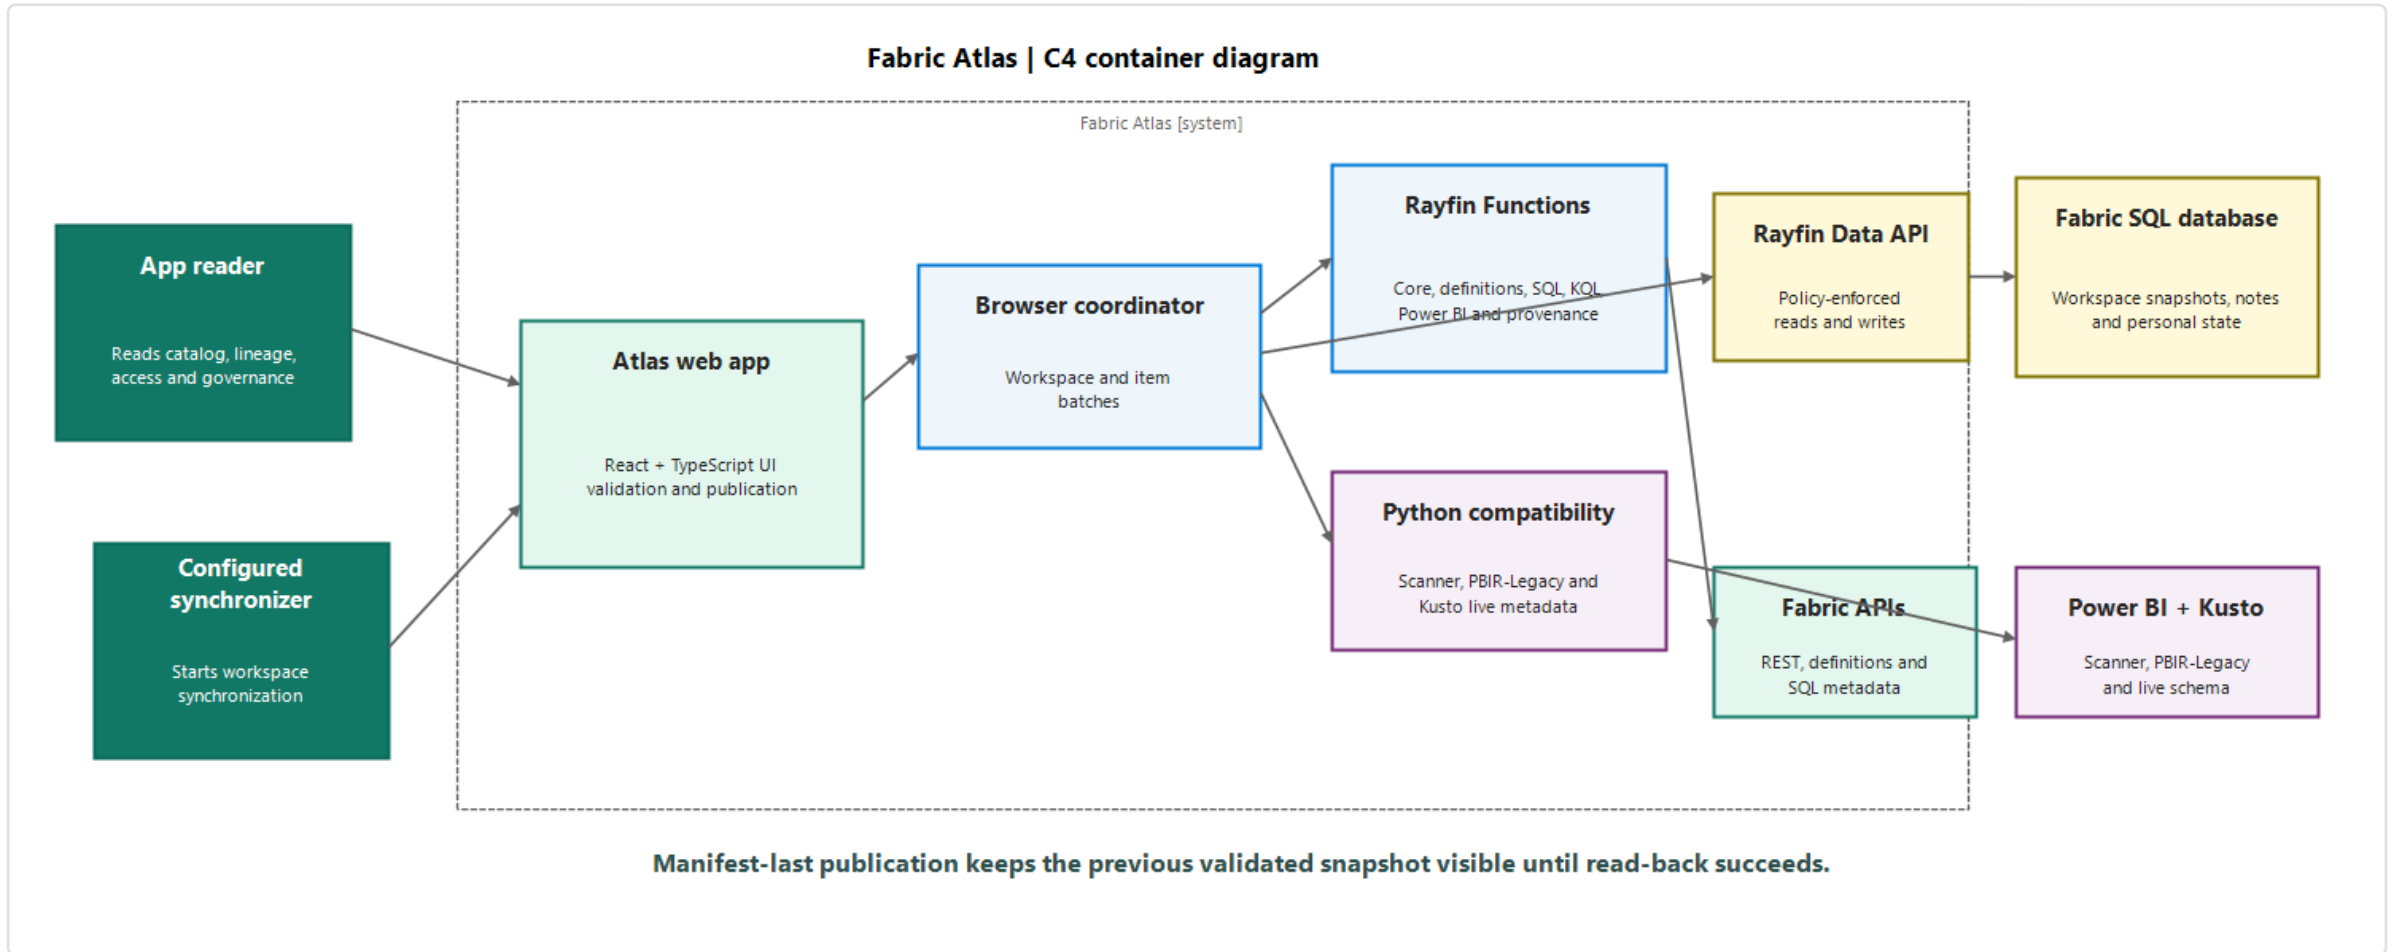


Python remains only for the Power BI scanner, PBIR-Legacy and Kusto gaps.

Synchronization follows five stages and publishes the manifest last.



The previous snapshot stays visible until the Workspace manifest is created.


Rayfin Functions process large workspaces without restarting the run.

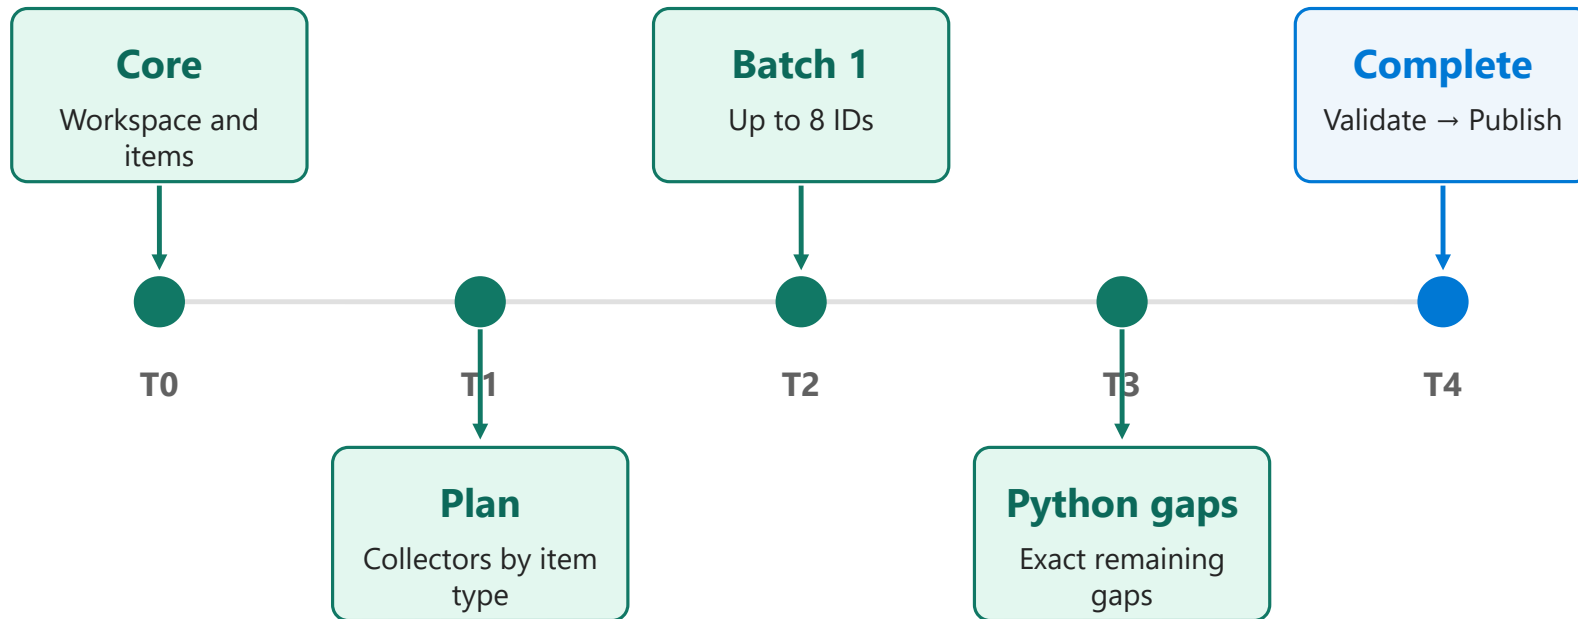

**Every invocation has bounded time, attempts, pages and response size.
Completed evidence is retained while remaining work continues.**

- Core creates the workspace and item plan.
- Rayfin collectors handle definitions, Item Relations, KQL, SQL and Power BI structure.
- Python runs only the requested scanner, PBIR-Legacy and Kusto gaps.

The Workspace manifest publishes only a snapshot Atlas can read back.

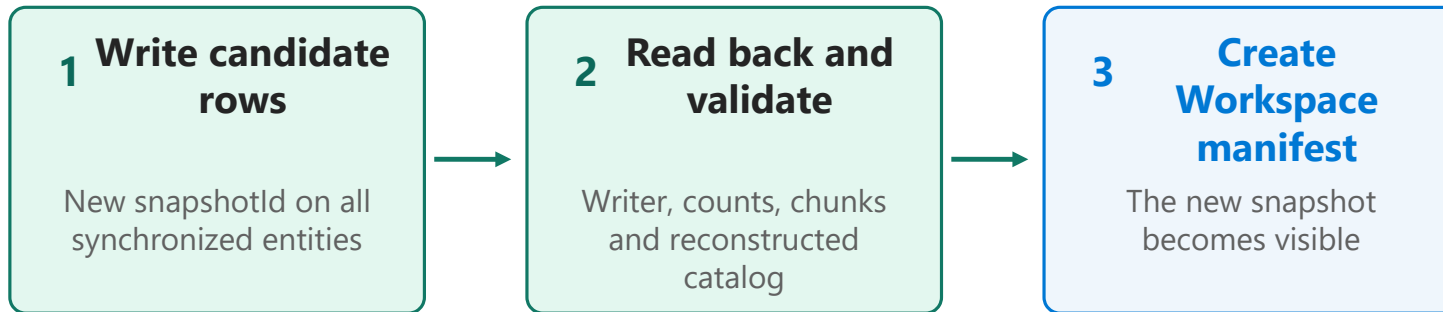

- Child rows use one new snapshotId.
- Read-back uses the same path as application startup.
- Workspace is written last and acts as the visibility switch.

Failure before the manifest → candidate rows stay invisible and readers keep the previous snapshot.

Rayfin receives twenty-six entity classes across four lifetimes.

Snapshot catalog

Workspace, FabricItem, LineageEdge, Principal, AccessGrant, JobRun and ConfigEntry

Sync and evidence state

Sync runs, tasks, commands, payload records and evidence snapshots

Shared control state


Comment, policies, exceptions, WorkspaceScope and synchronizer authority

Personal state

SavedView, AccessReview, AccessReviewEvent and FindingAck are filtered by user_id.

The entity classes define the database schema and the authorization boundary.

The core UML shows snapshot entities and logical associations.

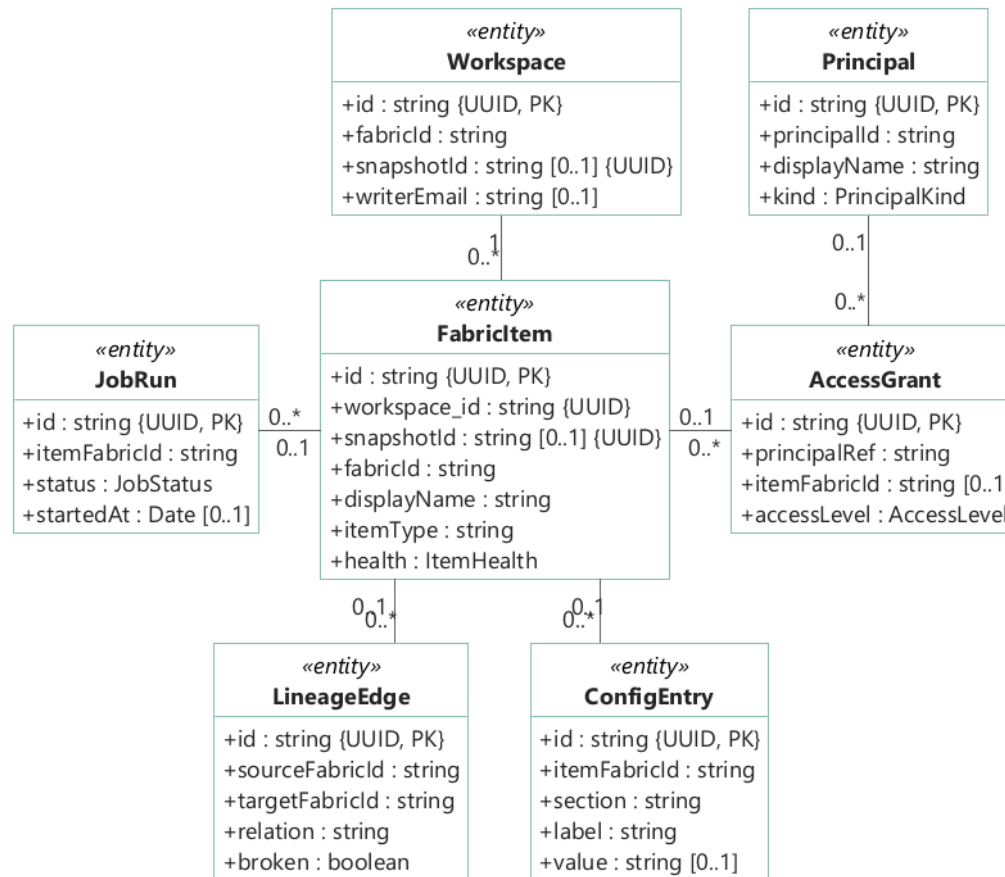


- Selected properties mirror the core TypeScript entities.

- Workspace publishes a manifest; FabricItem anchors item evidence.


- Additional v2 sync and evidence entities are grouped outside this core view.

The MPD shows the fifteen core MSSQL tables and logical links.

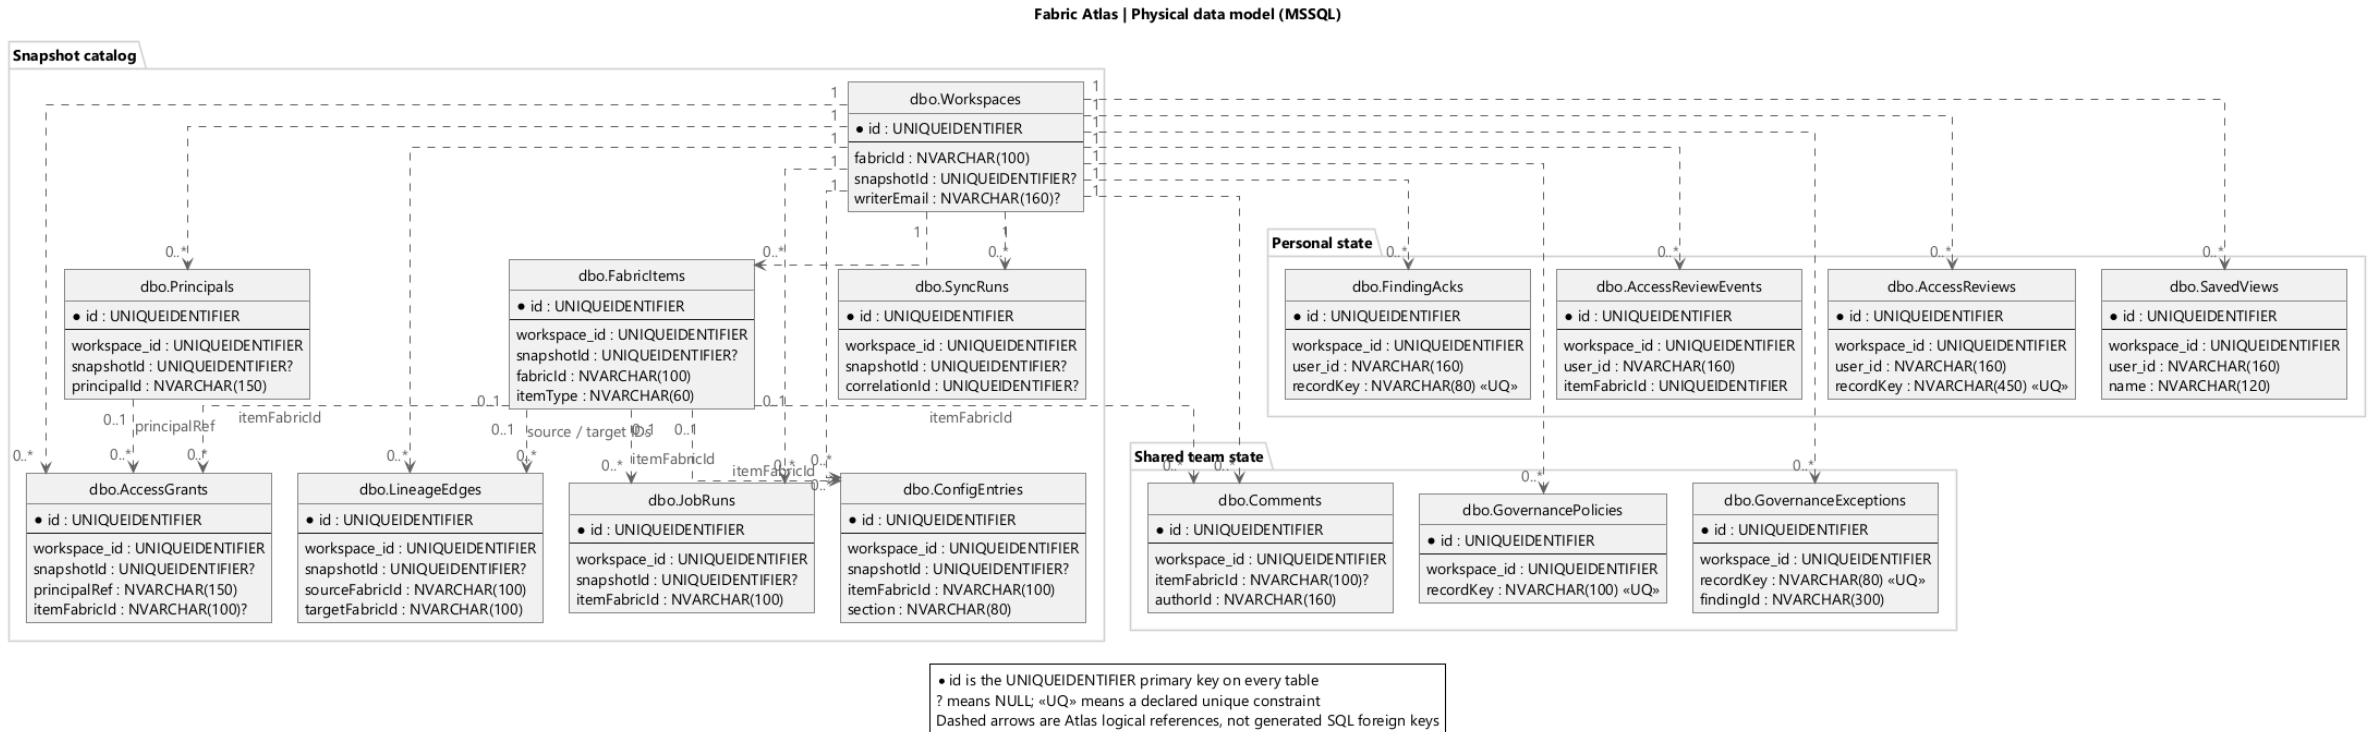

Fabric Atlas 2.0 adds eleven sync, scope and evidence tables outside this core view.

Rayfin turns decorated TypeScript classes into the Fabric SQL data model.

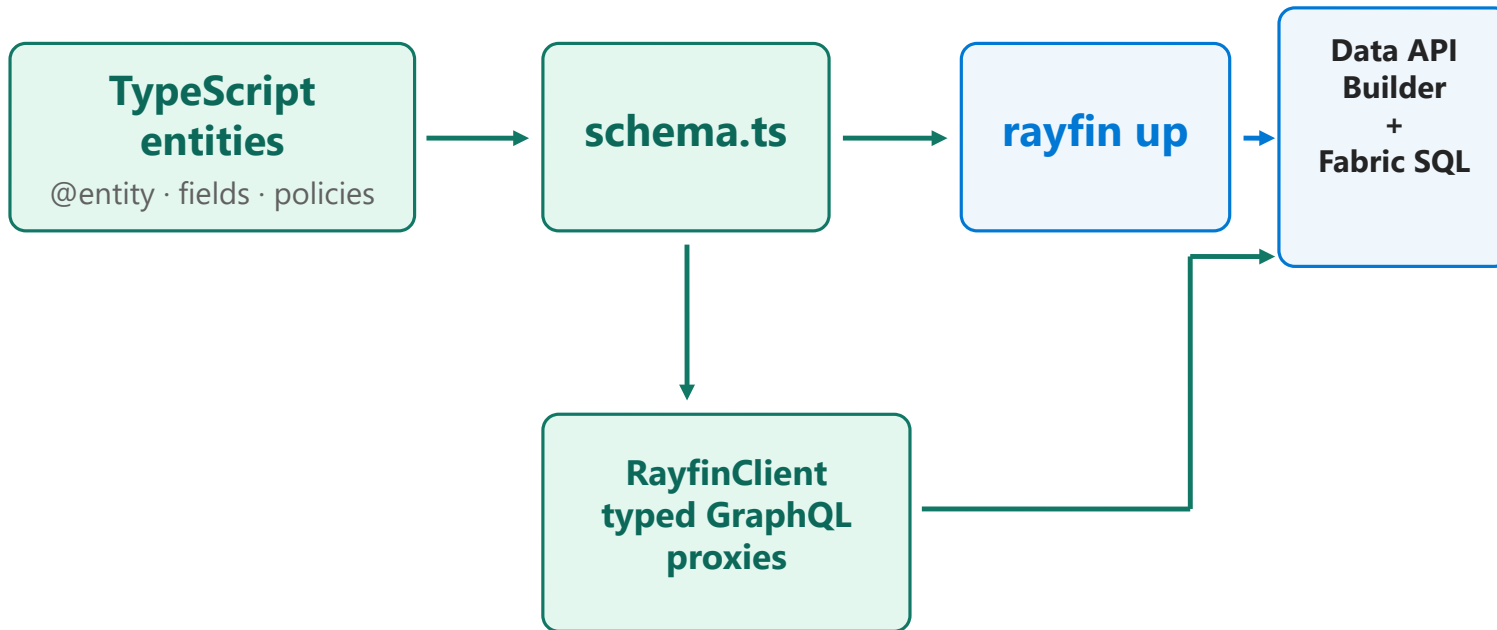

- Field decorators define SQL types, limits and optional values.
- Authorization decorators generate read and write policies.
- schema.ts registers the 26 entities used by RayfinClient.

Three platform gaps keep the Python compatibility UDF.

- 1. Power BI application audience or first-party scanner connector.**
- 2. Kusto application audience for live schema metadata.**
- 3. PBIR-Legacy report-page coverage.**
- 4. Once all three pass parity, delete sync_compatibility and the Python UDF.**

Scheduling is separate: it needs an unattended trigger plus durable claim and publication fencing.



FABRIC ATLAS

A trusted catalog stays available while the next snapshot is built.

Collect with Rayfin Functions. Keep exact compatibility gaps. Publish after read-back.

Questions and feedback

github.com/fredgis/FabricAtlas

Rayfin Functions · Fabric SQL · Multi-workspace · Metadata only