

EXHIBIT 1**STANDARD MATERIAL DELIVERY SCHEDULE FOR TV****As of August 2022****MATERIAL**

Immediately upon signature of the present Agreement respectively upon completion of the Production, Producer shall deliver and transfer ownership to Distributor of the following material of the Production, and, as far as available, of the teaser and the trailer, in the original version respectively - if applicable - in the original "international" version, i.e. in a version which includes film music for international usage, all free of charge.

The EBU resp. SMPTE guidelines apply (The original mix must be in compliance with the EBU R128 recommendations)

The marketing/artwork materials to be provided by Producer to Distributor in accordance with this Exhibit 1 shall include but not be limited to all social media assets created by Producer and Producer's licensees for Distributor's use in connection with the Production.

1. Digital Delivery**1.1. Delivery formats**

ProRes 4444 (preferably) or 422HQ in UHD (3840x2160) or HD (1920x1080)

Container formats:

- Apple =.mov Container
- Without technical leader
- Starting with TC at 00.00.00.00
- Neutral backgrounds for credits and inserts as one separated file (with a few black frames between the textless clips)

Audio formats:

- The audio files have to be delivered as uncompressed .wav files (.bwf) 48kHz, 24bit and ungrouped.
- The neutral backgrounds files must have two muted audio tracks (MOS)
- TV-Mix 5.1 and 2.0 (Broadcast mix) will conform to R128 recommendation of EBU
- The 5.1 Mix must always be delivered as discrete audio tracks, not as Dolby E

Subtitles formats:

Available subtitle files must be delivered in .ebu-stl, .rtf or .docx formats and must have the same time-code as the video file

Graphic projects incl. all fonts

- 1.2. **Digital delivery requested - We give access to our Delivery Portal as soon as we receive a Notice of Delivery.**

1.3. **Directory structure**

The name of the folders and of the files must not contain any special character and their total length shall not exceed 160 characters (pathname + filename)

1.4. **Digital File Report / Digital Content Note (DCN)**

Each file must be accompanied by a Digital Content Note (DCN) according to the model in Appendix 1 as a document in pdf or text file.

Templates for the directory structure and for the DCN can be retrieved from the following frame.io Link: <https://f.io/1ihPANx7>

1.5 **File formats and Audio configuration**

- 1.5.1 Delivery of one ProRes Master file in 25 fps in 4:4:4:4 or 4:2:2 HQ 3840p or 1080p 16/9 original aspect ratio with beginning and end credits, with inserts for time and location but without burnt-in subtitles for foreign language dialogues (and if applicable all available pan & scan versions approved by the director and the DoP (mostly 16/9 1:1,78 should the original be 1:2,39 or 1:1,85). Technicals specifications as in Appendix 2, audio configuration as follows (**multi audio tracks, ungrouped**):

Channel 1-2: TV-Mix (LT/RT) in compliance with the EBU-R128 recommendation

Channel 3-4: TV-M&E (LT/RT)

Channel 5-10: 6 track TV-Mix in compliance with the EBU-R128 recommendation as follows:

Channel 5: L

Channel 6: R

Channel 7: C

Channel 8: Lfe (Sub)

Channel 9: Ls

Channel 10: Rs

Channel 11-16: 6 track M&E as follows:

Channel 11: L

Channel 12: R

Channel 13: C

Channel 14: Lfe (Sub)

Channel 15: Ls

Channel 16: Rs

- 1.5.2 Delivery of the neutral backgrounds for beginning and end credits as well as for any insert that may appear in the body of the picture as one separated file with two muted audio tracks and with a few black frames between the textless clips.

- 1.5.3 Delivery of the 5.1 Stems (with all optionals if applicable) conformed to the Video Master 25 fps described under § 1.5.1.

Distributor shall give notice of any defects with regard to the delivered material no later than 8 (eight) weeks after receipt thereof at Distributor's address.

Distributor will cover the cost of the initial quality control check ("QC") of each element of the delivered materials. Producer agrees that any additional QC procedures that are deemed necessary by Distributor to confirm the acceptable status of the materials shall be at Producer's cost.

In case of delayed delivery or defectiveness of the material the Term shall be extended - notwithstanding all and any other rights or claims that Distributor might have - by the period of such delay or by the period required for fixing such defects by Producer at his costs. Should Distributor's exploitation of the material be in any way restricted thereby or an extension not be possible, Distributor shall be entitled - subject to all and any other rights or claims that he might have - to request a replacement title, a reduction of the Minimum Guarantee or the cancellation of the present Agreement.

August 2022/MPO



Appendix 1 Digital Content Note

Digital Content Note				
Material descriptors				
Title				
File name				
Program Duration				
File Size				
Technical Descriptors				
TC IN		Text information		
TC OUT		Text information		
Frame resolution				
Aspect Ratio /Framing				
Frame Rate/Speed				
Video Codec		Video Sampling		Gamut
Audio Codec		Audio Bitrate and Sampling		
Bitrate				
Container				
Audio Configuration			Language	
Channel 1				
Channel 2				
Channel 3				
Channel 4				
Channel 5				
Channel 6				
Channel 7				
Channel 8				
Channel 9				
Channel 10				
Channel 11				
Channel 12				
Channel 13				
Channel 14				
Channel 15				
Channel 16				
Delivery				
File System				

g

N

Appendix 2 Technical specifications of master file (1.5.1)

Content Management Services | Technical Specification

V1.1

Apple ProRes 4444 - HD (MOV)**General**

Essence container	MOV
File name	No longer than 32 characters, no special characters, no spaces
File suffix	mov (case sensitive - no capital letters)
Program start	First frame (no clocks, no bars, no backgrounds ...)
Start timecode	00:00:00:00

Video essence

Essence format	Apple ProRes
Format profile	4444
Bit rate mode	Variable
Bit rate	Approx. 275 Mbps (25p, 50i) / 551 Mbps (50p)
Width	1920 pixels
Height	1080 pixels
Display aspect ratio	16:9
Frame rate	25p or 50i or 50p
Color space	YUV or RGB or RGBA
Video signal compliance	ITU-R BT.709
Chroma sampling	4:4:4
Bit depth	Up to 12 bits (Alpha-channel up to 16 bits)
Scan type	Interlaced or progressive
Scan order	Top Field First (if interlaced)

Audio essences

Essence format	PCM, ungrouped audio tracks
Track count	Up to 32 tracks (1 channel per track)
Endianness	Little Endian
Sampling rate	48 kHz
Bit depth	24 bits

Audio track configuration

1-2	Stereo total mix primary language
3-4	Stereo total mix secondary language or M&E
5-10	5.1 Surround mix primary language
11-16	5.1 Surround mix secondary language or M&E

Surround sound channel configuration

1	Front left
2	Front right
3	Center
4	LFE
5	Surround left
6	Surround right

f

N.

Apple ProRes 422 HQ - HD (MOV)**General**

Essence container	MOV
File name	No longer than 32 characters, no special characters, no spaces
File suffix	mov (case sensitive - no capital letters)
Program start	First frame (no clocks, no bars, no backgrounds ...)
Start timecode	00:00:00:00

Video essence

Essence format	Apple ProRes
Format profile	422 HQ
Bit rate mode	Variable
Bit rate	Approx. 184 Mbps (25p, 50i) / 367 Mbps (50p)
Width	1920 pixels
Height	1080 pixels
Display aspect ratio	16:9
Frame rate	25p or 50i or 50p
Color space	YUV
Video signal compliance	ITU-R BT.709
Chroma subsampling	4:2:2
Bit depth	10 bits
Scan type	Interlaced or progressive
Scan order	Top Field First (if interlaced)

Audio essences

Essence format	PCM, ungrouped audio tracks
Track count	Up to 32 tracks (1 channel per track)
Endianness	Little Endian
Sampling rate	48 kHz
Bit depth	24 bits

Audio track configuration

1-2	Stereo total mix primary language
3-4	Stereo total mix secondary language or M&E
5-10	5.1 Surround mix primary language
11-16	5.1 Surround mix secondary language or M&E

Surround sound channel configuration

1	Front left
2	Front right
3	Center
4	LFE
5	Surround left
6	Surround right

9

N

Content Management Services | Technical Specification

Apple ProRes 4444 - UHD (MOV)

V1.0

General

Essence container	MOV
File name	No longer than 32 characters, no special characters, no spaces
File suffix	mov (case sensitive - no capital letters)
Program start	First frame (no clocks, no bars, no backgrounds ...)
Start timecode	00:00:00:00

Video essence

Essence format	Apple ProRes
Format profile	4444
Bit rate mode	Variable
Bit rate	Approx. 1108 Mbps (25p) / 2212 Mbps (50p) / 2652 Mbps (59.94p)
Width	3840 pixels
Height	2160 pixels
Display aspect ratio	16:9
Frame rate	25p or 50p or 59.94p
Color space	YUV or RGB or RGBA
Video signal compliance	ITU-R BT.709
Chroma sampling	4:4:4
Bit depth	10 or 12 bits (Alpha-channel up to 16 bits)
Scan type	Progressive

Audio essences

Essence format	PCM, ungrouped audio tracks
Track count	Up to 32 tracks (1 channel per track)
Endianness	Little Endian
Sampling rate	48 kHz
Bit depth	24 bits

Audio track configuration

1-2	Stereo total mix primary language
3-4	Stereo total mix secondary language or M&E
5-10	5.1 Surround mix primary language
11-16	5.1 Surround mix secondary language or M&E

Surround sound channel configuration

1	Front left
2	Front right
3	Center
4	LFE
5	Surround left
6	Surround right

Content Management Services | Technical Specification

Apple ProRes 422 HQ - UHD (MOV)

V1.0

General

Essence container	MOV
File name	No longer than 32 characters, no special characters, no spaces
File suffix	mov (case sensitive - no capital letters)
Program start	First frame (no clocks, no bars, no backgrounds ...)
Start timecode	00:00:00:00

Video essence

Essence format	Apple ProRes
Format profile	422 HQ
Bit rate mode	Variable
Bit rate	Approx. 737 Mbps (25p) / 1475 Mbps (50p) / 1768 Mbps (59.94p)
Width	3840 pixels
Height	2160 pixels
Display aspect ratio	16:9
Frame rate	25p or 50p or 59.94p
Color space	YUV
Video signal compliance	ITU-R BT.709
Chroma subsampling	4:2:2
Bit depth	10 or 12 bits
Scan type	Progressive

Audio essences

Essence format	PCM, ungrouped audio tracks
Track count	Up to 32 tracks (1 channel per track)
Endianness	Little Endian
Sampling rate	48 kHz
Bit depth	24 bits

Audio track configuration


1-2	Stereo total mix primary language
3-4	Stereo total mix secondary language or M&E
5-10	5.1 Surround mix primary language
11-16	5.1 Surround mix secondary language or M&E

Surround sound channel configuration

1	Front left
2	Front right
3	Center
4	LFE
5	Surround left
6	Surround right


f

M

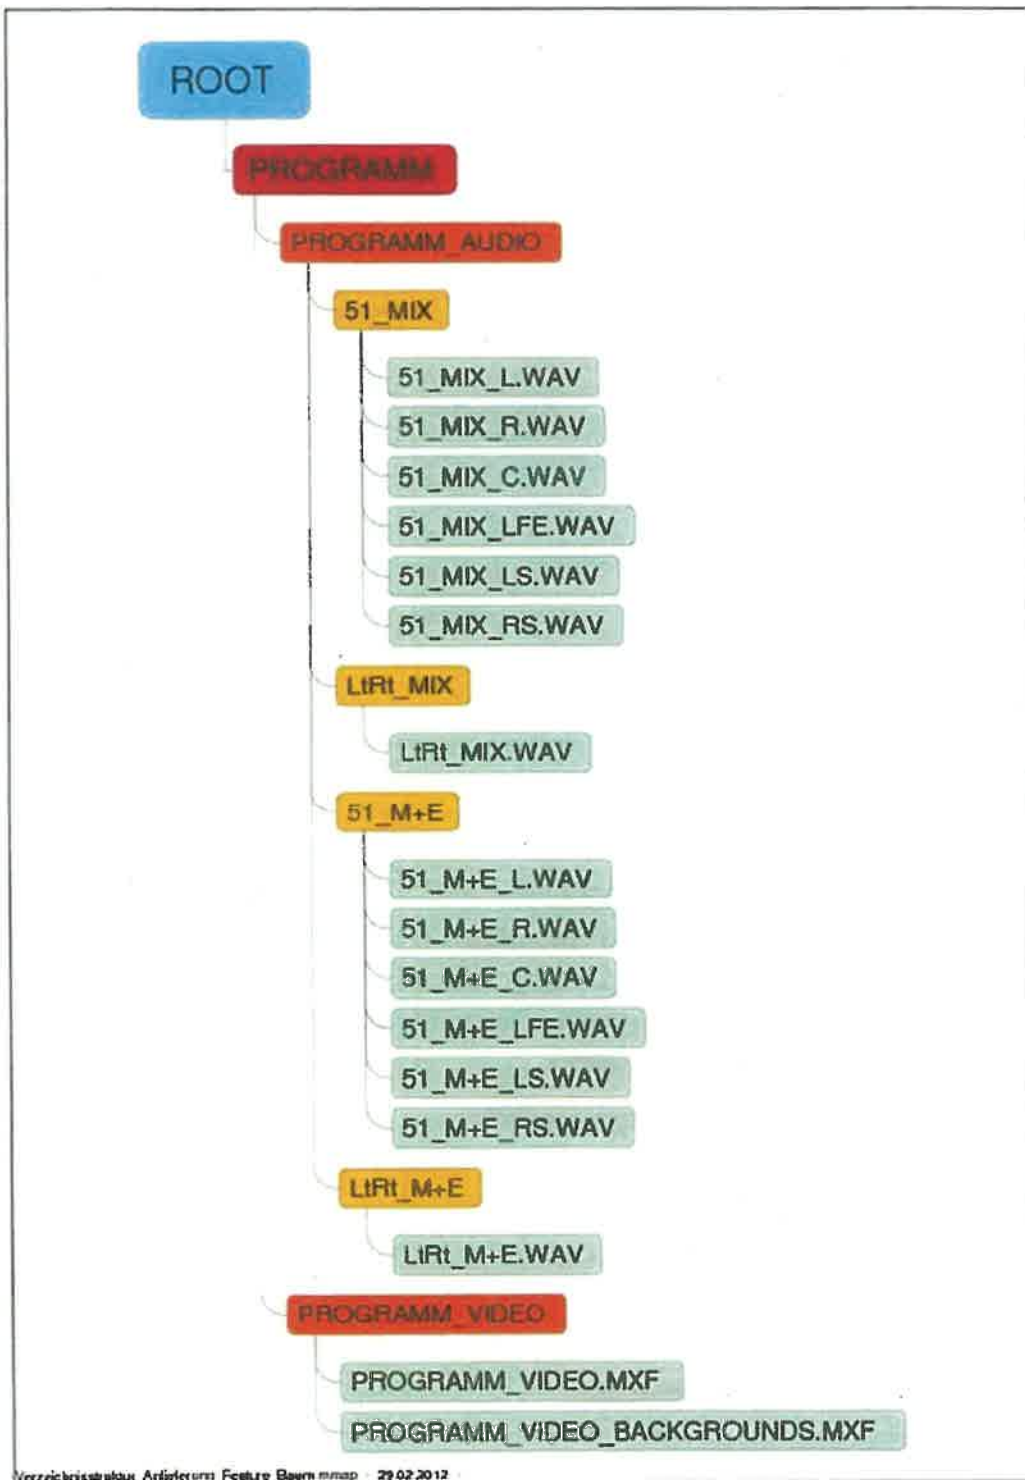Appendix I: Directory Structure

f

M.

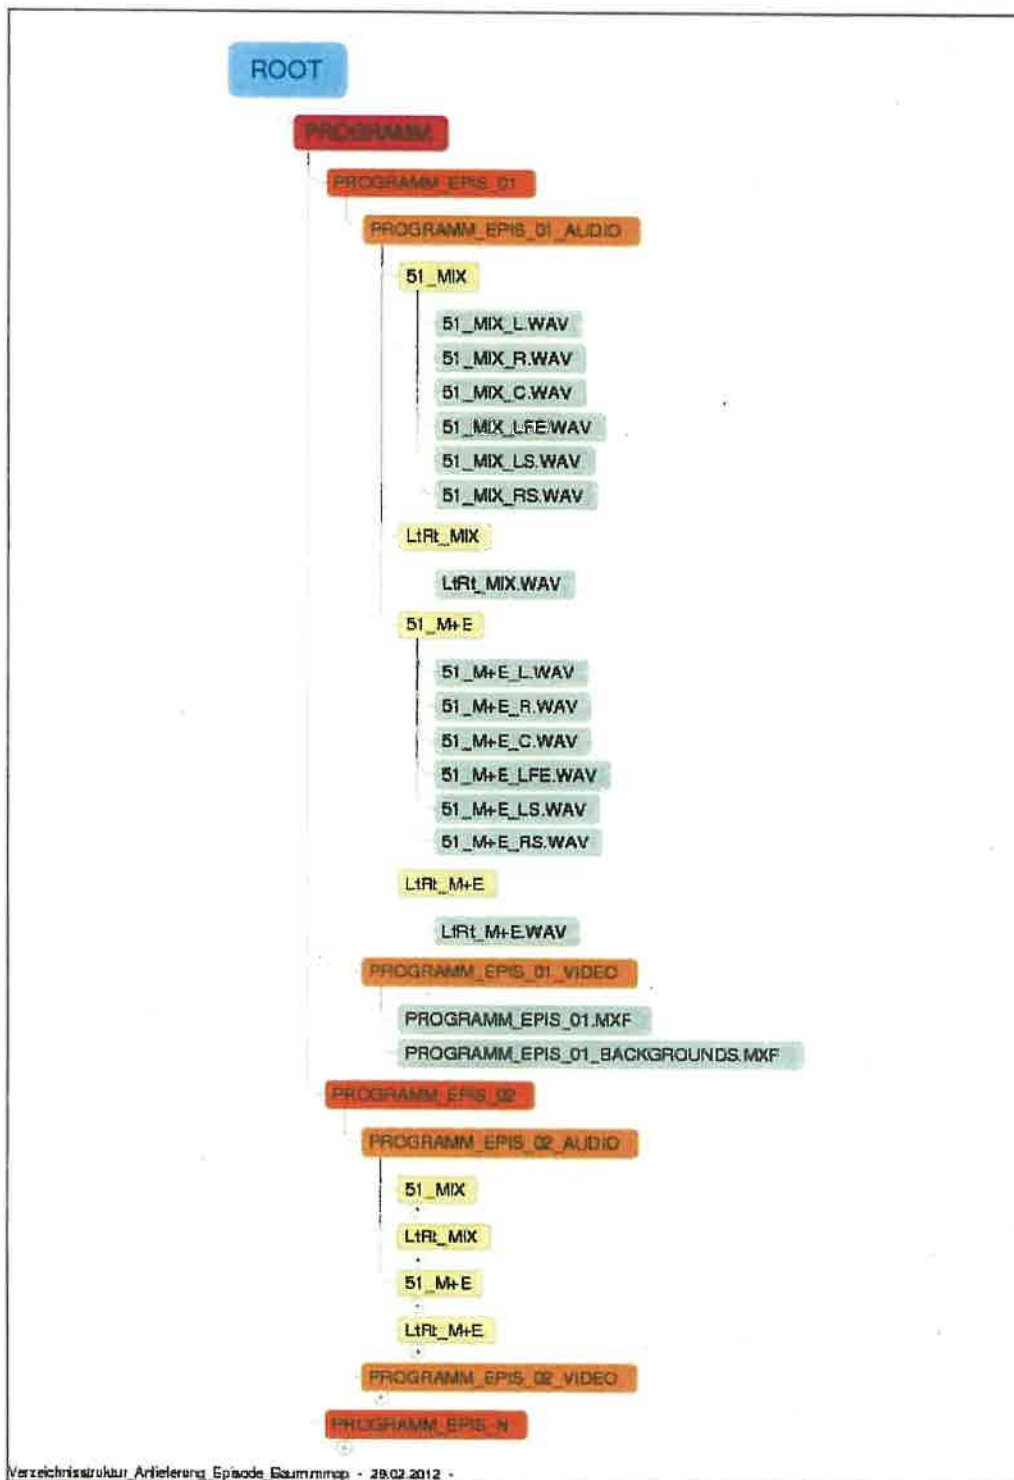

f

B.

Appendix II Digital Content Note

Digital Content Note				
Material descriptors				
Title				
File name				
Program Duration				
File Size				
Technical Descriptors				
TC IN		Text information		
TC OUT		Text information		
Frame resolution				
Aspect Ratio /Framing				
Frame Rate/Speed				
Video Codec		Video Sampling		Gamut
Audio Codec		Audio Bitrate and Sampling		
Bitrate				
Container				
Audio Configuration			Language	
Channel 1				
Channel 2				
Channel 3				
Channel 4				
Channel 5				
Channel 6				
Channel 7				
Channel 8				
Channel 9				
Channel 10				
Channel 11				
Channel 12				
Channel 13				
Channel 14				
Channel 15				
Channel 16				
Delivery				
File System				




Appendix III Technical specifications of master file (5.1.5.1)

Content Management Services | Technical Specification

Apple ProRes 4444 (MOV)**General**

Essence container	MOV
File name	Not longer than 32 characters, no special characters, no spaces
File suffix	mov (case sensitive - no capital letters)
Programme start	First frame (no clocks, no bars, no backgrounds ...)
Start timecode	00:00:00:00

Video essence

Essence format	AppleProRes
Format profile	High
Bit rate mode	Variable
Bit rate	Ca. 275 Mbps
Width	1 920 pixels
Height	1 080 pixels
Display aspect ratio	16:9
Frame rate	25.000 fps (p, 50i or PsF)
Color space	YUV, RGB, RGBA
Video signal compliance	ITU-R BT.709
Chroma subsampling	4:4:4 (no subsampling)
Bit depth	Up to 12 bits (Alpha-channel up to 16 bits)
Scan type	Interlaced, progressive, progressive segmented frames
Scan order	Top Field First (if interlaced)

Audio essence

Essence format	AES-3 (SMPTE 382M, multi audiotracks, ungrouped)
Audio coding	PCM
Sampling rate	48 kHz
Channel configuration	Max. 16 channels
Bit depth	24 bits

Audio channel configuration

1-2	Stereo total mix primary language
3-4	Stereo total mix secondary language or M&E
5-10	Surround (5.1) primary language
11-16	Surround (5.1) secondary language or M&E

Surround sound channel configuration

1	Front left
2	Front right
3	Center
4	LFE
5	Surround left
6	Surround right

f

N.

Content Management Services | Technical Specification

Apple ProRes HQ(MOV)

General

Essence container	MOV
File name	Not longer than 32 characters, no special characters, no spaces
File suffix	mov (case sensitive - no capital letters)
Programme start	First frame (no clocks, no bars, no backgrounds ...)
Start timecode	00:00:00:00

Video essence

Essence format	AppleProRes
Format profile	High
Bit rate mode	Variable
Bit rate	184 Mbps
Width	1 920 pixels
Height	1 080 pixels
Display aspect ratio	16:9
Frame rate	25 000 fps (p, 50i or PsF)
Color space	YUV
Video signal compliance	ITU-R BT 709
Chroma subsampling	4:2:2
Bit depth	10 bits
Scan type	Interlaced, progressive, progressive segmented frames
Scan order	Top Field First (if interlaced)

Audio essence

Essence format	AES-3 (SMPTE 382M, multi audiotracks, ungrouped)
Audio coding	PCM
Sampling rate	48 kHz
Channel configuration	Max. 16 channels
Bit depth	24 bits

Audio channel configuration

1-2	Stereo total mix primary language
3-4	Stereo total mix secondary language or M&E
5-10	Surround (5.1) primary language
11-16	Surround (5.1) secondary language or M&E

Surround sound channel configuration

1	Front left
2	Front right
3	Center
4	LFE
5	Surround left
6	Surround right

4

M

Content Management Services | Technical Specification

V1.3

DNxHD 185x (MXF)**General**

Essence container	MXF OP1a (SMPTE 378M)
File name	Not longer than 32 characters, no special characters, no spaces
File suffix	mxf (case sensitive - no capital letters)
Programme start	First frame (no clocks, no bars, no backgrounds ...)
Start timecode	00:00:00:00

Video essence

Essence format	VC-3
Format profile	DNxHD 185x
Bit rate mode	Constant
Bit rate	184 Mbps
Width	1 920 pixels
Height	1 080 pixels
Display aspect ratio	16:9
Frame rate	25.000 fps (p, 50i or PsF)
Color space	YUV
Video signal compliance	ITU-R BT.709
Chroma subsampling	4:2:2
Bit depth	10 bits
Scan type	Interlaced, progressive, progressive segmented frames
Scan order	Top Field First (if interlaced)

Audio essence

Essence format	AES-3 (SMPTE 382M, multi audiotracks, ungrouped)
Audio coding	PCM
Sampling rate	48 kHz
Channel configuration	Max. 16 channels
Bit depth	24 bits

Audio channel configuration

1-2	Stereo total mix primary language
3-4	Stereo total mix secondary language or M&E
5-10	Surround (5.1) primary language
11-16	Surround (5.1) secondary language or M&E

Surround sound channel configuration

1	Front left
2	Front right
3	Center
4	LFE
5	Surround left
6	Surround right

f

N