

Value-Based Prioritization*

Kevin Grigorenko[†]

February 16, 2019

Abstract

A method is proposed to use value theory to quantitatively prioritize potential actions to accomplish a goal. This method is applied to the example of choosing meaningful work using an example value system based on the desire to reduce suffering.

1 Introduction

Why should a particular goal be pursued (“Why”)? Given a goal, what actions should be pursued to best accomplish said goal (“What”)? Given an action, how should said action be pursued (“How”)?

This article proposes that value theory usually best scopes “Why” and “What” and the scientific method usually best answers “How”. A method called Value-Based Prioritization is developed to answer the “What” question:

Why: *Value Theory*
↓
What: ***Value-Based Prioritization*** (1)
↓
How: *Scientific Method*

2 Why a Goal?

“Why a Goal?” is usually best scoped using value systems because they are evaluative by nature¹³. Evaluating different value systems is left as an (lifelong) exercise for the readerⁱ.

*<https://github.com/freeradical13/ValueBasedPrioritization>

[†]kevin@myplaceonline.com

ⁱExample value systems include intuitionism⁸,

3 What Actions?

“What Actions?” is usually best scoped by prioritizing actions because actions usually have differing effect sizes and time is limited. It follows from the value system used to answer “Why” that the same value system is used primarily to evaluate the priority of each action.

This article proposes a method called Value-Based Prioritization which builds a quantitative prioritization model based on predicted effect sizes. Raw prioritization scores are further scaled by contextual factors such as implementation time, cost, risk, and other judgments.

4 How to do an Action?

Given answers to “Why?” and “What?”, how to implement actions is usually best answered with the scientific method¹: observations are made and rational thought is used to generate hypotheses, hypotheses are tested with experiments, and successful experiments lead to theories and results.

consequentialism¹⁴, evolutionary biology⁶, religion⁷, epicureanism¹⁰, stoicism³, political liberalism¹⁶, anarcho-capitalism⁹, communitarianism⁴, objectivism², etc.

5 Value-Based Prioritization

A **value system** V (2) generates a **goal** $G(t)$ (3) (for some future time t) and a set of **mutually exclusive potential future actions** $A(t)$:

$$A(t) = \{A_1(t), \dots, A_N(t)\}, \quad (4)$$

$$N > 1$$

An action's **estimated relative accomplishment amount** $B(A(t))$ is an action's expected *relative* (i.e. with respect to other actions) contribution towards accomplishing $G(t)$:

$$B(A(t)) = \mathbb{R}, \quad (5)$$

$$0 \leq \mathbb{R} \leq 1$$

Thus, $G(t)$ is fully accomplished if all actions are accomplished:

$$G(t) = \sum_{i=1}^N B(A_i(t)) = 1 \quad (6)$$

A **value-based prioritization score** $C(A(t))$ is the result of the product of a set of **value-based prioritization scale functions** $S = \{S_1, \dots, S_N\}$ (7) multiplied by (5):

$$C(A(t)) = B(A(t)) \cdot \prod_{j=1}^N S_j(A(t)), \quad (8)$$

$$0 \leq S_j(B(A(t))) \leq 1$$

Example scale functions include implementation time, cost, risk, and other judgments. Ideally, scale functions should be defined before running the model to reduce bias. The set S always includes the element $S_1(A(t)) = 1$. Note that $\sum_{i=1}^N C(A_i(t)) \neq G$ if any $S_j(A_i(t)) < 1$.

A **value-based prioritization** $Z(t)$ is a sequence of actions ordered by prioritization score (8) in descending order:

$$Z(t) = (A_1(t), \dots, A_N(t)), \quad (9)$$

$$C(A_1(t)) \geq \dots \geq C(A_N(t))$$

The first k actions in $Z(t)$ should be executed in descending priority/proportion where k (10) is chosen based on factors such as available concurrency, time, resources, etc.

6 Modeled Value-Based Prioritization

Historical data may be used to predict actions' estimated relative accomplishment amounts (5) at a future time t_F (11) (e.g. the average time actions will take to ramp up implementation).

If each action has historical data $D(A)$:

$$D(A) = ((t_1, D(A, t_1)), \dots, (t_N, D(A, t_N))) \quad (12)$$

Then, a set of **comparable prediction models** $R(D(A))$ is applied to each $D(A)$ (e.g. linear regression with different degrees):

$$R(D(A)) = \{R_1(D(A)), \dots, R_N(D(A))\} \quad (13)$$

The models are compared using **model selection** ^{17,18} $L(R(D(A)))$ (14) (e.g. adjusted r^2 , log-likelihood, AIC, BIC, ANOVA, cross-validation, etc.).

For each action, the **best fitting model** $M(A(t))$ is selected from $R(D(A))$ using $L(R(D(A)))$.

Each action's $M(A(t_F))$ is used to predict $B(A(t_F))$.

Finally, **modeled value-based prioritization** $Z(t_F)$ (15) is simply (9) with t_F .

7 Choosing Meaningful Work

The following example applies modeled value-based prioritization (15) to the goal of choosing meaningful work. Every aspect is an example and should be reconsidered.

First, outline the parameters:

- (2) V = a value system which answers “Why work?” with “To reduce suffering” which is defined as maximal human suffering: deathⁱⁱ. Alternatives include disease burden (e.g. Quality-Adjusted Life Years [QALYs]¹⁵), non-human suffering, pre-birth suffering, etc.
- (3) $G(t)$ = eliminate human death.
- (4) $A(t)$ = the set of actions which would eliminate human death.
- (10) $k = 2$ for a single person, weighted heavily on the first item with the second item being a hedge or volunteer activity.
- (11) $t_F = 5$ years; an average amount of time under normal conditions to integrate into a new career to work on some subset of $A(t)$ (including learning, certification, building experience, networking, etc.).
- (12) $D(A)$ = time-series data on human death by underlying cause.
- (13) $R(D(A))$ = ordinary least squares linear regression with one, two, three, and four degrees.
- (14) $L(R(D(A)))$ = highest adjusted r^2 (\bar{R}^2), lowest log-likelihood, highest AIC, and highest BIC.

$A(t)$ is the set of 179 actions which would eliminate the 179 major groups (ICD-10 sub-chapters¹²) of underlying causes of death in the United States^{5,iii,iv}:

ⁱⁱMore accurately, something like the lack of a potential of life.

ⁱⁱⁱGroup Results By “Year” And By “ICD Sub-Chapter”; Check “Export Results”; Uncheck “Show Totals”

^{iv}`python3 -m vbp.run count_actions UnderlyingCausesOfDeathUnitedStates`

$$A(t) = \{$$

$$A_1(t) = \text{Eliminate: Malignant neoplasms,}$$

$$A_2(t) = \text{Eliminate: Ischaemic heart diseases,}$$

$$\dots$$

$$A_{179}(t) = \text{Eliminate: Other disorders of ear}$$

$$\}$$

Review the list of actions^v and hypothesize scale functions. Examples:

- $S_1(A_i) = 1$

Required scale function.

- $S_2(A_i) = \begin{cases} 0.1 & \text{if } \bar{R}^2 < 0.1 \\ 1 & \text{otherwise} \end{cases}$

Essentially remove actions with poorly predicted $B(A_i(t_F))$.

- $S_3(A_i) = \begin{cases} 0.1 & \text{if } p(F) > 0.05 \\ 1 & \text{otherwise} \end{cases}$

Essentially remove actions whose $M(A_i(t))$ p-value of the F-statistic of the fully specified model is not statistically significant. Calculated as the mean squared error of the model divided by the mean squared error of the residuals^{vi}.

- $S_4(A_i) = \begin{cases} 0.1 & \text{if heteroscedastic} \\ 1 & \text{if homoscedastic} \end{cases}$

Essentially remove actions with heteroscedastic $M(A_i(t))$: Heteroscedastic if the p-value of the Breusch-Pagan Lagrange Multiplier test is < 0.05 ^{vii}.

- $S_5(A_i) = \left(1 - \frac{\text{AverageAge}(A_i)}{\text{MaxAge}(A(t))}\right)$

Scale towards younger people as they have more to lose.

^v`python3 -m vbp.run list_actions UnderlyingCausesOfDeathUnitedStates`

^{vi}https://www.statsmodels.org/devel/generated/statsmodels.regression.linear_model.RegressionResults.html

^{vii}https://www.statsmodels.org/dev/generated/statsmodels.stats.diagnostic.het_breuschpagan.html

- $S_6(A_i) = \left(\frac{(f(A_i) - \min(f(A(t)))) \cdot (b-a)}{\max(f(A(t)) - \min(f(A(t))))} \right) + a$

$$f(A_i) = M'(A_i(t_F)), a = 0.5, b = 1$$

Scale down by up to half by the relative rate of change of an action's predicted rate of death: Take the derivative of $M(A_i(t))$ and evaluate it with the predicted value and min-max normalize^{viii} into $[0.5, 1]$ relative to other actions.

- $S_7(A_i) = \begin{cases} 0.1 & \text{if primarily political} \\ 1 & \text{otherwise} \end{cases}$

Essentially remove actions that are primarily political.

The list does not include common scale functions such as implementation time, cost, risk, playing into strengths, piquing interest, market demand, return on investment, ramp-up time, interest, etc. because all medical actions are predicted to be in the same order of magnitude for those scales and all other actions are primarily political so they have a low score, rendering those scales moot.

Create a table listing all actions as rows and all *manually calculated* scale functions as columns^{ix,x}:

Action	S_1	...	S_N
A_1	0.1		1
A_2	1		0.25
...			
A_N	0.99		0.9

Table 1: Theoretical scale function table

$D(A)$ for each action is the time-series data of number of deaths per year per 100,000 of

^{viii}[https://en.wikipedia.org/wiki/Normalization_\(statistics\)](https://en.wikipedia.org/wiki/Normalization_(statistics))

^{ix}For the example scale functions, this is only $S_7(A_i)$.

^x`python3 -m vbp.run scale_functions
-t excel -o scale_functions.xlsx -n
"Scale Values" -p "Eliminate: "
UnderlyingCausesOfDeathUnitedStates S7`

population ("Crude Rate")^{xi}. For example, for *Malignant neoplasms*^{xii}:

Year	Crude Rate
1999	197.0
...	...
2017	183.9

Table 2: Crude rate of deaths per year for *Malignant neoplasms*

Run each comparable prediction model $R_i(D(A))$. For example, see Figure 1 for ordinary least squares linear regressions with polynomial degrees 1, 2, 3, and 4 for *Malignant neoplasms*^{xiii}.


References

- [1] Hanne Andersen and Brian Hepburn. Scientific method. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, summer 2016 edition, 2016.
<https://plato.stanford.edu/archives/sum2016/entries/scientific-method/>.
- [2] Neera K. Badhwar and Roderick T. Long. Ayn rand. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, fall 2017 edition, 2017. <https://plato.stanford.edu/archives/fall2017/entries/ayn-rand/>.
- [3] Dirk Baltzly. Stoicism. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research


^{xi}<https://wonder.cdc.gov/wonder/help/cmfm.htm#Frequently%20Asked%20Questions%20about%20Death%20Rates>

^{xii}`python3 -m vbp.run action_data
UnderlyingCausesOfDeathUnitedStates
"Malignant neoplasms"`


^{xiii}`python3 -m vbp.run predict
UnderlyingCausesOfDeathUnitedStates
"Malignant neoplasms" -d -m 1 -x 4
--do-not-obfuscate -p 5`

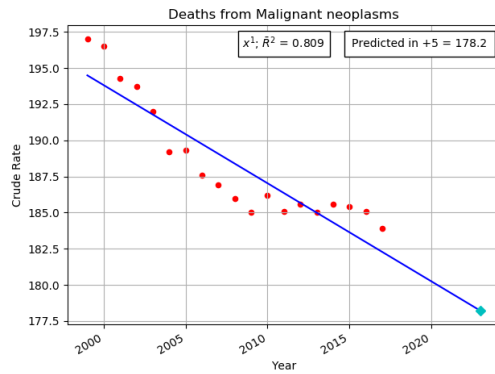


(a) 1 degree

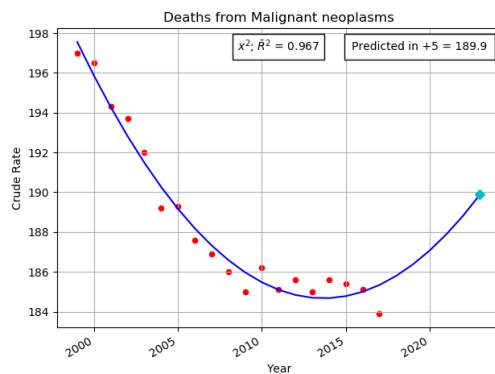

(b) 2 degrees

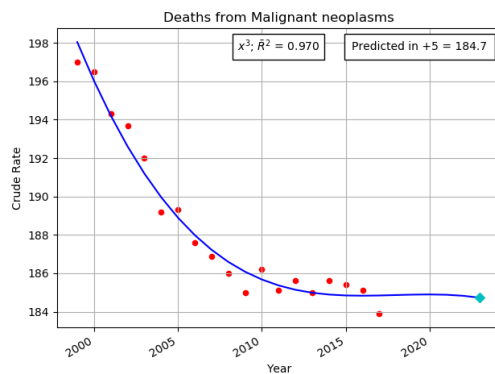

(c) 3 degrees

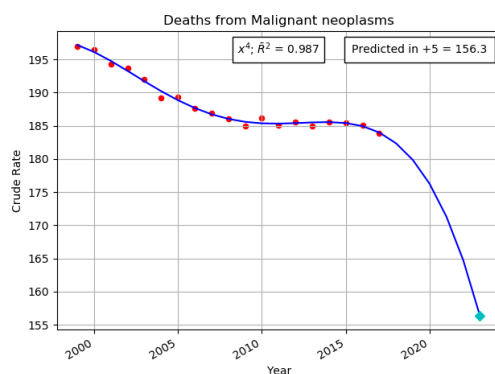

(d) 4 degrees

Figure 1: Ordinary least squares linear regression with polynomial degrees 1, 2, 3, and 4 for *Malignant neoplasms*

Lab, Stanford University, summer 2018 edition, 2018. <https://plato.stanford.edu/archives/sum2018/entries/stoicism/>.

- [4] Daniel Bell. Communitarianism. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, summer 2016 edition, 2016. <https://plato.stanford.edu/archives/sum2016/entries/communitarianism/>.
- [5] Centers for Disease Control and Prevention and National Center for Health Statistics. *Underlying Cause of Death 1999-2017 on CDC WONDER Online Database*, released December, 2018. Data are from the *Multiple Cause of Death Files, 1999-2017*, as compiled from data provided by the 57 vital statistics jurisdictions through the Vital Statistics Cooperative Program. <https://wonder.cdc.gov/ucd-icd10.html>. Accessed: 2019-01-31.
- [6] William FitzPatrick. Morality and evolutionary biology. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, spring 2016 edition, 2016. <https://plato.stanford.edu/archives/spr2016/entries/morality-biology/>.
- [7] John Hare. Religion and morality. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, winter 2014 edition, 2014. <https://plato.stanford.edu/archives/win2014/entries/religion-morality/>.
- [8] Michael Huemer. *Ethical Intuitionism*. Springer, 2007. <https://spot.colorado.edu/~huemer/5.htm>.
- [9] Michael Huemer. *The Problem of Political Authority*. Springer, 2013. <https://spot.colorado.edu/~huemer/1.htm>.

- [10] David Konstan. Epicurus. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, summer 2018 edition, 2018. <https://plato.stanford.edu/archives/sum2018/entries/epicurus/>.
- [11] Frank Martela and Michael F Steger. The three meanings of meaning in life: Distinguishing coherence, purpose, and significance. *The Journal of Positive Psychology*, 11(5):531–545, 2016. <https://dx.doi.org/10.1080/17439760.2015.1137623>.
- [12] World Health Organization. *International statistical classification of diseases and related health problems*. World Health Organization, 10th edition, 2016. <https://apps.who.int/iris/bitstream/handle/10665/246208/9789241549165-V1-eng.pdf>.
- [13] Mark Schroeder. Value theory. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, fall 2016 edition, 2016. <https://plato.stanford.edu/archives/fall2016/entries/value-theory/>.
- [14] Walter Sinnott-Armstrong. Consequentialism. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, winter 2015 edition, 2015. <https://plato.stanford.edu/archives/win2015/entries/consequentialism/>.
- [15] Milton C Weinstein, George Torrance, and Alistair McGuire. Qalys: the basics. *Value in health*, 12:S5–S9, 2009. <https://onlinelibrary.wiley.com/doi/pdf/10.1111/j.1524-4733.2009.00515.x>.
- [16] Leif Wenar. John rawls. In Edward N. Zalta, editor, *The Stanford Encyclopedia of Philosophy*. Metaphysics Research Lab, Stanford University, spring 2017 edition, 2017. <https://plato.stanford.edu/archives/spr2017/entries/rawls/>.
- [17] Ernst Wit, Edwin van den Heuvel, and Jan-Willem Romeijn. ‘all models are wrong...’: an introduction to model uncertainty. *Statistica Neerlandica*, 66(3):217–236, 2012. <https://www.rug.nl/research/portal/files/13270992/2012StatistNeerlWit.pdf>.
- [18] Walter Zucchini. An introduction to model selection. *Journal of mathematical psychology*, 44(1):41–61, 2000. http://www.indiana.edu/~clcl/Q550/Papers/Zucchini_JMP_2000.pdf.