

32 bit

Int - 4byte



Char - 1 byte

Pointer - 4 byte

Short - 2 byte

Rubble - 12 byte


Flintstone

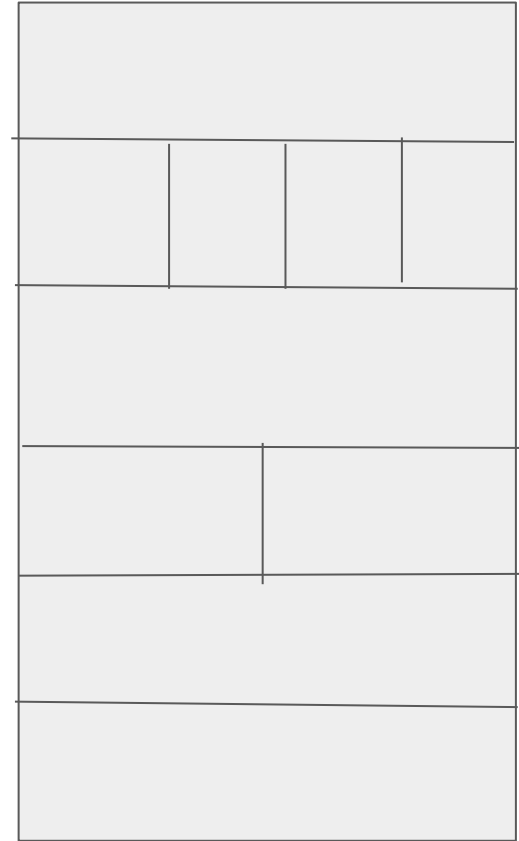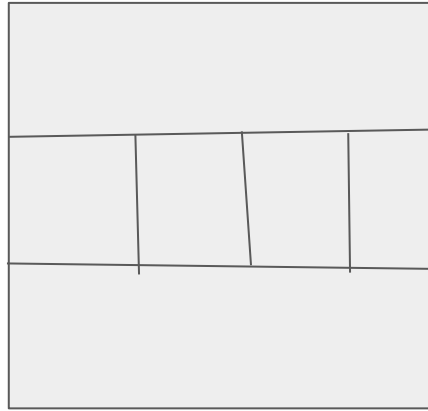


Rubble *simpsons




Flintstone jetsons[4];

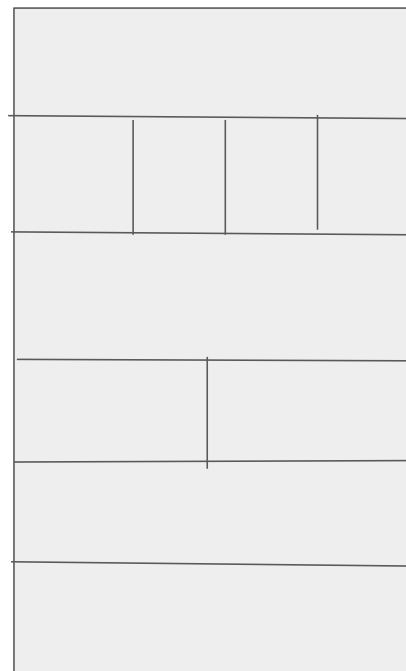


Jetsons[0]

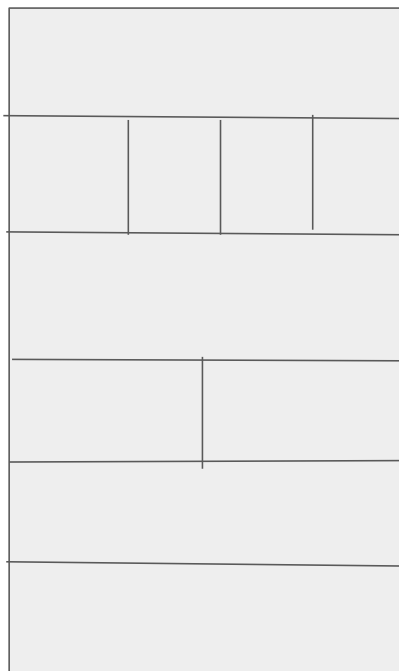

jetsons[1]

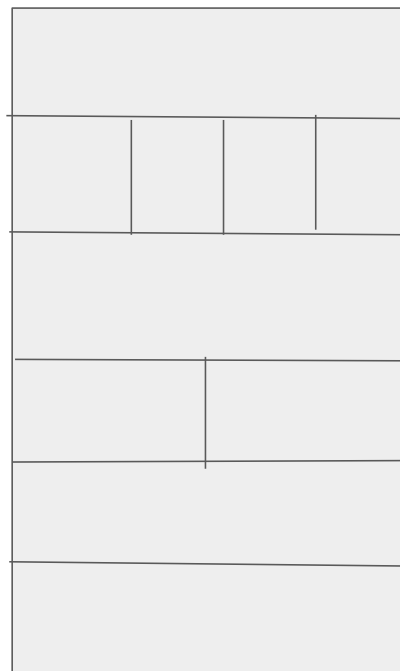


jetsons[2]

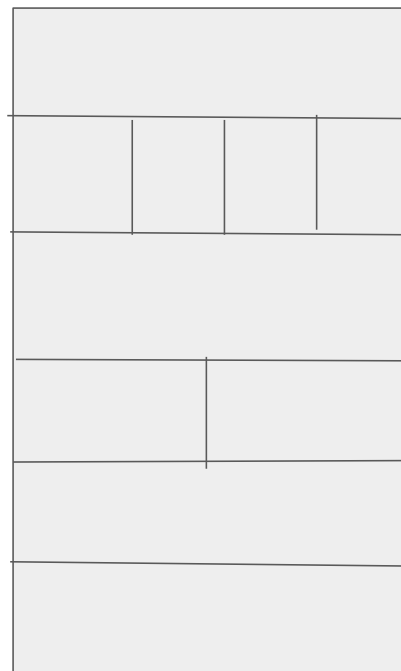


jetsons[3]


Simpsons = &jetsons[0].dino

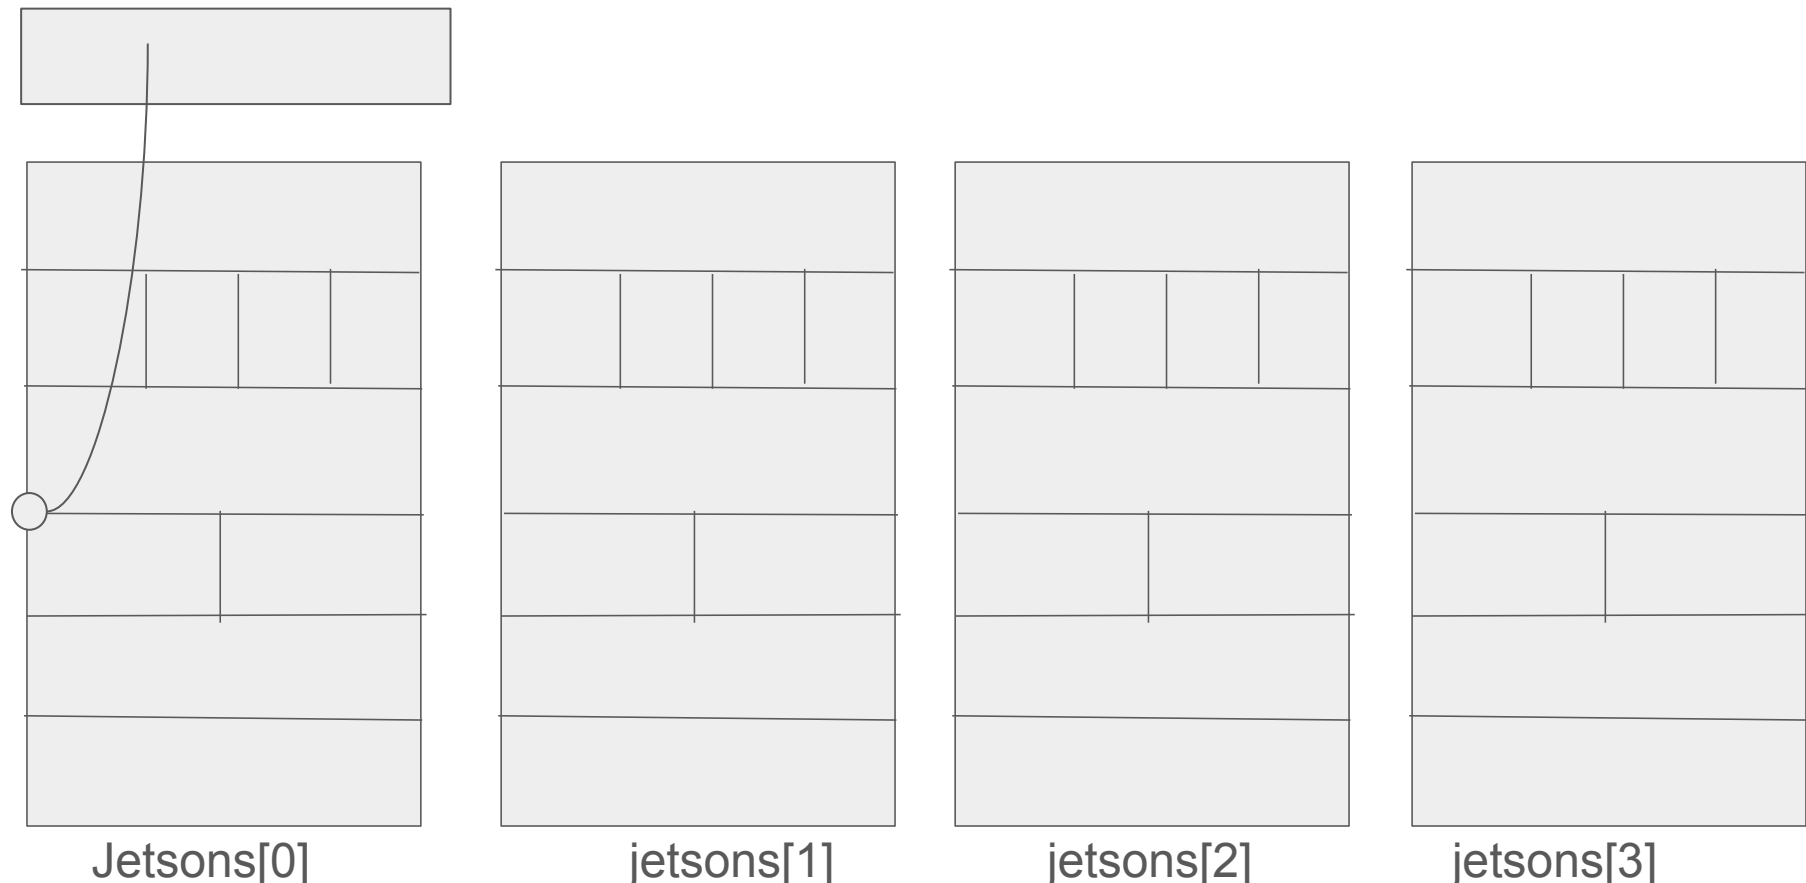


Jetsons[1].wilma[3] = (short *) &simpsons;

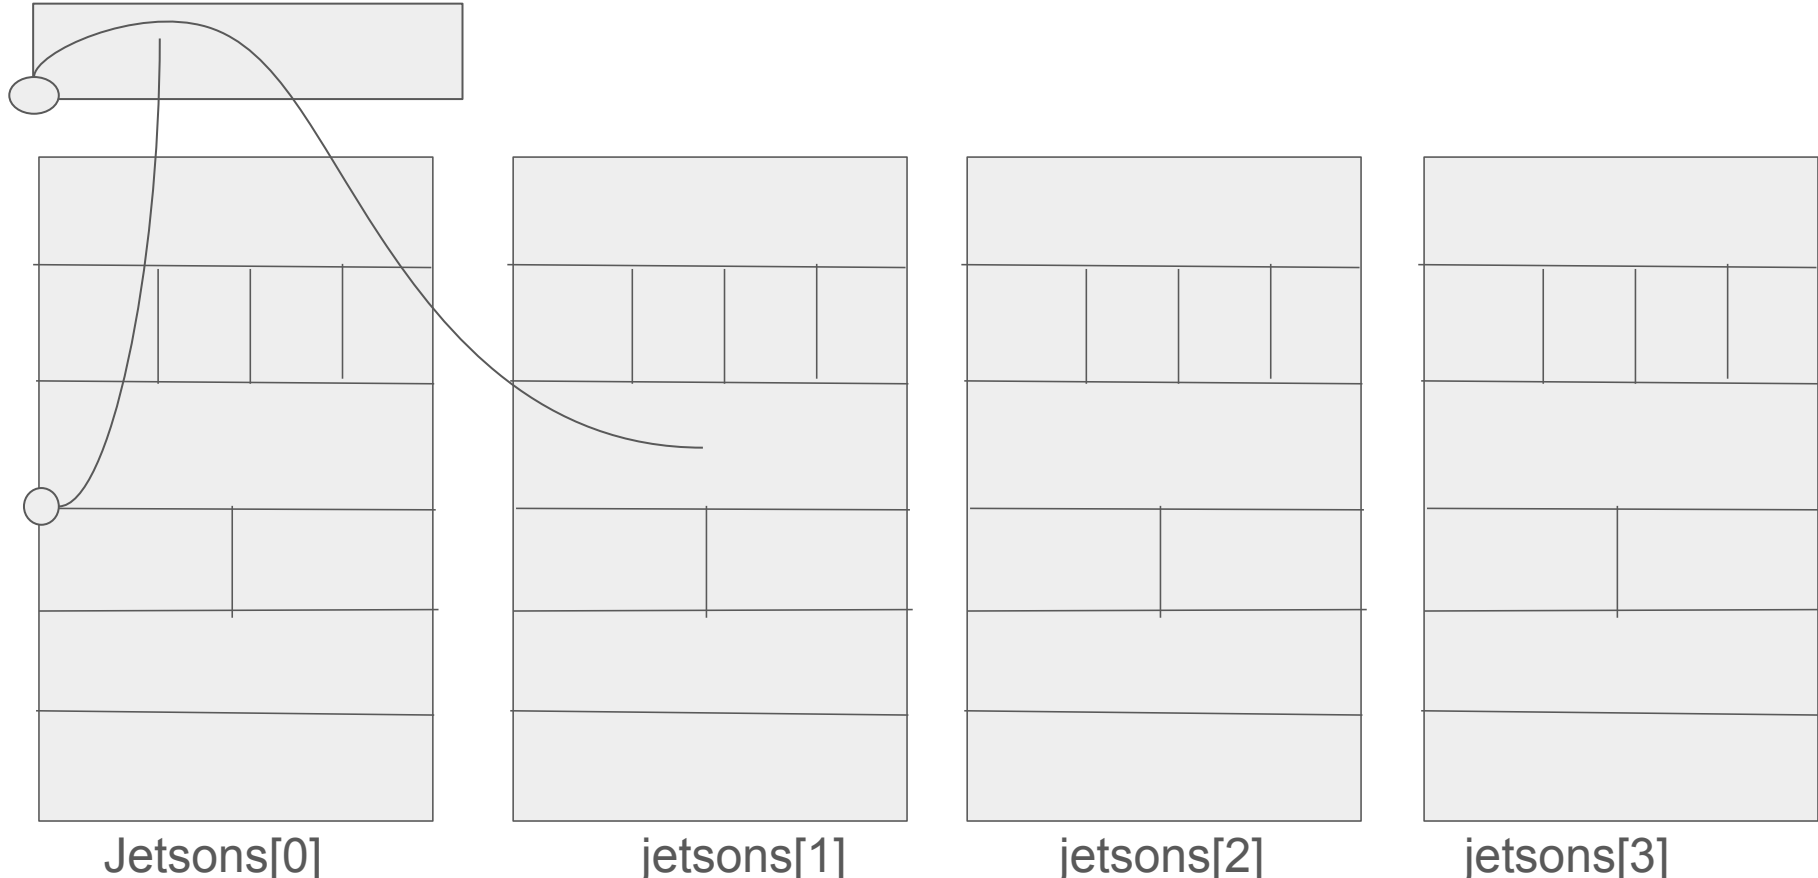

```
srtcpy(simpsons[2].barney, "Bugs Bunny");  
*(simpsons + sizeof(rubble) * 2).barney
```

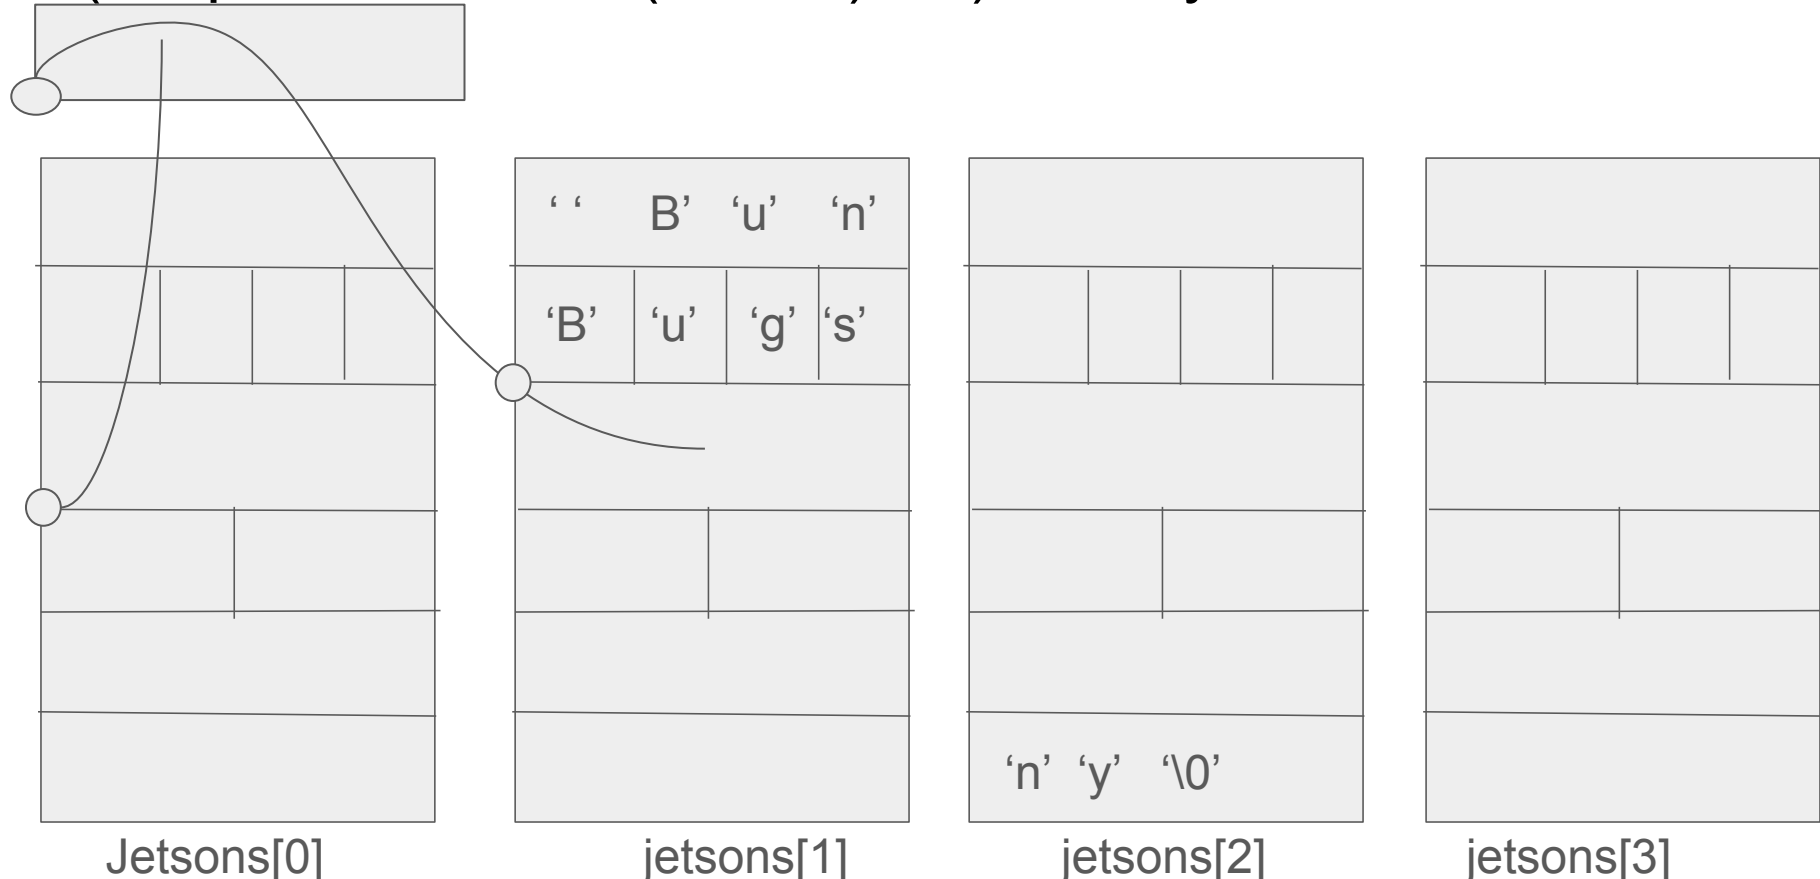

((flintstone *) (jetsons->fred))->dino.bammamm = simpsons
*((flintstone *) (jetsons->fred)).dino

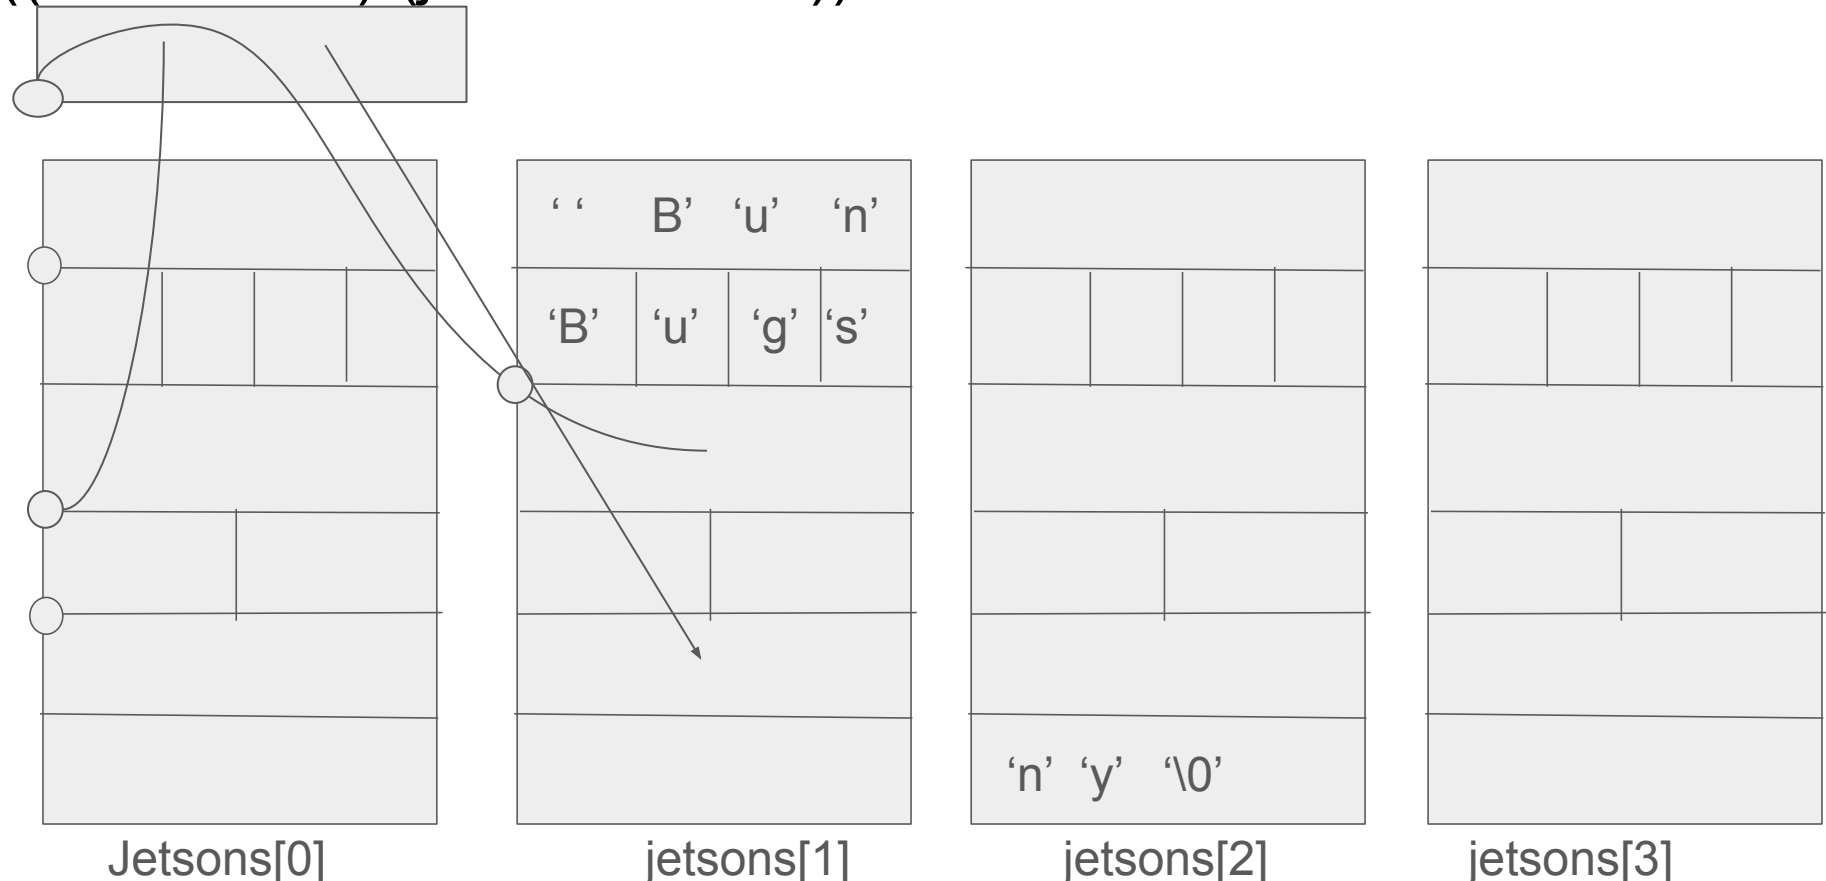

`*(char *)jetson[4].fred = (char *)simpsons->barney + 4 * sizeof(char)`

