

Creamos el proyecto con vite

```
C:\Users\freis\OneDrive\Documentos>cd Terpel_app

C:\Users\freis\OneDrive\Documentos\Terpel_app>dir
El volumen de la unidad C es Windows-SSD
El número de serie del volumen es: 8866-3390

Directorio de C:\Users\freis\OneDrive\Documentos\Terpel_app

06/08/2026  09:38    <DIR>          .
06/08/2026  09:29    <DIR>          ..
               0 archivos                0 bytes
               2 dirs  51.177.803.776 bytes libres

C:\Users\freis\OneDrive\Documentos\Terpel_app>npm create vite@latest . -- --template react|
```

Instalamos dependencias

```
C:\Users\freis\OneDrive\Documentos\Terpel_app>npm create vite@latest . -- --templ

> npx
> create-vite . --template react

|
o Package name:
  terpel-app
o Which linter to use?
  Oxlint
o Install with npm and start now?
  Yes
o Scaffolding project in C:\Users\freis\OneDrive\Documentos\Terpel_app...
o Installing dependencies with npm...
|
```


Creamos Carpetas del proyecto

```
VITE v8.2.1  ready in 348 ms

→ Local:   http://localhost:3000/
→ Network: use --host to expose
→ press h + enter to show help
Desea terminar el trabajo por lotes (S/N)? s

C:\Users\freis\OneDrive\Documentos\Terpel_app>cd src
C:\Users\freis\OneDrive\Documentos\Terpel_app\src>mkdir pa
C:\Users\freis\OneDrive\Documentos\Terpel_app\src>cd ..|
```

Actualizamos el main.jsx

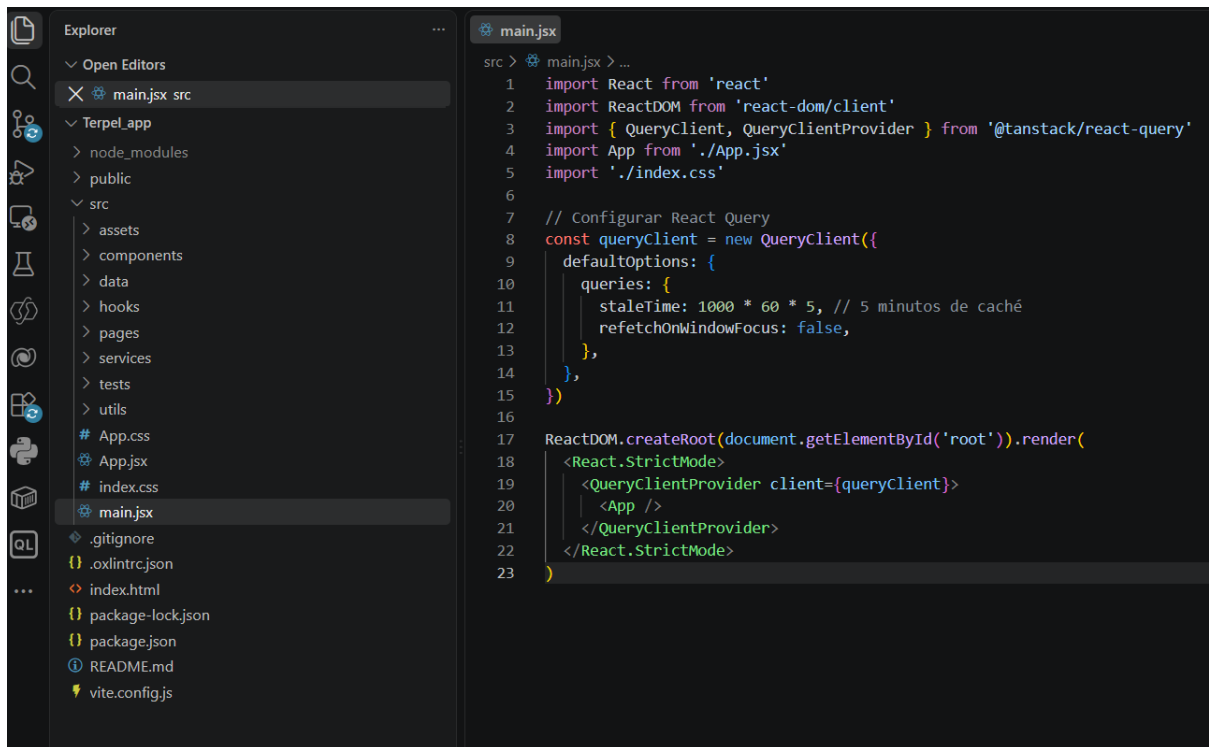

```
src > main.jsx > ...
1  import React from 'react'
2  import ReactDOM from 'react-dom/client'
3  import { QueryClient, QueryClientProvider } from '@tanstack/react-query'
4  import App from './App.jsx'
5  import './index.css'
6
7  // Configurar React Query
8  const queryClient = new QueryClient({
9    defaultOptions: {
10     queries: {
11       staleTime: 1000 * 60 * 5, // 5 minutos de caché
12       refetchOnWindowFocus: false,
13     },
14   },
15 })
16
17 ReactDOM.createRoot(document.getElementById('root')).render(
18   <React.StrictMode>
19     <QueryClientProvider client={queryClient}>
20       <App />
21     </QueryClientProvider>
22   </React.StrictMode>
23 )
```

Creamos base de atos

New Project | Supabase

jq?projectName=freisterortizguevara-wq%27s%20Project

Note: If using the Postgres connection string, you will need to [percent-encode](#) the password.

This password is strong. [Generate a password](#).

 South America (São Paulo) 

Select the region closest to your users for the best performance.

☒ **Enable Data API**
Autogenerate a RESTful API for your public schema.
Recommended if using a client library like [supabase-js](#).

☒ **Automatically expose new tables**
Grants privileges to Data API roles by default, exposing new tables.
We recommend disabling this to control access manually.

☐ **Enable automatic RLS**
Create an event trigger that automatically enables Row Level Security on all new tables in the public schema.

DURATION >

Cancel

 Create new project

Creamos Las tablas

freisterortizguevara-wq's Org **FREE** / terpel-app / main **PRODUCTION** **Connect**

Feedback Search... Ctrl K

terpel-app

https://xojutizjuzxwcmhxtvt.supabase.co Copy

STATUS

Healthy

COMPUTE

NANO

GITHUB

No repository connected

RECENT BRANCH

No branches

LAST MIGRATION

No migrations

LAST BACKUP

No backups

Primary Database

South America (São sa-east-1 - t3.nano)

CPU 2% Disk 13% RA 48

SQL Editor

```
1 -- Tabla de estaciones
2 CREATE TABLE stations (
3   id SERIAL PRIMARY KEY,
4   station_id TEXT UNIQUE NOT NULL,
5   name TEXT NOT NULL,
6   status TEXT DEFAULT 'draft' CHECK (status IN ('draft', 'published')),
7   is_active BOOLEAN DEFAULT true,
8   updated_at TIMESTAMPTZ DEFAULT now()
9 );
10
11 -- Tabla de servicios
12 CREATE TABLE services (
13   id SERIAL PRIMARY KEY,
14   service_id TEXT UNIQUE NOT NULL,
15   name TEXT NOT NULL
16 );
17
18 -- Tabla de relación estación-servicio
19 CREATE TABLE station_services (
20   id SERIAL PRIMARY KEY,
21   station_id TEXT REFERENCES stations(station_id),
22   service_id TEXT REFERENCES services(service_id)
23 );
```

Save as snippet Run Ctrl R

freisterortizguevara-wq's Org **FREE**

Table Editor

schema public

+ New table

Search tables...

- services **UNRESTRICTED**
- station_services **UNRESTRICTED**
- stations **UNRESTRICTED**

Insertamos datos

freisterortizguevara-wq's Org **FREE** / terpel-app / main **PRODUCTION** **Connect**

Feedback Search... Ctrl K

Table Editor

schema public

+ New table

Search tables...

- services **UNRESTRICTED**
- station_services **UNRESTRICTED**
- stations **UNRESTRICTED**

Create a table
Design and create a new database table

Recent items
No recent items yet
Items will appear here as you browse through your

SQL Editor

```
1 -- Insertar estaciones
2 INSERT INTO stations (station_id, name, status) VALUES
3   ('001', 'Estación Prueba 1', 'published'),
4   ('002', 'Estación Prueba 2', 'draft'),
5   ('003', 'Estación Prueba 3', 'published'),
6   ('004', 'Estación Prueba 4', 'draft');
7
8 -- Insertar servicios
9 INSERT INTO services (service_id, name) VALUES
10  ('s1', 'Baño'),
11  ('s2', 'Cajeros'),
12  ('s3', 'Soat'),
13  ('s4', 'Tienda');
14
15 -- Insertar relaciones
16 INSERT INTO station_services (station_id, service_id) VALUES
17  ('001', 's1'), ('001', 's2'),
18  ('002', 's1'), ('003', 's3'), ('003', 's1'), ('004', 's4');
```

Table Editor

schema public

+ New table

Search tables...

services (UNRESTRICTED)

station_services (UNRESTRICTED)

stations (UNRESTRICTED)

Filter by id, service_id, name or ask AI

Sort

RLS disabled

Role postgres

	id int4	service_id text	name text
	1	s1	Baño
	2	s2	Cajeros
	3	s3	Soat
	4	s4	Tienda

Filter by id, station_id, service_id or ask AI

Sort

RLS disabled

Role postgres

	id int4	station_id text	service_id text
	1	001	s1
	2	001	s2
	3	002	s1
	4	003	s3
	5	003	s1
	6	004	s4

Filter by id, station_id, name... or ask AI

Sort

RLS disabled

Role postgres

	id int4	station_id text	name text	status text
	1	001	Estación Prueba 1	published
	2	002	Estación Prueba 2	draft
	3	003	Estación Prueba 3	published
	4	004	Estación Prueba 4	draft

freisterortiguevara-wq's Org (FREE)

terpel-app

main (PRODUCTION)

Connect


Feedback

Search... Ctrl K


Configuramos .env en el proyecto

```
.env
1 VITE_SUPABASE_URL=https://xojutizjuzxwcmhxtxvt.supabase.co
2 VITE_SUPABASE_ANON_KEY=tu_clave_anonima
```


Instalamos dependencias

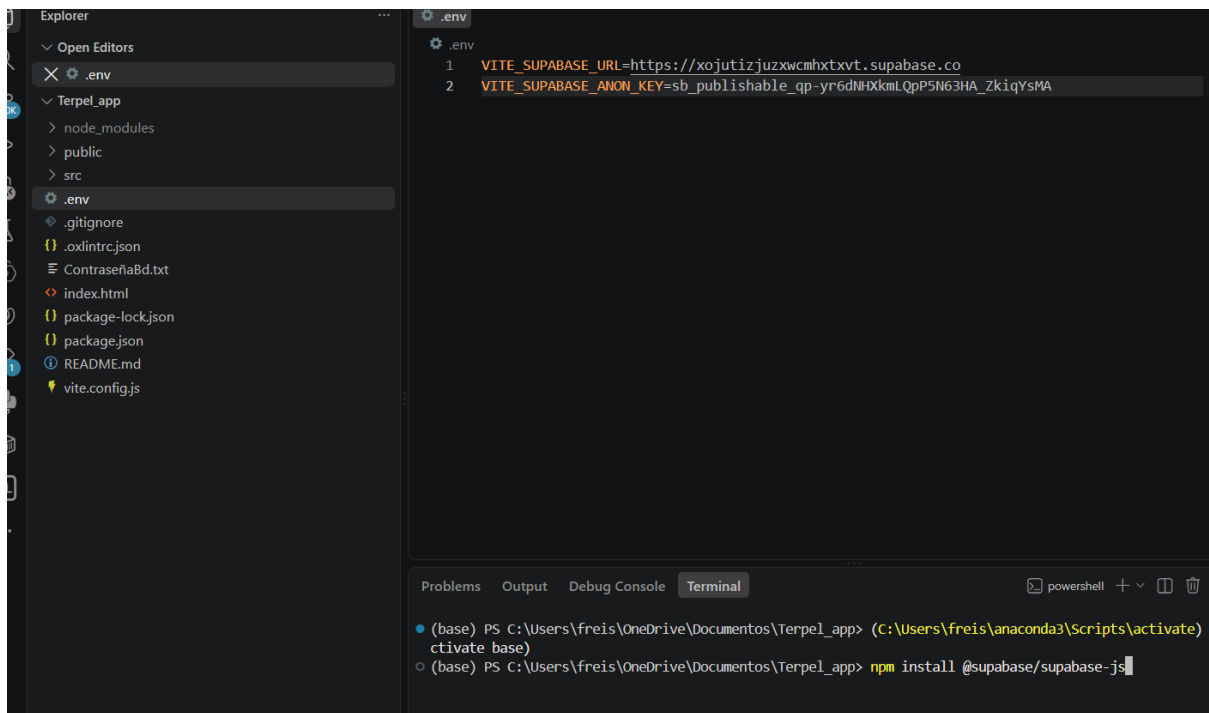

Creamos el servicio para la base de datos

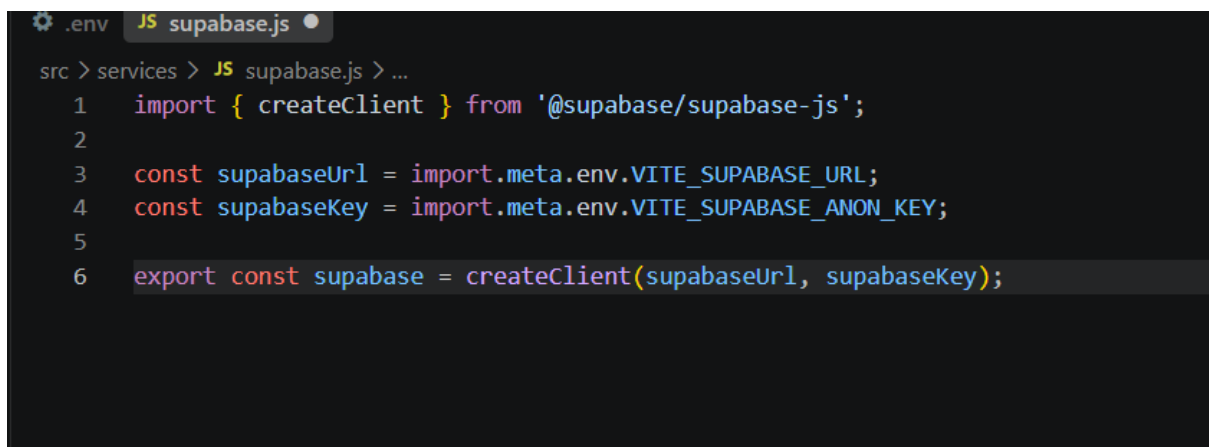


Creamos los hooks

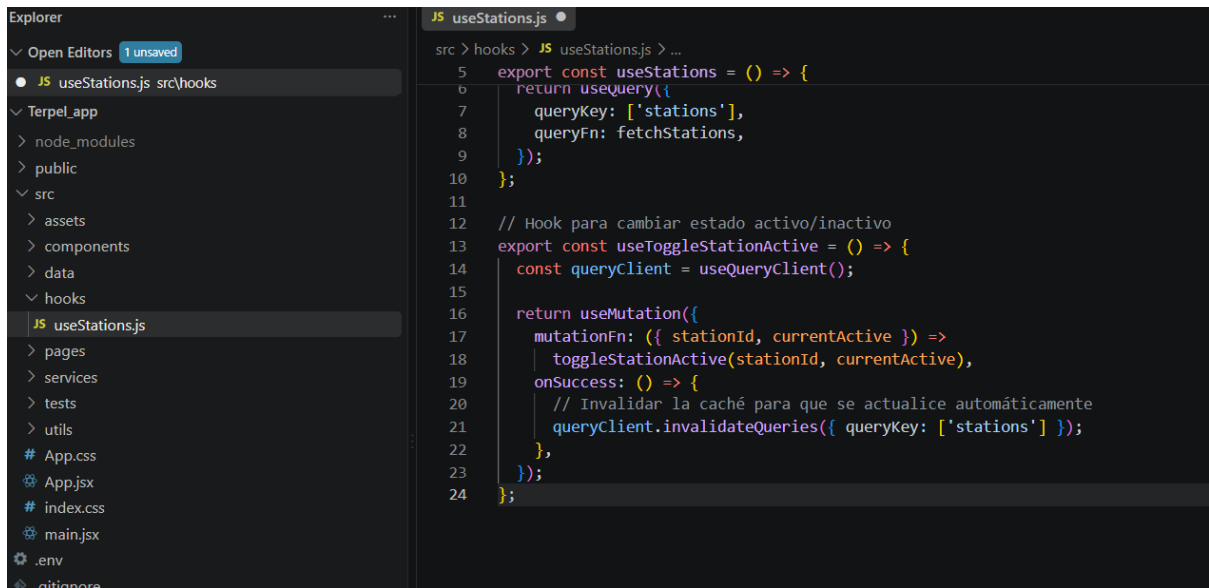


```
src > hooks > JS useStations.js > ...
5 export const useStations = () => {
6   return useQuery({
7     queryKey: ['stations'],
8     queryFn: fetchStations,
9   });
10 };
11
12 // Hook para cambiar estado activo/inactivo
13 export const useToggleStationActive = () => {
14   const queryClient = useQueryClient();
15
16   return useMutation({
17     mutationFn: ({ stationId, currentActive }) => {
18       toggleStationActive(stationId, currentActive),
19     },
20     onSuccess: () => {
21       // Invalidar la caché para que se actualice automáticamente
22       queryClient.invalidateQueries({ queryKey: ['stations'] });
23     },
24   });
25 };
```

Creamos los componentes

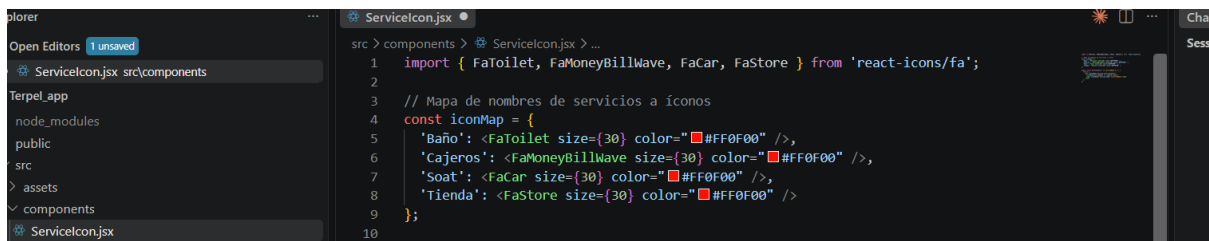

```
src > components > ServiceIcon.jsx > ...
1 import { FaToilet, FaMoneyBillWave, FaCar, FaStore } from 'react-icons/fa';
2
3 // Mapa de nombres de servicios a íconos
4 const iconMap = {
5   'Baño': <FaToilet size={30} color="#FF0F00" />,
6   'Cajeros': <FaMoneyBillWave size={30} color="#FF0F00" />,
7   'Soat': <FaCar size={30} color="#FF0F00" />,
8   'Tienda': <FaStore size={30} color="#FF0F00" />
9 };
10
```

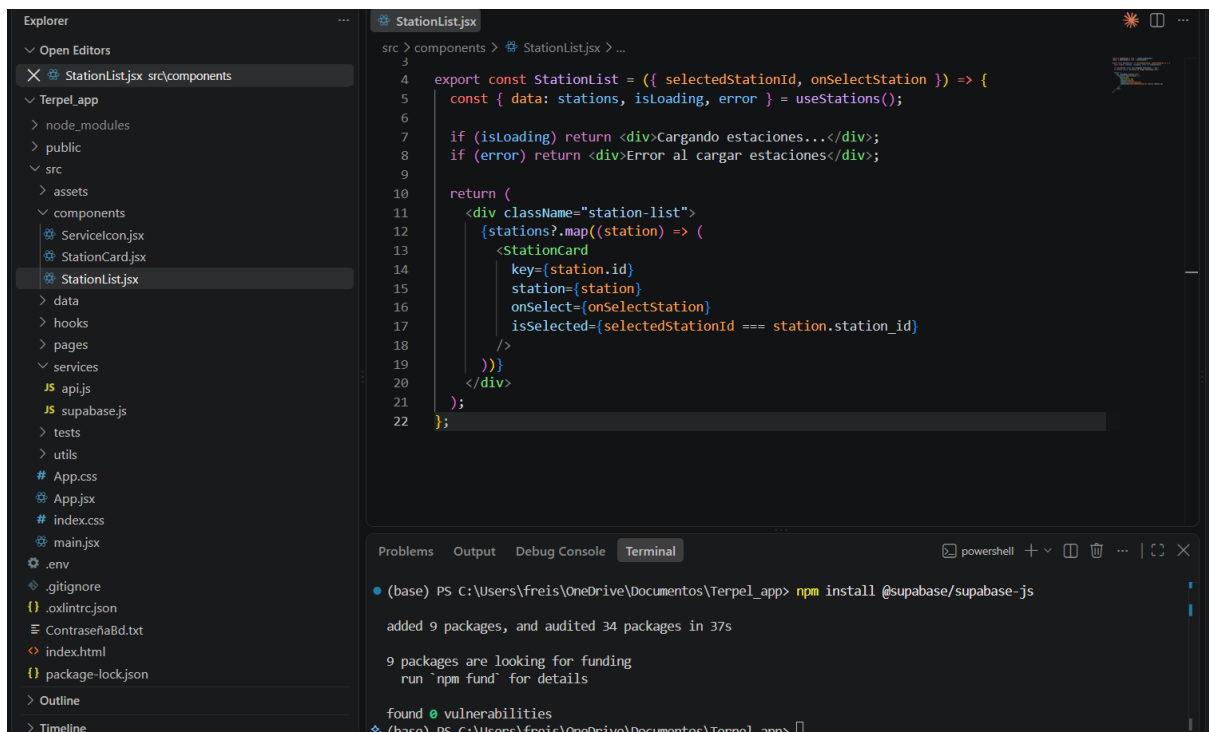

```
src > components > StationList.jsx > ...
3
4 export const StationList = ({ selectedStationId, onSelectStation }) => {
5   const { data: stations, isLoading, error } = useStations();
6
7   if (isLoading) return <div>Cargando estaciones...</div>;
8   if (error) return <div>Error al cargar estaciones</div>;
9
10  return (
11    <div className="station-list">
12      {stations?.map((station) => (
13        <StationCard
14          key={station.id}
15          station={station}
16          onSelect={onSelectStation}
17          isSelected={selectedStationId === station.station_id}
18        />
19      ))}
20    </div>
21  );
22 };
```

Problems Output Debug Console Terminal

(base) PS C:\Users\freis\OneDrive\Documents\Terpel_app> npm install @supabase/supabase-js

added 9 packages, and audited 34 packages in 37s

9 packages are looking for funding
run 'npm fund' for details


found 0 vulnerabilities

(base) PS C:\Users\freis\OneDrive\Documents\Terpel_app>

Creamos los pages

```
StationsPage.jsx
src > pages > StationsPage.jsx > ...
5   export const StationsPage = () => {
20     </header>
21
22     <div className="content-grid">
23       <div className="stations-section">
24         <h2>Estaciones</h2>
25         <StationList
26           selectedStationId={selectedStationId}
27           onSelectStation={setSelectedStationId}
28         />
29       </div>
30
31       <div className="services-section">
32         <h2>Servicios</h2>
33         <ServicesDisplay stationId={selectedStationId} />
34       </div>
35     </div>
36   </div>
37 };
38 };
```

Actualizamos APP.jsx

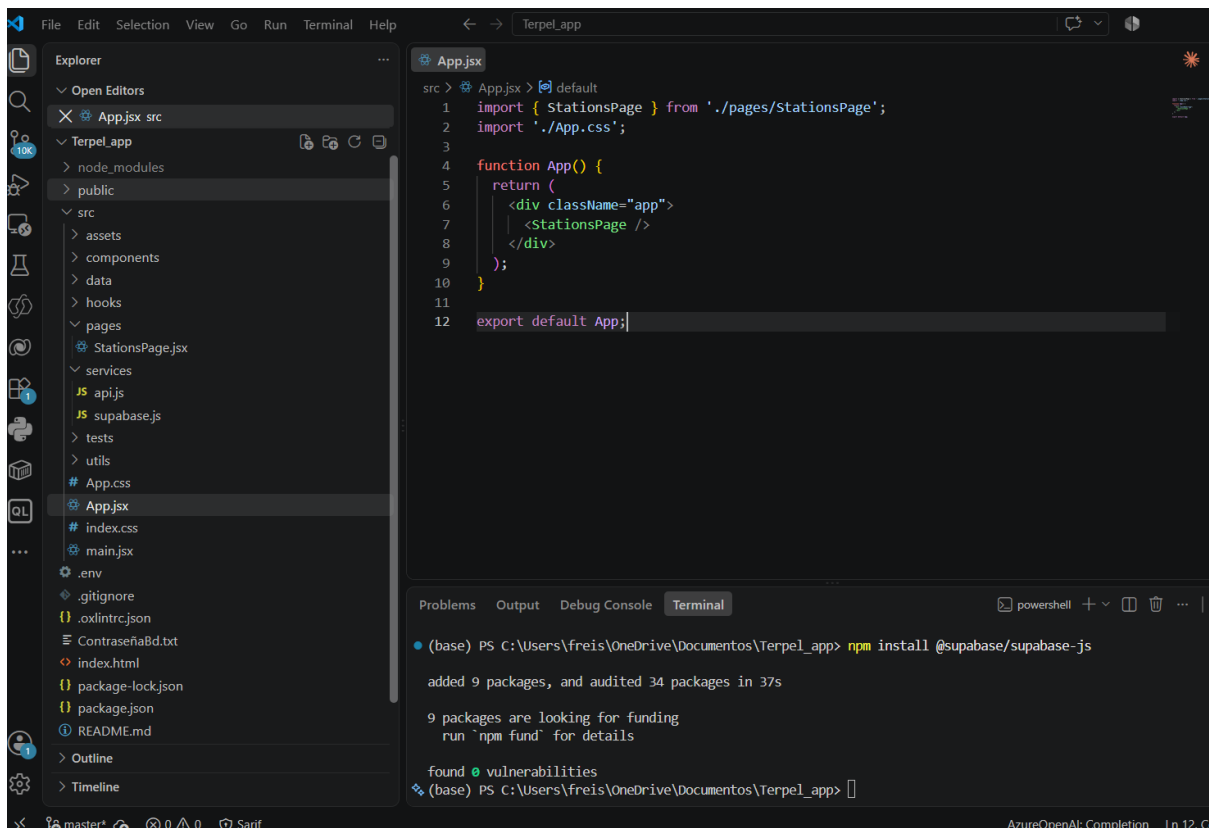


The screenshot shows the Visual Studio Code editor with the 'App.jsx' file open. The file content is as follows:

```
src > App.jsx > default
1 import { StationsPage } from './pages/StationsPage';
2 import './App.css';
3
4 function App() {
5   return (
6     <div className="app">
7       <StationsPage />
8     </div>
9   );
10 }
11
12 export default App;
```


The Explorer sidebar on the left shows the project structure, with 'App.jsx' selected under the 'src' directory. The Terminal window at the bottom shows the output of the command `npm install @supabase/supabase-js`:

```
(base) PS C:\Users\freis\OneDrive\Documentos\Terpel_app> npm install @supabase/supabase-js
added 9 packages, and audited 34 packages in 37s
9 packages are looking for funding
  run `npm fund` for details
found 0 vulnerabilities
(base) PS C:\Users\freis\OneDrive\Documentos\Terpel_app>
```


Agregamos estilos corporativos

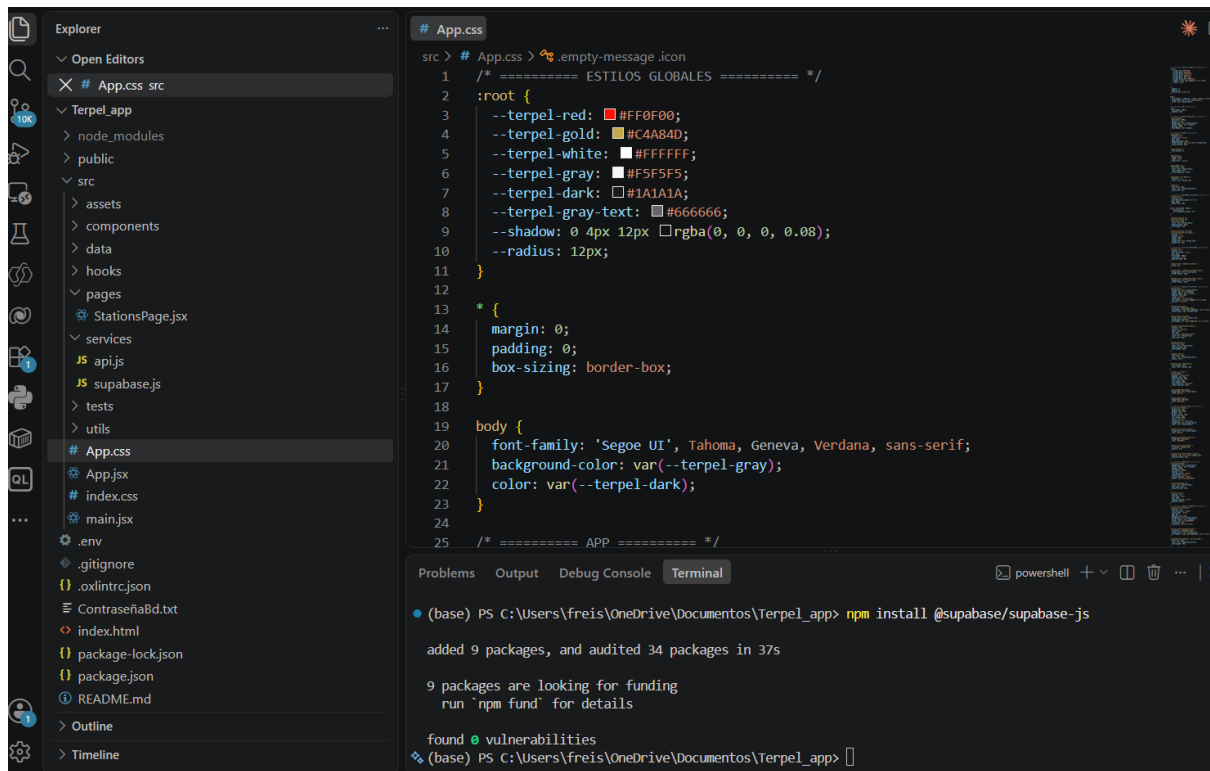

Actualizamos index

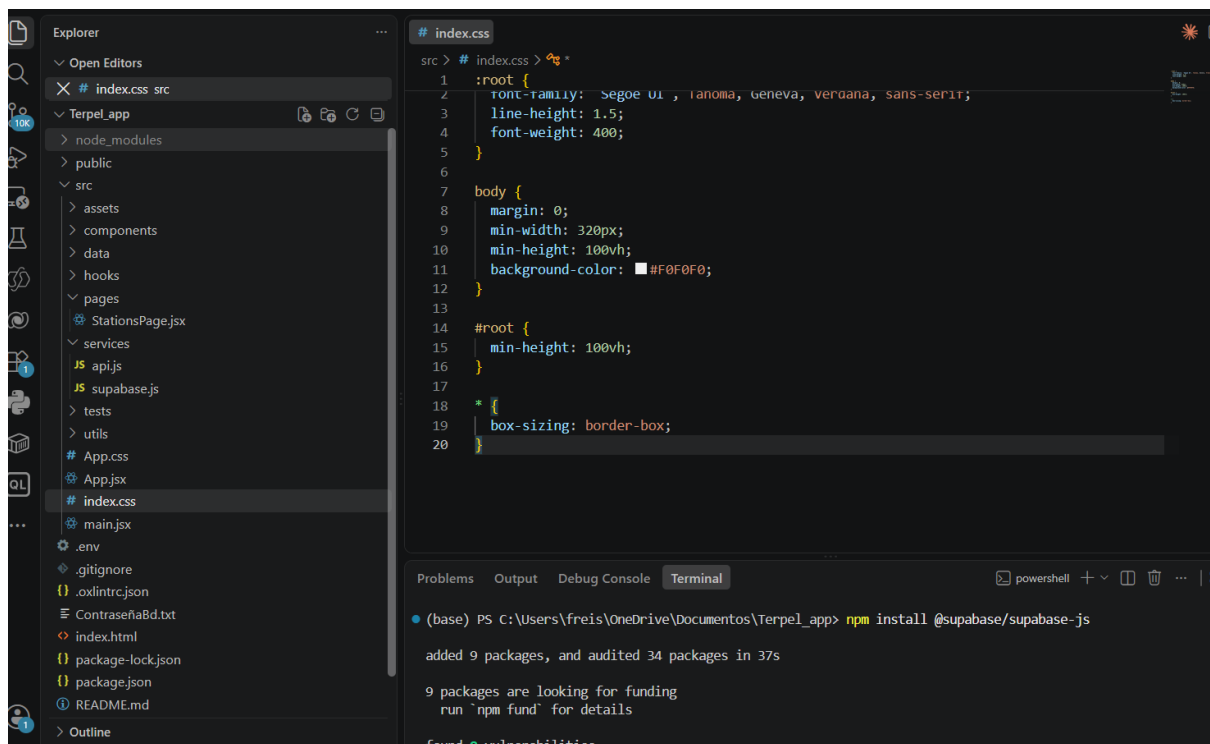


Desplegamos e instalamos dependencias faltantes



```
Terpel_app
├── node_modules
├── public
├── src
│   ├── assets
│   ├── components
│   ├── data
│   ├── hooks
│   ├── pages
│   ├── services
│   ├── supabase
│   ├── tests
│   ├── utils
│   ├── App.css
│   ├── App.jsx
│   ├── index.css
│   └── main.js
├── .env
├── .gitignore
├── .oxlinttrc
├── Contrase
├── index.htm
├── package
├── package
├── README
├── Outline
└── Timeline

npm install @tanstack/react-query
C:\Users\freis\OneDrive\Documentos\Terpel_app\src>mkdir pages components services hooks utils data tests
C:\Users\freis\OneDrive\Documentos\Terpel_app\src>cd ..
C:\Users\freis\OneDrive\Documentos\Terpel_app>npm run dev -- --port 3000
> terpel-app@0.0.0 dev
> vite --port 3000
10:41:43 [vite] (client) Re-optimizing dependencies because lockfile has changed
VITE v8.2.1 ready in 807 ms
  ➔ Local:   http://localhost:3000/
  ➔ Network: use --host to expose
  ➔ press h + enter to show help
(!) Failed to run dependency scan. Skipping dependency pre-bundling. Error: The following dependencies are imported but could not be resolved:
  @tanstack/react-query (imported by C:/Users/freis/OneDrive/Documentos/Terpel_app/src/hooks/useStations.js)
  react-icons/fa (imported by C:/Users/freis/OneDrive/Documentos/Terpel_app/src/components/ServiceIcon.jsx)
  Are they installed?
    at file:///C:/Users/freis/OneDrive/Documentos/Terpel_app/node_modules/vite/dist/node/chunks/node.js:32102:33
    at async file:///C:/Users/freis/OneDrive/Documentos/Terpel_app/node_modules/vite/dist/node/chunks/node.js:34370:15
¿Desea terminar el trabajo por lotes (S/N)? s
C:\Users\freis\OneDrive\Documentos\Terpel_app>npm install @tanstack/react-query react-icons
```


Probamos aplicaiion

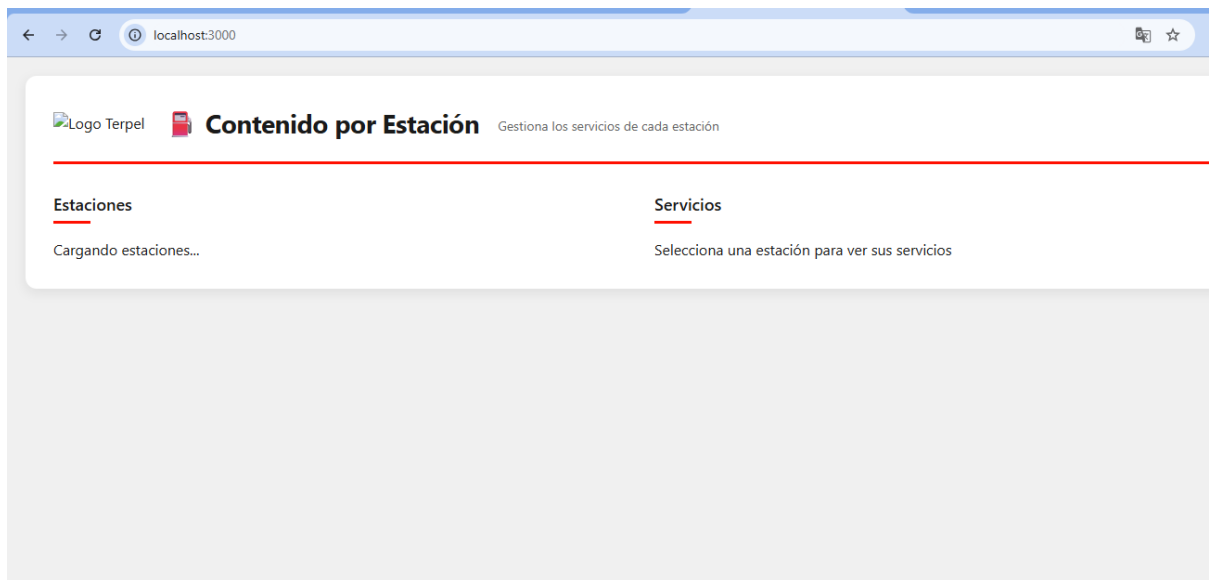


Corejimos errores

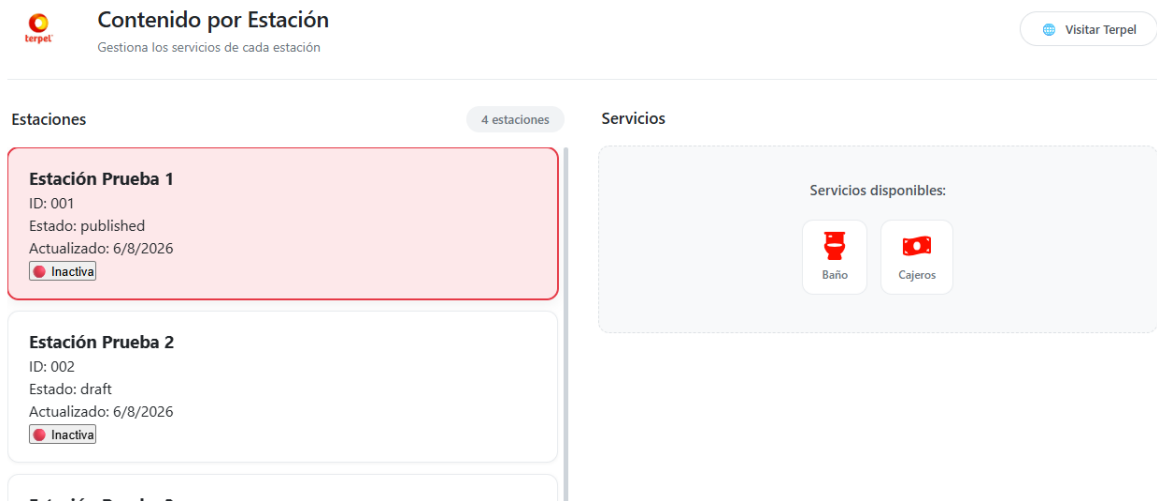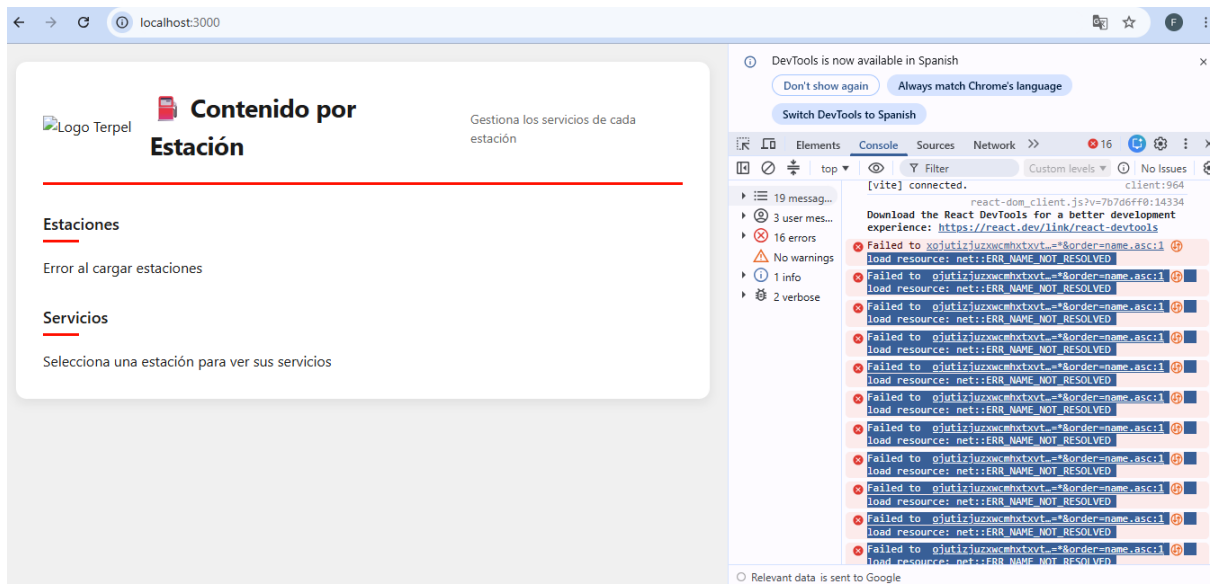

Plus agregamos mapa con direccion

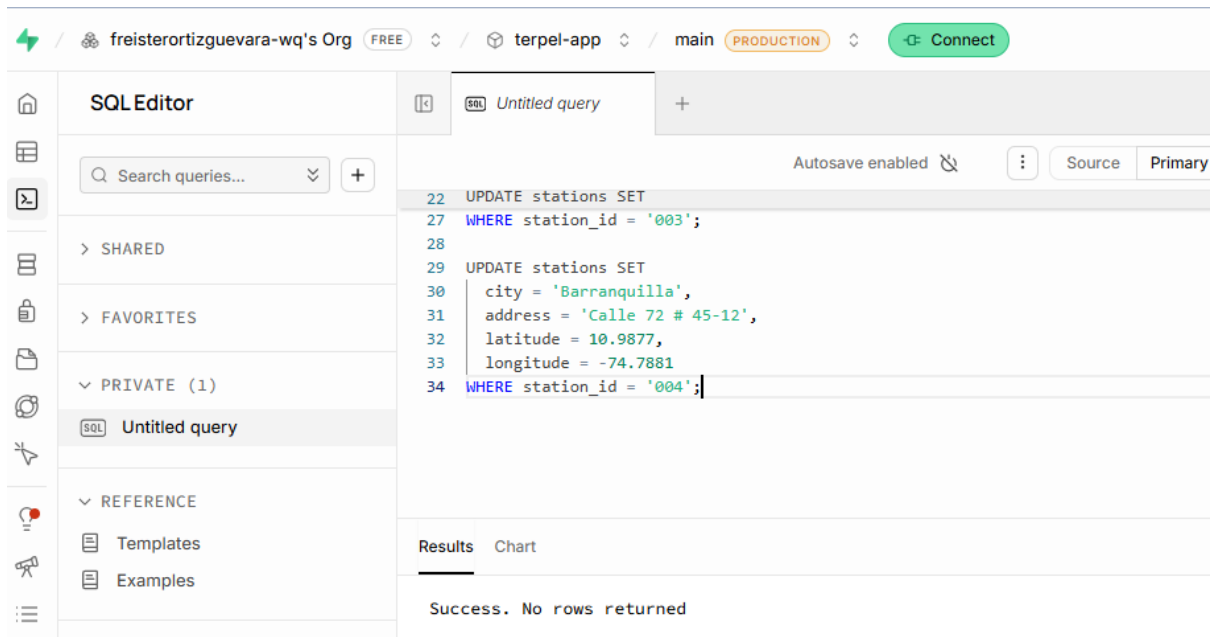

Instalamos librerias y creamos componentes

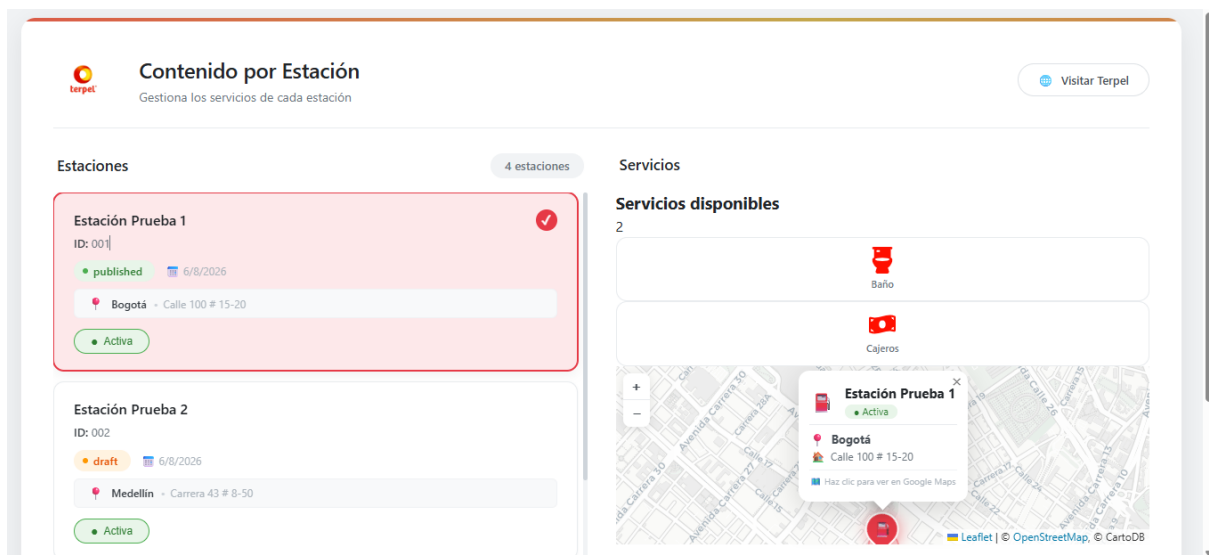


Subimos a git

Creamos repositorio en git


```
(base) PS C:\Users\freis\OneDrive\Documentos\Terpel_app> git commit -m "Initial commit"
Compressing objects: 100% (37/37), done.
Writing objects: 100% (39/39), 122.27 KiB | 2.31 MiB/s, done.
Total 39 (delta 1), reused 0 (delta 0), pack-reused 0 (from origin)
remote: Resolving deltas: 100% (1/1), done.
To https://github.com/freisterortizguevara-wq/Terpel_Ptecnica
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
(base) PS C:\Users\freis\OneDrive\Documentos\Terpel_app>
```

The screenshot shows the GitHub web interface for a repository named 'Terpel_Ptecnica' by user 'freisterortizguevara-wq'. The repository is public. The page includes a header with navigation links (Code, Issues, Pull requests, Agents, Actions, Projects, Wiki, Security and quality, Insights, Settings) and a search bar. Below the header, there are buttons for Pin, Watch (0), Fork (0), and Star (0). The main content area features two cards: 'Start coding with Codespaces' with a 'Create a codespace' button, and 'Add collaborators to this repository' with an 'Invite collaborators' button. A 'Quick setup' section provides instructions for cloning the repository via Desktop, HTTPS, or SSH, with the repository URL 'https://github.com/freisterortizguevara-wq/Terpel_Ptecnica.git'. It also includes links for 'creating a new file' and 'uploading an existing file'. At the bottom, there is a section for creating a new repository on the command line with the command 'git init' and a 'README.md' file.

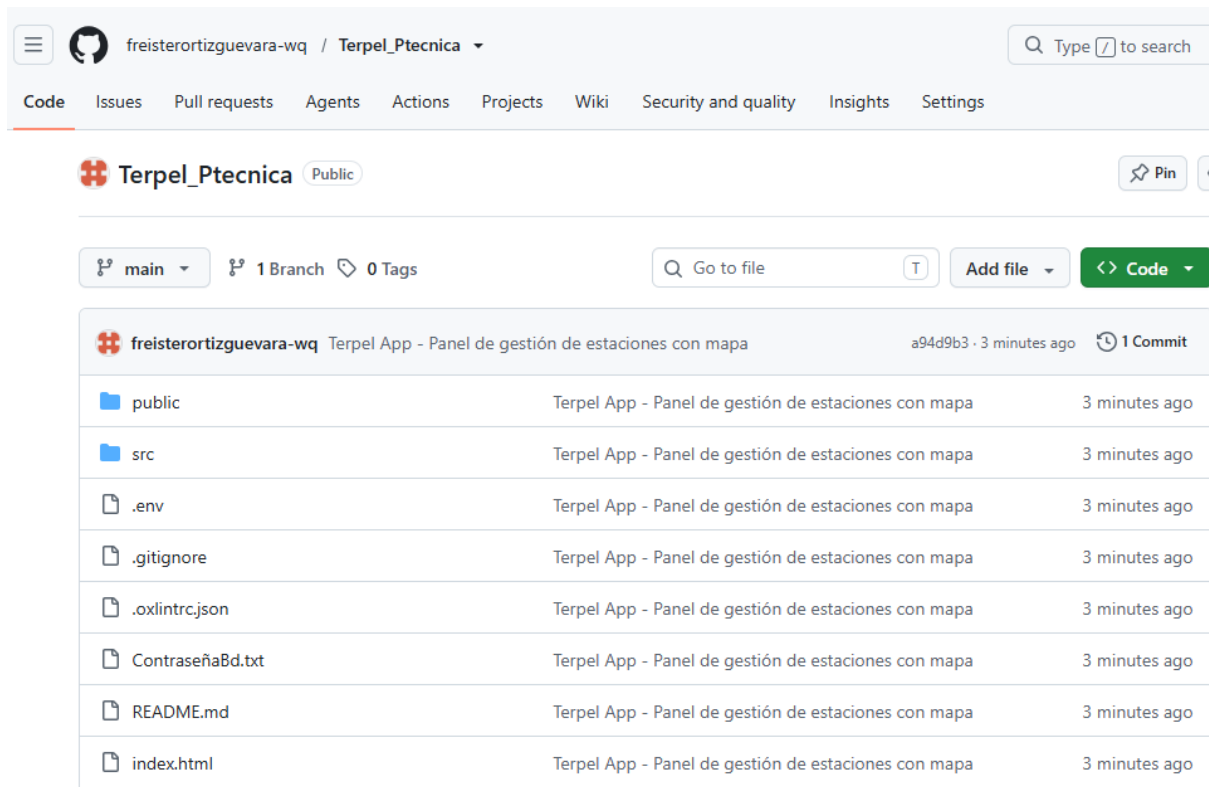

Desplegamos la aplicacion conectada atrvez de .env a la base de datos de supabase

Configuramos package.json

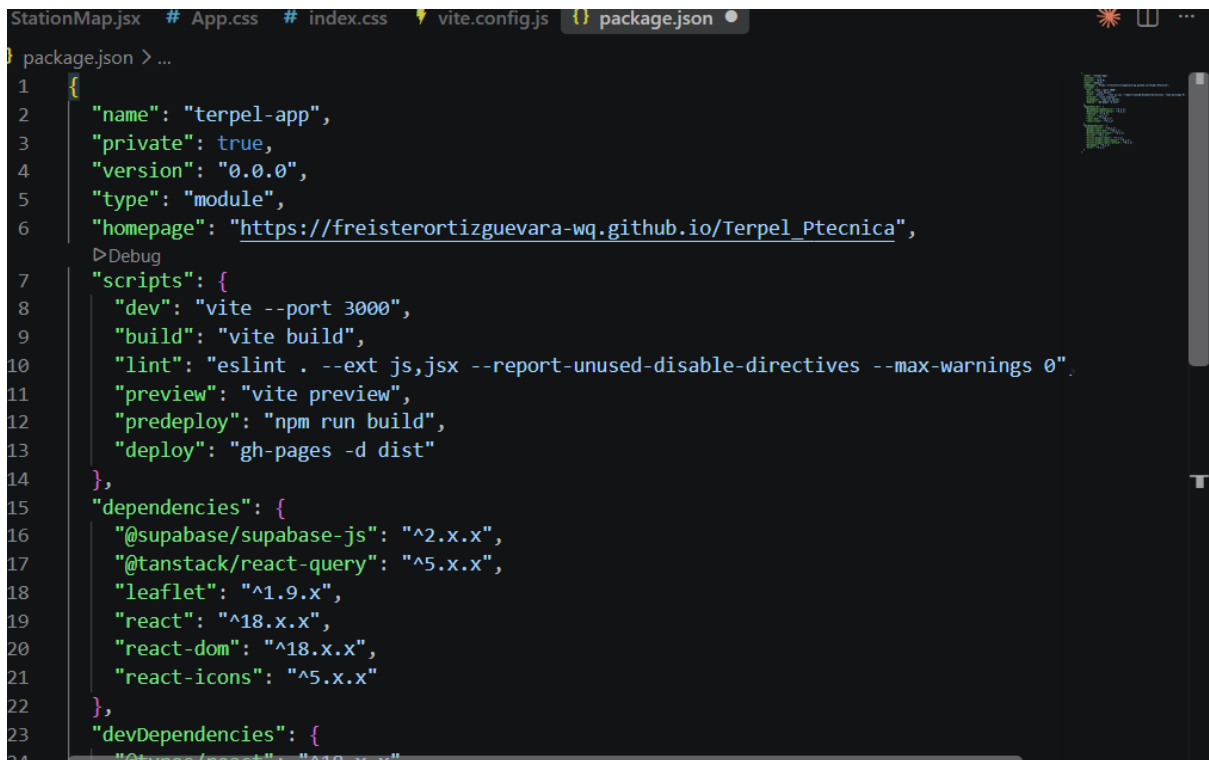



Estaciones

4 estaciones

Estación Prueba 1

ID: 001

published

6/8/2026

Bogotá

Calle 100 # 15-20

Activa

Estación Prueba 2

ID: 002

draft

6/8/2026

Medellín

Carrera 43 # 8-50

Activa

Servicios

Servicios disponibles

1|

Baño