

# Advanced Programming - Appunti

Francesco Lorenzoni

September 2023

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	19 - Settembre . . . . .	3
1.1.1	Info and Contact . . . . .	3
1.1.2	Framwork . . . . .	3
1.1.3	Design Patterns . . . . .	3
1.2	20 - Settembre . . . . .	3
1.2.1	Programming Languages . . . . .	3
1.2.2	Programming Paradigms . . . . .	4
1.2.3	Implementing PLs . . . . .	4
<b>2</b>	<b>JVM</b>	<b>6</b>
2.1	Runtime System . . . . .	6
2.1.1	JRE . . . . .	6
2.2	JVM . . . . .	6
2.2.1	Data types . . . . .	7
2.2.2	Threads . . . . .	7
2.2.3	per-thread Data Areas . . . . .	8
2.2.4	shared data areas . . . . .	8
2.2.5	Loading . . . . .	9
2.2.6	Linking . . . . .	9
2.2.7	Initialization . . . . .	9
<b>3</b>	<b>JVM Instr Set &amp; JIT</b>	<b>10</b>
3.1	Instruction Set . . . . .	10
3.1.1	Invoking methods . . . . .	10
3.2	JIT . . . . .	10
3.2.1	Deoptimization and Speculation . . . . .	11
<b>4</b>	<b>Component-Based software</b>	<b>12</b>
4.1	Definitions . . . . .	12
4.2	Concepts of Component Model . . . . .	12
4.3	Components and Programming Concepts . . . . .	13
<b>5</b>	<b>Java Beans</b>	<b>14</b>
5.1	3 - Ottobre . . . . .	14
<b>6</b>	<b>Reflection</b>	<b>15</b>
6.1	Introduction and Definitions . . . . .	15
6.2	Uses and drawbacks . . . . .	15
6.2.1	Uses . . . . .	15
6.2.2	Drawbacks . . . . .	15
6.3	Reflection in Java . . . . .	15
6.3.1	Introspection . . . . .	16
6.3.2	Program Manipulation . . . . .	16
<b>7</b>	<b>Annotations</b>	<b>17</b>
7.1	Defining annotations . . . . .	17
<b>8</b>	<b>Polymorphism</b>	<b>18</b>
8.1	Classification . . . . .	18
8.1.1	Overloading . . . . .	18

8.2	Coercion . . . . .	19
8.3	Inclusion Polymorphism . . . . .	19
8.4	Overriding . . . . .	19
8.5	C++ v Java . . . . .	19
8.6	C++ Templates . . . . .	20
8.6.1	Macros . . . . .	20
8.6.2	Specialization . . . . .	20
<b>9</b>	<b>Generics</b>	<b>22</b>
9.1	Methods . . . . .	22
9.2	Inheritance and Arrays . . . . .	22
9.2.1	Generic Arrays . . . . .	23
9.3	Wildcards . . . . .	24
9.4	Generics Limitations . . . . .	24
<b>10</b>	<b>Standard Templates Library</b>	<b>25</b>
10.1	Main Entities . . . . .	25
10.2	Iterators . . . . .	26
10.2.1	C++ iterators implementation . . . . .	26
10.2.2	Invalidation . . . . .	27
10.3	C++ specific features . . . . .	27
10.3.1	Inheritance . . . . .	27
10.3.2	Inlining . . . . .	27
10.3.3	Memory management . . . . .	27
10.3.4	Potential Problems . . . . .	27
<b>11</b>	<b>Functional Programming</b>	<b>28</b>
11.1	FP language families . . . . .	28
11.2	Haskell basics . . . . .	29
11.3	More on Haskell features . . . . .	29
11.3.1	Function Types . . . . .	30
11.3.2	Loops and Recursion . . . . .	30
11.3.3	Higher-Order functions . . . . .	31

# Chapter 1

## Introduction

### 1.1 19 - Settembre

#### 1.1.1 Info and Contact

[Pagina del corso](#)

#### 1.1.2 Framework

A software **framework** is a collection of common code providing generic functionality that can selectively overridden or specialized by user code providing specific functionality.

When using *frameworks* there is an **inversion of control**. Differently from what happens when using libraries, the program-flow is dictated by the framework, not the caller.

#### 1.1.3 Design Patterns

A **design pattern** is a general reusable solution to a commonly occurring problem within a given context in software design. A design pattern is characterized by:

- ◊ **Name**
- ◊ **Problem Addressed**
- ◊ **Context** - Used to determine applicability
- ◊ **Forces** - Constraints or issues that the solution must address
- ◊ **Solution** - It must resolve all *forces*

### 1.2 20 - Settembre

Useful tool, to see preprocessor output, compiling, ecc.

#### 1.2.1 Programming Languages

A **PL** is defined via **syntax**, **semantics** and **pragmatics**<sup>1</sup>.

##### Syntax

Used by the compiler for *scanning* and *parsing*. The *lexical* grammar defines the syntax of token (e.g. "for" blocks, constants)

##### Semantics

Semantics might be described using natural language, which even if precise, allows ambiguity. Formal approaches to semantics definition are:

1. Denotational - Mapping every syntactic entity with a mathematical entity
2. Operational - Defining a computation relation in a form  $e \Rightarrow v$ , where  $e$  is a program
3. Axiomatic - Based on Hoare-triples  $Precondition \wedge Program \Rightarrow Postcondition$

However, they rarely scale to fully-fledged programming languages.

---

<sup>1</sup>the way in which the PL is intended to be used in practice

## Pragmatics

*Pragmatics* include coding conventions, guidelines for elegant code, etc.

### 1.2.2 Programming Paradigms

Paradigms belong to languages *pragmatics*, not to the way the language is defined, i.e. not syntax nor semantics.

1. **Imperative**
2. **Object-oriented**
3. **Concurrent** - Processes, communication, ...
4. **Functional**
5. **Logic** - Assertions, relations, *strange sorceries*...

Modern PLs, provide constructs and solutions to program in all these paradigms

### 1.2.3 Implementing PLs

- ◇ Programs written in **L** must be *executable*
- ◇ Every language **L** implicitly defines and *Abstract Machine*  $M_L$  having **L** as a Machine Language
- ◇ Implementing  $M_L$  on an existing host machine  $M_O$  via compilation or interpretation (or both) makes programs written in **L** executables


An **Abstract Machine**  $M_L$  for  $L$  is a collection of data structures and algorithms which can perform the storage and execution of programs written in **L**.

Viceversa,  $M$  defines a language  $L_M$  including all programs which can be executed by the interpreter  $M$ .

There is a bidirectional correspondance between machines and languages components.

<i>Primitive data processing</i>	$\longleftrightarrow$	<i>Primitive data types</i>
<i>Sequence control</i>	$\longleftrightarrow$	<i>Control structures</i>
<i>Data transfer control</i>	$\longleftrightarrow$	<i>Parameter passing and value return</i>
<i>Memory management</i>	$\longleftrightarrow$	<i>Memory management</i>

## General structure of the Interpreter

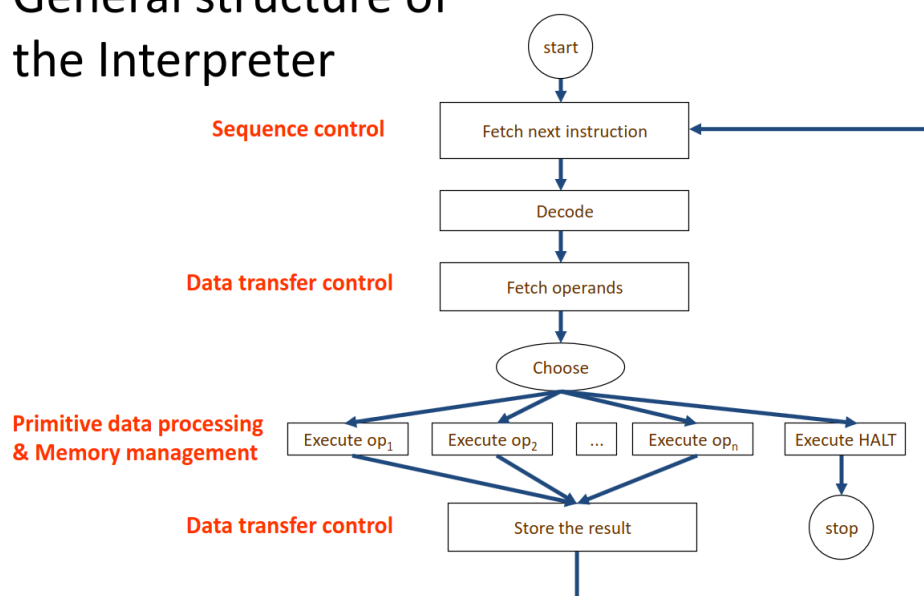


11

In computer science one of the main focuses is **abstraction**, as can be seen in this hierarchical scheme.

## Hierarchies of Abstract Machines

- Implementation of an AM with another can be iterated, leading to a hierarchy (onion skin model)
- Example:

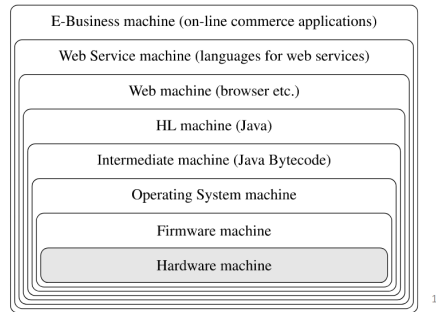

A software component is a unit of composition with contractually specified interfaces and explicit context dependencies only. A software component can be deployed independently and is subject to composition by third parties.

### Implementing PLs - Wrap Up

- ◇  $L$  High-level programming language
- ◇  $M_L$  Abstract machine for  $L$
- ◇  $M_O$  host machine

#### Pure Interpretation

...PIC HERE

$M_L$  is interpreted over  $M_O$ . It isn't very efficient, mainly because of fetch-decode phases

#### Pure Compilation

...PIC HERE

$L$  programs are translated into  $L_O$ , the machine language of  $M_O$ , hence,  $M_L$  is not realized at all and the programs are directly executed on  $M_O$ .

*Compilation* is more efficient than *Interpretation*, but produced code is larger

#### Both

...PIC HERE

All real languages use both *interpretation* and *compilation*,

Some languages, e.g. Java, use an intermediate Abstract Machine, called a *Virtual Machine*, which increases *Portability* and *Interoperability*.

# Chapter 2

## JVM

25 - Settembre

### 2.1 Runtime System

Every language defines an **execution model**, which is (partially) implemented by a **runtime system**, providing runtime **support** needed by both *compiled* and *interpreted* programs.

A **Runtime system** includes (eventually):

- ◊ Code:
  - in the executing program generated by the compiler
  - running in other threads/processes ]
- ◊ Language libraries
- ◊ Operating system functionalities
- ◊ The interpreter/virtual machine itself

**Runtime support** can be needed for various reasons:

- ◊
  - Memory Management → Stack Management
  - Heap Management
- ◊
  - I/O operations → File System
  - Sockets
  - I/O devices
- ◊ Intercation with runtime environment
- ◊ Parallel execution (threads/processes)
- ◊ Dynamic binding type checking
- ◊ Dynamic loading and linking of modules
- ◊ Debugging
- ◊ ¿Code Generation?
- ◊ ¿Verification and Monitoring?

#### 2.1.1 JRE

The **Java Runtime Environmnet** includes **JVM** and **JCL** (*Java Class Library*).

### 2.2 JVM

**JVM** is an *abstract* machine, defined by the documentation, which omits details on stuff like memory layout of runtime data area, garbage-collection, internal optimization, and even the representation of the **null** constant. The JVM specification, instead, defines precisely a machine independent "*class file format*" that all JVM implementations must support; it also imposes strong **synctatic** and **structural constraints** on the code in a class file.


The **JVM** is not *register-based*, instead it is a *multi-threaded **stack**<sup>1</sup> based machine*. Id est the JVM pops intructions

---

<sup>1</sup>Not to be confused with the stack of activation records!

from the top of **operand stack** of the current frame, and pushes their result on the top of the **operand stack**. The **operand stack** is used to:

- ◇ Pass arguments to functions
- ◇ Return results from a function
- ◇ Store intermediate values while evaluating expressions
- ◇ Store local variables

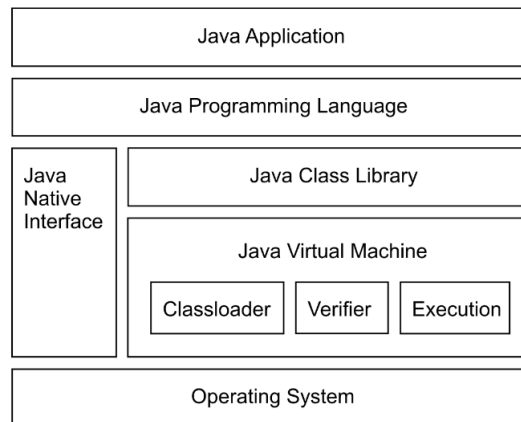

## 2.2.1 Data types

`.class` file are platform independent external representations, which are represented internally by the JVM using simpler data types, which are implementation dependent.


- ◇ **Primitive types**
  - Numerica integral
  - Numeric floating point
  - boolean (support only for arrays)
  - internal (for exception handling)
- ◇ **Reference types**
  - Class types
  - Array types
  - Interface types

No type information on local variables at runtime, there are only operand types specified by **opcodes** e.g. `iadd`, `fadd`, ...

◇

## 2.2.2 Threads

There are some runtime areas of the JVM related to a single thread, while others are shared among threads

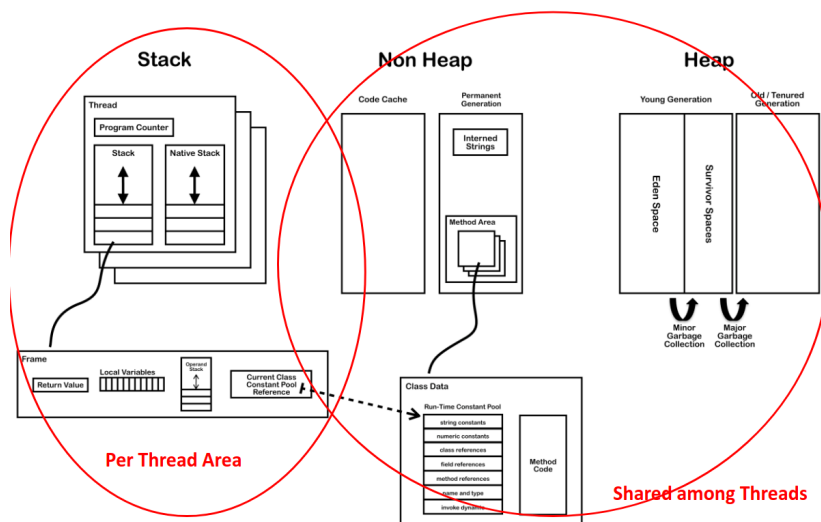

16

All Java Programs are multithreaded, since there is at least a **main** thread running the user's program, and many



daemons:

- ◊ Garbage collector
- ◊ Signal Dispatching
- ◊ Compilation
- ◊ ¿ ... ?

JVM doesn't pose strong implementation constraints, by defining a precise abstract consistency model, including volatiles, allowing non-atomic longs and doubles, distinguishing working-memory and general store.

### 2.2.3 per-thread Data Areas

- ◊ **pc** pointer to next instruction in *method area*  
*undefined* if current method is native
- ◊ **Java stack**: stack of *frames* (or *activation records*)
- ◊ **Native stack**: used for invocation of native functions through the *Java Native Interface (JNI)*

Considering the **structure** of **frames**, each one is composed by:

- ◊ **Local Variable Array** (32 bits) containing:
  1. Reference to **this**
  2. Method parameters
  3. Local variables
- ◊ **Operand stack**
- ◊ Reference to **Constant Pool** of current class

Differently from C/C++, where the **linking** phase is done before running an executable, java computes linking **dynamically** at **runtime**; this is achieved using **symbolic** references, which can be resolved using *static* (eager) or *late* (lazy) resolution.

Since the execution of a Java program must **not** depend on the JVM implementation, the JVM always behaves as if the implementation implies *lazy* resolution, even if the actual implementation provides static resolution instead.

### 2.2.4 shared data areas

#### Heap

- ◊ Memory for objects and arrays
- ◊ No explicit deallocation, it is demanded to the garbage collection.

#### Non-Heap

Memory for objects never deallocated

- ◊ Method area
- ◊ Interned strings
- ◊ Code cache for JIT

*Just In Time* (JIT) compilation refers to profiling as "hot" code areas of bytecode which may be executed many times, and storing the compiled native code in a cache in the *Non-heap* memory.

#### Method-area

Here **class** files are loaded. For each class a classloader reference and the following info from the **class** file are stored:

- ◊ Runtime Constant Pool
- ◊ Field data
- ◊ Method data
- ◊ Method code

Method area is *shared* among threads! Access to it must be *thread safe*.

This should be a **permanent** area of the memory, but it may be **edited** when a new class is loaded or when a symbolic link is resolved by dynamic linking.

## 26 - Settembre

### Constant Pool

Contains constants and symbolic references for dynamic binding. It is possible to see the constant pool of a compiled `.class` file using the command:

```
javap -v name.class
```

Displaying something resembling to:

```
#1 = Methodref          #6.#14          // java/lang/Object.<init>():()V
#2 = Fieldref           #15.#16         // java/lang/System.out:Ljava/io/PrintStream;
#3 = String             #17            // Hello World
#4 = Methodref          #18.#19         // java/io/PrintStream.println:(Ljava/lang/
    String;)V
#5 = Class              #20            // com/baeldung/jvm/ConstantPool
#6 = Class              #21            // java/lang/Object
#7 = Utf8               <init>
#8 = Utf8               ()V
#9 = Utf8               Code
#10 = Utf8              LineNumberTable
#11 = Utf8              sayHello
#12 = Utf8              SourceFile
```

### 2.2.5 Loading

**Loading** is finding the binary representation of a class or interface type with a given name and creating a class or interface from it.

Class (or Interface) *C* creation is *triggered* by other classes **referencing** *C* or by methods (e.g. reflection). If not previously loaded, `loader.loadClass` is invoked.

There are 4 **Classloaders**:

1. **Bootstrap CL**: loads basic Java APIs
2. **Extension CL**: loads classes from standard Java extension APIs
3. **System CL**: loads application classes from *classpath* (default application CL)
4. **User Defined CLs**: can be used for:
  - ◊ runtime classes reloading
  - ◊ loading network, encrypted files or on-the-fly generated classes
  - ◊ supporting separation between different groups of loaded classes as required by web servers

### Runtime Constant Pool

### 2.2.6 Linking

**Linking** includes *verification*, *preparation*, *resolution*.

1. **Verification** multiple checks at runtime, e.g. operand stack under/overflows, validity of variable uses and stores, validity arguments type. Details later on
2. **Preparation** Allocation of storage
3. **Resolution**<sup>2</sup> resolve symbol references by loading referred classes/interfaces

**Verification** is a relevant part of JVM Specification, it is described in 170pp over a total of 600pp. When a class file is loaded there is a *first* verification pass to check formatting, there is a *second* one when a class file is linked regarding only not instruction-dependant checks. During the linking phase there is a data-flow analysis on each method (*third check*), and lastly (*fourth check*) when a method is invoked for the first time.

### 2.2.7 Initialization

`<clinit>` initialization method is invoked on classes and interfaces to initialize class variables; it also executes static initializers. `<init>` initialization method instead is used for instances.

---

<sup>2</sup>Optional, it may be postponed till first use by an instruction

# Chapter 3

## JVM Instr Set & JIT

### 3.1 Instruction Set

#### 26 - Settembre

Let's consider the instructions **format**. Each instr may have different *"forms"* supporting different kinds of operands. For example there are different forms of **iload** (i.e. push).

Runtime memory contains - Local variable array (frame) – Operand stack (frame) – Object fields (heap) – Static fields (method area)

Note that Java instructions are explicitly typed through **opCodes**, e.g. **dload, iload, fload**.

**opCodes** are bytes, allowing only for 256 distinct ones; hence it is impossible to have for each instruction an opCode per type. The JVM specification indicates a selection of which types to support for each op instruction, and not supported types have to be converted; resulting in the Instruction Set Architecture to present non-orthogonality. Types like **byte**, **char** and **short** are usually converted to **int** when performing computations.

#### 27 - Settembre

##### 3.1.1 Invoking methods

**invokevirtual** causes the allocation of a new frame, pops the arguments from the stack into the local variables of the caller (putting this in 0), and passes the control to it by changing the **pc**.

- ◊ A resolution of the symbolic link is performed
- ◊ **ireturn** pushes the top of the current stack to the stack of the caller, and passes the control to it. Similarly for **dreturn**, **freturn** ...
- ◊ **return** just passes the control to the caller

There are 4 others kinds of method invocation:

- ◊ **invokestatic**: call methods with **static** modifier; *this* is not passed
- ◊ **invokespecial**: call constructors, **private** methods or *superclass* methods; *this* is always passed
- ◊ **invokeinterface**: identical to **invokevirtual**, but used when the method is declared in an interface, thus a different lookup is required
- ◊ **invokedynamic**: introduced in Java 7 to support dynamic typing<sup>1</sup>

(...)

### 3.2 JIT

**AOT Ahead of Time Compilation** leads to better performance in general, exploiting hardware features and variables allocation without runtime lookup; While **Interpretation** facilitates interactive debugging and testing: it allows

---

<sup>1</sup>lambda functions related?

command-line invocation.

**JIT** aims to get the advantages of both.

*JIT* differs from *AOT* since it runs in the same process of the application and competes with the app for resources, thus compilation time for JIT is more relevant than for an AOT Compiler. Besides, a JIT compiler doesn't verify classes at compile time, it is a task performed by the JVM at load time. JIT can exploit new optimization possibilities, e.g. *deoptimization* and *speculation*. A JIT takes bytecode as input and outputs machine code that the CPU executes directly.

Wrapping up:

- ◊ Code starts executing interpreted with no delay
- ◊ Methods that are found commonly executed (*hot*) are JIT compiled
- ◊ Once compiled code is available, the execution switches to it.

To identify *hot* methods, there is a **threshold** on two *per-method* counters:

1. Times the method is invoked
2. Times a brach back to the start of a loop is taken in the method

A tradeoff between "fast-to-start-but-slow-to-execute" interpreter vs "slow-to- start-but-fast-to-execute" compiled code is managed by a multi tier system.


(...)

### 3.2.1 Deoptimization and Speculation

Usually method executions pass in three phases:

Interpreter  $\longrightarrow$  Low tier compiler  $\longleftrightarrow$  Optimizing compiter

But sometimes **deoptimization** can happen, i.e. :



# Chapter 4

## Component-Based software

### 2 - Ottobre

Component software indicates **composite systems** made of **software components**. In short, component software allows reuse, improving reliability<sup>1</sup> and reducing costs.

Bertrand Meyer suggests some guidelines regarding Object-Oriented software construction (1997):

1. modular
2. reliable
3. efficient
4. portable
5. timely

### 4.1 Definitions

*A **software component** is a unit of composition with contractually specified **interfaces** and explicit context dependencies only. A software component can be deployed independently and is subject to composition by third parties.*

A **contract**, A specification attached to an **interface** (component specification) that mutually binds the clients and providers of the components.

**Context dependencies** are specification of the deployment environment and run-time environment. This goes beyond the simple interfaces required and provided which are specified in the contract. Context dependencies include required tools, platform and resources.

**Deployed independently** means that a component can be plugged or unplugged from an architecture, even at runtime in some cases. It is common-practice to deploy "small components" called connectors, to resolve situations where two components supposed to interact do not provide identical interfaces, creating the need for a intermediary.

**composition by third party** means that a component may interact with third parties components without knowing the internals of such components.

### 4.2 Concepts of Component Model

- ◇ **Component interface** describes the operations implemented and exposed by the component
- ◇ **Composition mechanism** How components can be composed to work together to accomplish a task
- ◇ **Component platform** A platform for the development of the components

Concepts should be language/paradigm agnostic, laying the ground for language interoperability.

The ancestors of Components are **Modules**, whose support has been introduced in Java 9, but isn't very common. Some concepts related to modules can be found in more modern notions such as classes, components and packages. For example, objects inside a module are visible to each other, but not visible from outside unless exported. Modules

---

<sup>1</sup>Industries may even require to use *certified* components

worked — pretty much like classes — as abstraction mechanism → *collection of data with operations defined on them*. In OOP the concept of **inheritance**, unknown in modules, is introduced.

## 4.3 Components and Programming Concepts

Components can be anything and can contain anything, they can be *collections of* classes, objects, functions/algorithms, data structures.

*¡Note that **OOP** ≠ **COP**!*

OOP isn't focused on **reuse**, instead its focus is onto appropriate domain and problem representation.

- ◇ **Component Specification** describes the behavior (as a set of *Interfaces*) of a set of Component Objects and defines a unit of implementation.
- ◇ **Component Implementation** is a realization of *Component Specification* which can be independently deployed<sup>2</sup>.
- ◇ **Installed Component** is an installed (i.e. *deployed*) copy of a *Component Implementation*.  
A Component Implementation is deployed by registering it with the runtime environment
- ◇ **Component Object** is an instance of a *Component Implementation*. It is a runtime concept, an object with its own data and unique identity. Ideally, it is the "thing that performs the implemented behaviour". An *Installed Component* may have multiple *Component Objects*

Some examples of successful components are Plugin architectures, Microsoft's Visual Basic, Operating Systems, Java Beans, and others. It is clear that components can be purchased by independent providers and deployed by the clients, and that multiple components can coexist in the same installation. Besides, components exist on a level on abstraction where they directly mean something to the deploying client.

Recalling the comparison with modules, while modules are usually seen as part of a program, *components are parts of a system*.

---

<sup>2</sup>It does **not** mean that it cannot have *dependencies* nor that it must be a *single file*

# Chapter 5

## Java Beans

### 5.1 3 - Ottobre

"A **Java Bean** is a *reusable* software component that can be manipulated visually in a builder tool."

Typically a Bean has a GUI representation but is not necessary. What is necessary instead for a class to be recognized as a bean is that it:

- ◊ has a public constructor with no arguments
- ◊ implements `java.io.Serializable`
- ◊ is in a `jar` file with a *manifest* file that contains: `Java-Bean: True`

Beans can be **assembled** to build a new bean or application, writing clue code to wire beans together. *Connection-oriented* programming is based on the **Observer** or (*Publish-Subscribe*) paradigm. *Observers* come into play when there is a 1 : N dependency between objects and one of them changes state, creating the need for the others to be notified and updated. Beans must be able to run in a *design environment* allowing the user to customize aspect and behaviour. Beans provide support for some standard features:

1. **Properties** e.g. `color`. **Bounded** properties generate an *event* of type `PropertyChangeEvent`, while **constrained** can only change value if none of the registered *observers* "poses a veto", by raising an *exception* when they receive the `PropertyChangeEvent` object.
2. **Events**: The **Observer** pattern is based on *Events* and *Events listeners*. An *event* is an object created by an *event source* and propagated to the registered *event listeners*. Sometimes event **adaptors** can be placed between source and listener, which might implement queuing mechanism, filter events, demuxing from many sources to a single listener.

- ◊ **Design Patterns for Events**

```
public void add<EventListType>(<EventListType> a)
public void remove<EventListType>(<EventListType> a)
```

3. **Customization**

4. **Persistence**

5. **Introspection**: process of analyzing a bean to determine capabilities. There are implicit methods based on *reflection*, *naming conventions* and *design patterns*, but can be simplified by explicitly defining info for the builder tool in the `<BeanName>BeanInfo` class. Such class allows exposition of features, specifying customizer class, segregate feats in normal/expert mode, and some other stuff.

- ◊ **Design Patterns for Simple Methods**

```
public <PropertyType> get<PropertyName>();
public void set<PropertyName>(<PropertyType> a);
```

- ◊ **Design Patterns for Simple Methods**

```
public java.awt.Color getSpectrum (int index);
public java.awt.Color[] getSpectrum ();
public void setSpectrum (int index, java.awt.Color color);
public void setSpectrum (java.awt.Color[] colors);
```

# Chapter 6

## Reflection

9 - Ottobre

### 6.1 Introduction and Definitions

**Reflection** is the ability of a program to manipulate as data something representing the state of the program during its own execution. Another dimension of reflection is if a program is allowed to **read only**, or also to **change** itself.

- ◇ **Introspection** is the ability of a program to observe and therefore reason about its own state
- ◇ **Intercession** is the ability for a program to modify its own execution state or alter its own interpretation or meaning
- ◇ **Reification** is the mechanism of encoding execution state into data, which is needed by both *introspection* and *intercession*

**Structural** reflection is concerned with the ability of the **language** to provide a complete *reification* of both the *program* executed and its *abstract data types*.

**Behavioral** reflection is concerned instead with the reification of its<sup>1</sup> *semantics & implementation* (processor) and the data and implementation of the *run-time system*.

### 6.2 Uses and drawbacks

#### 6.2.1 Uses

- ◇ *Class Browsers* need to be able to enumerate the number of classes
- ◇ *Visual Development Environments* can exploit type info available in reflection to aid the developer in writing correct code
- ◇ *Debuggers* need to be able to examine private members on classes
- ◇ *Test Tools* exploit reflection to ensure a high level of code coverage in a test suite
- ◇ *Extensibility Features* an app may make use of external, user-defined classes by creating instances of extensibility objects.

#### 6.2.2 Drawbacks

- ◇ **Performance Overhead**
- ◇ **Security Restrictions**
- ◇ **Exposure of internals**

### 6.3 Reflection in Java

Java supports **introspection** and **reflexive invocation**, but not *code modification*.

---

<sup>1</sup>referred to a **language**



### 6.3.1 Introspection

The JVM maintains for every type an associated object of type `java.lang.Class` which "*reflects*" the type it represents, acting as entry point for reflection, since it provides all info needed:

- ◊ Class name and modifiers
- ◊ Extended superclasses and implemented interfaces
- ◊ Methods, fields, constructors, etc.

To retrieve such `java.lang.Class` object it is sufficient to do `Object.getClass()`. `Class` objects are constructed automatically by the JVM as classes are loaded.

Using `java.util.reflect.*` it is possible also to retrieve class **Members** i.e. *fields*, *constructors* and *methods*. The extensive `java.util.reflect.*` API provides many *methods* to achieve this which will not be reported here.

There is a class for each Member

- ◊ `java.util.reflect.Field`: access type info and set/get values.
- ◊ `java.util.reflect.Method`: type info for parameters and return type; invoking method on a given object.
- ◊ `java.util.reflect.Constructor`: note that constructors have no return values and invocation creates a new instance of the given class.

### 6.3.2 Program Manipulation

By now we have talked only about **introspection** in java, but reflection can be used also to create objects of a type not known at compile time, or to access members (access fields or invoke methods) unknown at compile time.

# Chapter 7

## Annotations

### 9 - Ottobre

In java, `static`, `private`, ... modifiers are *meta-data* describing properties of program elements. **Annotations** can be understood as (user-) definable modifiers. They are composed by one or two parts:

1. **name**
2. finite number of **attributes** i.e. `name=value`. There may be no attributes.

The syntax is the following:

```
@annName           // e.g. Override
@annName{constExp} // shorthand for @annName{value=constExp}
@annName{name_1 = constExp_1, ..., name_k = constExp_k}
```

`constExp` are expression which can be evaluated at *compile time*. Besides, attributes have a *type*, thus the supplied values have to be convertible to that type.

Annotations can be applied to almost any syntactic element, from packages to parameters and any type use.

### 7.1 Defining annotations

```
@interface InfoCode {
    String author ();
    String date ();
    int ver () default 1;
    int rev () default 0;
    String [] changes () default {};
}
```

This defines the custom annotation `InfoCode`, imposing some fields possibly with default values. It can be used as follows:

```
@InfoCode(author="Beppe", date="10/12/07")
public class C {
    public static void m1() { /* ... */ }
    @InfoCode(author="Gianni",
        date="4/8/08", ver=1, rev=2)
    public static void m2() { /* ... */ }
}
```

## Chapter 8

# Polymorphism

Polymorphism basically means "*many forms*", where *forms* are **types**. Thus there may be *polymorphic* function names, or *polymorphic* types.

There are many "flavors" of polymorphism, many variations. Two main kinds opposed to each other are *ad hoc* and *universal* polymorphism, which however, may coexist:

- ◇ **ad hoc** PM indicates that a single function name denotes different algorithms, determined by the actual types.
- ◇ **universal** PM indicates a single algorithm (solution) applicable to objects of different types.

When PM is taken into account, it is crucial to consider when happens the **binding** between a function name and the actual code to be executed:

- ◇ compile time; *static/early binding*
- ◇ linking time
- ◇ execution time; *late/dynamic binding*

In general the earlier the binding happens, the better (for debugging reasons). If the binding spans over more phases (e.g. *overriding* in Java), as a convention we consider the **binding time** the last phase.

### 8.1 Classification

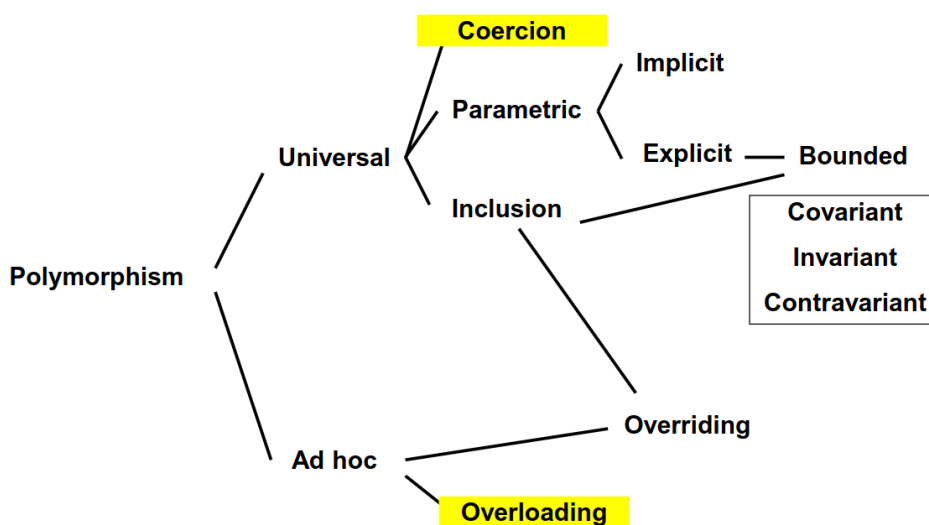


Figure 8.1: Polymorphism classification

#### 8.1.1 Overloading

**Overloading** is present in every language for basic operators  $+$   $-$   $*$ ..., and sometimes is supported for user-defined functions, and in some languages it is even allowed the overloading of primitive operator by user-defined functions.

Since this falls under the **ad hoc** polymorphism family, the code to be executed is determined by the type of the arguments; the binding can either happen at *compile* or at *runtime*, depending on the typing of the language, whether it is static or dynamic.

```
// C language doesn't allow overloading for user-defined functions
int sqrInt(int x) { return x * x; }
double sqrDouble(double x) { return x * x; }

// Overloading in Java & C++
int sqr(int x) { return x * x; }
double sqr(double x) { return x * x; }
```

Haskell introduces **type classes** for handling overloading in presence of type inference

## 8.2 Coercion

**Coercion** is the automatic (implicit) conversion of an object to a different type, opposed to casting which is explicit instead. Coercion allows a code snippet to be applied of arguments of different (convertible) types. Sometimes coercion is allowed only if there is no **information loss**.

```
double sqrt(double x){...}
double d = sqrt(5) // applied to int
```

## 8.3 Inclusion Polymorphism

Inclusion polymorphism is also known as *subtyping polymorphism* or **inheritance**. It is ensured by *Barbara Liskov's substitution principle*:

*A subtype object can be used in any context where a supertype object is expected*

Methods and fields defined in a superclass may be invoked and accessed by subclasses if not redefined (see *Overriding*).

## 8.4 Overriding

In Java a method *m* of a class *A* can be redefined in a subclass *B* of *A*.

Overriding introduces ad hoc polymorphism in the universal polymorphism of inheritance. Notice that overriding requires the final binding to happen at runtime: it happens through the lookup done by `invokevirtual` in the JVM.

## 8.5 C++ v Java

```
class A {
public:
    virtual void onFoo() {}
    virtual void onFoo(int i) {}
};
class B : public A {
public:
    virtual void onFoo(int i) {}
};
class C : public B {};
int main() {
    C* c = new C();
    c->onFoo();
    // Compile error - doesn't exist
}
```

The equivalent code in Java compiles, because in java invokes the function `onFoo()` with no arguments defined in the superclass *A*. In C++ instead, the function `onFoo(int i)` defined in *B* is found and stops the search, but there is arguments type mismatch, thus it doesn't compile. This happens because in C++ the method lookup is based on the method *name*, not on its *signature*.

## 8.6 C++ Templates

They are similar to *Generics* in Java, they are used as function and class templates each concrete instantiation produces a copy of the generic code, specialized for that type: monomorphization. In java Generics, instead, **type erasure** happens at runtime, i.e. type variables `T` are replaced by `Object` variables.

Templates support parametric polymorphism and type parameters can also be primitive types (unlike Java generics)

```
template <class T> // or <typename T>
T sqr(T x) { return x * x; }
```

Assuming to invoke `sqr(T x)` on variables of different types, the compiler will generate a specific code for each type used. This works even on user-defined types; check the following code for an example:

```
class Complex {
public:
    double real;
    double imag;
    Complex(double r, double im) : real(r), imag(im){};
    Complex operator*(Complex y) { // overloading of *
        return Complex(real * y.real - imag * y.imag,
                        real * y.imag + imag * y.real);
    }
};

Complex cc = sqr(c); // legal and produces a function "Complex sqr(Complex x) {...}"
```

It is important to check for type ambiguity; in the following example, it is highlighted a case where it's not clear whether it is `i` to be converted to `long` or `m` to `i`.

```
template <class T>
T GetMax(T a, T b) { return (a > b) ? a : b; }
...
n = GetMax(1, m);           // ok: GetMax<long>
// v = GetMax(i, m);       // no: ambiguous
v = GetMax<int>(i, m);      // ok
```

### 8.6.1 Macros

**Macros** can be exploited to achieve *polymorphism* and can have the same effect of the templates, but notice that macros are executed by the preprocessor<sup>1</sup> and are only **textual substitution**, there is no parsing, no static analysis checks or whatsoever.

```
#define sqr(x) ((x) * (x))
int a = 2;
int aa = sqr(a++); // int aa = ((a++) * (a++));
// value of aa? aa contains 6 :(

#define fact(n) (n == 0) ? 1 : fact(n-1) * n
// compilation fails because fact is not defined
```

## 16 - Ottobre

### 8.6.2 Specialization

A template can be **specialized** by defining a template with the same name but with more specific parameters (*partial specialization*) or with no parameters (*full specialization*). This is kinda similar to *Overriding*, leaving to the compiler the choice of the most appropriate template.

```
/* Primary template */
template <typename T> class Set {
    // Use a binary tree
};
/* Full specialization */
template <> class Set<char> {
    // Use a bit vector
};
```

<sup>1</sup>Macro expansion can be seen using the option `-E` when compiling

```

};
/* Partial specialization */
template <typename T> class Set<T*> {
    // Use a hash table
};

```

Templates can be used by a compiler to generate temporary source code, which is merged by the compiler with the rest of the source code and then compiled.

Template compilation happens *on demand*: the code of a template is not compiled until an instantiation is required, however in case of *fully-specialized* template, the compiler treats the template as a function, thus it generates its code **regardless** whether it is ever used or not.

Note that in C/C++ while method *prototypes* usually are in a separate .h file, the compiler needs the template *declaration* and *definition* in the same place to instantiate it.

# Chapter 9

## Generics

**Generics** are instance of *Universal Polymorphism* with explicit parameters (see Fig 8.1).

### 9.1 Methods

```
public static <T> T getFirst(List<T> list)
```

Invocations of generic methods must instantiate all type parameters, either explicitly or implicitly. Some sort of *type inference* is applied in case of implicit instantiation.

```
class NumList<E extends Number> {  
    void m(E arg) {  
        arg.intValue();    // OK, since...  
        // Number and its subtypes support intValue()  
    }  
}
```

Type parameters can also be **bounded** as in the above example, allowing methods (and fields) defined in the **bound** to be invoked on objects of the type parameter T.

There may be various kinds of type bounds:

```
<TypeVar extends SuperType>  
    // UPPER bound; SuperType and any of its subtype are ok.  
<TypeVar extends ClassA & InterfaceB & InterfaceC & ...>  
    // MULTIPLE UPPER bounds  
<TypeVar super SubType>  
    // LOWER bound; SubType and any of its supertype are ok
```

Unlike C++ where *overloading* is resolved and can **fail** after instantiating a template, in Java **type checking** ensures that overloading will succeed.

### 9.2 Inheritance and Arrays

There are two major issues which came up along with generics. The first one regards **inheritance**; consider the following example:

Since Integer is a *subtype* of Number,  
is List<Integer> *subtype* of List<Number>?

**NO!**

In a formal way, *subtyping is invariant* for Generic classes. Informally, given A,B concrete types, MyClass<A> has no relationship to MyClass<B>, even if A,B have one.

On the other hand if A **extends** B and are *generic* classes, then A<C> **extends** B<C> for any type C. For example, ArrayList<Integer> **extends** List<Integer>.

Note that the common parent of MyClass<B> and MyClass<A> is MyClass<?>.

Let's now discuss **covariance** and **contravariance**, with the aid of a few examples.

```
List<Integer> lisInt = new ...;
List<Number> lisNum = new ...;
lisNum = lisInt; // ??? - Reassign pointer
lisNum.add(new Number(...)); // NOT ALLOWED
listInt = lisNum; // ??? - Reassign pointer
Integer n = lisInt.get(0); // NOT ALLOWED
```

List<Integer> is neither a subtype or a supertype of List<Number>, thus the above operations aren't allowed. However there are *read-only* and *write-only* situations where they may be allowed.

```
RO_List<Integer> lisInt = new ...;
RO_List<Number> lisNum = new ...;
lisNum = lisInt; // ???
Number n = lisNum.get(0); // OK
```

It is ok to *read* a **supertype** starting from a **subtype**.

*covariance is safe if the type is read-only*

```
WO_List<Integer> lisInt = new ...;
WO_List<Number> lisNum = new ...;
lisInt = lisNum; // ???
lisInt.add(new Integer(...)); // OK
```

It is ok to *write* a **subtype** in the place of from a **supertype**.

*contravariance is safe if the type is write-only*

## 17 - Ottobre

### Other languages

In the case of **C#**, generic classes can be marked with the keyword **out** (*covariant*) or **in** (*contravariant*), otherwise the class is invariant. In **Scala** the same happens, but with the + or - operators.

Let's now discuss **arrays**.

Let **A** **extends** **B**, then **A[]** **extends** **B[]** even if instead **Array<A>** is not related to **Array<B>**.

Thus, *arrays in Java are covariant*.

However there is a counterpart, since this allows rule-breaking assignments which are allowed by the compiler but which lead to a runtime **ArrayStoreException**. This happens because the dynamic type of an array is checked at runtime. Knowing this, for each array update, a runtime check is performed by the JVM which throws the exception if needed.

```
Apple[] apples = new Apple[1];
Fruit[] fruits = apples; // Ok, covariance
fruits[0] = new Strawberry(); // Compiles!
// Throws ArrayStoreException at runtime
```

After compilation Generic are all **type-erased** to **Object** or to their first *bound*, if present. This choice has been made mainly for compatibility with legacy code, leading all instances of the same generic type to have the same type at runtime; i.e.

```
List<String> lst1 = new ArrayList<String>();
List<Integer> lst2 = new ArrayList<Integer>();
assert(lst1.getClass() == lst2.getClass())
```

### 9.2.1 Generic Arrays

What about *arrays of generics*? Such arrays in Java are **not allowed**, because every array update needs a runtime check which is impossible to perform on generics, since at runtime generics are all of the same type due to *type-erasure*.



## 9.3 Wildcards

**Wildcards** are strongly related to the topic of *covariance* and *contravariance*.

As briefly mentioned before, wildcards are the only relationship between generic classes.

To use *wildcards*, the **PECS** principle is applied: *Producer Extends, Consumer Super*.

- ◇ ? **extends** T to **get** values from a *Producer*: **covariance** allowed
- ◇ ? **super** T to **insert** values into a *Consumer*: **contravariance** allowed
- ◇ Never use ? when both insertion and retrieving is needed, T is sufficient and way more appropriate.

Wildcards improve type-safety, allowing a program to fail at *compile-time* instead of *runtime*.

```
List<Apple> apples = new ArrayList<Apple>();
List<? extends Fruit> fruits = apples;
fruits.add(new Strawberry()); // COMPILING FAILS
```

## 9.4 Generics Limitations

- ◇ Cannot instantiate Generics with primitive types:

```
|         ArrayList<int> a = ...                               // compile error
```

- ◇ Cannot create instances of type parameters
- ◇ Cannot declare static fields whose types are type parameters

```
|         public class C<T>{ public static T local; ...}
```

Because static fields are represented in the **unique** representation of the class in the dedicated static memory area of the JVM for classes

- ◇ Cannot use casts or instanceof with parameterized types

```
|         mylist instanceof ArrayList<Integer>                // fails
|         mylist instanceof ArrayList<?>                      // OK
```

- ◇ Cannot Create arrays of parameterized types
- ◇ Cannot create, catch, or throw objects of parameterized types
- ◇ Cannot overload a method where the formal parameter types of each overload erase to the same raw type.

```
|         public class Example {                               // does not compile
|             public void print(Set<String> strSet) { }
|             public void print(Set<Integer> intSet) { } }
```

# Chapter 10

## Standard Templates Library

17 - Ottobre

The goal of STL is to represent algorithms in as general form as possible without compromising efficiency. There is an extensive use of **templates**, **overloading** and **iterators**, which are used for decoupling algorithms from containers, and can be seen as an abstraction of pointers.

STL is very different from the *Java Collection Library* since it does **not** use *dynamic binding* and is **not** *object oriented*; instead the STL uses only *static binding* and *inlining*.

### 10.1 Main Entities

- ◇ **Container** collection of *typed* objects
- ◇ **Iterator** Generalization of pointer or address; used to step through the elements of collections
- ◇ **Algorithm** initializing, sorting, searching, and transforming contents of containers
- ◇ **Adaptor** Convert from one form to another e.g. iterator from updatable container; or stack from list
- ◇ **Function Object** Form of closure (class with "operator()" defined)
- ◇ **Allocator** encapsulation of a memory pool

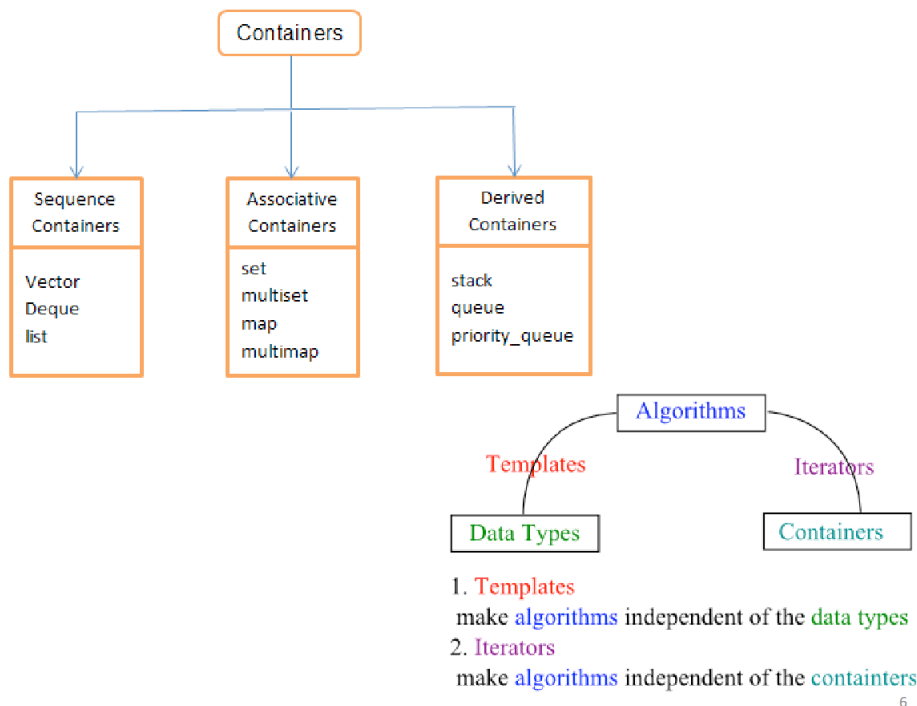


Figure 10.1: TIKZ RE-DO : STL Containers

## 10.2 Iterators

Since algorithms cannot be used *directly* on different kinds of collections, Iterators come in handy by providing a **uniform**, **linear** access to elements of different collections.

In **Java** iterators are supported by the *JCF*<sup>1</sup> through the interface `Interface<T>`. They are related to an **instance** of a class and are usually defined as *nested classes*, more precisely *non-static private member classes*. Collections equipped with iterators must **implements** `Iterable<T>` interface.

## 18 - Ottobre

In **C++** there is no `next/hasNext()` function, standard `++ --` operators are used instead.

In case of *arrays* pointers can be trivially used, since `int v[]` is no different `int *v`<sup>2</sup>. In the case of *vector* instead, an actual *iterator* may be instantiated, but the operator `++` stays the same.

```
vector<int> vec;
vector<int>::iterator v = vec.begin();
while( v != vec.end()) {
    cout << "value of v = " << *v << endl;
    v++;
}
```

Every class in **C++** has its own iterator; more specifically, containers define and expose a type named iterator in the container's **namespace**, allowing the semantic value of `iterator` to change according to the context.

### 10.2.1 C++ iterators implementation

Typically iterators are implemented as `struct` and provide a visit of the container, retaining information about the **state** of the visit, e.g. pointer to next element, remaining elements, and so on. Note that in case of *trees* or *graphs* the visit's state may not be trivial to be represented.

```
template <class T>
struct v_iterator {
    T* v;
    int sz;
    v_iterator(T* v, int sz) : v(v), sz(sz) {}
    // != implicitly defined
    bool operator==(v_iterator& p) { return v == p->v; }
    T operator*() { return *v; }
    v_iterator& operator++() { // Pre-increment
        if (sz)
            ++v, --sz;
        else
            v = NULL;
        return *this;
    }
    v_iterator operator++(int) { // Post-increment!
        v_iterator ret = *this;
        ++(*this); // call pre-increment
        return ret;
    }
};
```

Container	<i>insert/erase</i>		
	beginning	middle	end
<i>vector</i>	linear	linear	amortized constant
<i>list</i>	constant	constant	constant
<i>deque</i>	amortized constant	linear	amortized constant

Table 10.1: **Guaranteed** time complexity for iterators

To achieve transparency to third-party algorithms STL assumes *constant* time for every operation, and allows 5 types of operators:

<sup>1</sup>Java Collection Framework

<sup>2</sup>At least from an "accessing values" point of view, there are some differences in terms of static/dynamic allocation of memory.

- ◊ *Forward iterators* only dereference and pre/post increment
- ◊ *Input (and Output) iterators* same as *forward iterators* but with possible issues when dereferencing
- ◊ *Bidirectional iterators* dereference, pre/post increment and decrement
- ◊ *Random access iterators* same as *Bidirectional* but allow also integer sum ( $p + n$ ) and difference ( $p - q$ )

Each category defines only the functions which take constant time. Not all iterators are defined for all containers, e.g. since *random access* takes *linear* time on lists, there is no *random access* iterator on *lists*.

### 10.2.2 Invalidation

When a container is *modified*, iterators *may* become **invalid**: no "exception" is thrown, iterators can still be used, but their behaviour is **undefined**. *Not every operation* invalidates iterators, it depends on the operation and on the container.

The main limiting aspect of STL's iterators is that they provide a **linear view** of the container, allowing the definition of operations only on one-dimensional containers; thus, if it is needed to access the organization of the container (e.g. tree custom visist), the only way-to-go is to define a custom iterator which behaves as desired.

## 10.3 C++ specific features

### 10.3.1 Inheritance

STL relies on typedefs combined with namespaces to implement genericity, the programmer always refers to `container::iterator` to know the type of the iterator. Note that there is no relation among iterators for different containers (!), if not a semantically abstract one. The reason for this is **performance**: without *inheritance*, types are resolved at compile time and the compiler may produce better and optimized code. On the other hand sacrificing inheritance may lead to lower expressivity and lack of type-checking; in fact, STL relies only on coding conventions: when the programmer uses a wrong iterator the compiler complains of a bug in the library.

### 10.3.2 Inlining

C++ standard has the notion of **inlining** which is a form of semantic macros. Inline methods should be available in header files and can be labelled *inline* or defined within class definition, invocation on such methods is type-checked and then it is replaced by the method body. The compiler tends to (automatically?) inline methods with small bodies and without iteration; it is able to determine types at compile time and usually does inlining of function objects.

### 10.3.3 Memory management

STL abstract from the specific memory model using a concept named **allocators**. All the information about the memory model is encapsulated in the **Allocator** class. Each container is parametrized by such an allocator to let the implementation be unchanged when switching memory models.

### 10.3.4 Potential Problems

The problem may be error checking: almost all facilities of the compiler fail with STL resulting in lengthy error messages that ends with error within the library

# Chapter 11

## Functional Programming

**Functional Programming** languages radicate their roots in the Church's model of computing known as *lambda calculus*. Such model is based on the notion  $\Lambda$  – *parametrized expressions*, with the focus on defining mathematical functions in a constructive and effective way. The computation proceeds by substituting parameters into expressions.

Functional programming languages such as *Lisp*, *Scheme*, *FP*, *ML*, *Miranda* and *Haskell* aim to implement Church's lambda calculus in the form of a programming language which does everything needed by **composing functions**, thus no *mutable state* and no *side effects*.

FPL<sup>1</sup> needs some key features which are often absent in *imperative* languages:

- ◊ 1<sup>st</sup>-class order and **high-order** functions: Functions can be *denoted*, passed as *arguments* to other functions, *returned* as result of function invocation
- ◊ **Recursion** opposed to "control variables"
- ◊ **Powerful list facilities**: Recursive functions exploit recursive definition of lists
- ◊ **Polymorphism** typically universal parametric implicit, which plays a key role when handling containers/collections.
- ◊ **Fully general aggregates**: there is a wide use of tuples and records, besides, data structures cannot be modified (*no state!*), they have to be re-created.
- ◊ **Structured function returns** allow to pass more meaningful information to the caller, avoiding the need for "side-effects".
- ◊ **Gargabe collection**

23 - Ottobre

### 11.1 FP language families

1. **LISP**: currently most used for *AI* after Python. Original LISP is no longer used, the current standard is *Common LISP* which introduced statical scope opposed to the dynamic one of *Original LISP* ; another version is called *Scheme*
2. **ML**: Common languages of this family are *Standard ML*, *Caml*, *OCaml*, *F#*. These are compiled languages, but intended for interactive use. ML results from the combination of Lisp and Algol-like features, including Garbage collection, Abstract data types, Module system and Exceptions
3. **Haskell**: Many features are shared with *ML* languages, but with some differences.
  - ◊ Type inference, Implicit parametric polymorphism, Ad hoc polymorphism (**overloading**) with type classes
  - ◊ **Lazy** evaluation, Tail recursion and continuations
  - ◊ **Purely functional** → precise management of side effects

---

<sup>1</sup>Short for *Functional Programming Languages*

## 11.2 Haskell basics

Basic types	◇ Unit	Other types	○ Patterns
	◇ Booleans		○ Declarations
	◇ Integers		○ Functions
	◇ Strings		○ Polymorphism
	◇ Reals		○ Type declarations
	◇ Tuples		○ Type Classes
	◇ Lists		○ Monads
	◇ Records		○ Exceptions

Note that basic types are written with the first letter Upper-cased.

Haskell provides an interactive read-eval-print interpreter (**ghci**): many examples are available in the lecture's slides, here we will discuss only some more interesting ones.

Variables (**names**) are bound to expressions, *without* evaluating them (because of *lazy evaluation*); the scope of the binding is the rest of the session.

```
ghci> let a = 3      -- 'let' can be omitted
ghci> b = a + 2
ghci> b
5
ghci> a = a + 1      -- okay, until here
ghci> a              -- infinite recursion
-- CTRL+C Manual Interrupt
ghci> x = 1:x
ghci> x              -- infinite ',1' print
```

Moving onto **anonymous functions** i.e. `\x -> ...` lambda notation

```
ghci> (\x -> x+1)5      -- apply 5 to anon function
6
ghci> f = (\x -> x+1)
ghci> f 5              -- brackets () can be omitted
6
ghci> h = \(x,y) -> x+y -- tuple Pattern instead of single variable
ghci> h (3,4)          -- brackets are needed here
7
ghci> h 3 4            -- brackets are needed here
-- ERROR
ghci> :t f
f :: Num a => a -> a
ghci> :t h
h :: Num a => (a, a) -> a
```

To declare explicit functions instead, the syntax is quite simple

```
f (x,y) = x+y --argument must match pattern (x,y)
```

```
reverse xs =      -- linear, tail recursive
  let rev ( [], accum ) = accum
      rev ( y:ys, accum ) = rev ( ys, y:accum )
  in rev ( xs, [] )
```

## 24 - Ottobre

### 11.3 More on Haskell features

Let's recall that Haskell is a **lazy** language, thus functions and data constructor don't evaluate arguments until they actually need them.

```
myData = [1,2,3,4,5,6,7]
twiceData = [2 * x | x <- myData]
-- [2,4,6,8,10,12,14]
```

```

twiceEvenData = [2 * x | x <- myData, x `mod` 2 == 0]
-- [4,8,12]

ghci> [ x | x <- [10..20], x /= 13, x /= 15, x /= 19]
      [10,11,12,14,16,17,18,20] -- more predicates
ghci> [ x*y | x <- [2,5,10], y <- [8,10,11]]
      [16,20,22,40,50,55,80,100,110] -- more lists
length xs = sum [1 | _ <- xs] -- anonymous (dont care) var
-- strings are lists...
removeNonUppercase st = [ c | c <- st, c `elem` ['A'..'Z']]

```

## Datatype declarations

```

data Color = Red | Yellow | Blue
data Atom = Atom String | Number
data List = Nil | Cons (Atom, List)

-- General form:
data <name> = <clause> | ... | <clause>
<clause> ::= <constructor> | <constructor> <type>

-- also possible to define Recursive data types
data Tree = Leaf Int | Node (Int, Tree, Tree)

Node(4, Node(3, Leaf 1, Leaf 2), Node(5, Leaf 6, Leaf 7))

-- it is possible to use constructors in pattern matching
sum (Leaf n) = n
sum (Node(n,t1,t2)) = n + sum(t1) + sum(t2)

```

Besides it is possible to match different cases with a specific **case** statement; note that **Indendation** in case statement **MATTERS**

```

data Exp = Var Int | Const Int | Plus (Exp, Exp)

case e of
  Var n -> ...
  Const n -> ...
  Plus(e1,e2) -> ...

-- Indendation in case statement MATTERS

```

### 11.3.1 Function Types

$f :: A \rightarrow B$  means that:

$$\forall x \in A f(x) = \begin{cases} \exists y = f(x) \in B \\ \text{run forever} \end{cases}$$

In other words, if  $f(x)$  terminates, then  $f(x) \in B$ . In ML, functions with type  $A \rightarrow B$  can throw an exception or have other effects, but **not** in Haskell.

### 11.3.2 Loops and Recursion

In FP **for** and **while** iterative loops are replaced by **recursive** subroutines calling themselves directly or indirectly (*mutual recursion*).

```

length' [] = 0
length' (x:s) = 1 + length'(s)
-- definition using guards and pattern matching
-- take' n lst returns first n elements of a list

```

```

take' :: (Num i, Ord i) => i -> [a] -> [a]
take' n _
| n <= 0 = []
take' _ [] = []
take' n (x:xs) = x : take' (n-1) xs

```

### 11.3.3 Higher-Order functions

Functions that take other functions as arguments or return a function as a result are **higher-order** functions.

```

applyTwice :: (a -> a) -> a -> a    -- function as arg and res
applyTwice f x = f (f x)

> applyTwice (+3) 10 => 16
> applyTwice (++ " HAHA") "HEY" => "HEY HAHA HAHA"
> applyTwice (3:) [1] => [3,3,1]

applyTwice' f = f.f                -- equivalent definition
:t (.)
> (.) :: (b -> c) -> (a -> b) -> a -> c

-- define the operator |> which inverts the order between function and argument
(|>) a f = f a
(|>) :: t1 -> (t1 -> t2) -> t2
-- Seems dull right?
-- Look at the following example

-- Here, the order of invocation is the same,
-- but the second "infix" form is (might be) more readable
> length ( tail ( reverse [1,2,3]))
2
> [1,2,3] |> reverse |> tail |> length
2

(+) :: Num a => a -> a -> a
> let f = (+) 5 // partial application
> :t f ==> f :: Num a => a -> a
> f 4 ==> 9
elem :: (Eq a, Foldable t) => a -> t a -> Bool
> let isUpper = ('elem' ['A'..'Z'])
> :t isUpper ==> isUpper :: Char -> Bool
> isUpper 'A' ==> True
> isUpper '0' ==> False

```

### Combinators

**map** *combinator* applies argument function to each element in a collection.

```

map :: (a -> b) -> [a] -> [b]
map _ [] = []
map f (x:xs) = f x : map f xs

```

**filter** takes a collection and a boolean predicate, and returns the collection of the elements satisfying the predicate. It is defined as follows:

```

filter :: (a -> Bool) -> [a] -> [a]
filter _ [] = []
filter p (x:xs)
| p x = x : filter p xs
| otherwise = filter p xs

```

And can be applied in the following way



```

> filter (>3) [1,5,3,2,1,6,4,3,2,1]
[5,6,4]
> filter (==3) [1,2,3,4,5]
[3]
> filter even [1..10]
[2,4,6,8,10]
> let notNull x = not (null x)
in filter notNull [[1,2,3],[],[3,4,5],[2,2],[],[],[]]
[[1,2,3],[3,4,5],[2,2]]

```

reduce (**foldl**,**foldr**): takes a collection, an initial value, and a function, and combines the elements in the collection according to the function.

```

-- folds values from end to beginning of list
foldr :: Foldable t => (a -> b -> b) -> b -> t a -> b
foldr f z [] = z
foldr f z (x:xs) = f x (foldr f z xs)
-- folds values from beginning to end of list
foldl :: Foldable t => (b -> a -> b) -> b -> t a -> b
foldl f z [] = z
foldl f z (x:xs) = foldl f (f z x) xs
-- variants for non-empty lists
foldr1 :: Foldable t => (a -> a -> a) -> t a -> a
foldl1 :: Foldable t => (a -> a -> a) -> t a -> a

```

Let's provide some examples:

```

sum' :: (Num a) => [a] -> a
sum' xs = foldl (\acc x -> acc + x) 0 xs

maximum' :: (Ord a) => [a] -> a
maximum' = foldr1 (\x acc -> if x > acc then x else acc)

reverse' :: [a] -> [a]
reverse' = foldl (\acc x -> x : acc) []

product' :: (Num a) => [a] -> a
product' = foldr1 (*)
product' = foldr (*) 1
-- Notice that product' [] returns 1 !

filter' :: (a -> Bool) -> [a] -> [a]
filter' p = foldr (\x acc -> if p x then x : acc else acc) []

head' :: [a] -> a
head' = foldr1 (\x _ -> x)
last' :: [a] -> a
last' = foldl1 (\_ x -> x)

```

TODO finish to read facultative slides