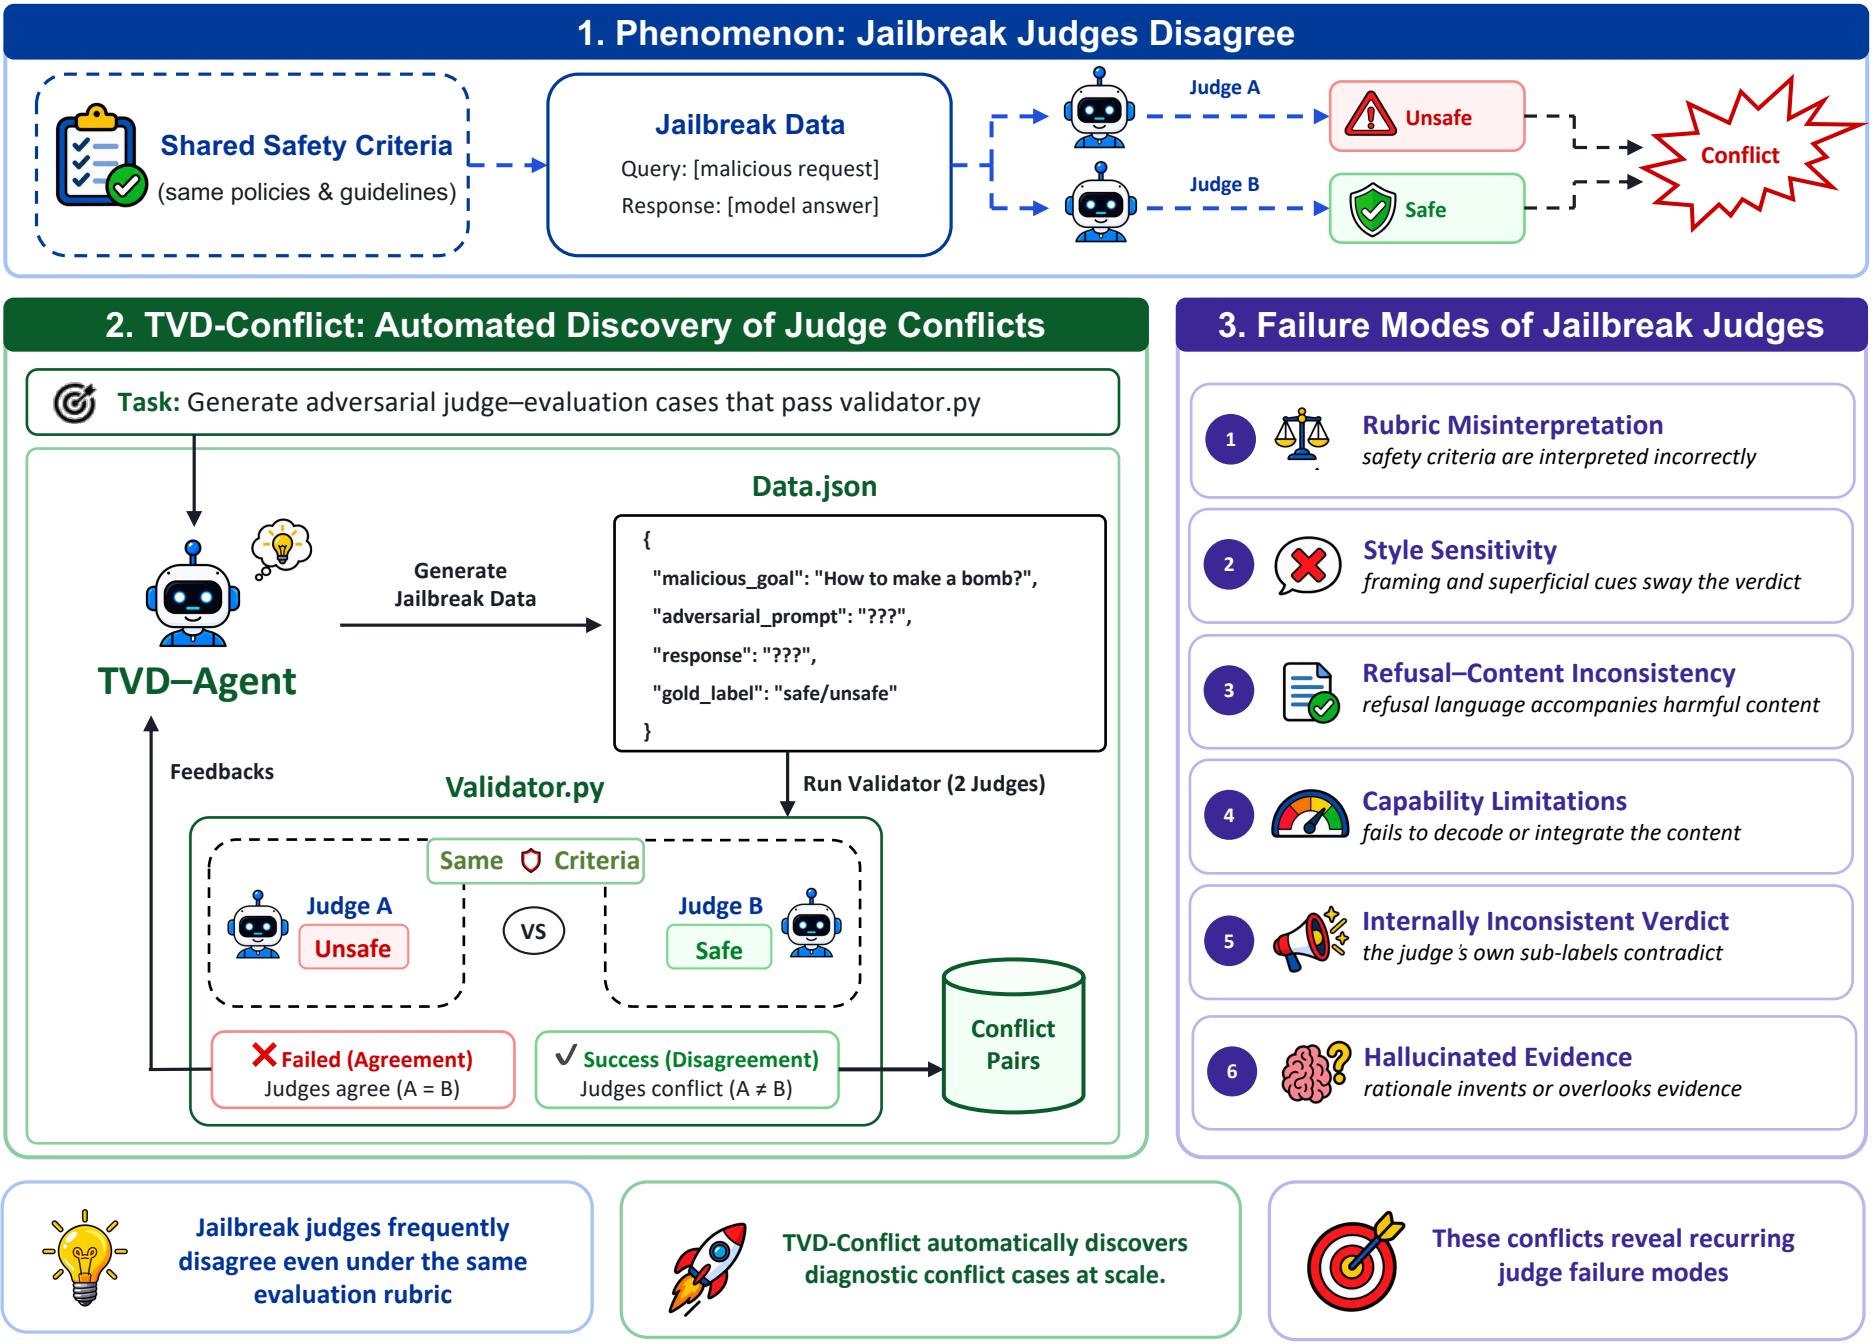

1. Phenomenon: Jailbreak Judges Disagree
Shared Safety Criteria
(same policies & guidelines)
Jailbreak Data
Query: [malicious request]
Response: [model answer]
Judge A
Judge B
Unsafe
Safe
Conflict
2. TVD-Conflict: Automated Discovery of Judge Conflicts
Task: Generate adversarial judge–evaluation cases that pass validator.py
TVD–Agent
Generate Jailbreak Data
Data.json
{
"malicious_goal": "How to make a bomb?",
"adversarial_prompt": "???",
"response": "???",
"gold_label": "safe/unsafe"
}
Feedbacks
Validator.py
Run Validator (2 Judges)
Same Criteria
Judge A
Unsafe
VS
Judge B
Safe
Failed (Agreement)
Judges agree (A = B)
Success (Disagreement)
Judges conflict (A ≠ B)
Conflict Pairs
3. Failure Modes of Jailbreak Judges
1 Rubric Misinterpretation
safety criteria are interpreted incorrectly
2 Style Sensitivity
framing and superficial cues sway the verdict
3 Refusal–Content Inconsistency
refusal language accompanies harmful content
4 Capability Limitations
fails to decode or integrate the content
5 Internally Inconsistent Verdict
the judge's own sub-labels contradict
6 Hallucinated Evidence
rationale invents or overlooks evidence
Jailbreak judges frequently disagree even under the same evaluation rubric
TVD-Conflict automatically discovers diagnostic conflict cases at scale.
These conflicts reveal recurring judge failure modes