

Neural network compression is necessary due to storage related issues (particularly on resource constrained systems) that often arise with the high number of parameters that modern DNNs tend to use, state-of-the-art CNNs can have upwards of hundreds of millions of parameters. Different compression methods can result in various underlying representations of the weight matrices, particularly with respect to its sparsity. Compression techniques that preserve the density of the weight matrix tend to result in inference acceleration on general-purpose processors[1], [2], not all techniques preserve this density and can result in weight matrices with various degrees of sparsity which in turn have varying degrees of regularity. These techniques, the resulting representations, and their consequences will be discussed in this section.

0.0.1 Pruning

Network pruning is the process of removing unimportant connections, leaving only the most informative connections. There has been a substantial amount of research into how pruning can be used to reduce overfitting and network complexity [3]–[6], but more recent research shows that some pruning methodologies can produce pruned networks with no loss of accuracy [7].

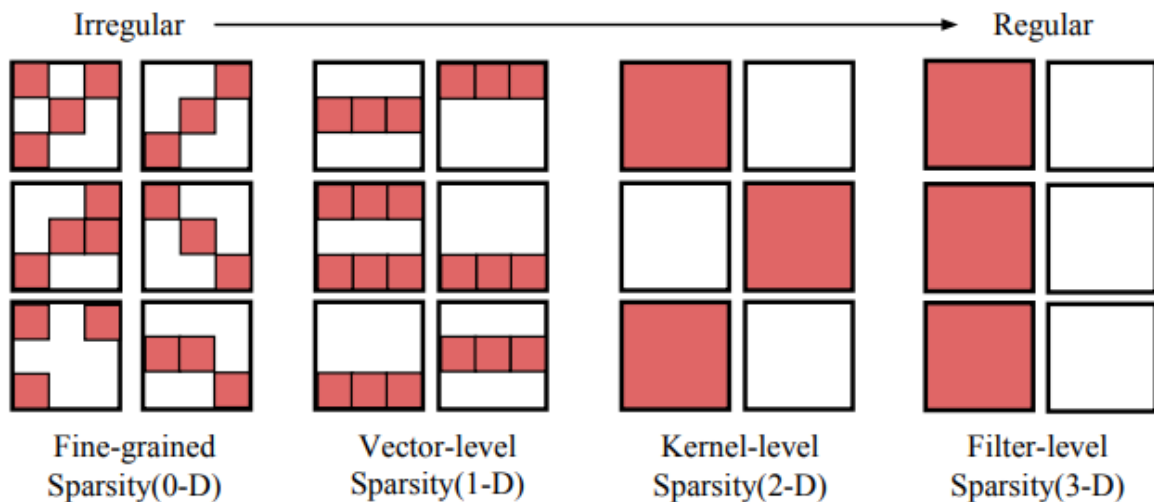


Figure 1: Sparse structures in a 4-dimensional weight tensor. Regular sparsity makes hardware acceleration easier.

(Adopted figure from [8])

This process of pruning the weight matrix within a DNN results in a sparse matrix representation

of weights, where the degree of sparsity is determined by the pruning algorithm being used and hyperparameters that can be tuned for the situation, such as how much accuracy loss is considered acceptable, and to what degree the neural network needs to be compressed. The pattern of sparsity in a weight matrix is a fundamental factor when considering how to accelerate a pruned neural network [8], this is known as the **granularity of sparsity**. The granularity of sparsity is usually categorised as either **fine-grained** or **course-grained**, pruning techniques are also categorised by the aforementioned granularities. Research shows that accelerating networks with very course-grained pruning is straightforward

0.0.2 Quantization and Weight Sharing

Quantization is the process of limiting the number of bits used to represent each weight within a network, this process results in many weights using identical or very close weight values. These repeated weight values creates an ideal situation to use weight sharing techniques.

The paper Deep Compression by Han et al [9] weight sharing is taken a step further and clustering is employed to gather the quantized weights into bins (whose value is denoted by the centroid of that bin) then an index is assigned to each weight that points to the weights corresponding bin, the bins value is the centroid of that cluster, which is further fine-tuned by subtracting the sum of the gradients for each weight in the bin their respective centroid see Fig. 2.

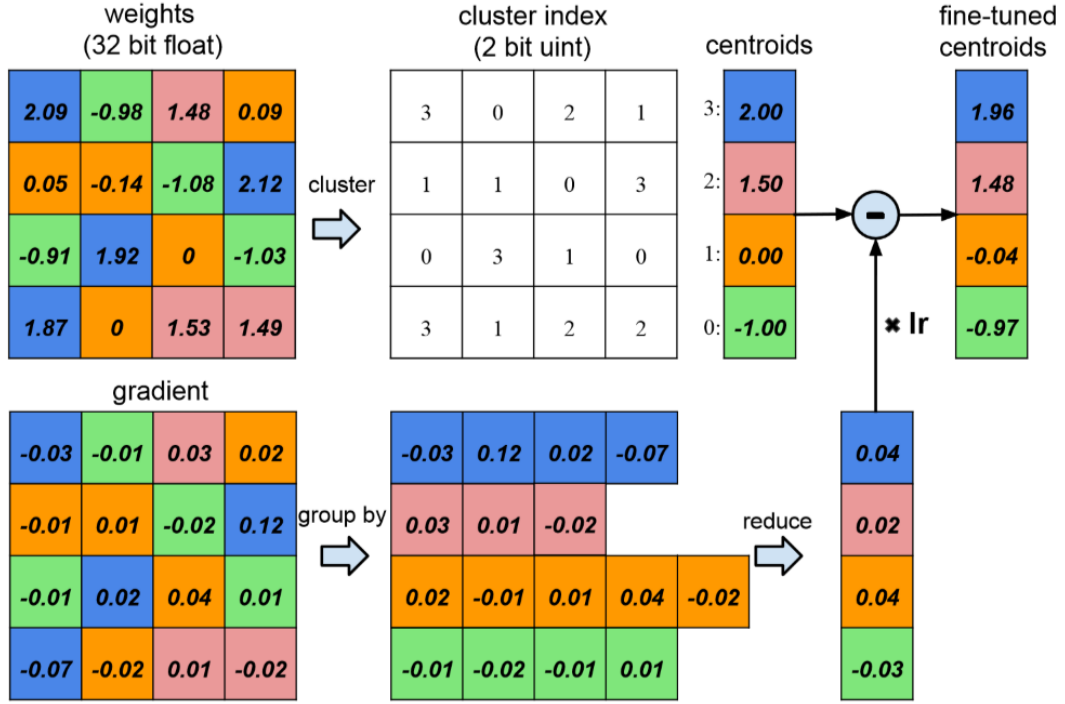


Figure 2: Weight sharing by quantization with centroid fine-tuning using gradients (Adopted figure from [9])

0.0.3 Distillation

0.0.4 Low-rank Factorization

0.0.5 Network Design Strategies