

Foundations2

Assignment 2020

Turing Machine multiplier


Sam Fay-Hunt sf52@hw.ac.uk

Contents

1	Turing machine multiplication	2
1.1	Graph	2
1.2	Formal definition	3
2	Discussion of graph	3
2.1	Logic of graph	3
2.2	States & Symbols	4
3	TM functionality	4
4	Implementation of Turing machine	4
5	Tests	4
6	Efficiency of program	4
7	Power of 3 machine	4

1 Turing machine multiplication

1.1 Graph

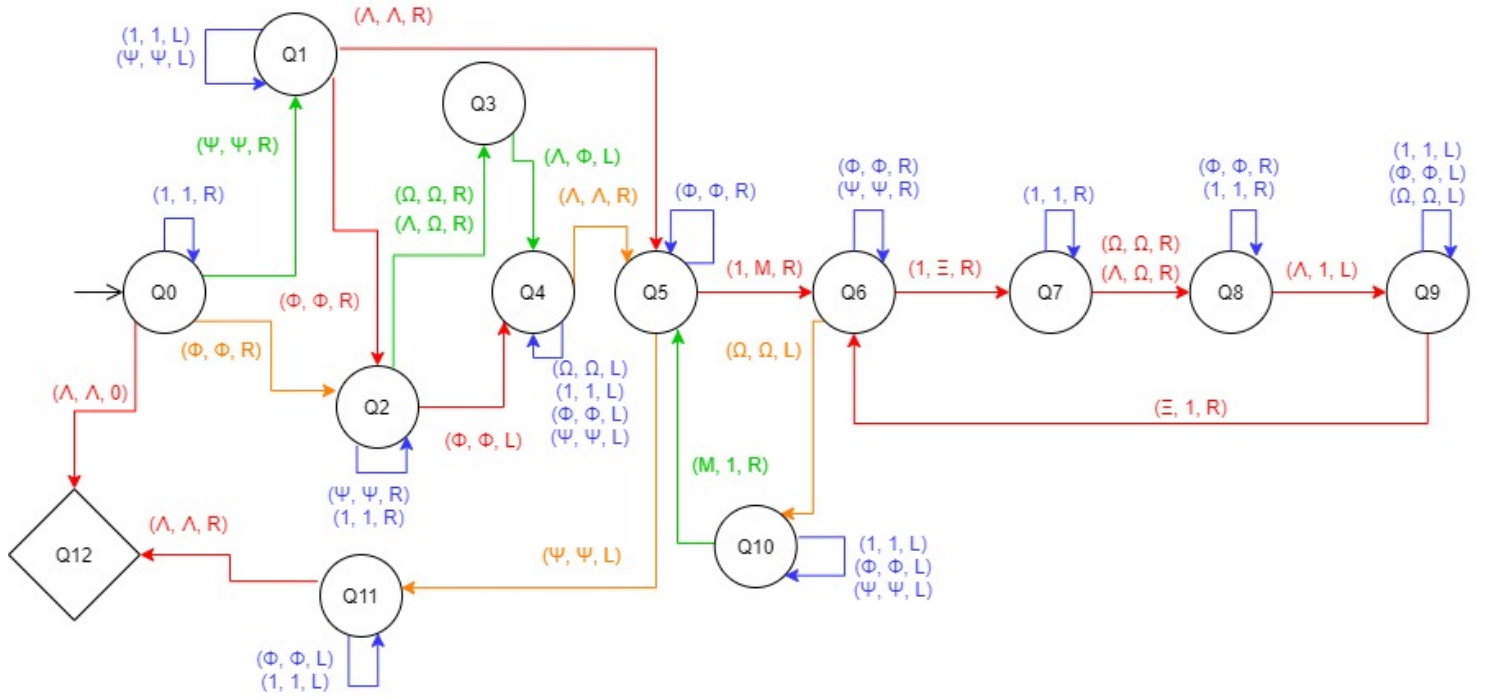

1.2 Formal definition

$$States = \{q_0, q_1, q_2, q_3, q_4, q_5, q_6, q_7, q_8, q_9, q_{10}, q_{11}, q_{12}\}$$

$$Symbols = \{\wedge, \Phi, \Psi, \Omega, 1, M, \Xi\}$$

$$M_{ex}(q_0, \wedge) = (q_{12}, \wedge, 0)$$

$$M_{ex}(q_0, \Psi) = (q_1, \Psi, R)$$

$$M_{ex}(q_1, 1) = (q_1, 1, L)$$

$$M_{ex}(q_1, \wedge) = (q_5, \wedge, R)$$

$$M_{ex}(q_2, 1) = (q_2, 1, R)$$

$$M_{ex}(q_2, \wedge) = (q_3, \Omega, R)$$

$$M_{ex}(q_2, \Phi) = (q_4, \Phi, L)$$

$$M_{ex}(q_4, \Omega) = (q_4, \Omega, L)$$

$$M_{ex}(q_4, \Phi) = (q_4, \Phi, L)$$

$$M_{ex}(q_4, \wedge) = (q_5, \wedge, R)$$

$$M_{ex}(q_5, 1) = (q_6, M, R)$$

$$M_{ex}(q_6, \Phi) = (q_6, \Phi, R)$$

$$M_{ex}(q_6, 1) = (q_7, \Xi, R)$$

$$M_{ex}(q_7, \Omega) = (q_8, \Omega, R)$$

$$M_{ex}(q_7, 1) = (q_7, 1, R)$$

$$M_{ex}(q_8, 1) = (q_8, 1, R)$$

$$M_{ex}(q_9, 1) = (q_9, 1, L)$$

$$M_{ex}(q_9, \Omega) = (q_9, \Omega, L)$$

$$M_{ex}(q_{10}, 1) = (q_{10}, 1, L)$$

$$M_{ex}(q_{10}, \Psi) = (q_{10}, \Psi, L)$$

$$M_{ex}(q_{11}, 1) = (q_{11}, 1, L)$$

$$M_{ex}(q_{11}, \wedge) = (q_{12}, \wedge, R)$$

$$M_{ex}(q_0, 1) = (q_0, 1, R)$$

$$M_{ex}(q_0, \Phi) = (q_2, \Phi, R)$$

$$M_{ex}(q_1, \Psi) = (q_1, \Psi, L)$$

$$M_{ex}(q_1, \Phi) = (q_2, \Phi, R)$$

$$M_{ex}(q_2, \Psi) = (q_2, \Psi, R)$$

$$M_{ex}(q_2, \Omega) = (q_3, \Omega, R)$$

$$M_{ex}(q_3, \wedge) = (q_4, \Phi, L)$$

$$M_{ex}(q_4, 1) = (q_4, 1, L)$$

$$M_{ex}(q_4, \Psi) = (q_4, \Psi, L)$$

$$M_{ex}(q_5, \Phi) = (q_5, \Phi, R)$$

$$M_{ex}(q_5, \Psi) = (q_{11}, \Psi, L)$$

$$M_{ex}(q_6, \Psi) = (q_6, \Psi, R)$$

$$M_{ex}(q_6, \Omega) = (q_{10}, \Omega, L)$$

$$M_{ex}(q_7, \wedge) = (q_8, \Omega, R)$$

$$M_{ex}(q_8, \wedge) = (q_9, 1, L)$$

$$M_{ex}(q_8, \Phi) = (q_8, \Phi, R)$$

$$M_{ex}(q_9, \Phi) = (q_9, \Phi, L)$$

$$M_{ex}(q_9, \Xi) = (q_6, 1, R)$$

$$M_{ex}(q_{10}, \Phi) = (q_{10}, \Phi, L)$$

$$M_{ex}(q_{10}, M) = (q_5, 1, R)$$

$$M_{ex}(q_{11}, \Phi) = (q_{11}, \Phi, L)$$

2 Discussion of graph

2.1 Logic of graph

describe the logic of the graph, why I chose this logical method. consider the correctness.

2.2 States & Symbols

Why I chose these states and symbols
cut down version here

3 TM functionality

How the graph works, where to start, where you end and dealing with 0,
and negative numbers

4 Implementation of Turing machine

Language choice

5 Tests

Tests, including count of tapes printed, time to complete test

6 Efficiency of program

comment on the number of computation sequences produced and the time
taken to complete each test

7 Power of 3 machine

asd