

TUGAS PEMROGRAMAN WEB 2

SETTIN VIEW

Disusun Oleh : Putri Friska Azzahra (4122038)

Dosen Pengampu : Muhammad Miftakhul Syaikhuddin, S.Kom., M.kom



1. Membuat file baru bernama *Page.php* dalam folder Controllers

```
app > Controllers > Page.php > PHP > App\Controllers\Page
1  <?php
2
3  namespace App\Controllers;
4
5  class Page extends BaseController
6  {
7      0 references | 0 implementations
8      public function index()
9      {
10         $data = [
11             'title' => 'Home | Unipdu Press',
12             'tes' => ['satu', 'dua', 'tiga']
13         ];
14         echo view('layout/header', $data);
15         echo view('page/home', $data);
16         echo view('layout/footer');
17     }
18
19     0 references | 0 overrides
20     public function about()
21     {
22         $data = [
23             'title' => 'Home | Unipdu Press',
24             'tes' => ['satu', 'dua', 'tiga']
25         ];
26         echo view('layout/header', $data);
27         echo view('page/about');
28         echo view('layout/footer');
29     }
30 }
```

2. Membuat folder baru didalam folder view dengan name page kemudian tambahkan file baru dengan nama *Home.php* dan *About.php*

- Home.php

```
app > Views > page > home.php > div.container
1  <div class="container">
2      <div class="row">
3          <div class="col">
4              <h1>Home</h1>
5              <?php
6                  d($tes);
7              ?>
8          </div>
9      </div>
10 </div>
```

- About.php

```

app > Views > page > about.php > div.container
1 <div class="container">
2   <div class="row">
3     <div class="col">
4       <h1>about</h1>
5     </div>
6   </div>
7 </div>

```

3. Kemudian membuat folder lagi didalam folder view dengan nama layout dan tambahkan file baru dengan nama *header.php* dan *footer.php*

- Header.php

```

app > Views > layout > header.php > html > body > nav.navbar.navbar-expand-lg.bg-body-tertiary
1 <!doctype html>
2 <html lang="en">
3
4 <head>
5   <meta charset="utf-8">
6   <meta name="viewport" content="width=device-width, initial-scale=1">
7   <title>
8     <? = $title ?>
9   </title>
10  <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/css/bootstrap.min.css" rel="stylesheet"
11    integrity="sha384-QWTKZyjpPEjISv5WaRU9OFeRpok6YctnYmDr5pNlyT2bRjXh0JMhY6hW+ALEwIH" crossorigin="anonymous">
12 </head>
13
14 <body>
15
16   <nav class="navbar navbar-expand-lg bg-body-tertiary">
17     <div class="container">
18       <a class="navbar-brand" href="#">Unipdu Press</a>
19       <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarNavAltMarkup">
20         <span class="navbar-toggler-icon"></span>
21       </button>
22       <div class="collapse navbar-collapse" id="navbarNavAltMarkup">
23         <div class="navbar-nav">
24           <a class="nav-link active" aria-current="page" href="/">Home</a>
25           <a class="nav-link" aria-current="about" href="/page/about">About</a>
26           <a class="nav-link" aria-current="#" href="#">Pricing</a>
27           <a class="nav-link disabled" aria-disabled="true" href="#">Disabled</a>
28         </div>
29       </div>
30     </div>
31   </nav>

```


- Footer.php

```

app > Views > layout > footer.php > ...
1 <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.bundle.min.js"
2   integrity="sha384-YvpcrYf0tY3lHB60NNkmXc5s9fDVZLESaAA55NDzOxhy9GkcldsdK1eN7N6jleHz" crossorigin="anonymous">
3 </script>
4 <script src="https://cdn.jsdelivr.net/npm/@popperjs/core@2.11.8/dist/umd/popper.min.js"
5   integrity="sha384-l7E8VVD/ismYTF4hNIPjVp/Zjvgyol6VFvRkX/vR+Vc4jQkC+hVqc2pM8ODewa9r" crossorigin="anonymous">
6 </script>
7 <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.3.3/dist/js/bootstrap.min.js"
8   integrity="sha384-0pUGZybkm6XF6gxjEnlmuGrJXVbNuzT9qBBavbLwCsOGabYfZo0T0to5e9ruptLy" crossorigin="anonymous">
9 </script>
10 </body>
11
12 </html>

```

4. Mengecek routes dan routing apakah SetAutoRoute sudah aktif atau belum

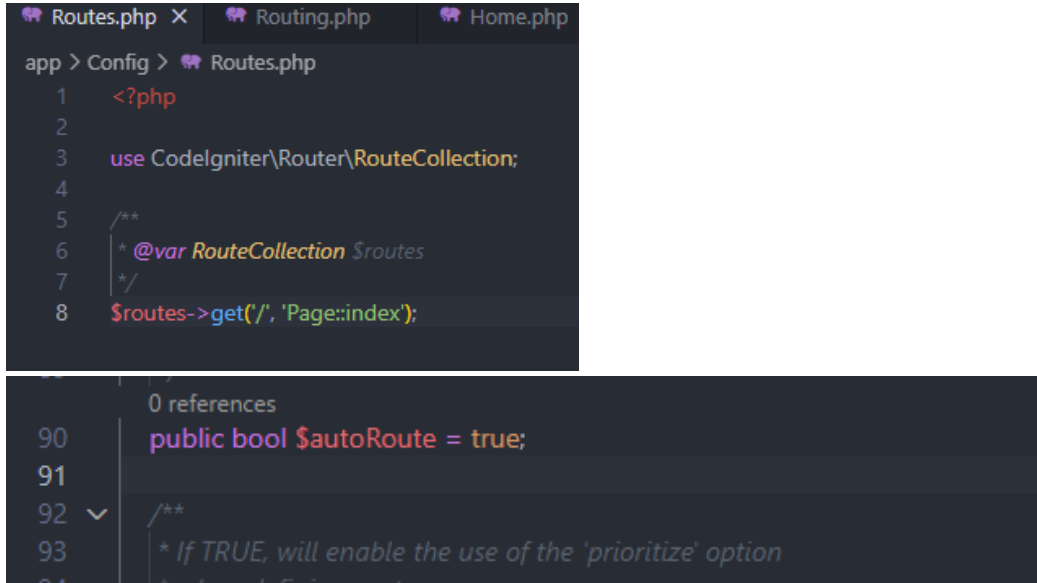


The screenshot shows a code editor with two tabs: 'Routes.php' and 'Routing.php'. The 'Routes.php' tab is active, displaying the following code:

```
1 <?php
2
3 use CodeIgniter\Router\RouteCollection;
4
5 /**
6  * @var RouteCollection $routes
7  */
8 $routes->get('/', 'Page::index');
```

The 'Routing.php' tab is also visible, showing the following code:

```
90 public bool $autoRoute = true;
91
92 /**
93  * If TRUE, will enable the use of the 'prioritize' option
94  * by default. This is a...
```

5. Dan inilah hasilnya jika code berhasil

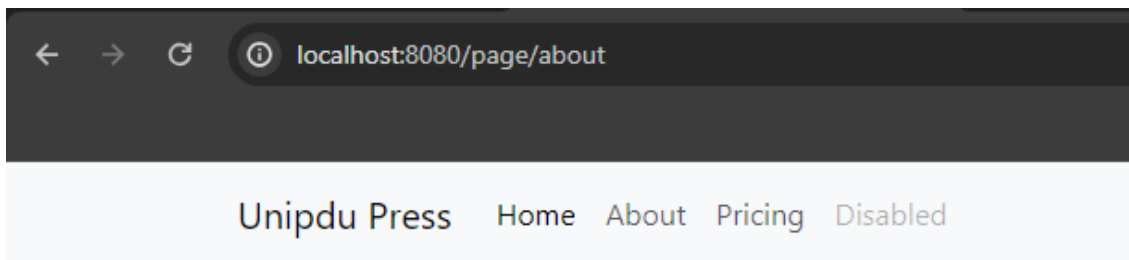

SEKIAN

TERIMA KASIH 😊