

wpasupplicant (lucid)

($\geq 1.1.1$)

libdbus-1-3

(≥ 1.1)

libnl1

($\geq 1.5.3$)

libpcsclite1

(≥ 6.0)

($\geq 0.9.8k-1$)

libreadline6


libssl0.9.8

wpasupplicant

```
graph LR; wpasupplicant[wpa supplicant] -- "(≥ 1.1.1)" --> libdbus[libdbus-1-3]; wpasupplicant -- "(≥ 1.1)" --> libnl[libnl1]; wpasupplicant -- "(≥ 1.5.3)" --> libpcsclite[libpcsclite1]; wpasupplicant -- "(≥ 6.0)" --> libreadline{libreadline6}; wpasupplicant -- "(≥ 0.9.8k-1)" --> libssl[libssl0.9.8];
```

The diagram illustrates the dependencies of the wpasupplicant package in the Lucid release. A central box labeled 'wpa supplicant' has five outgoing blue arrows. Each arrow is accompanied by a version constraint in parentheses. The arrows point to five target packages: libdbus-1-3, libnl1, libpcsclite1, libreadline6 (represented by a diamond shape), and libssl0.9.8.

wpasupplicant (maverick)

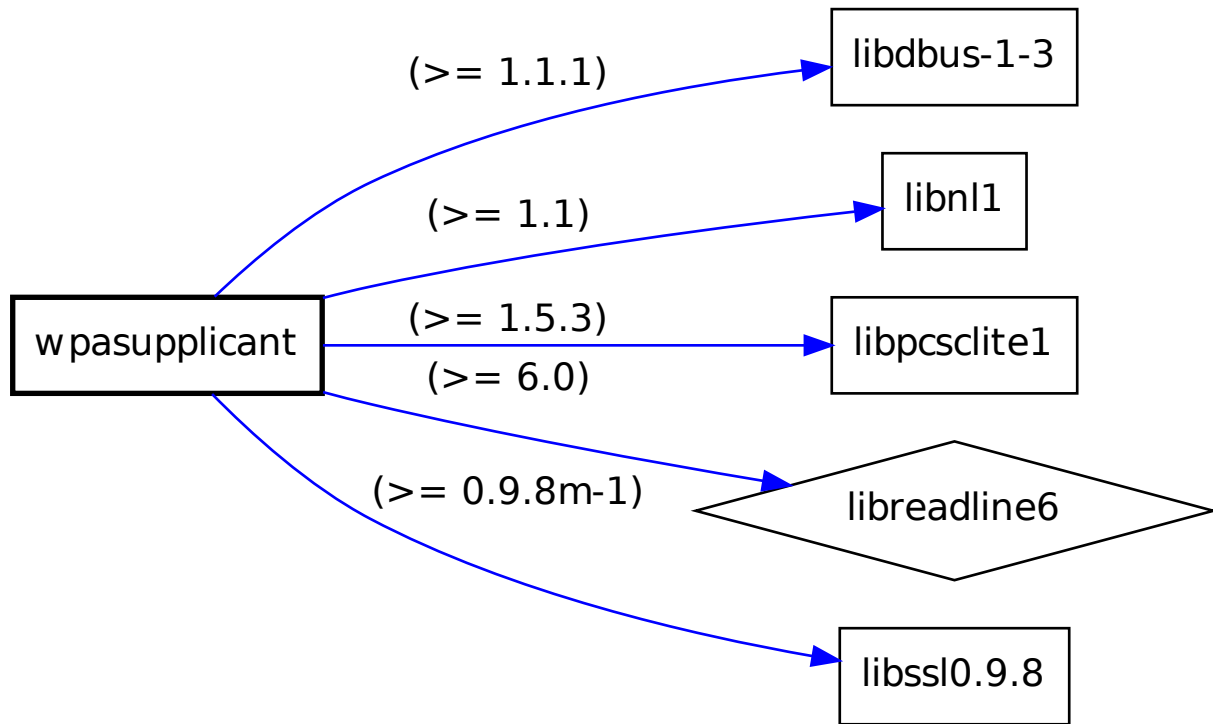

wpasupplicant (natty)

($\geq 1.1.1$)

libdbus-1-3

(≥ 1.1)

libnl1

($\geq 1.5.5$)

libpcsc-lite1


(≥ 6.0)

wpasupplicant

($\geq 0.9.8m-1$)

libreadline6

libssl0.9.8

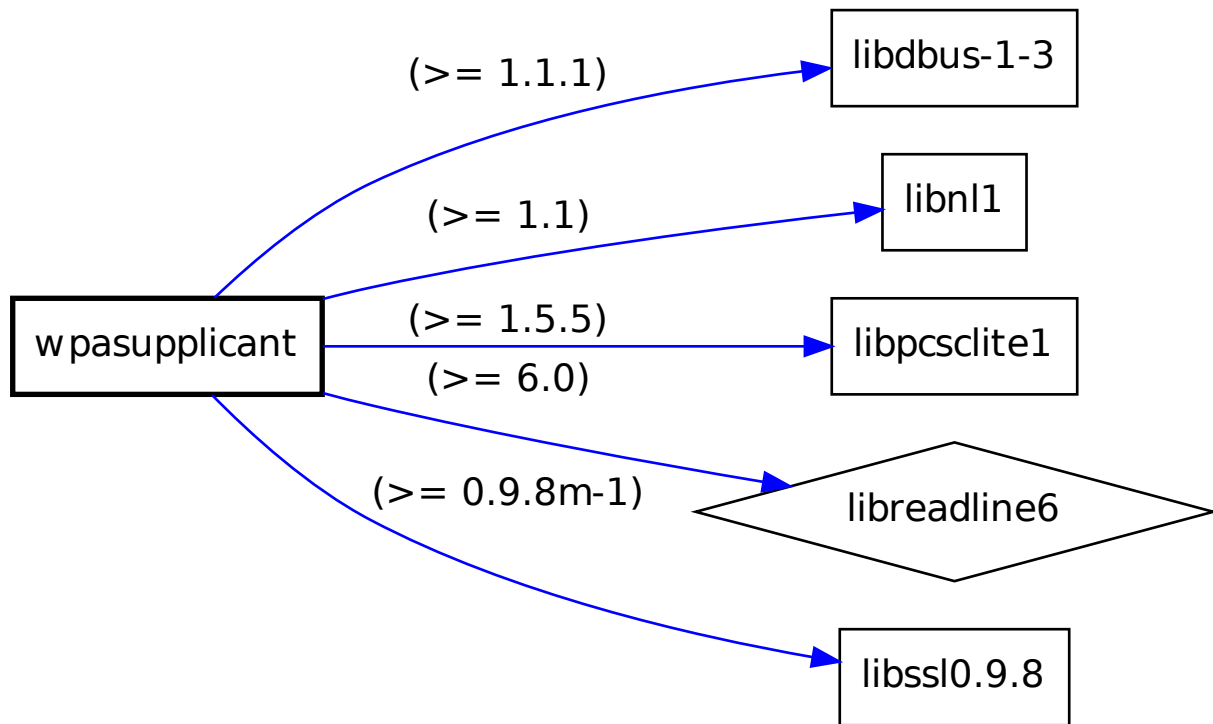

wpasupplicant (oneiric)

