

wpasupplicant (lucid)

($\geq 1.1.1$)

libdbus-1-3

(≥ 1.1)

libnl1

($\geq 1.5.3$)

libpcsclite1

(≥ 6.0)

($\geq 0.9.8k-1$)

libreadline6


libssl0.9.8

wpasupplicant

```
graph LR; wpasupplicant[wpa supplicant] -- "(≥ 1.1.1)" --> libdbus[libdbus-1-3]; wpasupplicant -- "(≥ 1.1)" --> libnl[libnl1]; wpasupplicant -- "(≥ 1.5.3)" --> libpcsclite[libpcsclite1]; wpasupplicant -- "(≥ 6.0)" --> libreadline{libreadline6}; wpasupplicant -- "(≥ 0.9.8k-1)" --> libssl[libssl0.9.8];
```

A dependency diagram for the 'wpasupplicant' package in the 'lucid' release. The central node is a rectangle labeled 'wpasupplicant'. Five blue arrows point from it to other nodes on the right. The first arrow points to a rectangle labeled 'libdbus-1-3' with the label '(≥ 1.1.1)' above it. The second arrow points to a rectangle labeled 'libnl1' with the label '(≥ 1.1)' above it. The third arrow points to a rectangle labeled 'libpcsclite1' with the label '(≥ 1.5.3)' above it. The fourth arrow points to a diamond-shaped node labeled 'libreadline6' with the label '(≥ 6.0)' above it. The fifth arrow points to a rectangle labeled 'libssl0.9.8' with the label '(≥ 0.9.8k-1)' above it.

wpasupplicant (maverick)

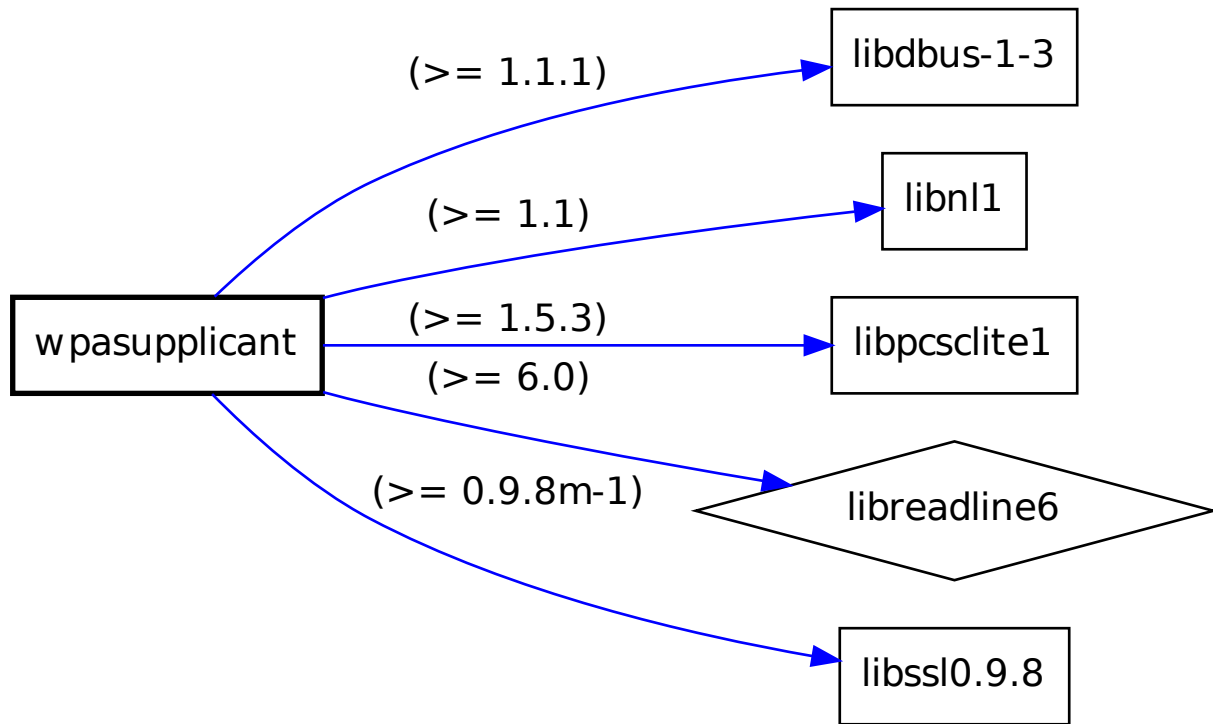

wpasupplicant (natty)

($\geq 1.1.1$)

libdbus-1-3

(≥ 1.1)

libnl1

($\geq 1.5.5$)

libpcsc-lite1


(≥ 6.0)

wpasupplicant

($\geq 0.9.8m-1$)

libreadline6

libssl0.9.8

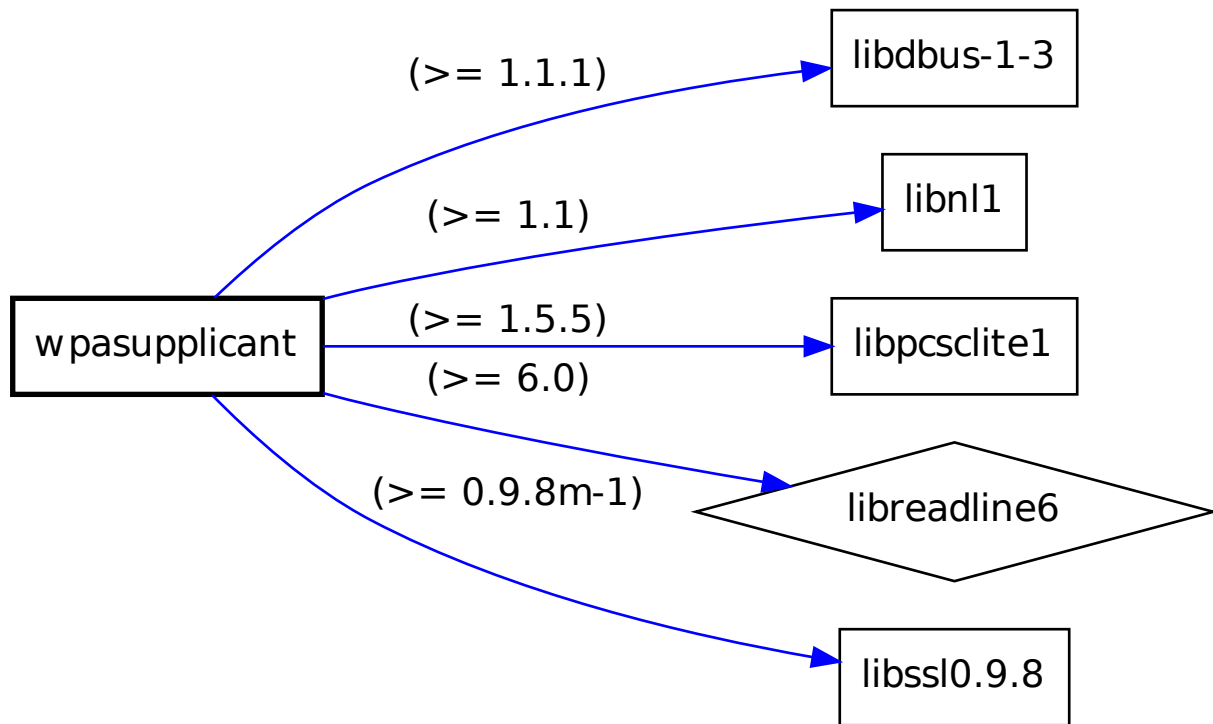

wpasupplicant (oneiric)

