

Development of a web-based application for the degradation configuration of IoT components

Project Report

Steffen Knoblauch `steffen.knoblauch@uni-ulm.de`

July 9, 2021

Contents

1	Introduction	1
2	Technology Stack	2
3	Architecture	3
3.1	General concepts	3
3.2	App-Component	3
3.3	Welcome page	3
3.4	Wizard	3
3.5	Import	5
3.6	Validation	5
3.7	Subcomponent configuration	6
3.8	Degradation Level Management	7
3.9	Degradation and Upgrade configuration	7
3.10	LevelChange configuration	7
4	Conclusion	7

1 Introduction

More and more IoT (Internet of Things) devices are finding their way into our daily lives, making it possible to combine a wide variety of end devices or sensors and design new composite systems. Such systems can encounter internal problems, for example, when a component no longer operates properly. The system as such must react to this and, for example, cease functionality or operate in another way.

This is where the SORRIR project comes in to develop a self-organising, resilient execution platform for IoT services. In order to make such a system resilient, i.e. resistant to errors of the subcomponents of the system, different levels were introduced in which such a system can operate.

A system that is composed of several subcomponents may be forced to change the level if, for example, one of these subcomponents is no longer functional. In the worst case, up to the complete deactivation of the system. In order to prevent a system from going directly into the deactivated state whenever an error occurs, various intermediate levels, the so-called degradation levels, can be defined. For example, a degradation level can continue to provide some of the original functionality, but with some limitations depending on the non-functional subcomponent.

An example of this is a smart barrier in a parking garage, which in the ideal case, i.e. when all subcomponents are functioning, recognizes a car by means of a camera and is opened automatically. If, for some reason, the camera failed, the system would no longer be able to function. However, if one uses the degradation levels, a part of the functionality could be guaranteed. For example, by opening the barrier manually with an ID card. To configure such degradation levels a json file is required which defines the different transitions between the levels. For example, what should happen when a certain subcomponent is no longer functional.

This is the starting point of this project, in which the goal is to create a graphical interface in form of a web application that allows to configure a system with the different degradation levels and finally to export it as Json. In order to change or create a configuration, several components for the web application are required, like the definition of subcomponents or the import of an existing configuration.

This report starts with a short description of the technology stack, in section 2, that was used to implement the web interface. It is followed by the architecture of the application, in section 3, that includes a description of the general components, their usage, and some additional information about the implementation. The last section is the conclusion that contains a short summary as well as potential further enhancements.

2 Technology Stack

The goal of this project is the development of a web application and due to the large number of different frameworks and libraries, the selection was relevant from the beginning. To develop a web application you can work without a framework or library, but nowadays there are also various frameworks available to make the work easier, such as React, Vue or Angular.

The choice for this application fell on React, because React is not only extremely popular [2], but it also allowed me to learn the required fundamentals and use it for the first time. React is a JavaScript library to create single-page applications, but also provides typings to use it with TypeScript [1]. In order to facilitate future development and enhancements for this application, the choice fell on TypeScript. In addition to this, TypeScript allowed to define interfaces that help to understand the model of the application.

With this technologies as base, the next step is the decision is related to the build system. It would be possible to use a custom build system based on webpack or similar bundlers, but for React there is an officially supported way: create-react-app. This is a npx package that will setup a single-page application with all the required configuration, like the bundler or the typescript compiler. It is possible to later exchange and adapt parts of the configuration or the build system in general, but for this project it was not required to further adapt the default setup.

In addition to react some additional libraries were used:

- **material-ui**: a library that offers standard material design components
- **react-syntax-highlighter**: a syntax highlighter that is used to display the configuration as Json in the import and export
- **ajv**: a validator that is used in the import to validate that the Json fits the configuration schema
- **react-dnd**: a drag and drop library for react

3 Architecture

This section will give an overview of the general concepts and will show with examples how to use the application.

3.1 General concepts

The complete code was structured with too general ideas in mind. On the one hand it should be modular in the sense that the application consists of components that can be reused on multiple occasions. For example a dialog for the deletion can be always the same and only the handling and the description text have to be adapted based on the usage. The modularity will be introduced implicitly by React, because the general idea is the creation of components that will be updated internally by react.

Another relevant aspect was the future extension of the application, in order to be able to integrate more steps for the creation of the configuration. For example adding additional properties for the subcomponent configuration.

3.2 App-Component

The App is the central component that will contain all the relevant components for the application. The App keeps track of the current configuration and provides the access for the components via a context provider. This allows the access and update of the configuration from all the components, which will also trigger the React lifecycle to re-render a component.

3.3 Welcome page

The welcome page is the first component that will be displayed when you start the application. In figure 1 you can see that there are two buttons that allow to start the configuration. There are two choices on how to start the configuration, the start with an import and without an import, based on the choice a user makes the wizard (compare section 3.4) will be started with different steps.

3.4 Wizard

The creation of the configuration can be divided into several steps. To facilitate the configuration, a wizard has been developed that allows the step-by-step configuration. In addition to that it is also possible to navigate arbitrary back and forth between the different steps of the configuration.

The wizard component allows to dynamically configure what steps will be shown and in what order. The wizard consist in general of a menu-bar, a stepper to show navigate between the steps and the content it will show which is internally called a view.

Figure 2 shows the menu bar and the stepper for the configuration with an import. You can navigate through the different steps by clicking on the steps in the stepper,

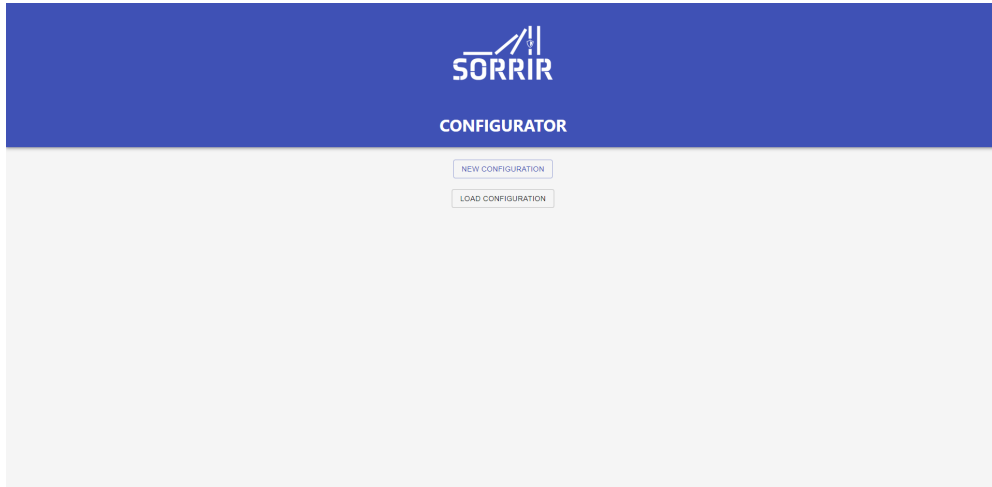


Figure 1: Welcome page

whereby the active step is highlighted. The menu bar will update its label with the label that was specified for the current step, for example in the figure the label was set to "Import".




Figure 2: Wizard

In addition to the navigation between the different steps there is a menu on the top right. At the moment this only has one menu item that allows to restart the configuration, but it is possible to further add more functionality. The restart will show a dialog to confirm the reset of the current configuration and will, after the confirmation, send the user back to the welcome page.

In order to extend the wizard with additional steps following actions have to take place:

- Extension of the view enum (a enum that contains all available views in the application) ("src\util\Views.ts")
- Setting a label for the new view ("src\util\ViewLabelResolver.ts")
- Adding the view that will be displayed for the step in the wizard. This has to be a react component ("src\components\wizard\ViewSelector\ViewSelector.tsx")

After these steps the wizard can be configured to display the new view as an additional step.

3.5 Import

The import view is only inserted as a step when the wizard is started with the "LOAD CONFIGURATION" button on the welcome page. The import page allows to import an existing configuration file and will update the current configuration in the app. This import will also override all previous changes in the configuration. The configuration will be displayed with syntax highlighter that will be updated with the new configuration after the import was successful.

There are several cases when the import has to fail to enforce a correct state of the configuration and therefore it will be validated that file contains a valid configuration. If this is not the case the import will display any errors that occurred during the import. The first part of the validation is to check if the file contains an object that can be parsed to a json object. if this is not the case an error message similar to the message in figure 3 will be displayed.

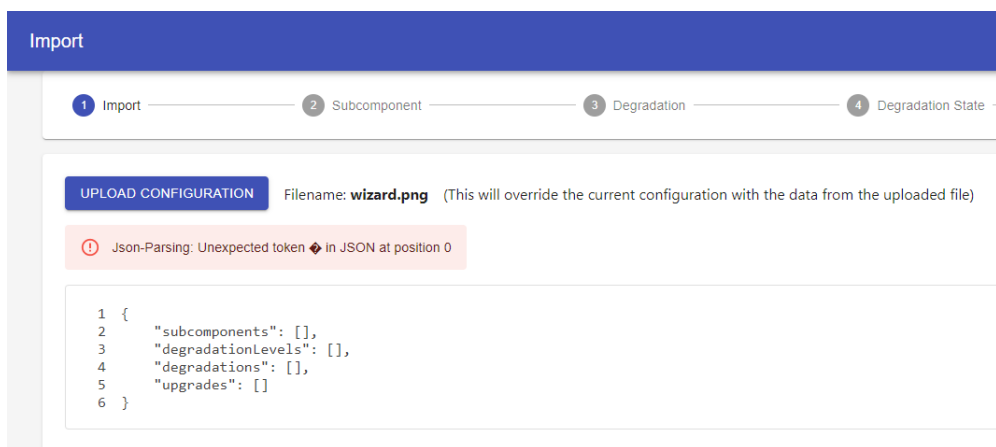


Figure 3: Import invalid file

The second part of the validation is the validation of the json object itself. The json object requires several properties to be a valid configuration. Details on this part of the validation can be found in section 3.6. The validation may also find several problems for the imported file that will be displayed as shown in figure 4. If the problem occurs in an element of an array, for example in the subcomponents, the index of the element will also be added to the error message.

3.6 Validation

- Validates if the file can be parsed as Json element
- If it can be parsed the validation will be done
- short explanation of the different schema types?

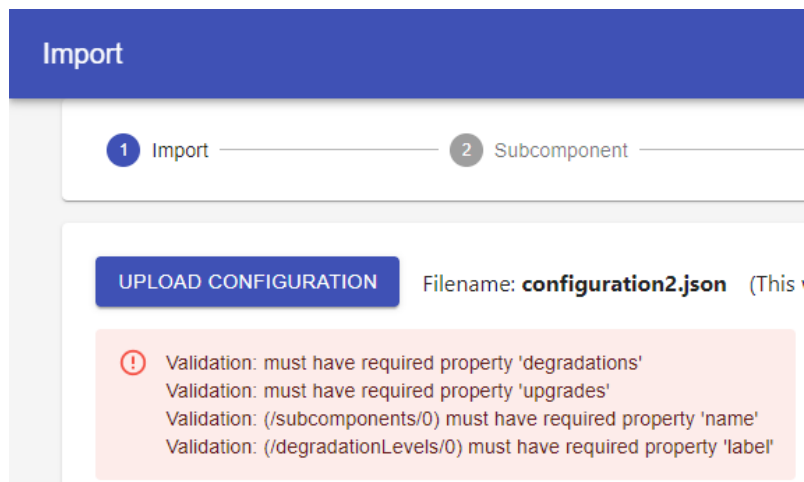


Figure 4: Import invalid json

- use of ajv (support of JSON Schema and JSON Type Definition)
- atm most tools support Json Schema (cite <https://ajv.js.org/guide/schema-language.html>) → selection for our usecase - but no official RFC only internet draft
- ajv used because it supports both - migration later possible (to RFC8927 JSON Type Definition)
- Short overview of the implemented schema for the configuration (perhaps using UML diagram)

3.7 Subcomponent configuration

- Subcomponents required for the creation of degradation levels
- Subcomponent has an id, a name and several shadowmodes (internal state of the subcomponent)
- each shadowmode has an id and a name
- In order to be able to manage the relevant subcomponents for the component, a table with a creation/edit and deletion dialog is offered
- The creation/edit dialog offers several functions:
 - Internal validation function (non empty fields + check for already existing subcomponents with the same id)
 - id autofill (based on the name) if no value is set

3.8 Degradation Level Management

- Creation/Deletion in the Degradation and Upgrade Configuration views
- Create/Edit with a Dialog:
 - name and id as string
 - the subcomponent states of the level (will show all possible values of a subcomponent and to choose what has to be true for this level)
 - creation of internal states of the Level (with custom chip input)
 - validation if id exists/ etc.
- Multi selection in the Degradation and Upgrade Configuration View

3.9 Degradation and Upgrade configuration

- Custom Graph View for the Hierarchy (Recursive generation of the Graph)
- Drag and Drop Support to update the Graph (degradation level hierarchy)
- Off state as default node
- Explain model on how to save the hierarchy (LevelChange model)
- shows all levels even the ones that are not inserted in the hierarchy yet
- Upgrade: Inverse of the Degradation Graph - same functionality as Degradation Graph
- Both will be saved separately in the configuration and are also separate steps in the wizard

3.10 LevelChange configuration

- configure the state in which the level after the degradation or upgrade is
- separate step in the wizard for both degradation and upgrade
- shows for all LevelChanges the states of the corresponding level and allows the selection of the state the level will be in after the degradation/upgrade

TODO: Use figures for the different sections (e.g. import successful and unsuccessful)

4 Conclusion

References

- [1] Facebook. Adding typescript, 2021. URL <https://create-react-app.dev/docs/adding-typescript/>. (last visited: 2021-07-09).
- [2] Stack Overflow. Stack overflow developer survey 2020, 2021. URL <https://insights.stackoverflow.com/survey/2020>. (last visited: 2021-07-09).