

Algorithms and Data Structures

Francesco Ranellucci

dicember 05, 2021

Contents

1	Sorting Algorithms	3
1.1	Insertion Sort	3
1.2	Exchange Sort	4
1.3	Selection Sort	5
1.4	Shell Sort	6
1.5	Counting Sort	7
1.6	Merge Sort	8
1.7	Quik Sort	10
2	Complexity equation	12
3	Heap sort	12
4	Priority queue	12
5	Binary Search Tree	12
6	Heap sort	13
7	Hash tables	14
7.1	Linear chaining	14
7.2	Open address	14
7.3	Linear Probing	14
7.4	quadratic Probing	14
7.5	double hasing	14
7.6	linear probing	14
7.6.1	example	14
7.7	quadratic probing	14
7.7.1	example	14
8	Greedy	15
9	Graphs	15
9.0.1	Loops	15
10	Graphs visit	16
10.1	Breadth-First Search (BFS)	16
10.2	Depth-First Search (DFS)	16
11	Pointers	16
11.0.1	Example in memory	16
11.1	Pointers	16
11.1.1	All possible cases	16
11.2	Final version with no Errors and no Warnings	17

11.2.1 Example	18
11.3 Pointer Arithmetic	19
11.4 By reference	20
11.4.1 Wrong	20
11.4.2 Correct	20
11.4.3 Pointers and arrays	20
11.4.4 Pointers and strings	21
11.4.5 Pointers and structures	22
12 Dinamic Memory Allocation	23
12.1 2D array	23
12.1.1 Mtrix allocation in a function	25
12.1.2 Free	27
13 List	28
13.1 Intro	28
13.2 Function required to operate with list	28
13.3 Main	28
13.4 List insertion	29
13.4.1 List visit	30
13.4.2 Head insertion	30
13.5 List searching	32
13.6 List extraction	33
13.6.1 In-order Extraction	33
13.7 List deletion (Free)	34
13.7.1 Free the entire list	34
13.7.2 Deleting first element	35
13.7.3 Deleting a particular element	35
13.7.4 Deleting ahead	36
13.8 Scan to find an elemet to delete it	36
13.9 Display list	36
13.10 Sentinel	37
13.11 OT Circular buffer	38
13.12 FIFO	38
13.12.1 Enqueue	38
13.12.2 Dequeue	38
13.13 Ordered Linked Lists	39
14 List library	46
14.1 Stack	46
14.2 BST Library	49
15 Item library	55
15.1 Item with Stack	55
15.2 Item with BST	56
16 Util library	57
16.1 Util with Stack	57
16.2 Util with BST	59
17 Data Library	60
17.1 Data with BST	60
18 Symbol table	61
18.1 Item with Symbol tables	63

1 Sorting Algorithms

1.1 Insertion Sort

$O(n^2)$

Vector divided in left sorted and right unsorted, when there is a number higher in the left compared to another on the right they are switched

0	1	2	3	4	5
4	2	6	3	1	5
4	(2)	6	3	1	5
2	4	6	3	1	5
2	4	(6)	3	1	5
2	4	6	3	1	5
2	4	6	(3)	1	5
2	3	4	6	1	5
2	3	4	6	(1)	5
1	2	3	4	6	(5)
1	2	3	4	5	6

```
//2 subarray
//left is sorted, right not sorted    i=1 means
//that the only sorted is in position 0.

#include <stdio.h>

void InsertionSort (int *A, int n);

int main(int argc, char *argv[]) {
    int n = 5;
    int arr[5] = {3, 8, 1, 7, 4};

    InsertionSort(arr, n);
    for(int i=0; i<n; i++){
        printf("%d ", arr[i]);
    }
    return 0;
}

void InsertionSort (int *A, int n) {
    int i, j, x;

    for (i=1; i<n; i++) {
        x = A[i]; //first unsorted number
        j = i - 1; //J=0: only sorted number

        while (j>=0 && x<A[j]) {
            A[j+1] = A[j]; //A[j] is not the smallest so it
            j--; //j=-1 // has to let the other go to left ex A[j+1=1]
        }

        A[j+1] = x; //A[j+1=0]
    }
}
```

1.2 Exchange Sort

$O(n^2)$

Vector divided in left unsorted and right sorted, swap of any numbers with a smaller one on its right

0	1	2	3	4	5
4	2	6	3	1	5
2	4	3	1	5	[6]
2	4	3	1	[5	6]
2	1	3	4	[5	6]
2	1	3	[4	5	6]
2	1	[3	4	5	6]
[1	2	3	4	5	6]

```
//2 subarray.
//left is unsorted, right is empty      i<n-1 means that you assume
void BubbleSort (int A[], int n) { // at the beginning the last is
    int i, j, temp;                // the greater.

    for (i=0; i<n-1; i++) {
        for (j=0; j<n-i-1; j++){    //j<n-1-i because the more you
            if (A[j] > A[j+1]) {    // go on, less numbers you have left
                temp = A[j];
                A[j] = A[j+1];
                A[j+1] = temp;
            } //in this for you find the greater unsorted
        } //number and swapping it, you put it on the right
    }

    return;
}
```

1.3 Selection Sort

$O(n^2)$

Vector divided in left sorted and right unsorted, the algorithm looks for the smallest number in the right unsorted array and swaps it with the first element of the unsorted array

0	1	2	3	4	5
] (4)	2	6	3	(1)	5
[1]	(2)	6	3	4	5
[1	2]	(6)	(3)	4	5
[1	2	3]	(6)	(4)	5
[1	2	3	4]	(6)	(5)
[1	2	3	4	5	6]

```

void SelectionSort (int A[], int n) {
    int i, j, min, temp;

    for (i=0; i<n-1; i++) {
        min = i; //first # is min

        for (j=i+1; j<n; j++) { //it finds the smallest on the line
            if (A[j] < A[min]) { //if the first on the right (A[j]) of the min num (A[min]) is less
                min = j; //in that position there's the new smallest one
            }
        } //after this for you know which number is
        //the smallest of the line
        temp = A[i]; //end now you swap it with the one you
        A[i] = A[min]; //assume to be the smallest (min=i line 7)
        A[min] = temp;
    }

    return;
}

```

1.4 Shell Sort

$O(n^2)$

swap numbers at same index in different arrays with insertion sort

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	h
7	6	8	9	8	6	2	1	8	7	0	4	5	3	0	1	0	4	9	
[3	0	1	0	4	6	2	1	5	7	3	4	5]	[7	6	8	9	8	9]	
[I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	XIII]	[I	II	III	IV	V	VI]	13
[3	0	0	0]	[4	6	1	1]	[5	7	2	4]	[8	7	6	8]	[9	8	9]	
[I	II	III	IV]	[I	II	III	IV]	[I	II	III	IV]	[I	II	III	IV]	[I	II	III]	4
0	0	0	1	4	6	1	1	5	7	2	4	8	7	6	8	9	8	9	1

```

void ShellSort (int A[], int n) {
    int i, j, x, h;
    h=1;

    while (h < n/3)
        h = 3*h+1;

    while (h >= 1) {
        for (i=h; i<n; i++) {
            x = A[i];
            j = i - h;

            while (j>=0 && x<A[j]) {
                A[j+h] = A[j];
                j -= h;
            }

            A[j+h] = x;
        }

        h = h/3;
    }
}

```

1.5 Counting Sort

$O(n^2)$

There are multiple arrays, the given one, another with every single value that is in the previous array with in each cell has the number of times that number exist in the previous array. A third array with the cumulative number of element at each index. Another array with the previous array numbers shifted by 1 index to the right. At this point number 0 at index 0 is between position 0 and 1, 1 occurrence, number 1 at index 1 is between position 1 and 4, 3 occurrences in the last vectors, number 2 at index 2 is between position 4 and 4, 0 occurrences in the last vectors, and last number, 3 at index 3 is between position 4 and 6, 2 occurrences in the last array.

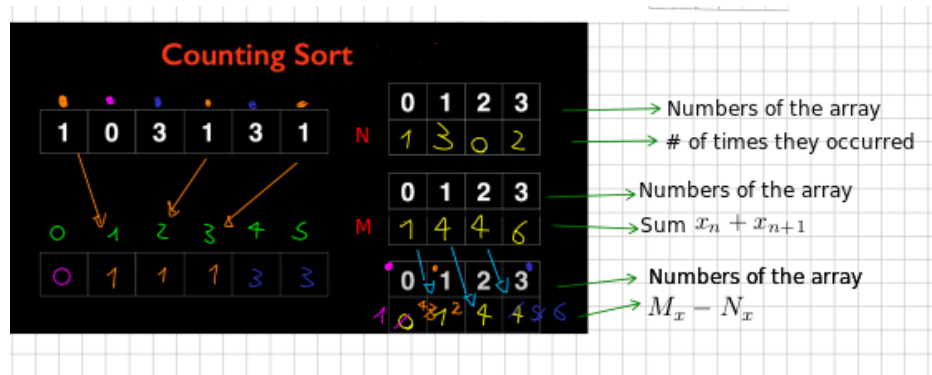


Figure 1: Counting sort

```
#define MAX 100

void CountingSort(int A[], int n, int k) {
    int i, C[MAX], B[MAX];

    for (i=0; i<k; i++)
        C[i] = 0;

    for (i=0; i<n; i++)
        C[A[i]]++;

    for (i=1; i<k; i++)
        C[i] += C[i-1];

    for (i=n-1; i>=0; i--)
    {
        B[C[A[i]]-1] = A[i];
        C[A[i]]--;
    }

    for (i=0; i<n; i++)
        A[i] = B[i];
}
```

1.6 Merge Sort

$O(\log_n(n))$

It divides the array and then, when it merges back the numbers, it does it ordering them

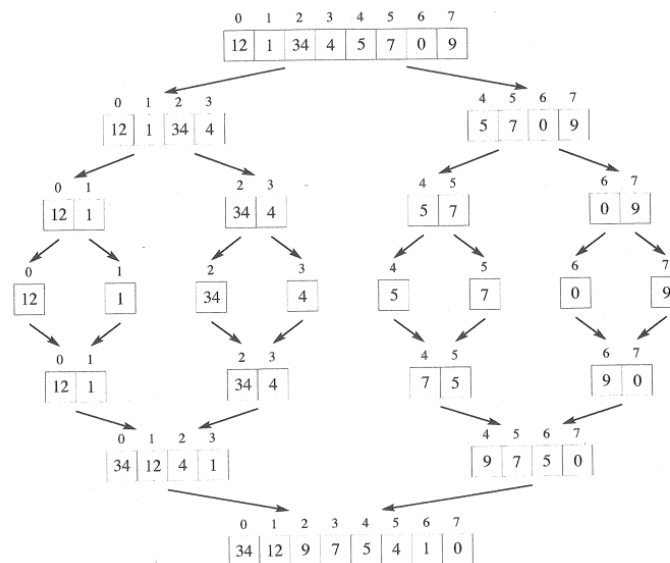


Figure 2: Merge sort

```
#include <stdlib.h>
#include <stdio.h>

#define max 100

int insert_array(int V[]) {
    int n, i;
    printf("How many elements?: ");
    scanf("%d", &n);

    for (i=0; i<n; i++) {
        printf("Element %d: ", i);
        scanf("%d", &V[i]);
    }
    return(n);
}

void print_array(int V[], int n) {
    int i;
    for (i=0; i<n; i++) {
        printf("%d ", V[i]);
    }
    printf("\n");
    return;
}

void merge(int a[], int p, int q, int r) {
    int i, j, k=0, b[max];
    i = p;
    j = q+1;
```



```

while (i<=q && j<=r) {
    if (a[i]<a[j]) {
        b[k] = a[i];
        i++;
    } else {
        b[k] = a[j];
        j++;
    }
    k++;
}
while (i <= q) {
    b[k] = a[i];
    i++;
    k++;
}
while (j <= r) {
    b[k] = a[j];
    j++;
    k++;
}
for (k=p; k<=r; k++)
    a[k] = b[k-p];
return;
}

void mergeSort(int a[], int p, int r) {
    int q;
    if (p < r) {
        q = (p+r)/2;
        mergeSort(a, p, q);
        mergeSort(a, q+1, r);
        merge(a, p, q, r);
    }
    return;
}

int main(void) {
    int n, V[max];
    n = insert_array(V);
    mergeSort(V, 0, n-1);
    print_array(V, n);
    return(0);
}

```

1.7 Quik Sort

$O(\log_n(n))$

It divides the array and then, when it merges back the numbers, it does it ordering them

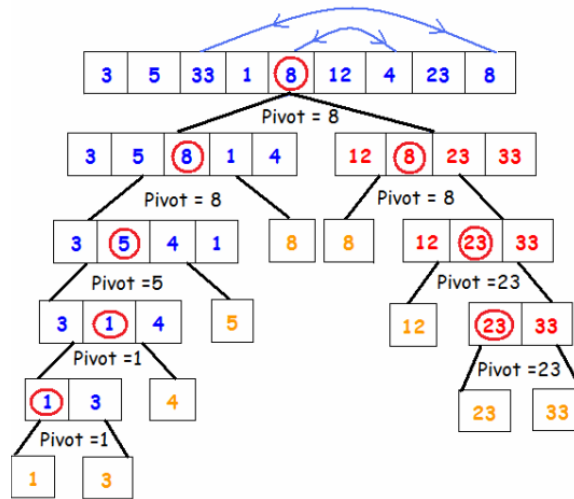


Figure 3: Quick sort

```
#include<stdio.h>

void quicksort(int number[25],int first,int last){
    int i, j, pivot, temp;
    if(first<last){
        pivot=first;
        i=first;
        j=last;
        while(i<j){
            while(number[i]<=number[pivot]&& i<last)
                i++;
            while(number[j]>number[pivot])
                j--;
            if(i<j){
                temp=number[i];
                number[i]=number[j];
                number[j]=temp;
            }
        }
        temp=number[pivot];
        number[pivot]=number[j];
        number[j]=temp;
        quicksort(number,first,j-1);
        quicksort(number,j+1,last);
    }
}

int main(){
    int i, count, number[25];
    printf("Enter some elements (Max. - 25): ");
    scanf("%d",&count);
    printf("Enter %d elements: ", count);
    for(i=0;i<count;i++)
        scanf("%d",&number[i]);
}
```

```
quicksort(number,0,count-1);  
printf("The Sorted Order is: ");  
for(i=0;i<count;i++)  
    printf(" %d",number[i]);  
return 0;  
}
```

2 Complexity equation

3 Heap sort

4 Priority queue

5 Binary Search Tree

InOrder(root) visits nodes in the following order:

4, 10, 12, 15, 18, 22, 24, 25, 31, 35, 44, 50, 66, 70, 90

A Pre-order traversal visits nodes in the following order:

25, 15, 10, 4, 12, 22, 18, 24, 50, 35, 31, 44, 70, 66, 90

A Post-order traversal visits nodes in the following order:

4, 12, 10, 18, 24, 22, 15, 31, 44, 35, 66, 90, 70, 50, 25

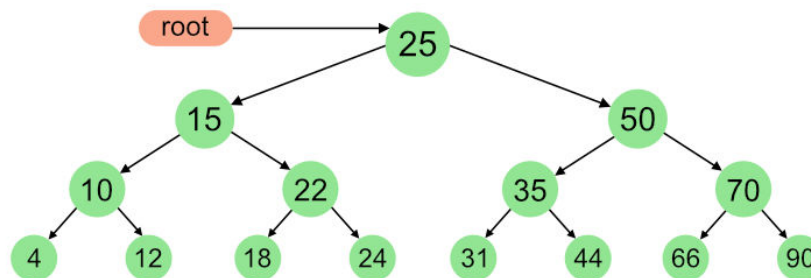


Figure 4: image

```
void writeTree(FILE *fp, node_t *rp, int modo) {
    if (rp == NULL) {
        return;
    }

    if (modo == PREORDER) {
        writeData(fp, rp->data);
    }

    writeTree(fp, rp->left, modo);

    if (modo == INORDER) {
        writeData(fp, rp->data);
    }

    writeTree(fp, rp->right, modo);

    if (modo == POSTORDER) {
        writeData(fp, rp->data);
    }

    return;
}
```

6 Heap sort

7 Hash tables

7.1 Linear chaining

$$h'(k) = k \% M$$

7.2 Open address

$$N \ll M \rightarrow \text{Load Factor} = \alpha = N / M$$

7.3 Linear Probing

$$h'(k) = (h(k) + i) \% M$$

7.4 quadratic Probing

$$h'(k) = (h(k) + c_1 * i + c_2 * i^2) \% M$$

7.5 double hasing

$$h'(k) = (h_1(k) + i * h_2(k)) \% M$$

7.6 linear probing

7.6.1 example

A S E R C H I N G X M P

a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	p	q	r	s	t	u	v	w	x	y	z
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
1	2	3	4	5	6	7	8	9	10	11	12	0	1	2	3	4	5	6	7	8	9	10	11	12	0

$$h'(k) = k \% M = k \% 13$$

$$h'(k) = (k \% 13 + i) \% 13$$

0	1	2	3	4	5	6	7	8	9	10	11	12
n	a		c		e	s	r	h	i			

7.7 quadratic probing

7.7.1 example

A S E R C H I N G X M P

a	b	c	d	e	f	g	h	i	j	k	l	m	n	o	p	q	r	s	t	u	v	w	x	y	z
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26
1	2	3	4	5	6	7	8	9	10	11	12	0	1	2	3	4	5	6	7	8	9	10	11	12	0

$$h'(k) = (h_1(k) + i * h_2(k)) \% M$$

$$\rightarrow h'(k) = (h(k) + c_1 * i + c_2 * i^2) \% M$$

0	1	2	3	4	5	6	7	8	9	10	11	12
a		c		e	s		r					

8 Greedy

9 Graphs

Definition - $G = (V, E)$ - V = Finite and non empty set of vertices (simple or complex data) - E = Finite set of edges, that define a binary relation on V

- Directed/Undirected graphs
- Directed
 - Edge = sorted pair of vertices $(u, v) \in E$ and $u, v \in V$
- Undirected
 - Edge = unsorted pair of vertices $(u, v) \in E$ and $u, v \in V$
- Weighted
 - each edge has a weight

9.0.1 Loops

- A loop is defined as a path where
 - $v_0 = v_k$, the starting and arrival vertices do coincide
- Self-loop
 - Loops whose length is 1
- A graphs without loops is called
- acyclic

10 Graphs visit

10.1 Breadth-First Search (BFS)

10.2 Depth-First Search (DFS)

11 Pointers

```
sizeof(char)=1
sizeof(short)
sizeof(int)= 4 (32 bit) or 8 (32bit)
sizeof(long)
sizeof(float)
sizeof(double)
sizeof(longdouble)
```

11.0.1 Example in memory

```
struct student{
    int id;
    char a;
    int id2;
    char b;
    float percentage
}
```

In memory:

.	1 byte	1 byte	1 byte	1 byte
id	x	x	x	x
a	x			
id2	x	x	x	x
b	x			
percentage	x	x	x	x

11.1 Pointers

Pointers are variables whose values are memory addresses

- The address operator, *
 - Returns the value of the object to which its operand (i.e., a pointer) points
 - $*p = v = 5$ because it's operand p points to v
- The indirection operator, &
 - Given a variable, it takes its address
 - Given $*p = v = 5$ & v is the address of v

```
<type> *<pointer>;
int *pointer;
int number;
```

```
pointer = &number;
```

This means that the pointer is equal to the number address, so pointer points to the number

11.1.1 All possible cases

```
#include <stdio.h>
#include <stdlib.h>
```



```

int main(int argc, char *argv[])
{
    int v = 5;
    int *p;
    p = &v;

    printf("%d\n", v);
    /** printf("%d\n", *v); Error!*/
    printf("%d\n", &v);
    printf("%d\n", p);
    printf("%d\n", *p);
    printf("%d\n", &p);
    printf("%d\n", *(&v));
    /** printf("%d\n", &(*v)); Error!*/
    printf("%d\n", *(&p));
    printf("%d\n", &(*p));

    return 0;
}
5
//Error!
957891628
957891628
5
957891616
5
//Error!
957891628
957891628

```

Symbol	Meaning	Outcome
v	integer value	5
v	meaningless	Error*
&v	Address of v	Warning*! address 957891628
p	It is the address of v that points to v	Warning! address 957891628
p	It's where p points. So it's the int value v	5
&p	p	Warning*! address 957891628
(&v)	v (integer value)	5
&(*v)	meaningless	Error!
(&p)	p	Warning*! address 957891628
&(*p)	p	Warning*! address 957891628

*The Warning is because the print is going to print an integer ("%d") but the symbol is the integer address

11.2 Final version with no Errors and no Warnings

```

#include <stdio.h>
#include <stdlib.h>

int main(int argc, char *argv[])
{
    int v = 5;
    int *p;

```

```

p = &v;

printf("%d\n", v);
printf("%lu\n", (long unsigned int) &v);
printf("%lu\n", (long unsigned int) &v);
printf("%lu\n", (long unsigned int) p);
printf("%d\n", *p);
printf("%lu\n", (long unsigned int) &p);
printf("%d\n", *(&v));
printf("%lu\n", (long unsigned int) *(&p));
printf("%lu\n", (long unsigned int) &(*p));

return 0;
}

```

Run:

```

5
140735223946540
140735223946540
140735223946540
5
140735223946528
5
140735223946540
140735223946540

```

Symbol	Meaning	Outcome
v	integer value	5
&v	Address of v	Address 140735223946540
p	It is the address of v that points to v	Address 140735223946540
p	It's where p points. So it's the int value v	5
&p	p	Address 140735223946540
(&v)	v (integer value)	5
(&p)	p	Address 140735223946540
&(*p)	p	Address 140735223946540

Value -> *p=v=5 -> > p is the pointer that points to v = 5 (*p means pointed by p) whose address is p = &v = 140735223946540

11.2.1 Example

```

#include <stdio.h>
#include <stdlib.h>

int main(int argc, char *argv[])
{
    float *ptr;
    float f = 7.5;

    int *ppp;
    int a = 3;

    ptr = &f;
    ppp = &a;
}

```

```

printf("%.2f\n%.2f\n", f, *ptr);
printf("%d\n%d\n%d\n", &a, &(*ppp), ppp);

return 0;
}

```

Run:

```

7.5
7.5
32324325525
32324325525
32324325525

```

11.2.1.1 void pointer

```

int i, j;
void *pv;
...
pv = &i;
...
j = *pv;
j = i;

int i, j;
void *pv;
...
pv = (void *) &i;
...
j = (int) *pv;
j = i;

```

11.3 Pointer Arithmetic

```

int i = 10;
int *p1;
int *p2;

```

```

p1 = &i;
p1++;

```

p++ makes the pointer points to next < type >, basically if int p++ means next byte, if char, next bit...

```

int i = 10;
int j = 20;
int *p1;
int *p2;
p1 = &i;
p2 = &j;
if (*p1 == *p2) { *1... }
if (p1 == p2) { *2... }
if (p1 > p2) { *3... }

```

- *1 Check whether the referenced values are the same even if they are placed in different position within the system memory
- *2 Check whether the two pointers refer to the same object, i.e., they store the same memory address

- 3 Check whether the address $p1$ comes after the address $p2$ into the system memory; this is often meaningless
If $p1 == p2$ also $p1 == *p2$

11.4 By reference

11.4.1 Wrong

```
int i; j;
```

```
swap (i, j);
```

Here you change them locally only

```
void swap (int x, int y) {
    int tmp;

    tmp = x;
    x = y;
    y = tmp;

    return;
}
```

11.4.2 Correct

you pass the pointer $\&i$ which is then pointed by x

```
int i; j;
```

```
swap (&i, &j);
```

Here you pass the address

```
void swap (int *x, int *y) {
    int tmp;

    tmp = *x;
    *x = *y;
    *y = tmp;

    return;
}
```

11.4.3 Pointers and arrays

```
int v[N];
```

```
v = &v[0]
```

```
v+i = &v[i]
```

```
*v = v[0]
```

```
*(v+i) = v[i]
```

```
#define L ...
```

```
int v[L];
```

```
int *p;
```

```
p = v;
```

```
p = &v[0];
```

```

//1
for (i=0; i<L; i++) {
    scanf ("%d", &v[i]);
    printf ("%d", v[i]);
}

//2
for (i=0, p=v; i<L; i++, p++) {
    scanf ("%d", p);
    printf ("%d", *p);
}

//3
p = &v[0];
for (i=0; i<L; i++) {
    scanf ("%d", (p+i));
    printf ("%d", *(p+i));
}

```

11.4.4 Pointers and strings

The last element is ‘\0’

```

int strlen (char str[]) {
    int cnt;
    cnt =0;
    while (str[cnt] != '\0')
        cnt++;
    return cnt;
}

int strlen (char str[]) {
    int cnt;
    char *p;
    cnt =0;
    p = &s[0];
    while (*p != '\0') {
        cnt++;
        p++;
    }
    return cnt;
}

int strlen (char *str) {
    int cnt;
    cnt = 0;
    while (*str != '\0') {
        cnt++;
        str++;
    }
    return cnt;
}

int strlen (char *str) {
    char *p;
    p = str;
    while (*p != '\0') {
        p++;
    }
}

```

```

    return (p - str);
}

```

11.4.5 Pointers and structures

pointer_to_structure->member_name
 (*pointer_to_structure).member_name

```

struct student {
    char s1[L], s2[L];
    int i;
    float f;
};

struct student v;
...
read (&v);
...

void read (struct student *v) {
    char s1[DIM], s2[DIM];
    int i; float f;

    fprintf (stdout, "...: ");
    scanf ("%s%s%d%f", s1, s2, &i, &f);

    strcpy (v->s1, s1);
    strcpy (v->s2, s2);

    v->i = i;
    v->f = f;

    return;
}

struct student {
    char s1[L], s2[L];
    int i;
    float f;
};

struct student v;
...
read (&v);
...

void read (struct student *v) {
    char s1[DIM], s2[DIM];
    int i; float f;

    fprintf (stdout, "...: ");
    scanf ("%s%s%d%f", v->s1, v->s2, &v->i, &v->f);

    return;
}

```

12 Dinamic Memory Allocation

there was a cool way to go there if only i would have like to

12.1 2D array

Two-dimensional arrays can be allocated in two different ways - As a single 1D array including all elements - Easy syntax for allocation and manipulation - Difficult manipulation logic - As an array of pointers to 1D arrays of elements - Difficult syntax for allocation and manipulation - Standard manipulation logic

you start with one array allocation

```
int **mat;

mat = (int **) malloc(r * sizeof(int *));
if (mat==NULL)
{
    fprintf(stderr, "memory allocation error.\n");
    exit(1);
}

printf("number of columns: ");
scanf("%d", &c);
//allocate memory for columns
for (i=0; i<r; i++)
{
    mat[i] = /*(int *)*/ malloc(c * sizeof(int)); //as always (int **) can be avoided.
    if (mat==NULL)
    {
        fprintf(stderr, "memory allocation error.\n");
        exit(2);
    }
}
```

It has 2 ** beacause

```
mat[i] = (int **) malloc (r * sizeof (int*));
```

- `mat[i][j]` or `(mat[i])[j]`
 - Indicates a single element
 - It is a value
- `mat[i]`
 - Indicates an entire row
 - It is a pointer to an array of values
- `mat`
 - Indicates the entire matrix
 - It is a pointer to an array of pointers

```
mat = &mat[0]; //same notaion as p = &v;
```

12.1.0.1 matrix scanf cool way to do it with strlen

```
int r, c, i;
char **mat;

printf ("Number of rows: ");
scanf ("%d", &r);
```

Allocation of a new node

Memory allocation

```
list_t *new_element ( ) {  
    list_t *e_ptr;  
    e_ptr = (list_t *) malloc (sizeof (list_t));  
    if (e_ptr==NULL) {  
        fprintf (stderr, "Memory allocation error.\n");  
        exit (FAILURE);  
    }  
    return (e_ptr);  
}
```

Function call

```
list_t *head, *new;  
...  
head = NULL;  
...  
new = new_element();
```

Initially the list is empty, thus,
head must be initially set to NULL

Figure 5: image

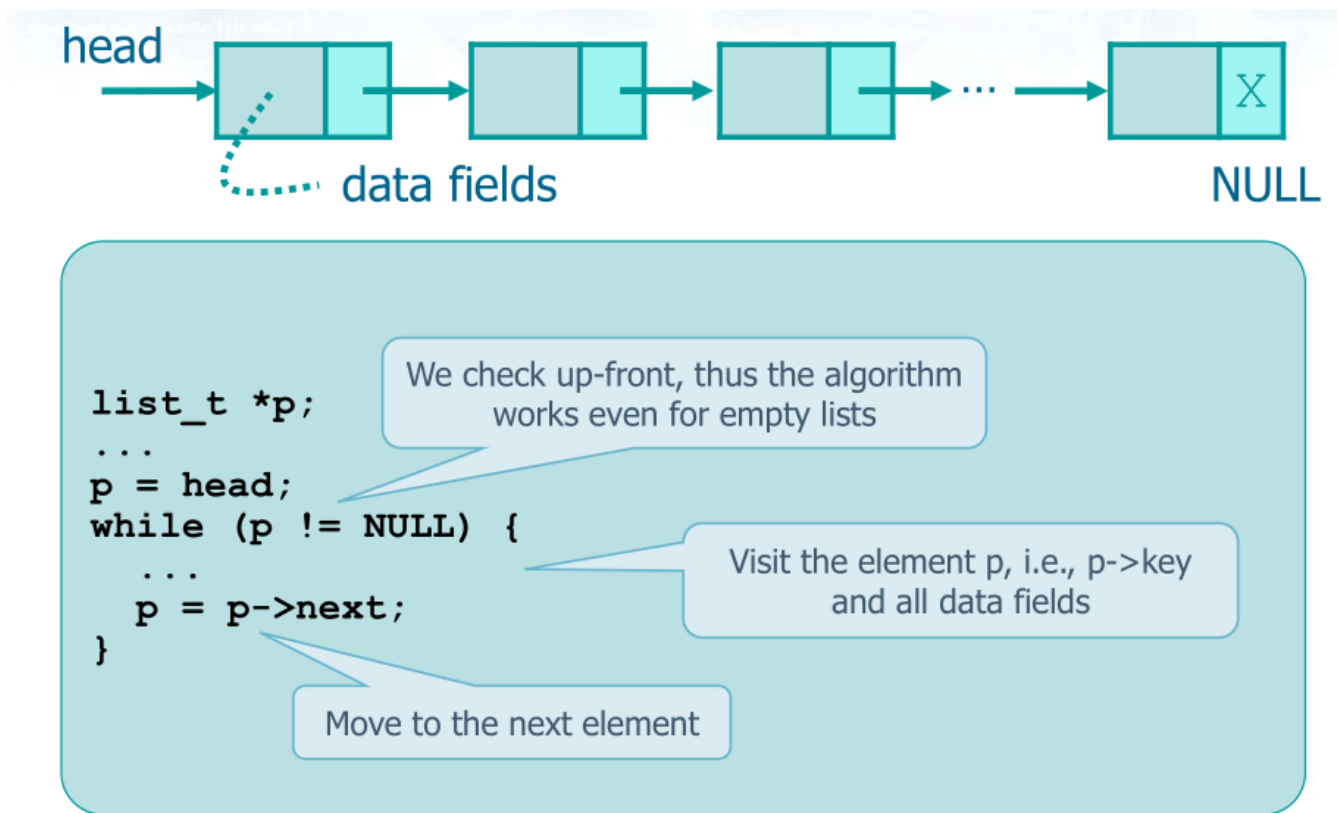


Figure 6: image

```
mat = (int **) malloc (r * sizeof (int *));
if (mat == NULL) {
    fprintf (stderr, "Memory allocation error.\n");
    exit (1);
}
for (i=0; i<r; i++) {
    scanf ("%s", str);

    mat[i] = malloc ((strlen(str)+1) * sizeof (char));
    if (mat[i] == NULL) {
        fprintf (stderr, "Memory allocation error.\n");
        exit (1);
    }
}
```

- As for 1D arrays, also 2D arrays may be made visible outside the environment in which they have been allocated
- As for 1D arrays, it is possible to
 - Use global variables to contain the matrix pointer
 - Adopt the return statement to return it
 - Pass the pointer to the matrix by reference
 - * Unfortunately, the pointer to the matrix is already a 2-star object (indirect reference)
 - * To pass it by reference, we have to use a 3-star object (a reference to a reference of a reference)

12.1.1 Mtrix allocation in a function

mat dies when function dies, but the content return

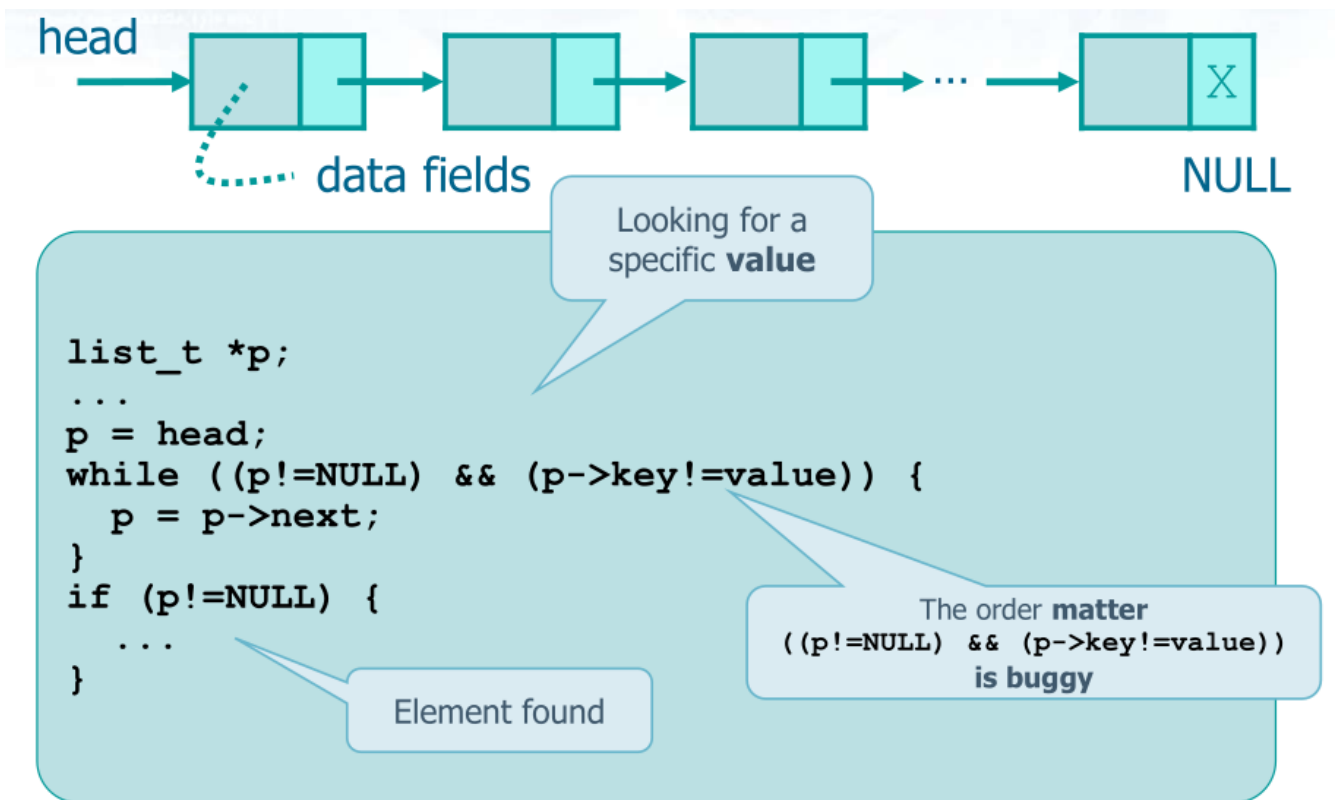


Figure 7: image

```
char **mat;
...
mat = malloc2d (nr, nc);

char **malloc2d (int r, int c) {
    int i;
    char **mat;

    mat = (char **) malloc (r * sizeof(char *));
    if (mat == NULL) { ... }
    for (i=0; i<r; i++) {
        mat[i] = (char *) malloc(c * sizeof (char));
        if (mat[i]==NULL) { ... }
    }
    return (mat);
}
```

second way
here you pass the address and the content remains there

```
char **mat;
...
malloc2d (&mat, nr, nc);
```

We use a 3-* object with a temporary 2* object as a support

```
void malloc2d (char ***m, int r, int c) {
    int i;
    char **mat;
```

```

mat = (char **) malloc (r * sizeof(char *));
if (mat == NULL) { ... }
for (i=0; i<r; i++) {
mat[i] = (char *) malloc(c * sizeof (char));
if (mat[i]==NULL) { ... }
}
*m = mat;
return;
}

```

another way

```

char **mat;
...
malloc2d (&mat, nr, nc);
void malloc2d (char ***m, int r, int c) {
    int i;

    (*m) = (char **) malloc (r * sizeof(char *));
    if (m == NULL) { ... }
    for (i=0; i<r; i++) {
        (*m)[i] = (char *) malloc(c * sizeof (char));
        if ((*m)[i]==NULL) { ... }
    }
    return;
}

```

12.1.2 Free

```

void free2d (char **m, int r) {
    int i;
    for (i=0; i<r; i++) {
        free (m[i]);
    }
    free (m);
    return;
}

```

```

void free2d (char ***m, int r) {
}

int **mat, i;
mat = *m;
for (i=0; i<r; i++) {
    free (mat[i]);
}
free (mat);
m = NULL;
return;
}

```

13 List

13.1 Intro

Easy to delete and add in ahead, in the middle, in the tail

- FIFO or Stack
- LIFO
- Ordered List
- Single-Linked List
- Double-Linked List
- List of List

|val1->next| b[val2] -> |val2->next| c[val3] -> |val3->next| d[NULL] -> b[val2] -> c[val3] -> d[NULL] -> ##

Prototypes (Atomic operation)

Struct of a List

```
#include <stdio.h>
#include <stdlib.h>
#include <ctype.h>
```

```
/* structure declaration */
typedef struct node_s {
    int val;
    struct node_s *next;
} node_t;
```

13.2 Function required to operate with list

```
/* function prototypes */
int read (void);
node_t *insert (node_t *head, int val);
void search (node_t *head, int val);
node_t *delete_first (node_t *head);
node_t *delete_last (node_t *head);
node_t *delete (node_t *head, int val);
void display (node_t *head);
```

13.3 Main

```
/*
 * main program
 */
int main(void) {
    node_t *head=NULL;
    int val, stop=0;
    char choice;

    while (stop == 0) {
        fprintf(stdout, "\nAvailable commands:\n");
        fprintf(stdout, "  i: insert a value (sorted)\n");
        fprintf(stdout, "  s: search a value\n");
        fprintf(stdout, "  f: delete the first value\n");
        fprintf(stdout, "  l: delete the last value\n");
        fprintf(stdout, "  d: delete a specified value\n");
        fprintf(stdout, "  c: display the list contents\n");
        fprintf(stdout, "  e: end program\n");
        fprintf(stdout, "Make your choice: ");
        scanf("%c%c", &choice);
```

```

switch (choice) {
    case 'i': val = read();
              head = insert(head, val);
              break;
    case 's': val = read();
              search(head, val);
              break;
    case 'f': head = delete_first(head);
              break;
    case 'l': head = delete_last(head);
              break;
    case 'd': val = read();
              head = delete(head, val);
              break;
    case 'c': display(head);
              break;
    case 'e': fprintf(stdout, "End of session.\n");
              stop = 1;
              break;
    default : fprintf(stdout, "Wrong choice!\n");
              break;
}
}

return EXIT_SUCCESS;
}

/*
 * read in a value
 */
int read (void) {
    int val;

    fprintf(stdout, "Value: ");
    scanf("%d%c", &val);

    return val;
}

```

13.4 List insertion

Assigning a new value `val` to the `p` element in order to insert that element in the list
 Malloc the struct

Allocation of a new node

Memory allocation

```
list_t *new_element ( ) {
    list_t *e_ptr;
    e_ptr = (list_t *) malloc (sizeof (list_t));
    if (e_ptr==NULL) {
        fprintf (stderr, "Memory allocation error.\n");
        exit (FAILURE);
    }
    return (e_ptr);
}
```

Function call

```
list_t *head, *new;
...
head = NULL;
...
new = new_element();
```

Initially the list is empty, thus, **head** must be initially set to NULL

13.4.1 List visit

```
/*
 * insert a value in the list (sorted)
 */
node_t *insert (node_t *head, int val) {
    node_t *p, *q=head;

    p = (node_t *)malloc(sizeof(node_t));
    p->val = val;
    p->next = NULL;
```

13.4.2 Head insertion

```
p insertion ahead
O(n) cost
-> val2/_next -> val3/_next -> -> val2/_next -> val3/_next -> ![image](support/5.png)c

/* insert ahead */
if (head==NULL || valval) {
    p->next = head;
    //head = p;
    return p;
}

### In-order insertion
![image](support/6.png)
```

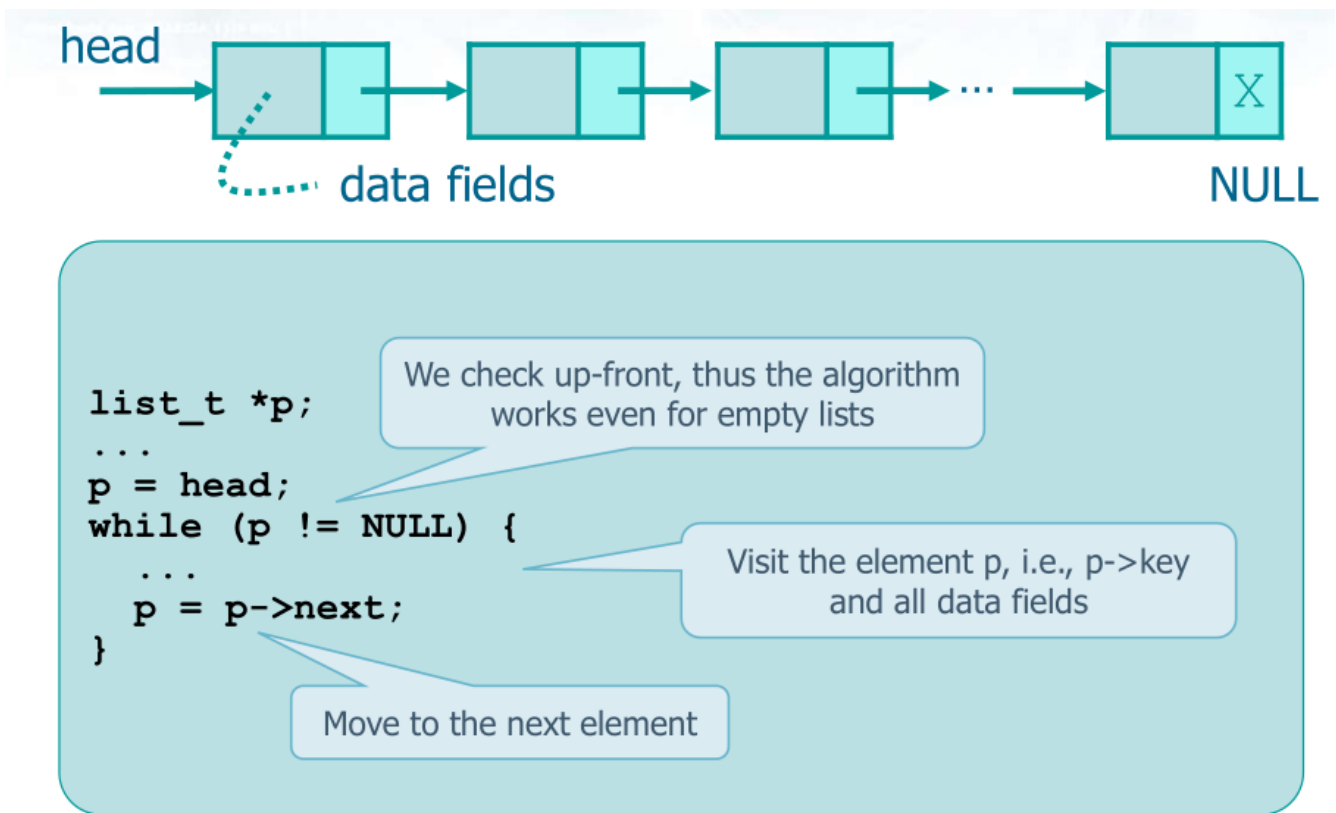


Figure 8: image

```

'''new->next = p->next'''
'''p->next = new'''
### Middle/Tail insertion
<!-- '''mermaid -->
<!-- graph LR -->
<!-- val1/_next -->p/_next -->
<!-- p/_next -->val3/_next -->
<!-- val1/_next -->val3/_next -->

p->next = val1->next
val1->next = p

/*
 * scan the list with the q pointer in order to find
 * the correct position where to perform the insertion
 */
while (q->next!=NULL && q->next->val<val) {
    q = q->next;
}
p->next = q->next;
q->next = p;
return head;
}


```

13.4.2.1 Tail insertion Tail insertion is basically middle insertion
`|val1->next| b[p] -> |p->next| c[val2] -> |val1->next| c[val2] -> p->next = val1->next`
`val1->next = p`

```

|val1->next| b[p] -> |p->next| c[NULL] -> |val1->next| c[NULL] -> p->next = val1->next
val1->next = p
or
p->next = NULL
val1->next = p

```

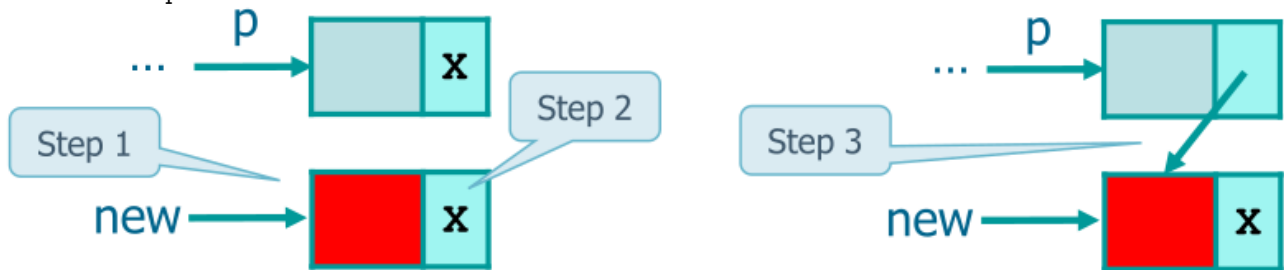

```
Step 1 new = new_element();
```


```
...
Step 2 new->next = p->next;
```

```
Step 3 p->next = new;
```

The only difference is that
`p->next` is NULL

13.5 List searching

if `p->key == value` you exit and unless `p == NULL` you're good in your element of the list

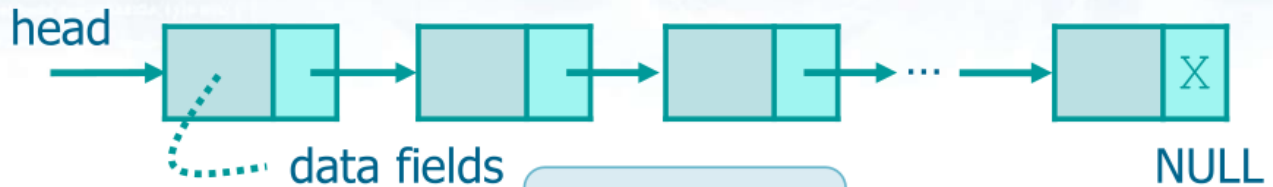

```

list_t *p;
...
p = head;
while ((p!=NULL) && (p->key!=value)) {
    p = p->next;
}
if (p!=NULL) {
    ...
}

```

Looking for a
specific **value**

The order **matter**
`((p!=NULL) && (p->key!=value))`
is **buggy**

Element found

```

/*
 * search a value in the list
 */

```



```

void search (node_t *head, int val) {
    node_t *p;
    int i;


    for (p=head, i=0; p!=NULL && p->val<val; p=p->next, i++) ;

    if (p!=NULL && p->val==val) {
        fprintf(stderr, "Element found (index = %d)\n", i);
    } else {
        fprintf(stderr, "Element NOT found.\n");
    }
}

```

13.6 List extraction

than you free p

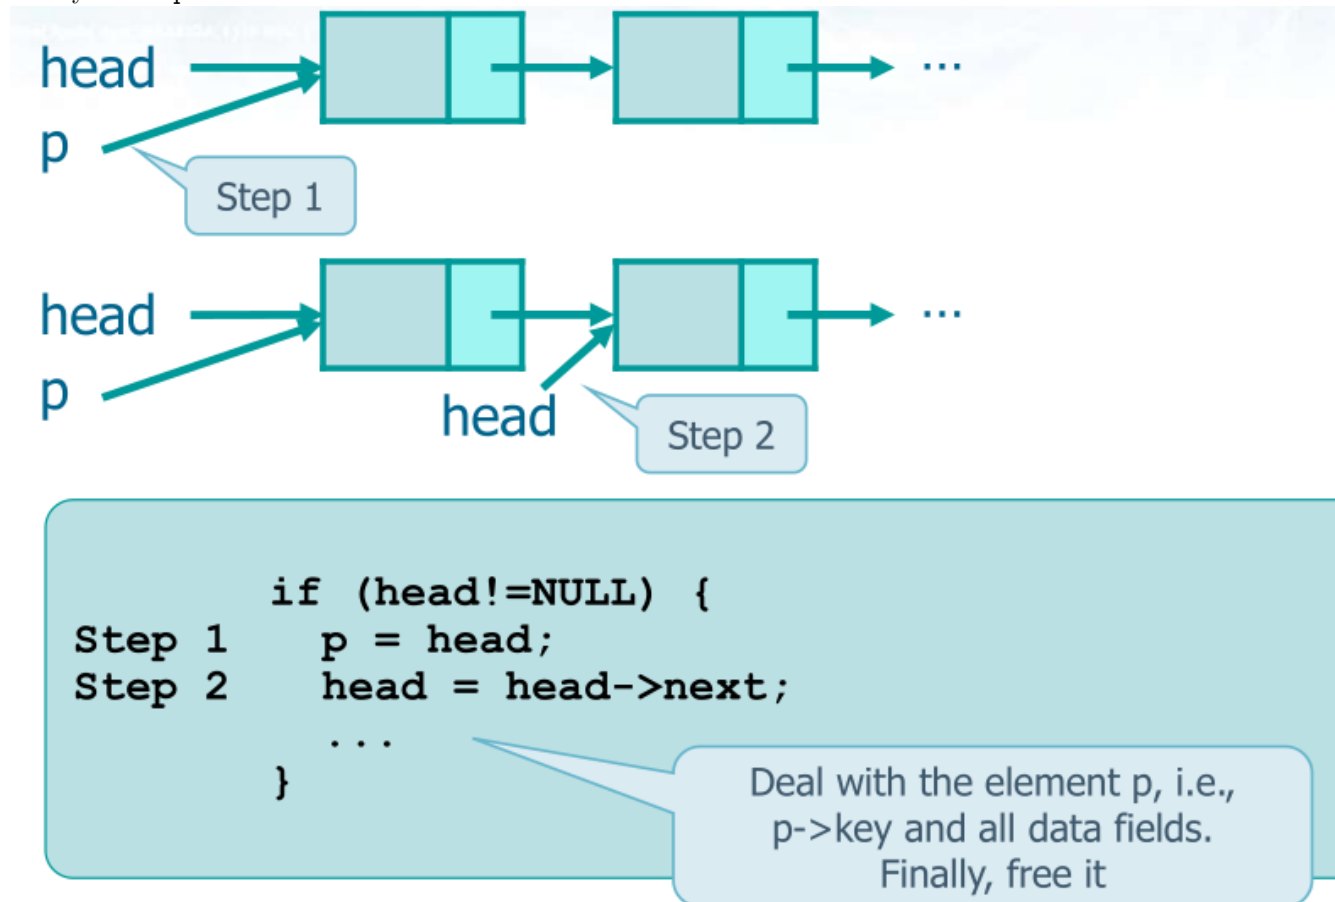

```

p = head
head = head->next
if there's only one element
p = head
head = NULL

```


13.6.1 In-order Extraction

```

p = q->next
q->next = p->next
or
q->next = q->next->next

```

p is only not to lose forever that element (red one), without step 1 I lose reference to elements and at the end of the program I have many leaks. If I lose the reference I can not free it.

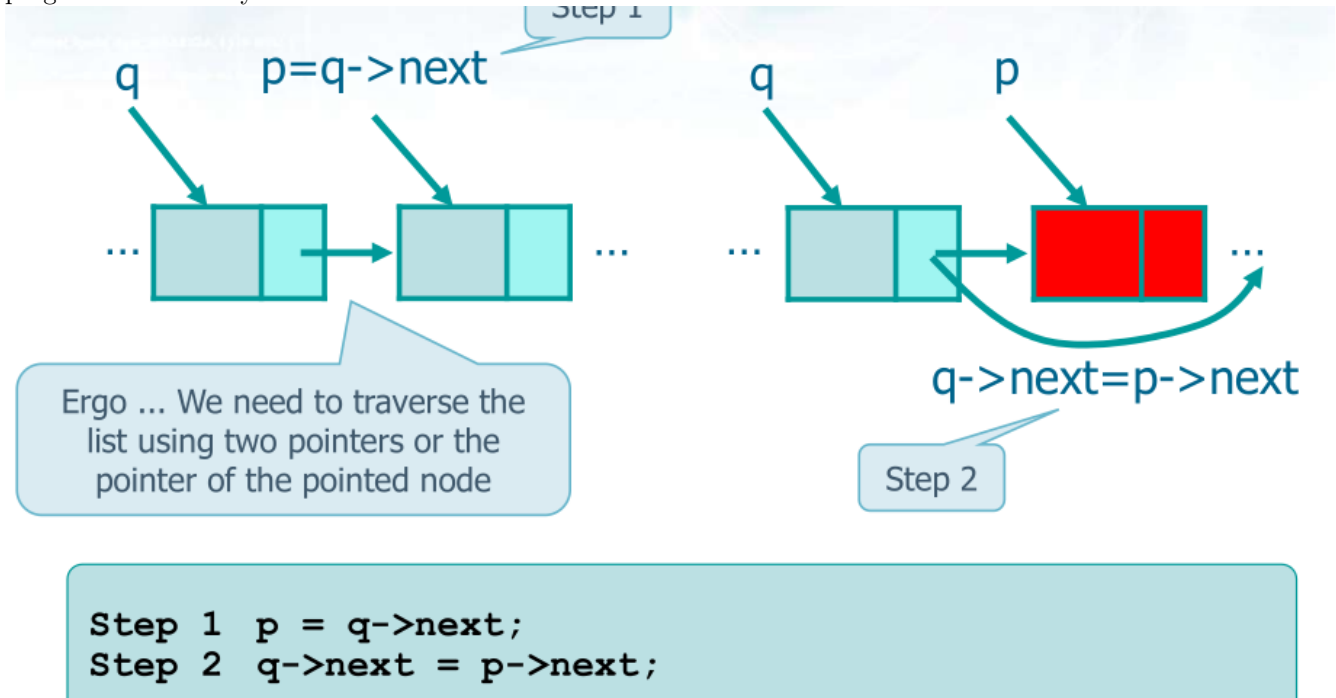

13.7 List deletion (Free)

13.7.1 Free the entire list

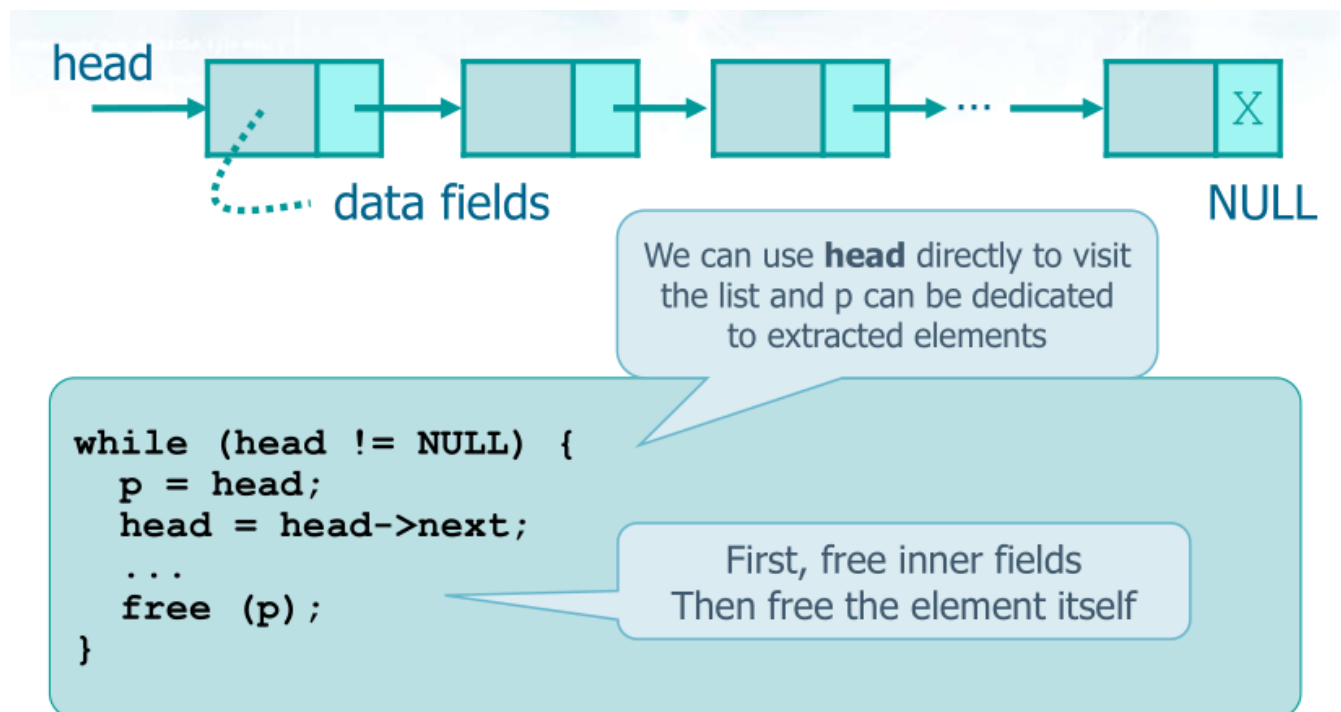


Figure 9: image

```
while (head != 0){
    p = head;
```

```

    head = head->next;
    free (p);
}

```

13.7.2 Deleting first element

```

/*
 * delete the first element of the list
 */
node_t *delete_first (node_t *head) {
    node_t *p;

    /* empty list */
    if (head != NULL) {
        p = head->next;
        free(head);
        return p;
    }

    return head;
}

```

13.7.3 Deleting a particular element

```

/*
 * delete a list element, keeping it sorted
 */
node_t *delete_last (node_t *head) {
    node_t *p, *q=head;

    /* empty list */
    if (head == NULL) {
        fprintf(stderr, "Error: empty list\n");
        return NULL;
    }

    /* delete ahead */
    if (head->next == NULL) {
        free(head);
        return NULL;
    }

    /* scan the list with the q pointer */
    while (q->next->next!=NULL) {
        q = q->next;
    }
    p = q->next;
    q->next = NULL;
    free(p);

    return head;
}

/*
 * delete a list element, keeping it sorted
 */
node_t *delete (node_t *head, int val) {

```

```

node_t *p, *q=head;

/* empty list */
if (head == NULL) {
    fprintf(stderr, "Error: empty list\n");
    return NULL;
}

```

13.7.4 Deleting ahead

```

/* delete ahead */
if (val == head->val) {
    p = head->next;
    free(head);
    return p;
}

```

13.8 Scan to find an element to delete it

```

/*
 * scan the list with the q pointer in order to find
 * the element to remove from the list
 */
while (q->next!=NULL && q->next->val<val) {
    q = q->next;
}
if (q->next!=NULL && q->next->val==val) {
    p = q->next;
    q->next = p->next;
    free(p);
} else {
    fprintf(stderr, "Element NOT found.\n");
}

return head;
}

```

13.9 Display list

```

/*
 * display the list contents
 */
void display (node_t *head) {
    int i=0;

    while (head != NULL) {
        fprintf(stderr, "Element %d = %d\n", i++, head->val);
        head = head->next;
    }
}


```

13.10 Sentinel

You don't check for null

❖ We insert a sentinel element at the end of the list

- We always have at least one element in the list, i.e., the sentinel
 - We waste a small chunk of memory
- We can use the extra element to store the value we are looking for
- Thus, we can simplify the search condition

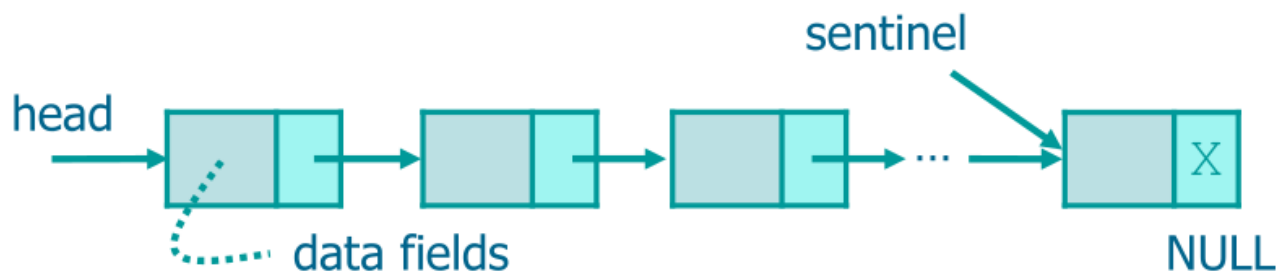

```
sentinel->key = value;  
p = head;  
while (value!=p->key) {  
    p = p->next;  
}  
if (p!=sentinel) {  
    ...  
} else {  
    ...  
}
```

At the very beginning, we insert the value in the sentinel

Thus, **value** is always in the list and we can simplify the condition

value found

value **not** found

```
sentinel->key = value;  
p = head;  
while (value!=p->key) {  
    p = p->next;  
}  
if (p!=sentinel) {  
    ...  
value found  
} else {  
    ...  
}
```

13.11 OT Circular buffer


in a circle

(i++)/%

so you reuse the array instead of use a matrix

13.12 FIFO

13.12.1 Enqueue

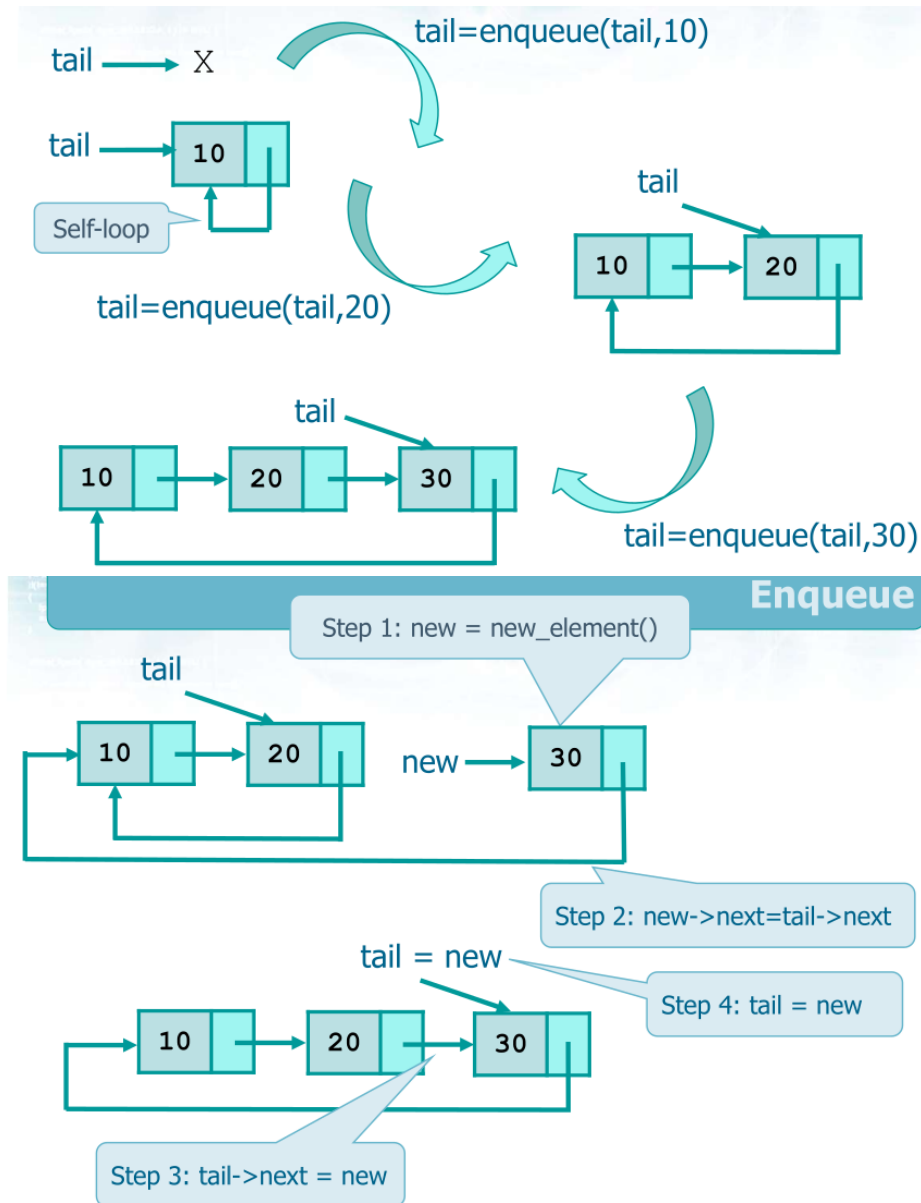

13.12.2 Dequeue

```
list_t *dequeue (list_t *tail, int *val, int *status) {  
    list_t *old;  
    if (tail != NULL) {  
        if (tail == tail->next) {  
            *val = tail->key;  
            free (tail);  
            tail  
        }  
    }  
}
```

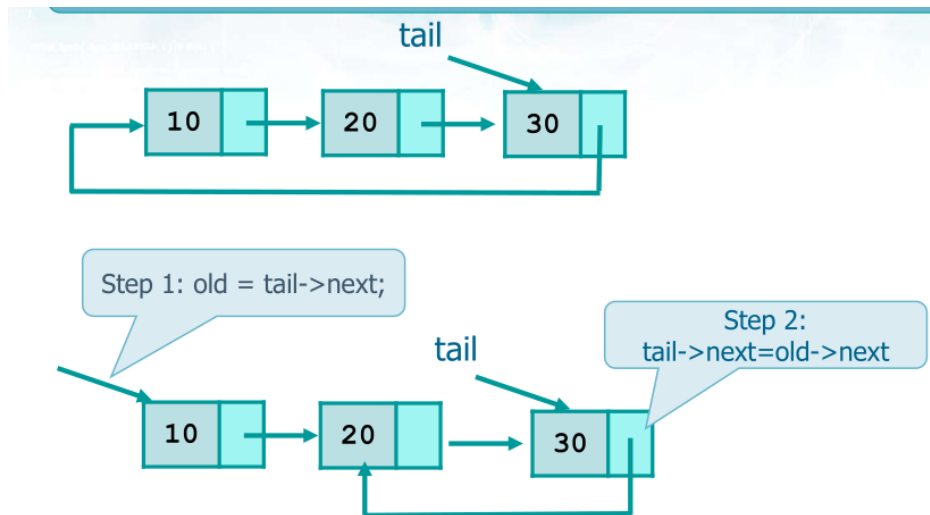


Figure 10: image

```

10
tail = NULL;
} else {
    old = tail->next;
    *val = old->key;
    tail
    X
    tail->next = old->next;
    free (old);
}
} else {
    *status = FAILURE;
}
return (tail);
}

```

13.13 Ordered Linked Lists

```

do {
    ...
    head = insert (head, val);
    ...
    search (head, val);
    ...
    head = extract (head, val);
} while ( ... );


list_t *dequeue (list_t *tail, int *val, int *status) {
    list_t *old;
    if (tail != NULL) {
        *status = SUCCESS;
        the self-loop) must be
        if (tail == tail->next) {
            implemented aside
            *val = tail->key;
            free (tail);

```

```

tail
10
tail = NULL;
} else {
old = tail->next;
*val = old->key;
tail
X
tail->next = old->next;
free (old);
}
} else {
*status = FAILURE;
}
return (tail);
}

```

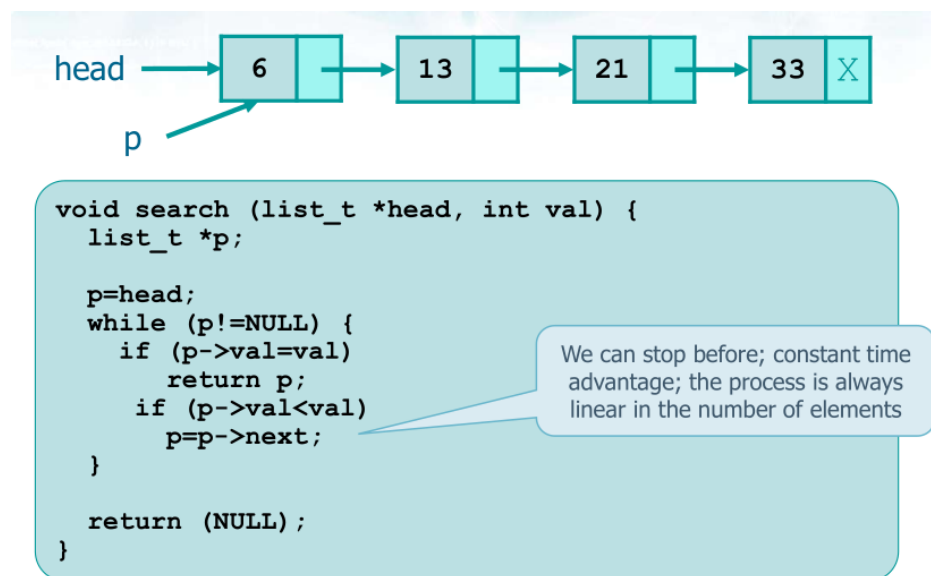

13.13.0.1 search

linear cost, not logarithmic, so, don't use at the examination

A search can terminate - Successfully, when we find the key - Unsuccessfully when a record with a key larger (or smaller) than the search key is found - In any case - We can stop the search as soon as the key we are looking for become larger than the current node's key - This make the search more efficient - Nevertheless, the search still has a linear cost ($O(n)$) in the number of elements stored into the list

```

void search (list_t *head, int val) {
    list_t *p;
    p=head;
    while (p!=NULL) {
        if (p->val==val)
            return p;
        if (p->val<val)
            p=p->next;
    }
    return (NULL);
}

```

There are several approaches to solve the problem - Use two pointers to individuate two consecutive elements - Move them along the list in a synchronized way - Use the rightmost to compare and the leftmost to insert - Use a pointer of the pointed element to make the comparison - Reach the element referenced by the pointed element to compare, use the direct pointer to insert


```
list_t *insert (list_t *head, int val) {
    list_t *p, *q=head;

    p = new_element ();
    p->val = val;
    p->next = NULL;

    if (head==NULL || val<head->val) {
        p->next = head;
        return p;
    }
    while (q->next!=NULL && q->next->val<val) {
        q = q->next;
    }
    p->next = q->next;
    q->next = p;
    return head;
}
```

Create a new element

Head insertion

q is used to insert
q->next is used to compare


13.13.0.2 insert

Example: val=15

```
list_t *insert (list_t *head, int val) {
    list_t *p, *q=head;

    p = new_element ();
    p->val = val;
    p->next = NULL;

    if (head==NULL || val<head->val) {
        p->next = head;
        return p;
    }
    while (q->next!=NULL && q->next->val<val) {
        q = q->next;
    }
    p->next = q->next;
    q->next = p;
    return head;
}
```

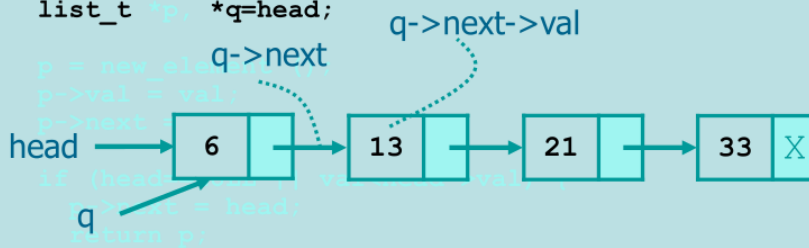


Example: val=15

```
list_t *insert (list_t *head, int val) {
    list_t *p, *q=head;

    p = new_element ();
    p->val = val;
    p->next = NULL;

    if (head==NULL || val<head->val) {
        p->next = head;
        return p;
    }
    while (q->next!=NULL && q->next->val<val) {
        q = q->next;
    }
    p->next = q->next;
    q->next = p;
    return head;
}
```

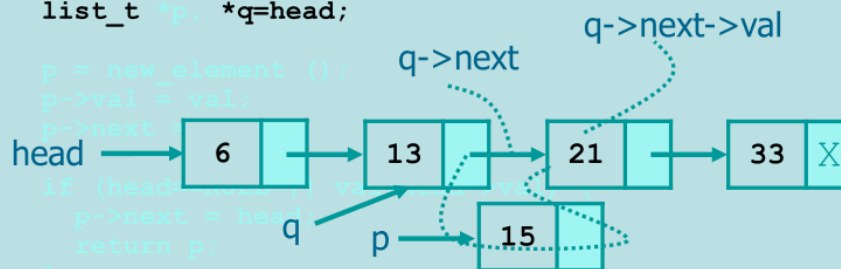

```

list_t *insert (list_t *head, int val) {
    list_t *p, *q=head;

    //Create a new element
    p = new_element ();
    p->val = val;
    p->next = NULL;

    Head insertion
    if (head==NULL || val<head->val) {
        p->next = head;
        return p;
    }
    while (q->next!=NULL && q->next->val<val) {
        q = q->next;
    }
    return head;
}

```

13.13.0.3 Extraction

```

list_t *extract (list_t *head, int val) {
    list_t *p, *q=head;
    if (head == NULL) {
        fprintf(stderr, "Error: empty list\n");
        return NULL;
    }
    if (val == head->val) {
        p = head->next;
        free(head);
        Head extraction
        return p;
    }
    while (q->next!=NULL && q->next->val<val) {
        q = q->next;
    }
}

```

13.13.0.4 Double linked list

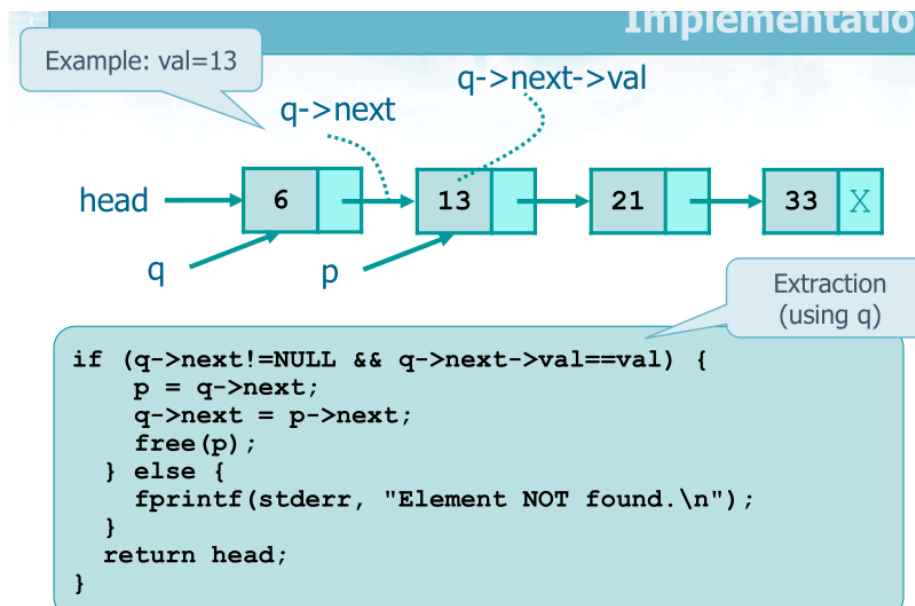


Figure 11: image



```

typedef struct list_s list_t;
struct list_s {
    ...
    list_t *left, *right;
};

```

List of List

13.13.0.5 Example you can extract from head1 and you insert in head2 list? with a head insertion
solution

```

typedef struct list_s list_t;
struct list_s {
    int key;
    ...
    list_t *next;
};

```

Type definition,

Extract from
list 1

Insert into
list 2

```

list_t *list_reverse (list_t *head1) {
    list_t *tmp1, head2;
    head2 = NULL;
    while (head1 != NULL) {
        tmp1 = head1->next;
        head1 = head1->next;
        tmp1->next = head2;
        head2 = tmp1;
    }
    return head2;
}

```


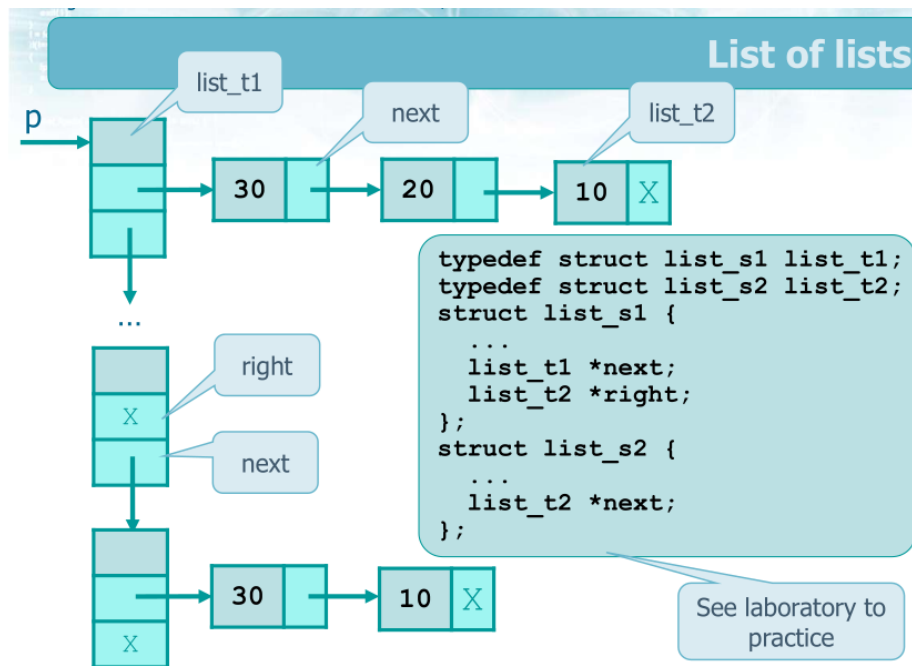


Figure 12: image

❖ Given a simple linked list, invert all elements of such a list such that

- The first element becomes the last one
- The last element becomes the first one
- Input list



➤ Output list




Figure 13: image


```

p = head1;
while (p != NULL){
    //p->val (p->key)
    head2 = push (head2, p->val);
    p = p->next;
}

```

❖ Given a simple linked list, sort all elements in ascending order

➤ Input list



➤ Output list




Figure 14: image

Head extraction and in order insertion

14 List library

14.1 Stack

```
#ifndef _STACK_PUBLIC
#define _STACK_PUBLIC

#include <stdio.h>

/* macro definition */
#define stack_empty_m(sp) (stack_count(sp) == 0)

/* type declarations */
typedef struct stack stack_t;

/* extern function prototypes */
extern stack_t *stack_init(int size);
extern int stack_count(stack_t *sp);
extern int stack_push(stack_t *sp, void *data);
extern int stack_pop(stack_t *sp, void **data_ptr);
extern void stack_print(FILE *fp, stack_t *sp, void (*print)(FILE *, void *));
extern void stack_dispose(stack_t *sp, void (*quit)(void *));

#endif

#ifndef _STACK_PRIVATE
#define _STACK_PRIVATE

#include <stdio.h>
#include "stackPublic.h"
#include "util.h"

/* structure declarations */
struct stack {
    void **array;
    int index;
    int size;
};

#endi

#include "stackPrivate.h"

/*
 * create a new empty stack
 */
stack_t *stack_init(int size) {
    stack_t *sp;

    sp = (stack_t *)util_malloc(sizeof(stack_t));
    sp->size = size;
    sp->index = 0;
    sp->array = (void **)util_malloc(size * sizeof(void *));
    return sp;
}

/*
 * return the number of elements stored in the stack
 */
```

```

    */
int stack_count(stack_t *sp) { return (sp != NULL) ? sp->index : 0; }

/*
 * store a new value in the stack (LIFO policy)
 */
int stack_push(stack_t *sp, void *data) {
    if (sp == NULL || sp->index >= sp->size) {
        return 0;
    }

    sp->array[sp->index++] = data;
    return 1;
}

/*
 * extract a value from the stack (LIFO policy)
 */
int stack_pop(stack_t *sp, void **data_ptr) {
    if (sp == NULL || sp->index <= 0) {
        return 0;
    }

    *data_ptr = sp->array[--sp->index];
    return 1;
}

/*
 * print all the stack elements (LIFO policy)
 */
void stack_print(FILE *fp, stack_t *sp, void (*print)(FILE *, void *)) {
    int i;

    if (sp != NULL) {
        for (i = sp->index - 1; i >= 0; i--) {
            print(fp, sp->array[i]);
            fprintf(fp, "\n");
        }
    }
}

/*
 * deallocate all the memory associated to the stack
 */
void stack_dispose(stack_t *sp, void (*quit)(void *)) {
    int i;

    if (sp != NULL) {
        if (quit != NULL) {
            for (i = 0; i < sp->index; i++) {
                quit(sp->array[i]);
            }
        }
        free(sp->array);
        free(sp);
    }
}

```

}

14.2 BST Library

```
#ifndef _TREE_PUBLIC_INCLUDED
#define _TREE_PUBLIC_INCLUDED

#include "data.h"

#define PREORDER -1
#define INORDER 0
#define POSTORDER 1

typedef struct node node_t;

data_t getData (node_t *);
node_t *createEmptyTree ();
node_t *readTree(FILE *);
node_t *searchI (node_t *, data_t);
node_t *searchR (node_t *, data_t);
node_t *treeMinI (node_t *);
node_t *treeMinR (node_t *);
node_t *treeMaxI (node_t *);
node_t *treeMaxR (node_t *);
node_t *insert(node_t *, data_t);
node_t *delete(node_t *, data_t);
void writeTree(FILE *, node_t *, int);
void freeTree(node_t *);

#endif

#ifndef _TREE_PRIVATE_INCLUDED
#define _TREE_PRIVATE_INCLUDED

#include "treePublic.h"
// #include "treeAddition.h"

struct node {
    data_t val;
    struct node *left;
    struct node *right;
};

#endif

#include "treePrivate.h"

#define FIND 0

static node_t *myAlloc(void);
#if FIND
static data_t findDeleteMax1(node_t **);
#endif
#if !FIND
static node_t *findDeleteMax2(data_t *, node_t *);
#endif

data_t getData(node_t *node) { return (node->val); }
```

```

node_t *createEmptyTree(void) { return (NULL); }

node_t *treeMinI(node_t *rp) {
    if (rp == NULL)
        return (rp);

    while (rp->left != NULL) {
        rp = rp->left;
    }

    return (rp);
}

node_t *treeMinR(node_t *rp) {
    if (rp == NULL || rp->left == NULL)
        return (rp);

    return (treeMinR(rp->left));
}

node_t *treeMaxI(node_t *rp) {
    if (rp == NULL)
        return (rp);

    while (rp->right != NULL) {
        rp = rp->right;
    }

    return (rp);
}

node_t *treeMaxR(node_t *rp) {
    if (rp == NULL || rp->right == NULL)
        return (rp);

    return (treeMaxR(rp->right));
}

node_t *searchI(node_t *rp, data_t data) {
    while (rp != NULL) {
        if (compare(rp->val, data) == 0)
            return (rp);

        if (compare(data, rp->val) < 0)
            rp = rp->left;
        else
            rp = rp->right;
    }

    return (NULL);
}

node_t *searchR(node_t *rp, data_t data) {
    if (rp == NULL || compare(rp->val, data) == 0)
        return (rp);

```

```

    if (compare(data, rp->val) < 0)
        return (searchR(rp->left, data));
    else
        return (searchR(rp->right, data));
}

node_t *insert(node_t *rp, data_t data) {
    node_t *p;

    /* Empty Tree: Found Position */
    if (rp == NULL) {
        p = myAlloc();
        p->val = data;
        p->left = p->right = NULL;
        return (p);
    }

    /* Duplicated Element */
    if (compare(data, rp->val) == 0) {
        return (rp);
    }

    if (compare(data, rp->val) < 0) {
        /* Insert on the left */
        rp->left = insert(rp->left, data);
    } else {
        /* Insert on the right */
        rp->right = insert(rp->right, data);
    }

    return (rp);
}

node_t *readTree(FILE *fp) {
    node_t *rp;
    data_t d;

    rp = createEmptyTree();

    while (readData(fp, &d) != EOF) {
        rp = insert(rp, d);
    }

    return (rp);
}

void freeTree(node_t *rp) {
    if (rp == NULL) {
        return;
    }

    freeTree(rp->left);
    freeTree(rp->right);
    free(rp);

    return;
}

```

```

}

void writeTree(FILE *fp, node_t *rp, int modo) {
    if (rp == NULL) {
        return;
    }

    if (modo == PREORDER) {
        writeData(fp, rp->val);
    }

    writeTree(fp, rp->left, modo);

    if (modo == INORDER) {
        writeData(fp, rp->val);
    }

    writeTree(fp, rp->right, modo);

    if (modo == POSTORDER) {
        writeData(fp, rp->val);
    }

    return;
}

node_t *delete (node_t *rp, data_t data) {
    node_t *p;

    /* Empty Tree */
    if (rp == NULL) {
        printf("Error: Unknown Data\n");
        return (rp);
    }

    if (compare(data, rp->val) < 0) {
        /* Delete on the left sub-tree Recursively */
        rp->left = delete (rp->left, data);
        return (rp);
    }

    if (compare(data, rp->val) > 0) {
        /* Delete on the right sub-tree Recursively */
        rp->right = delete (rp->right, data);
        return (rp);
    }

    /* Delete Current Node rp */
    p = rp;
    if (rp->right == NULL) {
        /* Empty Right Sub-Tree: Return Left Sub-Tree */
        rp = rp->left;
        free(p);
        return (rp);
    }
}

```

```

    if (rp->left == NULL) {
        /* Empty Left Sub-Tree: Return Right Sub-Tree */
        rp = rp->right;
        free(p);
        return rp;
    }

    /* Find Predecessor and Substitute */
#ifdef FIND
    rp->val = findDeleteMax1(&(rp->left));
#endif
    if !FIND
    {
        data_t val;

        rp->left = findDeleteMax2(&val, rp->left);
        rp->val = val;
    }
#endif

    return (rp);
}

static node_t *myAlloc(void) {
    node_t *p;

    p = (node_t *)malloc(sizeof(node_t));
    if (p == NULL) {
        printf("Allocation Error.\n");
        exit(1);
    }

    return (p);
}

#ifdef FIND
static data_t findDeleteMax1(node_t **rpp) {
    node_t *p;
    data_t d;

    /* Find The Righth-Most Node (max value) */
    while ((*rpp)->right != NULL)
        rpp = &((*rpp)->right);

    p = *rpp;
    d = p->val;
    *rpp = (*rpp)->left;
    free(p);

    return (d);
}
#endif

#ifdef !FIND
static node_t *findDeleteMax2(data_t *d, node_t *rp) {
    node_t *tmp;

```

```
if (rp->right == NULL) {
    *d = rp->val;
    tmp = rp->left;
    free(rp);
    return (tmp);
}

rp->right = findDeleteMax2(d, rp->right);
return (rp);
}
#endif
```

15 Item library

15.1 Item with Stack

```
#ifndef _ITEM
#define _ITEM

#include <stdio.h>
#include "util.h"

/* type declarations */
typedef int *item_t;

/* extern function prototypes */
extern int item_read(FILE *fp, void **ptr);
extern void item_print(FILE *fp, void *ptr);
extern int item_compare(void *data1, void *data2);
extern void item_dispose(void *ptr);

#endif

#include "item.h"

#define MAX 100

/*
 * read an item from file
 */
int item_read (FILE *fp, void **data_ptr) {
    int *p;

    p = (int *)util_malloc(sizeof(int));
    if (fscanf(fp, "%d", p) == EOF) {
        return EOF;
    }
    *data_ptr = p;

    return 1;
}

/*
 * print an item on file
 */
void item_print (FILE *fp, void *ptr) {
    item_t data = (item_t)ptr;
    fprintf(fp, "%d ", *data);
}

/*
 * compare two items
 */
int item_compare (void *ptr1, void *ptr2) {
    item_t data1 = (item_t)ptr1;
    item_t data2 = (item_t)ptr2;

    return (*data1)-(*data2);
}
```

```
/*  
 * free an item  
 */  
void item_dispose (void *ptr) {  
    item_t data = (item_t)ptr;  
    free(data);  
    return;  
}
```

15.2 Item with BST

16 Util library

16.1 Util with Stack

```
#ifndef _UTIL
#define _UTIL

#include <stdio.h>
#include <stdlib.h>
#include <string.h>

/* macro definition */
#define util_check_m(expr, msg) \
    if ( !(expr) ) { \
        fprintf(stderr, "Error: %s\n", msg); \
        exit(EXIT_FAILURE); \
    }

/* extern function prototypes */
extern FILE *util_fopen(char *name, char *mode);
extern void *util_malloc(unsigned int size);
extern void *util_calloc(unsigned int num, unsigned int size);
extern char *util_strdup(char *src);
extern void util_array_dispose(void **ptr, unsigned int n, void (*quit)(void *));
extern void **util_matrix_alloc(unsigned int n, unsigned int m, unsigned int size);
extern void util_matrix_dispose(void ***ptr, unsigned int n, unsigned int m,
                                void (*quit)(void *));

#endif

#include "util.h"

/*
 * fopen (with check) utility function
 */
FILE *util_fopen(char *name, char *mode) {
    FILE *fp = fopen(name, mode);
    util_check_m(fp != NULL, "could not open file!");
    return fp;
}

/*
 * malloc (with check) utility function
 */
void *util_malloc(unsigned int size) {
    void *ptr = malloc(size);
    util_check_m(ptr != NULL, "memory allocation failed!");
    return ptr;
}

/*
 * calloc (with check) utility function
 */
void *util_calloc(unsigned int num, unsigned int size) {
    void *ptr = calloc(num, size);
    util_check_m(ptr != NULL, "memory allocation failed!");
    return ptr;
}
```

```

/*
 * strdup (with check) utility function
 */
char *util_strdup(char *src) {
    char *dst = strdup(src);
    util_check_m(dst != NULL, "memory allocation failed");
    return dst;
}

/*
 * array de-allocation utility function
 */
void util_array_dispose(void **ptr, unsigned int n, void (*quit)(void *)) {
    int i;

    if (quit != NULL) {
        for (i = 0; i < n; i++) {
            quit(ptr[i]);
        }
    }
    free(ptr);
}

/*
 * matrix allocation utility function
 */
void **util_matrix_alloc(unsigned int n, unsigned int m, unsigned int size) {
    void **ptr;
    int i;

    ptr = (void **)util_malloc(n * sizeof(void *));
    for (i = 0; i < n; i++) {
        ptr[i] = util_calloc(m, size);
    }
    return ptr;
}

/*
 * matrix de-allocation utility function
 */
void util_matrix_dispose(void ***ptr, unsigned int n, unsigned int m,
                        void (*quit)(void *)) {
    int i, j;

    for (i = 0; i < n; i++) {
        if (quit != NULL) {
            for (j = 0; j < m; j++) {
                quit(ptr[i][j]);
            }
        }
        free(ptr[i]);
    }
    free(ptr);
}

```

16.2 Util with BST

17 Data Library

17.1 Data with BST

```
#ifndef _DATA_INCLUDED
#define _DATA_INCLUDED

#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <ctype.h>

#define MAXC 20

typedef int data_t;

int readData (FILE *, data_t *);
void writeData (FILE *, data_t);
int compare (data_t, data_t);

#endif

#include "data.h"

int readData(FILE *fp, data_t *data) {
    int retValue;

    retValue = fscanf(fp, "%d", data);

    return (retValue);
}

void writeData(FILE *fp, data_t data) {
    fprintf(fp, "%d\n", data);

    return;
}

int compare(data_t d1, data_t d2) {
    if (d1 < d2) {
        return (-1);
    } else {
        if (d1 == d2) {
            return (0);
        } else {
            return (1);
        }
    }
}
```

18 Symbol table

```
#ifndef ST_H_DEFINED
#define ST_H_DEFINED

#include "item.h"

typedef struct symboltable *ST;

ST      STinit(int) ;
void     STinsert(ST, Item) ;
Item     STsearch(ST, Key) ;
void     STdelete(ST, Key) ;
void     STdisplay(ST) ;

#endif

#include <stdio.h>
#include <stdlib.h>
#include <string.h>

#include "item.h"
#include "st.h"

typedef struct STnode *link;

struct STnode {
    Item item;
    link next;
};

struct symboltable {
    link *heads;
    int M;
    link z;
};

link NEW(Item item, link next) {
    link x = malloc(sizeof *x);
    x->item = item;
    x->next = next;
    return x;
}

ST STinit(int maxN) {
    int i;
    ST st = malloc(sizeof *st);

    st->M = maxN;
    st->heads = malloc(st->M * sizeof(link));
    st->z = NEW(ITEMsetvoid(), NULL);

    for (i = 0; i < st->M; i++)
        st->heads[i] = st->z;

    return st;
}
```

```

}

int hash(Key v, int M) {
    int h = 0, base = 127;

    for (; *v != '\0'; v++)
        h = (base * h + *v) % M;

    return h;
}

int hashU(Key v, int M) {
    int h, a = 31415, b = 27183;

    for (h = 0; *v != '\0'; v++, a = a * b % (M - 1))
        h = (a * h + *v) % M;

    return h;
}

void STinsert(ST st, Item item) {
    int i;

    i = hash(KEYget(item), st->M);

    fprintf(stdout, "    hash index = %d\n", i);

    st->heads[i] = NEW(item, st->heads[i]);

    return;
}

Item searchST(link t, Key k, link z) {
    if (t == z)
        return ITEMsetvoid();

    if ((KEYcompare(KEYget(t->item), k)) == 0)
        return t->item;

    return (searchST(t->next, k, z));
}

Item STsearch(ST st, Key k) {
    return searchST(st->heads[hash(k, st->M)], k, st->z);
}

link deleteR(link x, Key k) {
    if (x == NULL)
        return NULL;

    if ((KEYcompare(KEYget(x->item), k)) == 0) {
        link t = x->next;
        free(x);
        return t;
    }
}

```

```

    x->next = deleteR(x->next, k);

    return x;
}

void STdelete(ST st, Key k) {
    int i = hash(k, st->M);
    st->heads[i] = deleteR(st->heads[i], k);

    return;
}

void visitR(link h, link z) {
    if (h == z)
        return;

    ITEMshow(h->item);
    visitR(h->next, z);

    return;
}

void STdisplay(ST st) {
    int i;

    for (i = 0; i < st->M; i++) {
        fprintf(stdout, "st->heads[%d]: ", i);
        visitR(st->heads[i], st->z);
        fprintf(stdout, "\n");
    }

    return;
}

```

18.1 Item with Symbol tables

```

#ifndef _DATO_INCLUDED
#define _DATO_INCLUDED

#define MAXST 10

typedef struct item* Item;
typedef char *Key;

Item ITEMscan();
void ITEMshow(Item data);
int ITEMcheckvoid(Item data);
Item ITEMsetvoid();
Key KEYscan();
int KEYcompare(Key k1, Key k2);
Key KEYget(Item data);
#endif

#include <math.h>
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

```

```

#include "item.h"

struct item {
    char *name;
    int value;
};

Item ITEMscan() {
    char name[MAXST];
    int value;

    scanf("%s%d", name, &value);

    Item tmp = (Item)malloc(sizeof(struct item));
    if (tmp == NULL) {
        return ITEMsetvoid();
    } else {
        tmp->name = strdup(name);
        tmp->value = value;
    }

    return tmp;
}

void ITEMshow(Item data) {
    fprintf(stdout, "    name = %s value = %d ", data->name, data->value);
}

int ITEMcheckvoid(Item data) {
    Key k1, k2 = "";

    k1 = KEYget(data);
    if (KEYcompare(k1, k2) == 0)
        return 1;
    else
        return 0;
}

Item ITEMsetvoid() {
    char name[MAXST] = "";

    Item tmp = (Item)malloc(sizeof(struct item));
    if (tmp != NULL) {
        tmp->name = strdup(name);
        tmp->value = -1;
    }
    return tmp;
}

```