



Despliegue de aplicaciones Web

SERVIDOR FTP

Ángela Pérez Álvarez 2ºD.A.W.

Actividad 2

Primero creamos el grupo:

- `Sudo ftpasswd --group -- name = mantenimiento -- gid = 1020`

Segundo los usuarios:

- `sudo ftpasswd --passwd -- name= visor -- uid= 1011 -- gid=1020 -- home= /servidor/media -- shell=/bin/false`
- `sudo ftpasswd --passwd -- name= lector -- uid= 1012 -- gid=1020 -- home= /servidor/docs -- shell=/bin/false`

Descomentamos la línea 'RequireValidShell off', 'AuthOrder mod_auth_.....' y 'Include /etc/proftpd/virtuals.conf'. E incluimos las siguientes líneas:


```

** # PersistentPasswd                off
use
use # This is required to use both PAM-based authentication and local passwords
AuthUserFile      /etc/proftpd/ftpd.passwd
** AuthGroupFile    /etc/proftpd/ftpd.passwd
AuthOrder          mod_auth_file.c mod_auth_unix.c
**
** # Be warned: use of this directive impacts CPU average load!
** # Uncomment this if you like to see progress and transfer rate with ftpwho
use # in downloads. That is not needed for uploads either.

```

Cambiamos 'useIPv6 on' a 'useIPv6 off'.

Usuario visor:

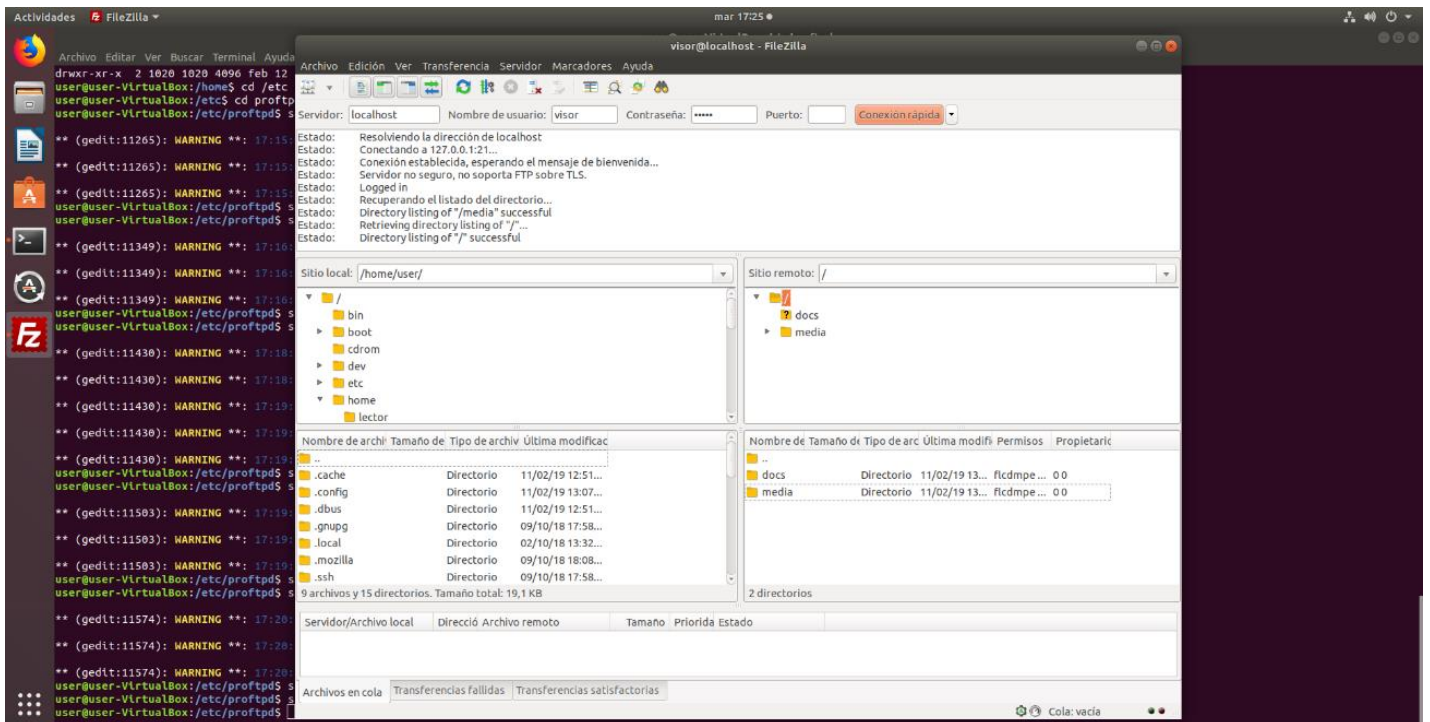

Usuario lector:

