


Apartado 1:

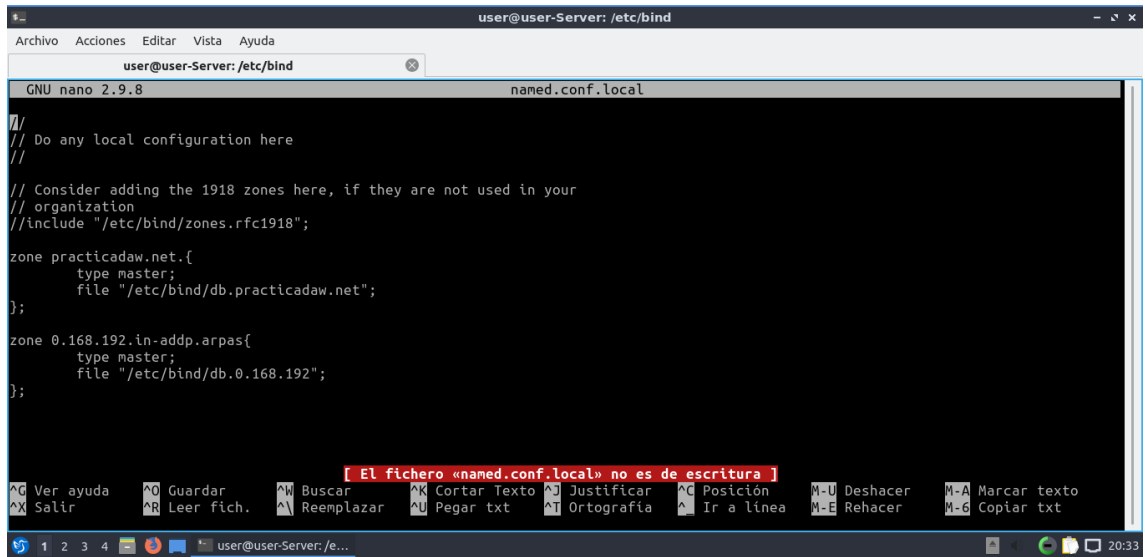

```
GNU nano 2.9.8 named.conf.local

//
// Do any local configuration here
//

// Consider adding the 1918 zones here, if they are not used in your
// organization
//include "/etc/bind/zones.rfc1918";


zone practacadaw.net {
    type master;
    file "/etc/bind/db.practicadaw.net";
};

zone 0.168.192.in-addr.arpa {
    type master;
    file "/etc/bind/db.0.168.192";
};
```

[El fichero «named.conf.local» no es de escritura]

Ver ayuda Guardar Buscar Cortar Texto Posición Deshacer Marcar texto
Salir Leer fich. Reemplazar Pegar txt Ortografía Ir a línea Rehacer Copiar txt

Apartado 2:

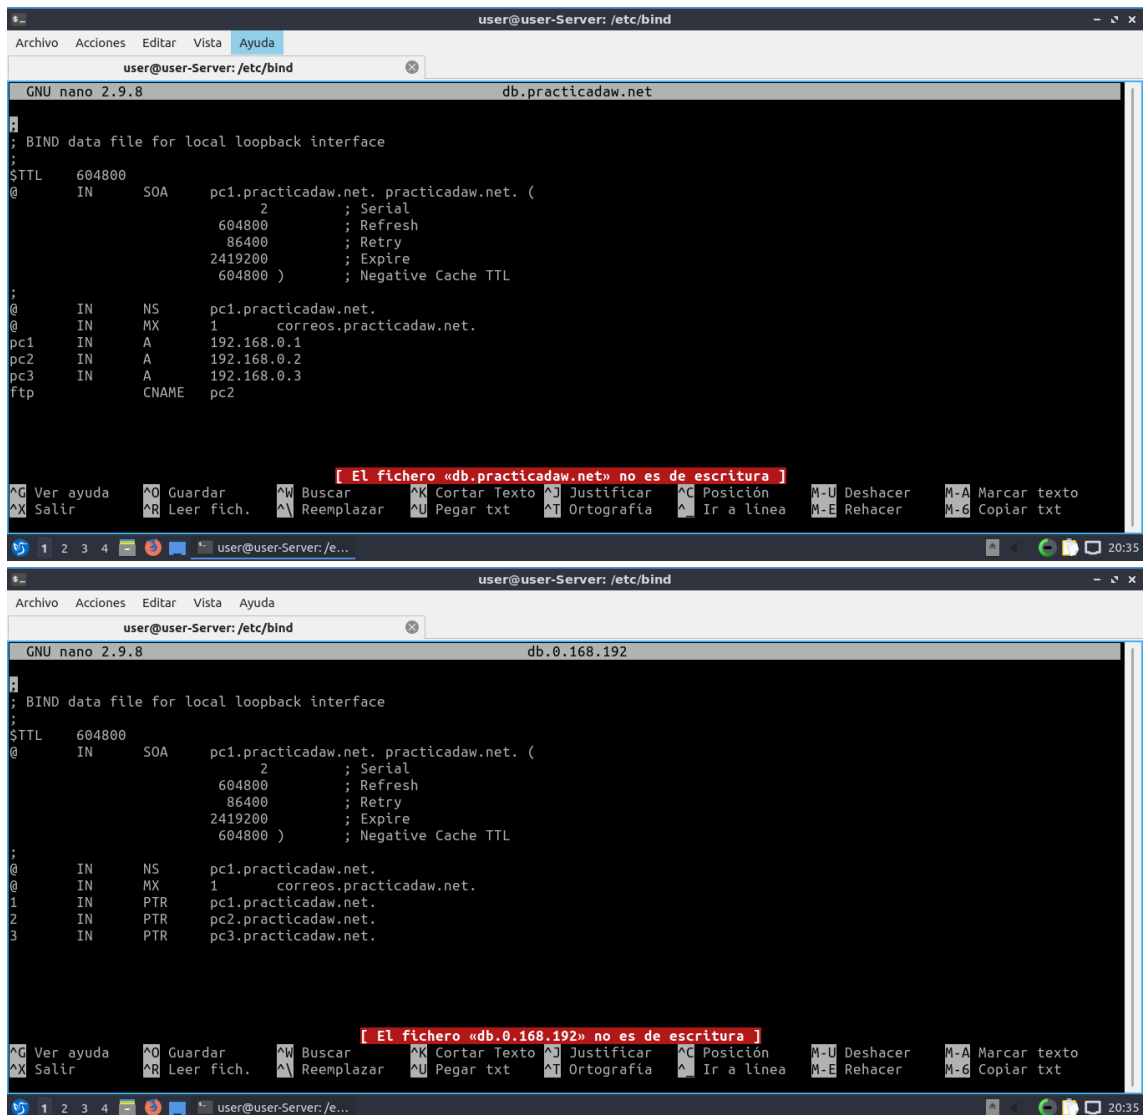

```
GNU nano 2.9.8 db.practicadaw.net

; BIND data file for local loopback interface
;
$TTL 604800
@ IN SOA pc1.practicadaw.net. practacadaw.net. (
    2 ; Serial
    604800 ; Refresh
    86400 ; Retry
    2419200 ; Expire
    604800 ) ; Negative Cache TTL
;
@ IN NS pc1.practicadaw.net.
@ IN MX 1 correos.practicadaw.net.
pc1 IN A 192.168.0.1
pc2 IN A 192.168.0.2
pc3 IN A 192.168.0.3
ftp CNAME pc2
```

[El fichero «db.practicadaw.net» no es de escritura]

```
GNU nano 2.9.8 db.0.168.192

; BIND data file for local loopback interface
;
$TTL 604800
@ IN SOA pc1.practicadaw.net. practacadaw.net. (
    2 ; Serial
    604800 ; Refresh
    86400 ; Retry
    2419200 ; Expire
    604800 ) ; Negative Cache TTL
;
@ IN NS pc1.practicadaw.net.
@ IN MX 1 correos.practicadaw.net.
1 IN PTR pc1.practicadaw.net.
2 IN PTR pc2.practicadaw.net.
3 IN PTR pc3.practicadaw.net.
```

[El fichero «db.0.168.192» no es de escritura]

Actividad 3

Apartado 1:

Situado en la carpeta /etc/bind/

Sudo git init

Sudo git add named.*

Sudo git commit -m "añadimos named"

Sudo git add db.*


Sudo git commit -m "añadimos db"

Sudo nano .gitignore

(introducir en .gitignore -> bind.keys, rndc.keys, zones.rfc1918)

Sudo git add .

Sudo git commit -m "cambios e ignore"

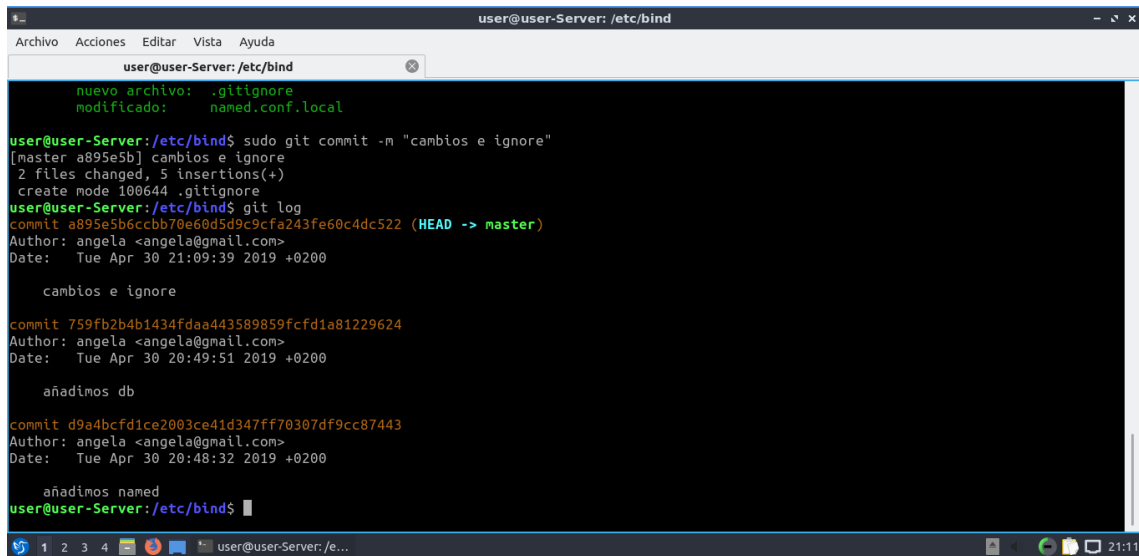

```
user@user-Server: /etc/bind
nuevo archivo: .gitignore
modificado:    named.conf.local

user@user-Server:/etc/bind$ sudo git commit -m "cambios e ignore"
[master a895e5b] cambios e ignore
2 files changed, 5 insertions(+)
create mode 100644 .gitignore
user@user-Server:/etc/bind$ git log
commit a895e5b6ccb70e60d5d9c9cfa243fe60c4dc522 (HEAD -> master)
Author: angela <angela@gmail.com>
Date:   Tue Apr 30 21:09:39 2019 +0200

    cambios e ignore

commit 759fb2b4b1434fdaa443589859fcfd1a81229624
Author: angela <angela@gmail.com>
Date:   Tue Apr 30 20:49:51 2019 +0200

    añadimos db


commit d9a4bcfd1ce2003ce41d347ff70307df9cc87443
Author: angela <angela@gmail.com>
Date:   Tue Apr 30 20:48:32 2019 +0200

    añadimos named
user@user-Server:/etc/bind$
```

Apartado 2:

<https://github.com/AngelaDAW/dns1819.git>

sudo git push -u origin master

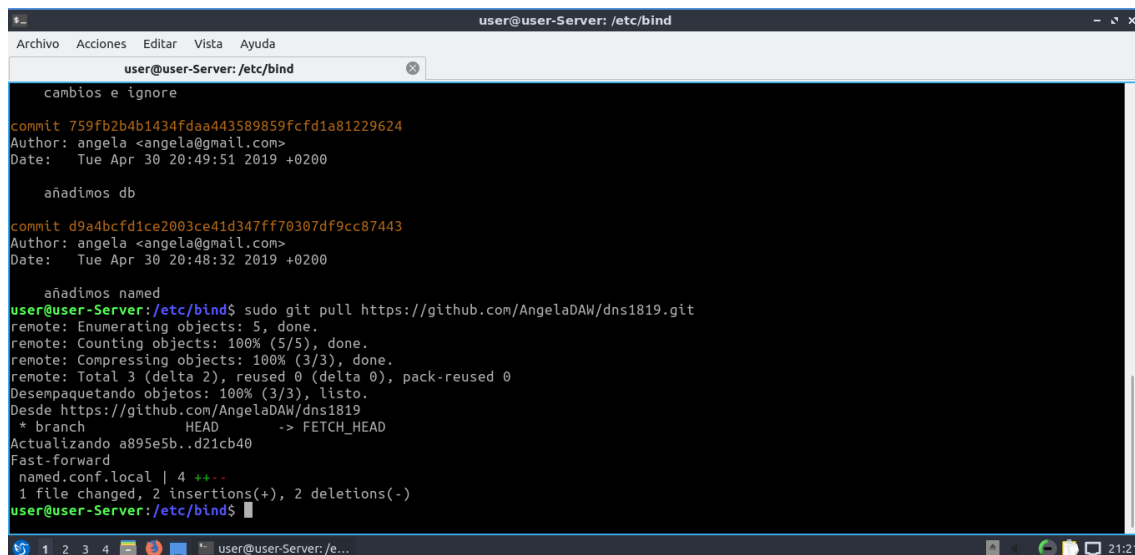A screenshot of a terminal window titled 'user@user-Server: /etc/bind'. The terminal shows a sequence of git commands and their outputs. First, a commit is made with the message 'cambios e ignore'. Then, another commit is made with the message 'añadimos db'. Next, a third commit is made with the message 'añadimos named'. Finally, a git pull is executed from a remote repository, which updates the local repository with new changes from the remote. The terminal output shows the progress of the pull, including enumerating, counting, and compressing objects, and finally merging the changes. The terminal window has a menu bar with 'Archivo', 'Acciones', 'Editar', 'Vista', and 'Ayuda'. The status bar at the bottom shows the current directory as '/etc/bind' and the time as 21:21.

```
user@user-Server: /etc/bind
cambios e ignore
commit 759fb2b4b1434fdaa443589859fcfd1a81229624
Author: angela <angela@gmail.com>
Date: Tue Apr 30 20:49:51 2019 +0200

añadimos db
commit d9a4bcfd1ce2003ce41d347ff70307df9cc87443
Author: angela <angela@gmail.com>
Date: Tue Apr 30 20:48:32 2019 +0200

añadimos named
user@user-Server:/etc/bind$ sudo git pull https://github.com/AngelaDAW/dns1819.git
remote: Enumerating objects: 5, done.
remote: Counting objects: 100% (5/5), done.
remote: Compressing objects: 100% (3/3), done.
remote: Total 3 (delta 2), reused 0 (delta 0), pack-reused 0
Desempaquetando objetos: 100% (3/3), listo.
Desde https://github.com/AngelaDAW/dns1819
 * branch      HEAD      -> FETCH_HEAD
Actualizando a895e5b..d21cb40
Fast-forward
 named.conf.local | 4 ++--
 1 file changed, 2 insertions(+), 2 deletions(-)
user@user-Server:/etc/bind$
```

Apartado 3:

```
sudo git checkout -b ramadns
sudo nano named.conf.local
sudo git add named.conf.local
sudo commit -m "cambio con ramadns 1"
sudo nano named.conf.local
sudo git add named.conf.local
sudo commit -m "segundo cambio con ramadns 1"
sudo git merge ramadns
sudo nano named.conf.local
sudo git add named.conf.local
sudo commit -m "fusión resuelta"
sudo git merge ramadns
sudo git push origin master
```