

Structured Synchronous Reactive Programming for Game Development

Case Study: On Rewriting Pingus from C++ to CéU

Francisco Sant’Anna
Departamento de Informática e Ciência da Computação, UERJ
francisco@ime.uerj.br



Figure 1: Pingus gameplay.

ABSTRACT

TODO.

Keywords: TODO, TODO, TODO.

1 INTRODUCTION

Pingus is an open-source puzzle-platform video game based on Lemmings. The objective of the game is to guide a group of penguins through a number of obstacles towards a designated exit (Figure 1). Pingus is developed in standard object-oriented C++, the *lingua franca* of game development [12]. The codebase¹ is about 40.000 lines of code (LoCs), divided into the engine, level editor, auxiliary libraries, and the game logic itself.

According to Tim Sweeney (of Unreal Engine fame), about half the complexity in game development resides in *simulation* (aka *game logic*), but which accounts for only 10% of the CPU budget [21]. The high development costs contrasting with the low impact on performance appeals for alternatives with productivity in mind, especially considering that it is the game logic that varies the most between projects. Sweeney states that “will gladly sacrifice 10% of our performance for 10% higher productivity”.

Object-oriented games rely on the *observer pattern* [12] to handle events from the environment (e.g., key presses and timers) and also as a notification mechanism between entities in the game logic. The observers are short-lived callbacks that have to execute as fast as possible to keep the game reactive to incoming events in real time. For this reason, callbacks cannot use long-lasting locals and

loops, which are elementary capabilities of classical structured programming [10, 17, 2]. In this sense, callbacks actually disrupt structured programming, becoming “our generation’s *goto*”.²

CéU [19, 18] is a C/C++ source compatible programming language with the following characteristics:

- *Reactive*: code only executes in reactions to events.
- *Structured*: programs use structured control-flow mechanisms, such as *await* (to suspend a line of execution), and *par* (to combine multiple lines of execution).
- *Synchronous*: reactions run atomically and to completion on each line of execution. There’s no implicit preemption or real parallelism, resulting in deterministic execution.

Structured reactive programming eliminates callbacks, letting programmers write code in direct and sequential style and recover from the inversion of control imposed by the observer pattern [10]. CéU provides primitives that help describing complex control-flow relationships in the game logic more concisely. CéU supports logical parallelism with a resource-efficient implementation in terms of memory and CPU usage [19]. The runtime is single threaded and does not rely on garbage collection.

In this work, we advocate structured synchronous reactive programming as an expressive and productive alternative for game logic development. We present a case study of rewriting Pingus from C++ to CéU with the contributions as follows:

- Alternative solutions in idiomatic CéU with gains in productivity for six selected behaviors in the game logic.
- An in-depth qualitative analysis of the proposed solutions in comparison to the original implementations in C++.
- The identification of four recurrent control-flow patterns that likely apply to other games: *Finite State Machines*, *Continuation Passing*, *Dispatching Hierarchies*, and *Lifespan Hierarchies*.

A control-flow pattern is a recurring technique to describe dependencies and explicit orders between statements (or groups of statements) in a program. The rewriting process consisted of identifying sets of callbacks implementing control flow in the game and translating them to CéU using appropriate structured constructs. As an example, a double mouse click is characterized by a first click, followed by a maximum amount of time, followed by a second click. This behavior depends on different events (clicks and timers) which have to occur in a particular order. In C++, the implementation involves callbacks crossing reactions to successive events which manipulate state variables explicitly. We focus on a qualitative analysis for the programming techniques that we applied during the rewriting process. Not all techniques result in reduction in LoCs (especially considering the verbose syntax of CéU), but have other

¹Pingus repository: github.com/Pingus/pingus/

²“Callbacks as our Generations’ Go To Statement”: tirania.org/blog/archive/2013/Aug-15.html

effects such as eliminating shared variables and dependencies between classes.

The rest of the paper is organized as follows: Section 2 gives an overview of the Pingus codebases in C++ and CÉU and describes our approach to identify and rewrite the control flow in the game. Section 3 discusses six case studies in detail which are categorized in four control-flow patterns. Section 4 discusses related work. Section 5 concludes the paper.

2 THE PINGUS CODEBASE

In Pingus, the game logic also accounts for almost half the size of the codebase: 18,173 from 39,362 LoCs (46%) spread across 272 files. However, about half of the game logic relates to non-reactive code, such as dealing with configurations and options, saved games and serialization, maps and levels descriptions, string formatting, collision detection, graph algorithms, etc. This part remains unchanged and relies on the integration between CÉU and C/C++. Therefore, we rewrote 9,186 LoCs spread across 126 files³. In order to only consider effective code in the analysis, we then removed all headers, declarations, trivial getters & setters, and other innocuous statements, resulting 4,135 dense LoCs spread across 70 implementation files originally written in C++⁴. We did the same with the implementation in CÉU, resulting in 3,697 dense LoCs⁵. Figure 2 summarizes the effective codebase in the two implementations.

Although the sections that follow compare the codebases qualitatively, the lines with lower ratio numbers in Figure 2 correlate to the parts of the game logic that we consider more susceptible to structured reactive programming. For instance, the *Pingu* behavior (*ratio* 0.80) contains complex animations that are affected by timers, game rules, and user interaction. In contrast, the *Option screen* (*ratio* 0.97) is a simple UI grid with trivial mouse interactions.

As a general rewriting rule, we could identify control-flow behaviors in C++ by looking for class members with identifiers resembling verbs, statuses, and counters (e.g., `pressed`, `particle.thrown`, `mode`, and `delay.count`). Good chances are that variables with these “suspicious names” encode some form of control-flow progression that cross multiple callback invocations.

We employed *live code translation*, i.e., starting from the original codebase in C++, we reimplemented piece-by-piece without breaking the game compilation and execution. This was only possible given the seamless integration between CÉU and C/C++ [19]: the type systems are equivalent and the integration happens at the source code level. This enables trivial sharing of control and data, i.e., accessing C/C++ data and calling C/C++ from CÉU and vice-versa.

3 CONTROL-FLOW PATTERNS & CASE STUDIES

During the course of the rewriting process, we have identified four abstract control-flow patterns which likely apply to other games as well:

1. *Finite State Machines*: Event occurrences lead to transitions between states and trigger actions comprising the behavior of a game entity.
2. *Continuation Passing*: The completion of a long-lasting activity may carry a continuation in the game, i.e., some action to execute next.

³Complete codebase: github.com/an000/p/tree/master/cpp

⁴C++ codebase: github.com/an000/p/tree/master/all

⁵CÉU codebase: github.com/an000/p/tree/master/all

3. *Dispatching Hierarchies*: Entities form a dispatching hierarchy in which a container that receives a stimulus automatically forwards it to its managed children.
4. *Lifespan Hierarchies*: Entities form a lifespan hierarchy in which a terminating container entity automatically destroys its managed children.

We describe six representative game behaviors in detail distributed in the four patterns, with their implementations in C++ and CÉU. Due to space constraints, we omit five other cases and also a fifth pattern *Signaling Mechanisms* entirely.

3.1 Finite State Machines

Event occurrences lead to transitions between states and trigger actions comprising the behavior of a game entity.

3.1.1 Case Study: Detecting Double-Clicks in the *Armageddon Button*

In Pingus, a double click in the *Armageddon button* at the bottom right of the screen literally explodes all pingus.⁶

Figure 3.a shows the C++ implementation for the class `ArmageddonButton` with methods for rendering the button and handling mouse and timer events. The code focus on the double click detection and hides unrelated parts with `<...>`. The methods `update` (ln. 14–26) and `on_click` (ln. 28–34) are examples of *short-lived callbacks*, which are pieces of code that execute atomically in reaction to external input events. The callback `on_click` reacts to mouse clicks detected by the base class `RectComponent` (ln. 2), while the callback `update` continuously reacts to the passage of time, frame by frame. The class first initializes the variable `pressed` (ln. 3) to track the first click (ln. 32). It also initializes the variable `press_time` (ln. 4) to count the time since the first click (ln. 16–17). If another click occurs within 1 second, the class signals the double click to the application (ln. 29–30). Otherwise, the `pressed` and `press_time` state variables are reset (ln. 18–21). Figure 4 illustrates how we can model the double-click behavior in C++ as a state machine. The circles represent the state of the variables in the class, while the arrows represent the callbacks manipulating state. Note in the code how the accesses to the state variables are spread across the entire class. For instance, the distance between the initialization of `pressed` (ln. 3) and the last access to it (ln. 32) is over 40 lines in the original file. Arguably, this dispersion of code across methods makes the understanding and maintenance of the double-click behavior more difficult. Also, even though the state variables are private, unrelated methods such as `draw`, which is defined in middle of the class (ln. 10–12), can potentially access them.

CÉU provides structured constructs to deal with events, aiming to eradicate explicit manipulation of state variables for control-flow purposes. In Figure 3.b, the loop to detect double clicks (ln. 4–10) awaits the first click (ln. 5) and then, while watching 1 second (ln. 6–9), awaits the second click (ln. 7). If the second click occurs within 1 second, the `break` terminates the loop (ln. 8) and the `emit` in sequence signals the double click to the application (ln. 12). Otherwise, the `watching` block as a whole aborts after 1 second and the loop restarts, falling back to the first click `await` (ln. 5). Double click detection in CÉU doesn’t require state variables and is entirely self-contained in the `loop` body. Also, these 7 lines of code *only* detect the double click, leaving the actual effect to happen outside the loop (ln. 12) as well as all unrelated code such as redrawing the button.

3.1.2 Case Study: The *Bomber Action* Animation Sequence

In Pingus, the player may assign actions to specific pingus, as illustrated in Figure 5. The *Bomber action* explodes the clicked pingu,

⁶Double click animation: github.com/an000/p/blob/master/README.md#1

Path	Ceu	C++	Ceu/C++	Description
game/	2064	2268	0.91	the main gameplay
./	710	679	1.05	main functionality
objs/	470	478	0.98	world objects (tiles, traps, etc)
pingu/	884	1111	0.80	pingu behaviors
./	343	458	0.75	main functionality
actions/	541	653	0.83	pingu actions (bomber, climber, etc)
worldmap/	468	493	0.95	campaign worldmap
screens/	1109	1328	0.84	menus and screens
option/	347	357	0.97	option menu
others/	762	971	0.78	other menus and screens
misc/	56	46	1.22	miscellaneous functionality
	3697	4135	0.89	

Figure 2: The Pingu codebase directory tree.

throwing particles around and also destroying the terrain under its radius.⁷ We can model the explosion animation with a sequential state machine (Figure 6) with effects associated to specific frames as follows⁸:

1. 0th frame: plays a "Oh no!" sound.
2. 10th frame: plays a "Bomb!" sound.
3. 13th frame: throws particles, destroys the terrain, and shows an explosion sprite.
4. Game tick: hides the explosion sprite.
5. Last frame: kills the pingu.

In C++, the class `Bomber` in Figure 7.a defines the callbacks `draw` and `update` to manage the state machine described above. The class first defines one state variable for each effect to perform (ln. 4–7). The "Oh no!" sound plays as soon as the object starts in *state-1* (ln. 11). The `update` callback (ln. 14–38) first updates the pingu animation and movement on every frame regardless of its current state (ln. 15–16). When the animation reaches the 10th frame, it plays the "Bomb!" sound and switches to *state-2* (ln. 18–22). The state variable `soundPlayed` is required because the sprite frame doesn't necessarily advance on every `update` invocation (e.g., `update` may execute twice during the 10th frame). The same reasoning and technique applies to *state-3* (ln. 24–32 and 43–44). The explosion sprite appears in a single frame in *state-4* (ln. 45). Finally, the pingu dies after the animation frames terminate (ln. 34–37). Note that a single numeric state variable suffices to track the states, but the original authors probably chose to encode each state in an independent boolean variable to rearrange and experiment with them during development. Still, due to the short-lived nature of callbacks, state variables are unavoidable and are actually the essence of object-oriented programming (i.e., *methods with mutable state*). Like double click detection in C++, note that the state machine is encoded across 3 different methods, each intermixing code with unrelated functionality (e.g., changing frames, moving, and redrawing).

The equivalent code in C  U for the *Bomber action* in Figure 7.b does not use state variables and reflects the sequential state machine implicitly, using `await` statements in direct style to separate the effects. The `Bomber` is a `code/await` abstraction of C  U, which is

similar to a coroutine or fiber [2]: a subroutine that retains runtime state, such as local variables and the program counter, across reactions to events (i.e., across `await` statements). The pingu movement and sprite animation are isolated in two other `code/await` abstractions and execute in separate through the `spawn` primitive (ln. 4–5). The event `game.update` (ln. 12,16,24) is analogous to the `update` callback of C++ and occurs on every frame. The code tracks the animation aliveness (ln. 7–27) and, on termination, performs the last bomber effect, killing the pingu (ln. 30). As soon as the animation starts, the code performs the first effect (ln. 9). The intermediate effects are performed when the corresponding conditions occur (ln. 12,16,24). The `do-end` block (ln. 19–25), restricts the lifespan of the single-frame explosion sprite (ln. 21): after the next game tick (ln. 24), the block terminates and automatically destroys the spawned abstraction (removing it from the screen). In contrast with the implementation in C++, all effects occur in a contiguous chunk of code (ln. 7–30), which handles no extra functionality.

3.1.3 Summary & Uses in Pingu

The structured constructs of C  U introduce some advantages in comparison to explicit state machines:

- They encode all states with direct sequential code, eliminating shared state variables.
- They handle all states (and only them) in the same contiguous block, improving code encapsulation.

Object-oriented games also adopt the *state pattern* to model state machines with subclasses describing each possible state [12]. However, this approach is not fundamentally different from Pingu's use of `switch` or `if` branches for each possible state.

Pingu supports 16 actions in the game. As Figure 8 shows, 5 of them implement at least one state machine and are considerable smaller in C  U in terms of LoCs after eliminating the state variables. Considering the other 11 actions, the reduction in LoCs is negligible. This asymmetry in the implementation of actions illustrates the gains in expressiveness when describing state machines in direct style.

Among the 65 implementation files in C  U, we found 29 cases in 25 files using structured mechanisms to substitute states machines. They manifest as `await` statements in sequence or in aborting constructs such as `par/or` and `watching`.

3.2 Continuation Passing

The completion of a long-lasting activity may carry a continuation in the game, i.e., some action to execute next.

⁷Bomber action animation: github.com/an000/p/blob/master/README.md#2

⁸State machine animation: github.com/an000/p/blob/master/README.md#3

```

1  ArmageddonButton::ArmageddonButton(<...>):
2      RectComponent(<...>),
3      pressed(false); // button initially not pressed
4      press_time(0);   // how long since 1st click?
5      <...>
6  {
7      <...>
8  }
9
10 void ArmageddonButton::draw (<...>) {
11     <...>
12 }
13
14 void ArmageddonButton::update (float delta) {
15     <...>
16     if (pressed) {
17         press_time += delta;
18         if (press_time > 1.0f) {
19             pressed = false; // give up, 1st click
20             press_time = 0; // was too long ago
21         }
22     } else {
23         <...>
24         press_time = 0;
25     }
26 }
27
28 void ArmageddonButton::on_click (<...>) {
29     if (pressed) {
30         send_armageddon_event();
31     } else {
32         pressed = true;
33     }
34 }

```

[a] Implementation in C++

```

1  do
2      var RectComponent r = <...>;
3      <...>
4      loop do
5          await r.on_click;
6          watching ls do
7              await r.on_click;
8              break;
9          end
10     end
11     <...>
12     emit game.armageddon;
13 end

```

[b] Implementation in CéU

Figure 3: Detecting double-clicks in the *Armageddon* button.

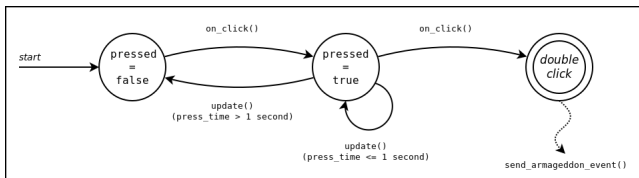


Figure 4: State machine for detecting double-clicks in the *Armageddon* button.

3.2.1 Case Study: Advancing Pages in the *Story* screen

The clickable *blue dots* in the campaign world map transit to ambience story screens⁹. A story is composed of multiple pages and, inside each page, the words of the story appear incrementally over time. A first click in the button >>> fast forwards the words to show the full page. A second click advances to the next page, until the story terminates. If the page completes before a click (due to the time elapsing), a first click advances to the next page.

In C++, the class `StoryScreenComponent` in Figure 10.a implements the method `next_text`, which is a callback for clicks in the button >>>. The variable `pages` (ln. 4–5, 24–26) is a vector holding each page, but which also encodes *continuations* for the story progress: each call to `next_text` that advances the story (ln. 23–32) removes the current page (ln. 24) and sets the next action to

⁹Story screen animation: github.com/an000/p/blob/master/README.md#4



Figure 5: Assigning the *Bomber* action to a pingu.

perform (i.e., “display a new page”) in the variable `current.page` (ln. 26). Figure 9 illustrates the continuation mechanism to advance pages and also a state machine for fast forwarding words (inside the dashed rectangle). The state variable `displayed` (ln. 6,15,20,21,27) switches between the behaviors “advancing text” and “advancing pages”, which are both handled intermixed inside the method `next_text`.

The code in CéU in Figure 10.b uses the internal event `next_text`, which is emitted from clicks in >>>. The sequential navigation from page to page uses a loop in direct style (ln. 6–15) instead of explicit state variables for the continuation mechanism and state machine. While the text advances in an inner loop (hidden in ln. 9), we watch the `next_text` event that fast forwards it. The loop may also eventually terminate with the time elapsing nor-

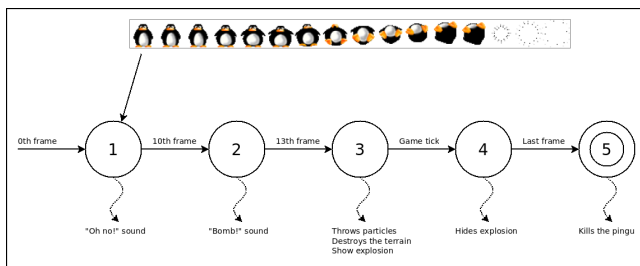


Figure 6: State machine for the *Bomber* animation sequence.

mally. This way, we do not need a variable (such as `displayed` in C++) to switch between the states “advancing text” and “advancing pages”. The `par/or` makes the page advance logic to execute in parallel with the redrawing code (ln. 13). Whenever the page advances, the redrawing code is automatically aborted (due to the `or` modifier). The `await next_text` in sequence (ln. 11) is the condition to advance to the next page. Note that, unlike the implementation in C++, the “advancing text” behavior is not intermixed with the “advancing pages” behavior, instead, it is encapsulated inside the inner loop nested with a deeper indentation (ln. 9).

3.2.2 Summary & Uses in Pingus

The direct style of C  U has some advantages in comparison to the continuation-passing style:

- It uses structured control flow (i.e., sequences and loops) instead of explicit data structures (e.g., stacks) and continuation variables (e.g. indexes).
- The activities in sequence are decoupled and do not hold references to one another.
- A single parent class describes the flow between the activities in a self-contained block of code.

Continuation passing typically controls the overall structure of the game, such as screen transitions in menus and level progressions. C  U uses the direct style techniques in five cases involving screen transitions: the main menu, the level menu, the level set menu, the world map loop, and the gameplay loop. It also uses the same technique for the loop that switches the pingu actions during gameplay.

3.3 Dispatching Hierarchies

Entities form a dispatching hierarchy in which a container that receives a stimulus automatically forwards it to its managed children.

3.3.1 Case Study: *Bomber Action* `draw` and `update` Dispatching

TODO: code for Sprite update?

In C++, the class `Bomber` presented in Figure 12.a declares a `sprite` member (ln. 3) to handle its animation frames (Figure 6). The `Sprite` class is part of the game engine and knows how to update and render itself. However, the `Bomber` still has to respond to `update` and `draw` requests from the game and forward them to the sprite (ln. 11–13 and 15–18). To understand how the `update` callback flows from the original environment stimulus to the game down to the sprite, we need to follow a long chain of 7 method dispatches (Figure 11):

1. `ScreenManager::display` in the main game loop calls `update`.
2. `ScreenManager::update` calls `last_screen->update` for the active game screen (a `GameSession` instance, considering the `Bomber`).

3. `GameSession::update` calls `world->update`.
4. `World::update` calls `obj->update` for each object in the world.
5. `PinguHolder::update` calls `pingu->update` for each pingu alive.
6. `Pingu::update` calls `action->update` for the active pingu action.
7. `Bomber::update` calls `sprite.update`. `Sprite::update` finally updates the animation frame.

Each dispatching step in the chain is necessary considering the game architecture:

- With a single assignment to `last_screen`, we can easily deactivate the current screen and redirect all dispatches to a new screen (step 2).
- The `World` class manages and dispatches events to all game entities, such as all pingus and traps, with the common interface `WorldObj` (step 4).
- Since it is common to iterate only over the pingus (vs. all world objects), the container `PinguHolder` manages all pingus (step 5).
- Since a single pingu can change between actions during lifetime, the `action` member decouples them with another level of indirection (step 6).
- Sprites are part of the game engine and are reusable everywhere (e.g., UI buttons, world objects, etc.), so it is also convenient to decouple them from actions (step 7).

The `draw` callback flows through the same dispatching hierarchy until reaching the `Sprite` class.

In C  U, the `Bomber` abstraction presented in Figure 12.b spawns a `Sprite` animation instance on its body (ln. 3). The `Sprite` abstraction can react directly to external `update` and `draw` events, bypassing the program hierarchy entirely. External events in C  U are broadcasted to the entire application. While (*and only while*) the bomber abstraction is alive, the sprite animation remains alive. The radical decoupling between the program hierarchy and reactions to events eliminates dispatching chains entirely. Note that one can still declare a local event and restrict its visibility like a local variable.

3.3.2 Summary & Uses in Pingus

Passive entities subjected to hierarchies require a dispatching architecture that makes the reasoning about the program harder:

- The full dispatching chain may go through dozens of files.
- The dispatching chain may interleave between classes specific to the game and also classes from the game engine (possibly third-party classes).

In C++, the `update` subsystem touches 39 files with around 100 lines of code just to forward `update` methods through the dispatching hierarchy. For the drawing subsystem, 50 files with around 300 lines of code. The implementation in C++ also relies on dispatching hierarchy for `resize` callbacks, touching 12 files with around 100 lines of code. Most of this code is eliminated in C  U since abstractions can react directly to the environment, not depending on hierarchies spread across multiple files.

Note that dispatching hierarchies cross game engine code, suggesting that most games also rely heavily on this control-flow pattern. In the case of the Pingus engine, we rewrote 9 files from C++ to C  U, reducing them from 515 to 173 LoCs (not shown in Figure 2), mostly due to dispatching code removal.

```

1 Bomber::Bomber (Pingu* p) :
2   <...>
3   sprite(<...>),           // bomber sprite
4   sound_played(false),    // tracks state 2
5   particle_thrown(false), // tracks state 3
6   colmap_exploded(false), // tracks state 3
7   gfx_exploded(false)    // tracks state 4
8 {
9   <...>
10  // 1. plays a "Oh no!" sound.
11  play_sound("ohno");
12 }
13
14 void Bomber::update () {
15   sprite.update();
16   <...> // pingu movement
17
18   // 2. plays a "Bomb!" sound.
19   if (sprite.frame()==10 && !sound_played) {
20     sound_played = true;
21     play_sound("plop");
22   }
23
24   // 3. particles, terrain, explosion sprite
25   if (sprite.frame()==13 && !particle_thrown) {
26     particle_thrown = true;
27     get_world()->get_particles()->add(...);
28   }
29   if (sprite.frame()==13 && !colmap_exploded) {
30     colmap_exploded = true;
31     get_world()->remove(bomber_radius, <...>);
32   }
33
34   // 5. kills the Pingu
35   if (sprite.is_finished ()) {
36     pingu->set_status(PS_DEAD);
37   }
38 }
39
40 void Bomber::draw (SceneContext& gc) {
41   // 3. particles, terrain, explosion sprite
42   // 4. tick: hides the explosion sprite
43   if (sprite.frame()==13 && !gfx_exploded) {
44     gfx_exploded = true;
45     gc.color().draw(explo_surf, <...>);
46   }
47   gc.color().draw(sprite, pingu->get_pos());
48 }

```

[a] Implementation in C++

```

1 code/await Bomber (void) -> ActionName
2 do
3   <...>
4   spawn Mover(); // movement in the background
5   var Sprite s = spawn Sprite(<...>);
6                       // animation in the background
7   watching s do
8     // 1. plays a "Oh no!" sound.
9     {play_sound("ohno")};
10
11     // 2. plays a "Bomb!" sound.
12     await game.update until s.sprite.frame == 10;
13     {play_sound("plop")};
14
15     // 3. particles, terrain, explosion sprite
16     await game.update until s.sprite.frame == 13;
17     spawn PinguParticles(<...>) in particles;
18     call Game_Remove({&bomber_radius}, <...>);
19   do
20     <...>
21     spawn Sprite(<...>); // explosion
22
23     // 4. tick: hides the explosion sprite
24     await game.update;
25   end
26   await FOREVER;
27 end
28
29 // 5. kills the pingu
30 escape DEAD;
31 end
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48 .

```

[b] Implementation in CéU

Figure 7: The *Bomber* action sequence.

Action	Ceu	C++	Explicit State
Bomber	23	50	4 state variables
Bridger	75	100	2 state variables
Drown	6	15	1 state variable
Exiter	7	22	2 state variables
Splashed	6	19	2 state variables

Figure 8: Pingus actions in CéU and C++.

3.4 Lifespan Hierarchies

Entities form a lifespan hierarchy in which a terminating container entity automatically destroys its managed children.

3.4.1 Case Study: Game UI Widgets

Figure 13 shows the game UI widgets with the action buttons, score counters, and a small map which all coexist with the game screen during its whole lifespan.

In C++, the widgets are created in the constructor of the class `GameSession` in Figure 14.a (ln. 5–7), added to a UI container (ln. 9–11), and are never removed since they must always be visible. Arguably, to better express the intent of making them coexist with the game screen, the widgets could alternatively be declared as top-level automatic (non-dynamic) members. However, the class relies on a container to automate `draw` and `update` dispatching to the widgets, as discussed in Section 3.3. The container method `add` expects only dynamically allocated children because they are automatically deallocated inside the container destructor. However, the dynamic nature of containers in C++ demand extra caution from program-

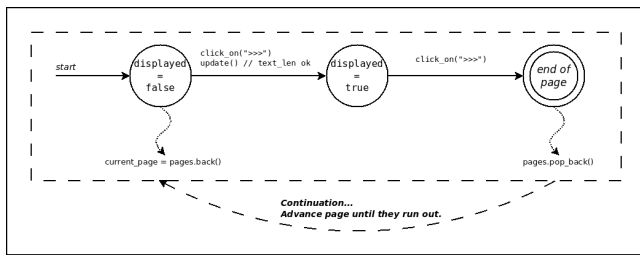


Figure 9: Continuation mechanism and state machine for advancing pages in the *Story screen*.

mers:

- When containers are part of a dispatching chain, it gets even harder to know which objects are dispatched at a given moment: one has to “simulate” the program execution and track calls to `add` and `remove`.
- For objects with dynamic lifespan, calls to `add` must always have matching calls to `remove`: missing calls to `remove` lead to memory and CPU leaks (to be discussed as the *lapsed listener* problem in Section 3.4.2).

In CÉU, the UI entities that coexist just have to be created in the same lexical block in Figure 14.b (ln. 3–5). Since abstractions can react independently, they do not require a dispatching container. Lexical lifespan never requires containers, allocation and deallocation, or explicit references. In addition, all required memory is known at compile time, similarly to stack-allocated local variables. The *Bomber action* of Section 3.1.2 also relies on lexical scope to delimit the lifespan of the explosion sprite to a single frame (Figure 7, ln. 19–25).

3.4.2 Case Study: Managing the Pingu Lifecycle

A pingu is a dynamic entity created periodically and destroyed under certain conditions, such as falling from a high altitude¹⁰.

In C++, the class `PinguHolder` in Figure 15.a is a container that holds all alive pingu. The method `PinguHolder::create_pingu` (ln. 1–6) is called periodically to create a new pingu and add it to the `pingus` collection (ln. 3–4). The method `PinguHolder::update` (ln. 8–18) checks the state of all pingu on every frame, removing those with the dead status (ln. 12–14). Entities with dynamic lifespan in C++ require explicit `add` and `remove` calls associated to a container (ln. 4,13). Without the `erase` call above, a dead pingu would remain in the collection still with updates on every frame (ln. 11). Since the `draw` behavior for a dead pingu is innocuous, the death could go unnoticed when testing it but the program would keep consuming memory and CPU time. This problem is known as the *lapsed listener* [12] and also occurs in languages with garbage collection: a container typically holds a strong reference to a child (sometimes the only reference to it), and the runtime cannot magically detect it as garbage.

CÉU supports `pool` declarations to hold dynamic abstraction instances. Additionally, the `spawn` statement supports a pool identifier to associate the new instance with a pool. The game screen in Figure 15.b spawns a new `Pingu` on every invocation of `Pingu.Spawn` (ln. 4–7). The `spawn` statement (ln. 6) specifies the pool declared at the top-level block of the game screen (ln. 3). In this case, the lifespan of the new instances follows the scope of the pool (ln. 1–9) instead of the enclosing scope of the `spawn` statement (ln. 4–7).

¹⁰Death of pingu animation: github.com/an000/p/blob/master/README.md#5

Since pools are also subject to lexical scope, the lifespan of all dynamically allocated pingu is constrained to the game screen. Lexical scopes handle memory and event dispatching automatically for static instances and also for pools. However, the lifespan of a dynamic instance does not necessarily have to match the lifespan of its associated pool (Figure 16). In CÉU, when the execution block of a dynamic instance terminates, which characterizes its *natural termination*, the instance is automatically removed from its pool. Therefore, dynamic instances do not require any extra bookkeeping related to containers or explicit deallocation. To remove a pingu from the game in CÉU, we just need to terminate its execution block according to the appropriate conditions: The `escape` statement (ln. 17) aborts the execution block of the `Pingu` instance, removing it from its associated pool automatically. Hence, a dynamic instance that terminates naturally leaves no traces in the program.

3.4.3 Summary & Uses in Pingu

Lexical lifespan for static instances and natural termination for dynamic instances provide some advantages in comparison to lifespan hierarchies through containers:

- Lexical scope makes an abstraction lifespan explicit in the source code. All entities in a game have an associated lexical lifespan.
- The memory for static instances is known at compile time.
- Natural termination makes an instance innocuous and, hence, susceptible to immediate reclamation.
- Abstraction instances (static or dynamic) never require explicit manipulation of pointers/references.

The implementation in CÉU has over 200 static instantiations spread across all 65 files. For dynamic entities, it defines 23 pools in 10 files, with almost 96 instantiations across 37 files. Pools are used to hold explosion particles, levels and level sets from files, gameplay & worldmap objects, and UI widgets.

4 RELATED WORK

The control-flow patterns closely relate to the *GoF* behavioral patterns [8], which some previous work discuss in the context of video games [12, 16, 3]. The original Pingu in C++ uses variations of the *state* (Sections 3.1 and 3.2), *visitor* (Sections 3.3 and 3.4), and *observer* (to handle events in general) patterns as implementation details to achieve the desired higher-level control-flow patterns. CÉU overcomes the need of behavioral patterns with a semantics that supports structured control-flow mechanisms and event-based communication via broadcast. As an example, the *state pattern* for the bomber animation in C++ in Section 3.1 becomes a series of blocks separated by `await` statements in CÉU.

A number of domain-specific languages, frameworks, and techniques have been proposed for particular subsystems of the game logic, such as animations [13, 6, 14, 15], game state and screen progression [22, 11], and behavior and AI modeling [9, 1] In Pingu, we employed CÉU at the core of the game for event dispatching (Section 3.3) and memory management of entities (Section 3.4), eliminating parts of the original game engine. We also implemented all entity animations and behaviors (Section 3.1), and screen transitions (Section 3.2) using the available control mechanisms of CÉU. Furthermore, CÉU is a superset of C targeting reactive systems in general, not only games, and has also been successfully adopted in other domains, such as wireless sensor networks [19, 4] and multimedia systems [20].

Functional reactive programming (FRP) [7] contrasts with structured synchronous reactive programming (SSRP) as a complementary programming style for reactive applications. We believe that


```

1 StoryScreenComponent::StoryScreenComponent (<...>) :
2   <...>
3 {
4     pages          = <...>; // vector with loaded pages
5     current_page = pages.back(); // first loaded page
6     displayed      = false; // if current is complete
7     <...>
8 }
9
10 <...> // draw page over time
11
12 void StoryScreenComponent::update (<...>) {
13     <...>
14     if (<all-words-appearing>) {
15         displayed = true;
16     }
17 }
18
19 void StoryScreenComponent::next_text () {
20     if (!displayed) {
21         displayed = true;
22         <...> // remove current page
23     } else {
24         pages.pop_back();
25         if (!pages.empty()) { // next page
26             current_page = pages.back();
27             displayed = false;
28             <...>
29         } else {
30             <...> // terminates the story screen
31         }
32     }
33 }

```

[a] Implementation in C++

```

1 code/await Story (void) -> bool do
2   <...>
3   event void next_text; // clicks in >>>
4
5   { pages = <...>; } // same as in C++
6   loop i in [0 <- {pages.size()}] do
7     par/or do
8       watching next_text do
9         <...> // advance text
10      end
11      await next_text;
12    with
13      <...> // redraw _pages[i]
14    end
15  end
16 end
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33 .

```

[b] Implementation in C  

Figure 10: Advancing pages in the *Story Screen*.

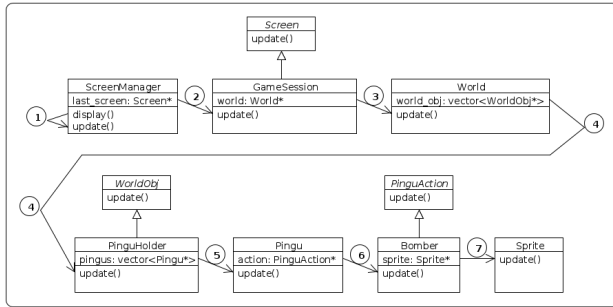


Figure 11: Dispatching chain for `update`.

FRP is more suitable for data-intensive applications, while SSRP, for control-intensive applications. On the one hand, FRP uses declarative formulas to specify continuous functions over time, such as for physics or data constraints among entities. On the other hand, describing a sequence of steps in FRP requires to encode explicit state machines so that functions can switch behavior depending on the current state. FRP has been successfully used to implement a 3D first person shooting game from scratch, but with performance considerations [5]. Instead, we rewrote an existing game and did it in small steps while keeping it working. Although we do not provide a performance evaluation (Pingu is not performance sensitive), previous work on C   shows that it is comparable to C in the context of embedded systems [19]. Nonetheless, given the

tight integration between with C/C++, critical parts of games can be preserved in C++ if needed.

5 CONCLUSION

TODO: non reactive, C++ integration - TODO: OO state + methods - eliminar estados explicitos com estruturas de controle apropriadas

We promote the *structured synchronous reactive* programming model of C   for the development of games. We present in-depth use cases categorized in four control-flow patterns applied to *Pingu* (an open-source *Lemmings* clone) that likely apply to other games.

We show how the standard way to program games with objects and callbacks in C++ hinders structured programming techniques, such as support for sequential execution, long-lasting loops, and persisting local variables. In this sense, callbacks actually disrupt structured programming, becoming [‘our generations goto’][goto] according to Miguel de Icaza.

Overall, we believe that most difficulties in implementing control behavior in game logic is not inherent to this domain, but a result of accidental complexity due to the lack of structured abstractions and an appropriate concurrency model to handle event-based applications.

TODO: rever summaries por advantage qualitativa vs LoCs
[goto]: tirania.org/blog/archive/2013/Aug-15.html

6 ACKNOWLEDGMENTS

We would like to thank Leonardo Kaplan and Alexander Tkachov for early explorations and prototypes of the game rewrite.


```

1 class Bomber : public PinguAction {
2     <...>
3     Sprite sprite;
4 }
5
6 Bomber::Bomber (<...>) : <...> {
7     sprite.load(<...>);
8     <...>
9 }
10
11 void Bomber::update () {
12     sprite.update();
13 }
14
15 void Bomber::draw (SceneContext& gc) {
16     <...>
17     gc.color().draw(sprite, <...>);
18 }

```

[a] Implementation in C++

```

1 code/await Bomber (void) -> ActionName do
2     <...>
3     var Sprite sprite = spawn Sprite(<...>);
4     <...>
5 end
6
7
8
9
10
11
12
13
14
15
16
17
18 .

```

[b] Implementation in Céu

Figure 12: *Bomber* action draw and update dispatching.



Figure 13: UI children with static lifespan.

REFERENCES

- [1] Behavior trees in unreal. <https://docs.unrealengine.com/latest/INT/Engine/AI/BehaviorTrees/> (accessed in Jun-2017).
- [2] A. Adya et al. Cooperative task management without manual stack management. In *Proceedings of ATEC'02*, pages 289–302. USENIX Association, 2002.
- [3] A. Ampatzoglou and A. Chatzigeorgiou. Evaluation of object-oriented design patterns in game development. *Information and Software Technology*, 49(5):445–454, 2007.
- [4] A. Branco, F. Sant’anna, R. Ierusalimschy, N. Rodriguez, and S. Rossetto. Terra: Flexibility and safety in wireless sensor networks. *ACM Trans. Sen. Netw.*, 11(4):59:1–59:27, Sept. 2015.
- [5] M. H. Cheong. Functional programming and 3d games. Master’s thesis, University of New South Wales, Sydney, Australia, November 2005.
- [6] F. Devillers and S. Donikian. A scenario language to orchestrate virtual world evolution. In *Proceedings of the 2003 ACM SIGGRAPH/Eurographics symposium on Computer animation*, pages 265–275. Eurographics Association, 2003.
- [7] C. Elliott and P. Hudak. Functional reactive animation. In *Proceedings of ICFP’97*, pages 263–273, New York, NY, 1997. ACM.
- [8] E. Gamma, R. Helm, R. Johnson, and J. Vlissides. *Design patterns: elements of reusable object-oriented languages and systems*. Addison-Wesley Reading, 1994.
- [9] D. Isla. Handling Complexity in the Halo 2 AI. In *Game Developers Conference*, Mar. 2005.
- [10] I. Maier, T. Rompf, and M. Odersky. Deprecating the observer pattern. Technical report, 2010.
- [11] W. Mallouk and E. Clua. An object-oriented approach for hierarchical state machines. In *Proceedings of SBGames’06*, pages 8–10, 2006.
- [12] R. Nystrom. *Game Programming Patterns*. Genever Benning, 2014.
- [13] L. L. O. P. A. Pagliosa. A new programming environment for dynamics-based animation. In *Proceedings of SBGames’06*. SBC, 2006.
- [14] K. Perlin and A. Goldberg. Improv: A system for scripting interactive actors in virtual worlds. In *Proceedings of the 23rd annual conference on Computer graphics and interactive techniques*, pages 205–216. ACM, 1996.
- [15] C. W. Reynolds. Computer animation with scripts and actors. In *ACM SIGGRAPH Computer Graphics*, volume 16, pages 289–296. ACM, 1982.
- [16] G. L. R. Roberto Tenorio Figueiredo. Gof design patterns applied to the development of digital games. In *Proceedings of SBGames’15*. SBC, 2015.
- [17] G. Salvaneschi et al. Rescala: Bridging between object-oriented and functional style in reactive applications. In *Proceedings of Modularity’13*, pages 25–36. ACM, 2014.
- [18] F. Sant’Anna, N. Rodriguez, and R. Ierusalimschy. Structured Synchronous Reactive Programming with Céu. In *Proceedings of Modularity’15*, 2015.
- [19] F. Sant’Anna, N. Rodriguez, R. Ierusalimschy, O. Landsiedel, and P. Tsigas. Safe System-level Concurrency on Resource-Constrained Nodes. In *Proceedings of SenSys’13*. ACM, 2013.
- [20] R. C. M. Santos, G. F. Lima, F. Sant’Anna, and N. Rodriguez. Céu-Media: Local Inter-Media Synchronization Using Céu. In *Proceedings of WebMedia’16*, pages 143–150, New York, NY, USA, 2016. ACM.
- [21] T. Sweeney. The next mainstream programming language: a game developer’s perspective. *ACM SIGPLAN Notices*, 41(1):269–269, 2006.
- [22] L. Valente, A. Conci, and B. Feijó. An architecture for game state management based on state hierarchies. In *Proceedings of SBGames’06*. Citeseer, 2006.

```

1  GameSession::GameSession(<...>) :
2      <...>
3  {
4      <...>      // these widgets are always active...
5      btpanel = new ButtonPanel(<...>);
6      pcounter = new PingusCounter(<...>);
7      smallmap = new SmallMap(<...>);
8      <...>
9      uimgr->add(btpanel); // ...but are added
10     uimgr->add(pcounter); // dynamically to the
11     uimgr->add(smallmap); // dispatching hierarchy
12     <...>
13 }

```

[a] Implementation in C++

```

1  code/await Game (void) do
2      <...> // other coexisting functionality
3      spawn ButtonPanel(<...>);
4      spawn PingusCounter(<...>);
5      spawn SmallMap(<...>);
6      <...> // other coexisting functionality
7  end
8
9
10
11
12
13 .

```

[b] Implementation in CÉU

Figure 14: Managing the UI widgets lifecycle.

```

1  Pingu* PinguHolder::create_pingu (<...>) {
2      <...>
3      Pingu* pingu = new Pingu (<...>);
4      pingus.push_back(pingu);
5      <...>
6  }
7
8  void PinguHolder::update() {
9      <...>
10     while(pingu != pingus.end()) {
11         (*pingu)->update();
12         if ((*pingu)->get_status() == PS_DEAD) {
13             pingu = pingus.erase(pingu);
14         }
15         <...>
16         ++pingu;
17     }
18 }
19
20 .

```

[a] Implementation in C++

```

1  code/await Game (void) do
2      <...>
3      pool[] Pingu pingus;
4      code/await Pingu_Spawn (<...>) do
5          <...>
6          spawn Pingu(<...>) in pingus;
7      end
8      <...> // code invoking Pingu_Spawn
9  end
10
11 code/await Pingu (<...>) do
12     <...>
13     loop do
14         await game.update;
15         if Pingu_Is_Out_Of_Screen() then
16             <...>
17             escape {PS_DEAD};
18         end
19     end
20 end

```

[b] Implementation in CÉU

Figure 15: Managing the pingus lifecycle.

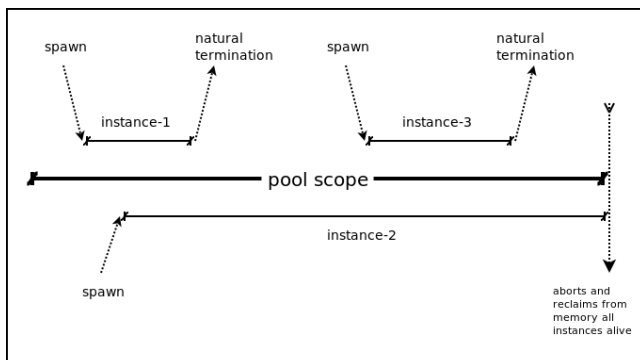


Figure 16: Lifespan of dynamic instances.