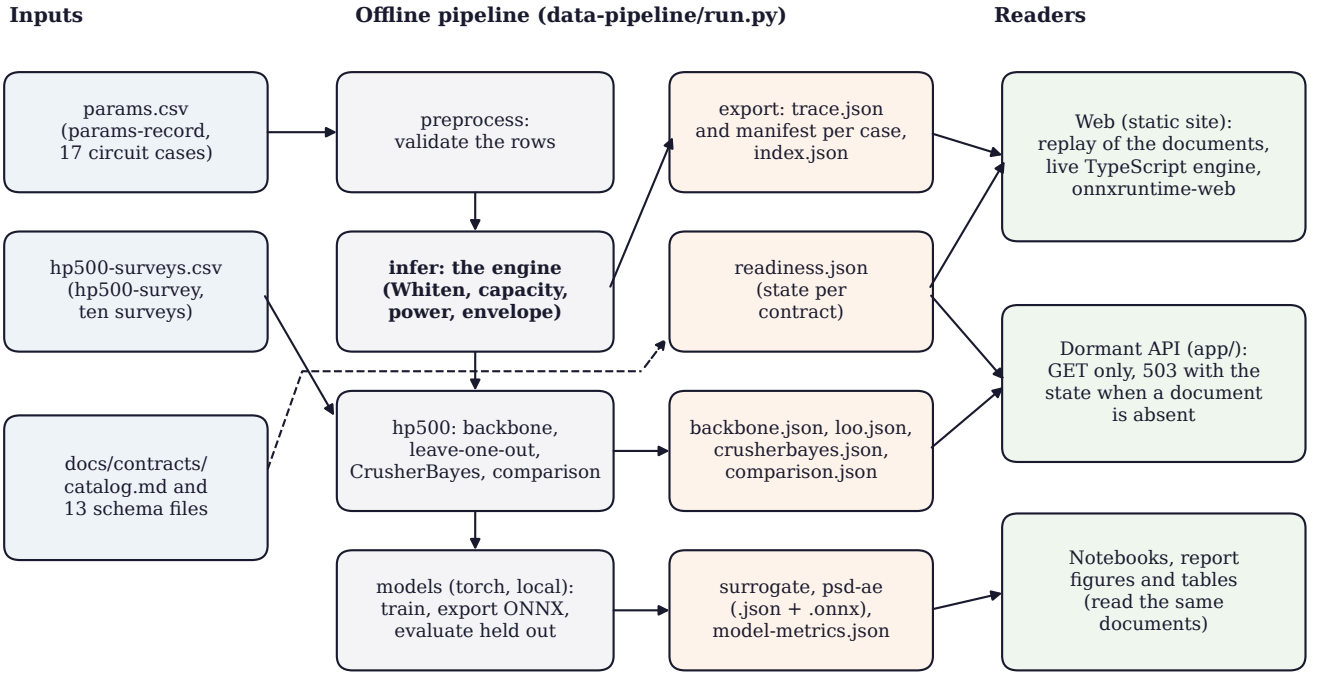
Inputs
Offline pipeline (data-pipeline/run.py)
Readers
params.csv (params-record, 17 circuit cases)
hp500-surveys.csv (hp500-survey, ten surveys)
docs/contracts/ catalog.md and 13 schema files
preprocess: validate the rows
infer: the engine (Whiten, capacity, power, envelope)
hp500: backbone, leave-one-out, CrusherBayes, comparison
models (torch, local): train, export ONNX, evaluate held out
export: trace.json and manifest per case, index.json
readiness.json (state per contract)
backbone.json, loo.json, crusherbayes.json, comparison.json
surrogate, psd-ae (.json + .onnx), model-metrics.json
Web (static site): replay of the documents, live TypeScript engine, onnxruntime-web
Dormant API (app/): GET only, 503 with the state when a document is absent
Notebooks, report figures and tables (read the same documents)
dashed: the readiness document is computed from the catalog and the repository state