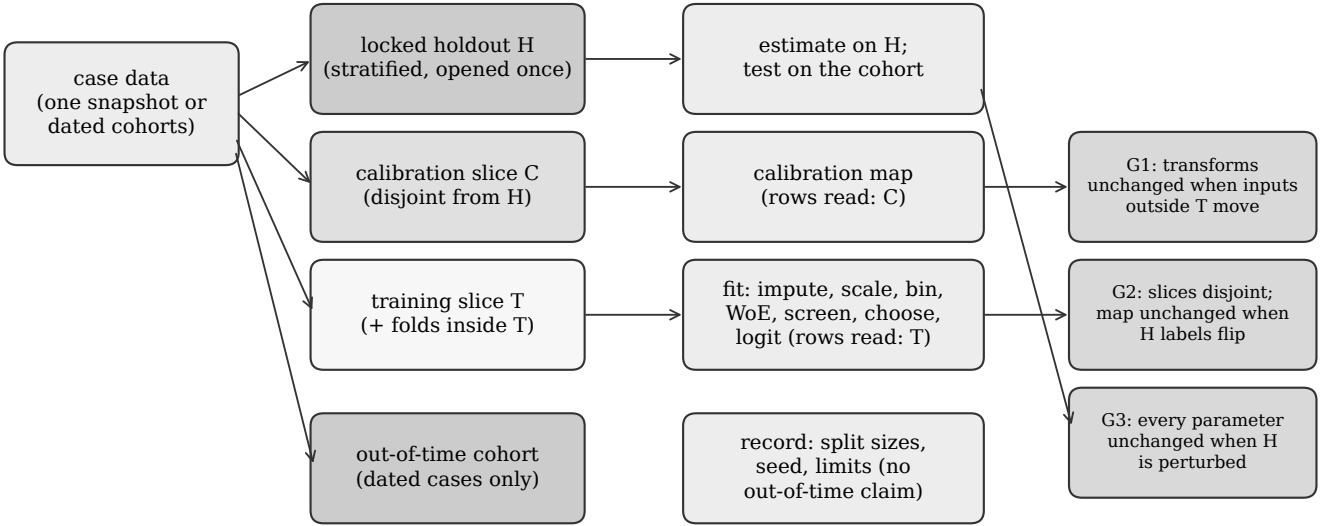
case data
(one snapshot or
dated cohorts)
locked holdout H
(stratified, opened once)
calibration slice C
(disjoint from H)
training slice T
(+ folds inside T)
out-of-time cohort
(dated cases only)
estimate on H;
test on the cohort
calibration map
(rows read: C)
fit: impute, scale, bin,
WoE, screen, choose,
logit (rows read: T)
record: split sizes,
seed, limits (no
out-of-time claim)
G1: transforms
unchanged when inputs
outside T move
G2: slices disjoint;
map unchanged when
H labels flip
G3: every parameter
unchanged when H
is perturbed