
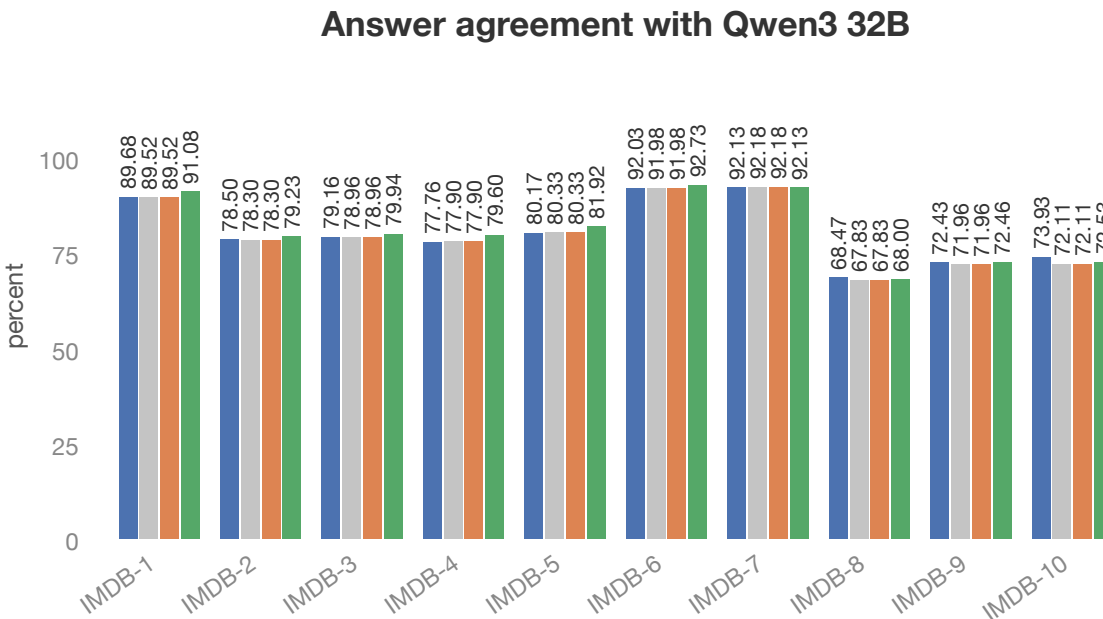
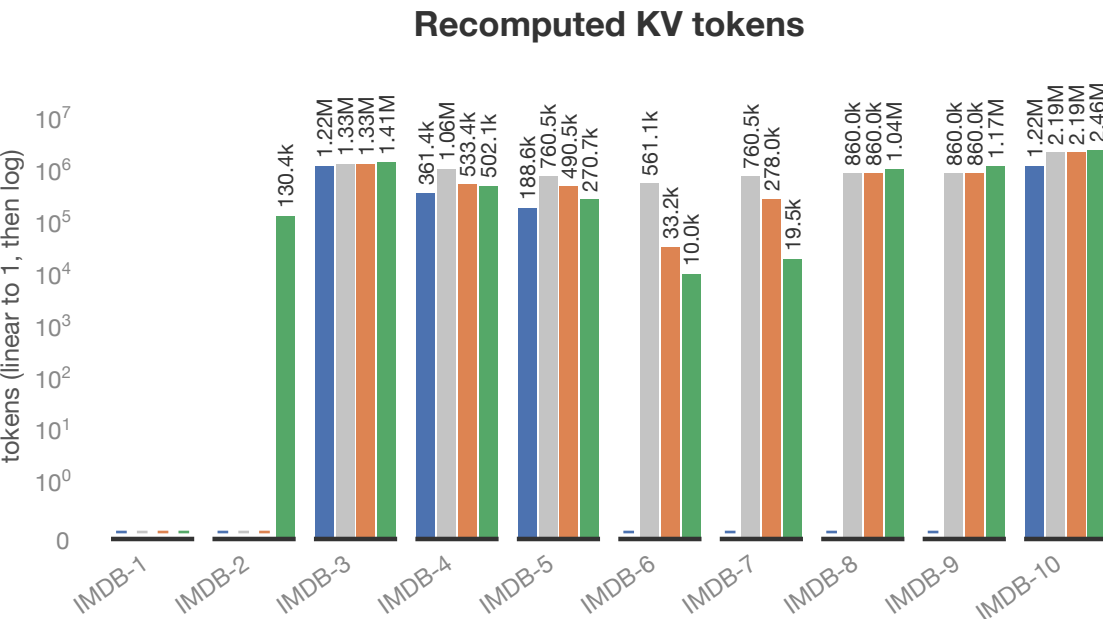
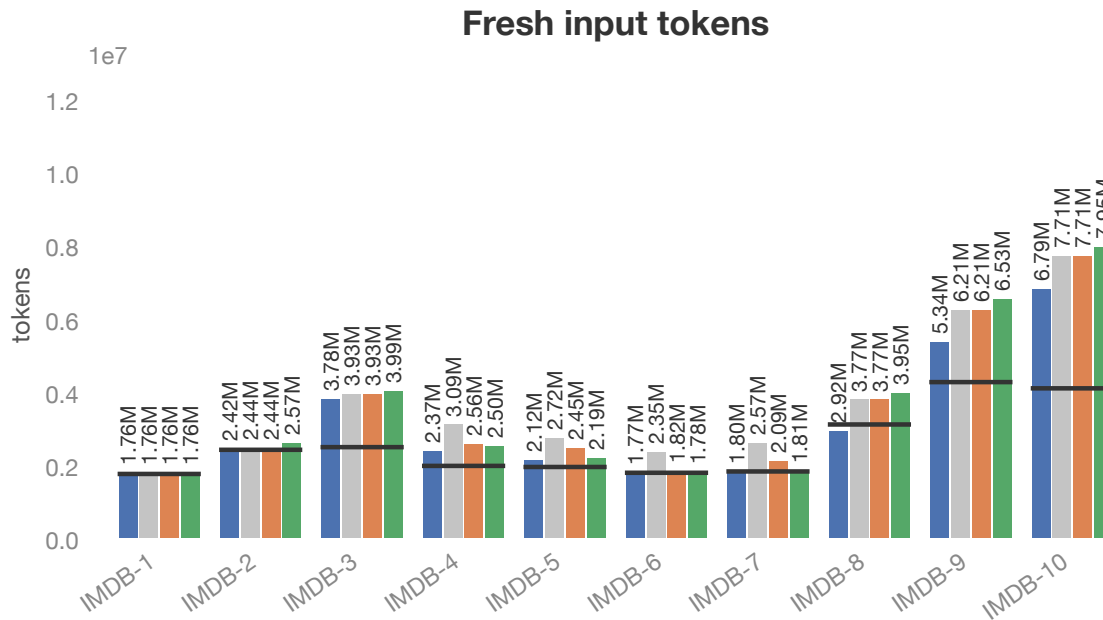


QUAIL-B IMDB, Qwen3 4B FP8, sf=0.1, one H100

Quail Stock vLLM Pipelined vLLM Pipelined SGLang SoL estimate

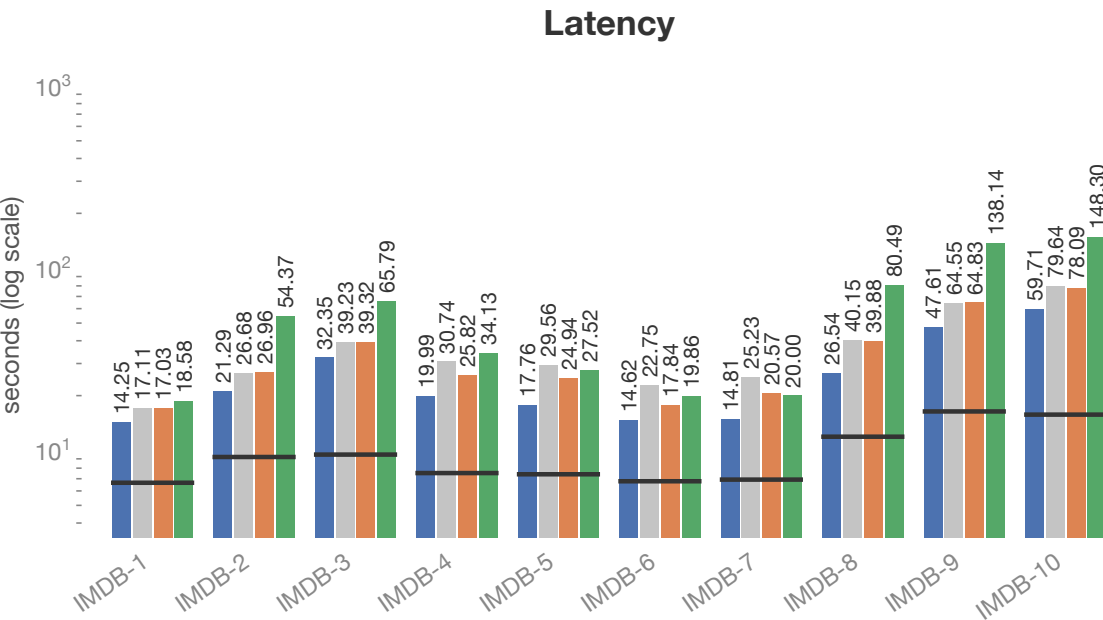

SoL estimates ideal work with unlimited prefix KV reuse across requests and reference-label survivors. It has no measured accuracy.

Fresh tokens include recomputed KV. A dash marks zero. Stock vLLM uses operator-at-a-time submission.

QUAIL-B IMDB: input documents before filtering

| Query   | Relation alias (set): input documents                                        |
|---------|------------------------------------------------------------------------------|
| IMDB-1  | r (reviews): 5,000                                                           |
| IMDB-2  | r (reviews): 5,000; a (aspects): 12                                          |
| IMDB-3  | r (reviews): 5,000; a (aspects): 12                                          |
| IMDB-4  | r (reviews): 5,000; a (aspects): 12                                          |
| IMDB-5  | r (reviews): 5,000; a (aspects): 12                                          |
| IMDB-6  | r (reviews): 5,000                                                           |
| IMDB-7  | r (reviews): 5,000                                                           |
| IMDB-8  | r (reviews): 5,000; a (aspects): 12; a2 (aspects): 12                        |
| IMDB-9  | r1 (reviews): 5,000; a1 (aspects): 12; r2 (reviews): 5,000; a2 (aspects): 12 |
| IMDB-10 | r1 (reviews): 5,000; a1 (aspects): 12; r2 (reviews): 5,000; a2 (aspects): 12 |

Each alias lists its full input before filters. Repeated aliases can refer to the same underlying set.  
Counts come from the saved corpus manifest. SoL uses the same inputs and the saved reference labels for survivors.