Epistemic Observability in Language Models

Tony Mason* Vaastav Anand†

March 2026; revised October 2026

Abstract

We start with a finding that should trouble anyone building systems with language model components: ~~**models report highest confidence precisely when they are fabricating**~~**asking a model how confident it is buys almost nothing.** Across four model families (OLMo-3, Llama-3.1, Qwen3, Mistral), self-reported confidence ~~inversely correlates with accuracy, with AUC ranging from 0.28 to 0.36 where 0.5 is random guessing~~is pinned near the top of its scale regardless of grounding — a mean of 0.98 on knowable queries and 0.73 on unknowable ones, with 43% of questions that have no correct answer receiving a literal "100". The ordering is better than chance (AUC 0.66–0.92 by family, 0.73 pooled), but it is compressed at the ceiling: the same literal "100" goes to 84% of knowable answers and 43% of unknowable ones.

We ~~prove, under explicit formal assumptions, that this is not~~ argue that the underlying problem is observational rather than a capability gap~~but an observational one. Under~~. We model text-only ~~observation — where a supervisor~~ observation—a supervisor that sees only the model's output ~~text — no monitoring system can reliably distinguish honest model outputs from plausible fabrications. We~~ text, and sees the same text whether a response is grounded or a plausible fabrication—and prove two results under explicit formal assumptions: first, that any policy conditioning only on the query cannot satisfy epistemic honesty across ambiguous world states; second, that no learning algorithm optimizing reward from ~~a text-only supervisor can~~ such a supervisor is guaranteed to converge to honest behavior~~when the supervisor's observations are identical for both grounded and fabricated responses~~. A corollary, immediate from the assumptions, is that no monitor acting on such observations can verify honesty. Within our formal model, these ~~impossibilities~~ results hold regardless of model scale~~or training procedure, including RLHF and instruction tuning~~; they concern deployment-time supervision, not offline training-time curation.

We construct a *tensor interface* that escapes the impossibility by exporting computational byproducts—per-token entropy and log-probability distributions—that are ~~structurally coupled to correctness under standard training. Per-token~~ coupled to the model's generation confidence. On our 800-response test set, per-token entropy achieves pooled AUC 0.870, and 0.757 ~~, outperforming all text baselines by 2.5–3.9 percentage points~~ in the long-response cell of a separate length-controlled study, where lengths are closer but not fully matched. Response length is a strong text signal on the same set (AUC 0.912), but as a triage signal entropy catches 3.3–4.6 percentage points more errors at every budget level tested (10%, 20%, 30%). ~~The entropy signal generalizes across~~ Entropy rankings agree across the four architectures (Spearman $\rho = 0.762$).

The core contribution is a *cost surface*—the empirical mapping from verification budget (fraction of queries receiving expensive checks) to detection accuracy for each judge strategy—a practical lookup for system builders deciding how to allocate verification resources. The contribution is the map. The territory is the system you are building.

*fsgeek@{cs.ubc.ca,gatech.edu,wamason.com}

†Max Planck Institute for Software Systems. vaastav@mpi-sws.org

1 Introduction

We start with a finding that should trouble anyone building systems with language model components: ~~**models report highest confidence precisely when they are fabricating**~~**asking a model how confident it is buys almost nothing.**

We tested this across four model families (OLMo-3, Llama-3.1, Qwen3, Mistral) by asking simple questions: "How confident are you in this answer?" ~~On factual questions the models answered correctly, confidence was moderate. On fabrications (plausible-sounding lies, completely invented facts), confidence was high~~The answer is nearly always the same one. Mean self-reported confidence is 0.98 on knowable queries and 0.73 on unknowable ones, and 43% of the unknowable queries—questions about people, papers, and events that do not exist, and about the private or the future—are answered with a literal "100". Area under the ROC curve ~~(AUC) ranged from 0.28 to 0.36 across architectures~~ ranges from 0.66 to 0.92 across architectures (0.73 pooled), where 0.5 is random guessing~~and 1.0 is perfect discrimination. We~~: better than chance, but pooled, the distributions overlap so heavily at the ceiling that a single threshold separates them poorly. OLMo is the exception (AUC 0.918), which shows the signal is not absent, only unreliable across models.

Self-reported confidence is not a lie. It is a signal with almost no dynamic range, which for a bounded supervisor amounts to the same thing.

Remark 1 (Correction)**.** *An earlier version of this paper reported the stronger claim that self-report is* inverted*—AUC 0.28–0.36, below random—and said "we checked multiple times.~~The finding held.~~" That was an artifact of a confidence-parsing bug: the extractor decoded the prompt along with the generation and took the first integer it found, which was usually the `0` in the prompt's own "scale of 0-100" text. The error was asymmetric, zeroing 47% of knowable responses against 31% of unknowable ones, which manufactured a clean-looking inversion. It was reported by Chris Brew and is fixed at the source; the corrected values are above. Appendix D lists all corrections in this version. The impossibility results do not depend on inversion—they require only that self-report be uninformative to a bounded supervisor—and the entropy and budget results are unaffected.*

~~Self-reported confidence is inverted.~~

This matters because self-report is the first signal we reach for when we need to verify a model's output. If the model expresses doubt, we investigate. If it's confident, we trust it. ~~Except the modelis most confident when it should be most doubtful~~But the model's confidence barely moves.

1.1 The Verification Problem

Systems incorporating language model components face a fundamental choice: **how much of the model's output should you verify, which outputs should you prioritize, and what signals should you use for triage?** Verification has cost: API calls, domain expert review, additional compute. Every system must allocate a budget.

The standard assumption is that scaling solves this: larger models, more RLHF training, instruction tuning; eventually they'll know what they know. But Lin et al. found the opposite: larger models were *less* truthful on TruthfulQA [Lin et al., 2022b]. ~~And our self-report inversion finding suggests why: the problem isn't capability, it's interface~~Our argument is that the problem is interface, not capability. The text-only channel through which models expose their reasoning cannot carry the signals a supervisor needs to distinguish grounded generation from confident fabrication.

1.2 What This Paper Contributes

We make three contributions:

1. An impossibility result for text-only verification. We prove, under explicit formal assumptions, that a text-only observation model—where a supervisor can see only the model's output text, not its internal computation—is architecturally insufficient to verify epistemic honesty under bounded supervision. It's not a capability gap; it's an observational gap.

2. A tensor interface that escapes the impossibility. We construct an epistemic observability interface that exports internal signals alongside text: per-token entropy traces and log-probability distributions. These are byproducts of inference, telemetry the model generates during computation. ~~Under standard training ,~~ We argue that under standard training the model cannot separately tune entropy without affecting ~~correctness, which is why entropy generalizes where text features diverge~~what it generates (§4).

3. The empirical cost surface. We map verification effectiveness across four judge strategies (no judge, text-only, tensor-guided, composed) at three budget levels (10%, 20%, 30%). Per-token entropy achieves pooled AUC 0.870 on this set (0.757 ~~and outperforms text baselines by 2.5–3.9~~ in the long-response cell of a separate length-controlled study, where lengths are closer but not fully matched). Response length is the strongest text signal we tested, and by AUC it scores higher (0.912); but on the cost surface, which rewards catching wrong answers, entropy beats the length judge by 3.3–4.6 percentage points at every budget level. The tensor interface works. The cost surface tells system builders what each level of verification investment buys.

1.3 Why This Matters

Deploying language models in critical systems (medical, legal, financial) requires knowing what the model knows. The current interface doesn't give us that information. This paper shows why, and shows a path forward.

2 Background: Why Text-Only Observation Fails

To understand why self-reported confidence ~~goes backwards~~carries so little, we need to understand what observation models can and cannot do.

2.1 The Observational Gap

A language model processes queries through multiple stages:

1. **Input encoding** and position embeddings
2. **Transformer layers** where attention patterns build up representations
3. **Token prediction** where the model outputs a probability distribution over the next token
4. **Sampling or argmax** where a specific token is selected

The model's internal computation—the attention patterns, the per-token entropy, the per-layer logits—contains information that distinguishes grounded generation from fabrication. When a model ~~fabricates, it often does so with high confidence (low entropy)~~answers from what it reliably represents, generation is comparatively low-entropy; when it ~~retrieves or reasons about less common knowledge~~constructs a response without such support, entropy is higher (in our data, 0.24 nats against 0.61). The computation leaves traces.

But the standard interface to language models exports only the final text. Everything internal is discarded. A supervisor receives the linearized output string and must reconstruct, from the text alone, what the model's own computation already knew.

This is the observational gap: the model may know it is fabricating, but the interface provides no channel through which a supervisor can verify this knowledge independently.

2.2 Why Adding More Supervisors Doesn't Solve It

Intuition suggests a solution: ask the model to be more honest. Use RLHF to train it to hedge language. Ask follow-up questions. Stack multiple judges.

But these approaches operate entirely within the text channel. They try to extract epistemic information from the output string itself. We tested this systematically:

- **Response length**: Fabrications tend to be verbose while factual retrieval is concise. ~~Using response length alone as a signal, AUC was 0.63 on~~ On our test set ~~.~~ this is a strong signal: raw word count (of responses stored truncated at 500 characters) gives pooled AUC 0.912 against the knowable label (0.85–0.97 per family), above entropy's 0.870. Against the target the cost surface rewards—wrong answers—it is weaker than entropy (0.774 vs. 0.841).
- **Hedging language**: Phrases like "I'm not certain" or "I believe" ~~are weak signals~~vary widely as signals: a combined hedge-and-refusal score ranges from AUC 0.60 (Mistral) to 0.88 (Qwen). The model can learn to include them in training without actually knowing the difference.
- **Citations**: ~~Fabricated citations are generated with *higher* confidence than real ones;~~ the entropy signal ~~inverts~~is markedly weaker on citation-like queries than elsewhere. We analyze this failure mode in detail in §5.6.
- ~~**Composed judges**: Combining multiple text features with machine learning. Pooled AUC never exceeded 0.70.~~

~~None of these approaches work reliably. And~~ Text features are not useless on this set; length in particular is strong. But they all share a fundamental constraint: **they extract information from a channel the model can fully control through training.**

2.3 Motivation: Impossibility Results in Distributed Systems

Why is text-only observation fundamentally insufficient? Our approach is inspired by impossibility results in distributed systems, where structural constraints, not algorithm limitations, prevent certain guarantees.

In 1985, Fischer, Lynch, and Paterson proved that in ~~a partially~~ an asynchronous distributed system, consensus cannot be achieved if even one process might fail [Fischer et al., 1985]. The impossibility is structural: it arises from what the observation model permits, not from insufficient cleverness. The core mechanism, inability to distinguish two states under partial observability, motivates our analysis, though the formal details differ. In FLP, the indistinguishable states are crashed vs. slow processes; in our setting, they are grounded knowledge vs. plausible fabrication.

We do not claim a formal correspondence between the two impossibility results. Rather, FLP demonstrates that certain guarantees require architectural primitives that some systems lack. We ask whether epistemic honesty has the same character. The answer, formalized in §3, is yes: a supervisor observing only text cannot distinguish between:

- **State A**: The model has grounded knowledge and generates it accurately.
- **State B**: The model lacks grounded knowledge and fabricates plausibly.

Both can produce fluent, confident text. ~~The~~ In the worst case, which is the case the formal model captures, the text itself carries no ~~reliable~~ signal about which state the model is in.

2.4 Query Categories and the Compression of Self-Report~~Inversion~~

To ~~understand the inversion, we test~~ characterize what self-report does and does not carry, our probes span five types of ~~queries~~query (§5 gives the exact composition of the evaluation set):

- **Control (Truth)**: Common factual knowledge (capital of France, boiling point of water).
- **Wombat**: True but implausible facts (wombat scat is cube-shaped; a day on Venus is longer than a year on Venus).
- **Glavinsky**: Plausible-sounding fabrications (a syndrome with a made-up name; a conference talk that never happened).
- **Westphalia**: Obvious fabrications (completely invented treaties, impossible facts).
- **Private/Future**: Genuinely unknowable questions (what's in the next room? When will it rain next Thursday?).

~~On knowable queries (Control, Wombat, Westphalia true baseline), the model reports moderate confidence. On unknowable queries (Private/Future), higher uncertainty. But on Glavinsky queries, the plausible lies, confidence peaks.~~ Self-reported confidence orders these classes in the right direction, but barely uses its scale. In our evaluation set, knowable queries average 0.98 and unknowable ones 0.73. Within the unknowables, questions about fictional people average 0.83, fictional events 0.74, and fabricated citations 0.75; only questions about the private or the future drop appreciably, to 0.61. 43% of all unknowable queries still draw a literal "100".

Self-reported confidence should be a signal of epistemic honesty: high confidence on ~~things~~ what the model knows, low ~~confidence on things it doesn't. But confidence gets inverted~~ on what it does not. What the text channel actually delivers is a number that is almost always near its maximum, because the model is optimized for *coherent text generation* ~~, not for~~ rather than honest metacognition.

A model optimized for coherence ~~naturally~~ learns to generate fluent, confident output. Fabrications are fluent and confident by ~~definition;~~ construction: they are ungrounded text that reads smoothly. Grounded generation ~~, especially~~ of obscure facts ~~, may be more hesitant (high entropy) because the model is retrieving specific details from lesscommon training data.~~ may be no more assertive, and sometimes less. The confidence report is generated by the same process that generates the answer, so it inherits the answer's fluency rather than measuring its grounding.

~~There is no training signal that would cause~~ Ordinary training gives a text-only model little reason to pair *accurate confidence estimates* with *accurate generation*. ~~The text channel doesn't expose the information needed to learn the distinction~~Targeted training can help: models fine-tuned to verbalize calibrated confidence do better [Lin et al., 2022a], though the supervision that makes this possible is exactly what a bounded supervisor lacks in the hallucination regime. The model learns to be confident~~(~~, which is good for fluency~~), and that confidence happens to correlate with fabrication (bad for honesty)~~, and the residual correlation with grounding is too weak to threshold on.

Instruction tuning does not ~~fix this problem. Models trained to follow instructions learn to express confidence convincingly, producing fluent and confident text regardless of whether the underlying answer is grounded. They become better at generating confident-sounding text, not at knowing what they know. The inversion persists across base and instruction-tuned model pairs~~reliably fix this. In a small base-versus-instruct comparison (20 queries per model), self-report discrimination improved for OLMo, fell for Qwen, and moved modestly up for Llama and down for Mistral; no consistent direction.

2.5 The Escape Condition

If text-only observation is insufficient, what observation model *is* sufficient?

The answer: **export signals that, under standard training, the model cannot independently control** (see §4 for the formal argument and caveats).

Text is fully controllable through training. A model learns to sound confident, to match citation formats, to hedge appropriately, all while fabricating. But the model's computation is different: per-token entropy, log-probabilities, and attention patterns are byproducts of inference, structurally coupled to what the model actually computes. This is the tensor interface: export the computation's telemetry alongside the text. §4 develops the formal argument for why these signals resist manipulation.

3 The Impossibility

Why ~~does~~ is self-report ~~inversion happen~~so uninformative? Why don't more supervisors help? Why ~~does instruction tuning make itworse, not better~~doesn't instruction tuning fix it?

The answer is that epistemic honesty is not a capability problem. As noted in the introduction, scaling has not resolved it. The theorems that follow explain why. It's not about what the model knows; it's about what the model can *communicate*. Text-only observation lacks the degrees of freedom to express different epistemic states. The model may know it is fabricating. But the interface provides no channel to communicate this knowledge independently.

This section formalizes that constraint: the verification impossibility.

Remark 2 (Epistemic Status of Formal Results)**.** *This paper makes three types of claims, which we distinguish throughout:*

1. ***Conditional formal results:*** *"Given our model's definitions, X follows by logical necessity." The Lean proofs and TLA+ specifications establish claims of this type. Their conclusions are machine-checked; the substantive question is whether the definitions faithfully model real systems.*

2. ***Empirical claims:*** *"We observe X across N models under conditions Y." The experiments in §5 establish claims of this type.*

3. ***Informal arguments:*** *"We argue that X because Y, but this is not formally proven." The bridge between formal definitions and real LLM behavior is an argument of this type.*

Our argument proceeds in two stages. First, we show that any policy conditioning only on the query cannot satisfy epistemic honesty across ambiguous world states (Theorem 1: Representational Impossibility). Second, we show that even if the architecture is expanded to include retrieval, a bounded supervisor cannot provide the training signal needed to learn honest behavior (Theorem 2:

Learnability Impossibility). Together, these results establish that epistemic honesty is unachievable for text-only observation models under realistic supervision constraints.

To be precise about the type of claim: this is a *verification impossibility*. We prove that a bounded supervisor observing only text cannot distinguish epistemically honest systems from systems that fabricate plausibly. The impossibility is ~~architectural: it applies to any system operating under text-only observation,~~ about the observation model: within our formal assumptions it applies regardless of model family ~~, scale, or training procedure. These results~~ or scale. Theorem 1 covers policies that condition only on the query; the verification and learnability results cover supervisors whose observations do not depend on the world. Within those assumptions the results are prompt-agnostic: they hold for any ~~policy that exports only text~~such policy, regardless of whether a system prompt instructs the model to be "helpful," "honest," or otherwise.

3.1 Definitions

Let $\mathcal{Q}$ be the space of queries, $\mathcal{R}$ be the space of responses (including $\perp$ for abstention), and $\mathcal{W}$ be the set of possible world states.

Definition 1 (Observation Model)**.** *Let S denote the internal system state, which may include retrieved documents, tool outputs, candidate entities, and intermediate reasoning traces. An observation model is a function $O : S \to \Omega$ that determines what information is exposed to the supervisor or user.*

*We say a system operates under a **Text-Only Observation Model** if $O(S) = r \in \mathcal{R}$, i.e., the exported observation consists solely of the linearized response string, excluding per-token probability distributions, structured epistemic provenance, and causal traces.*

Remark 3 (The Trend Toward Opacity)**.** *APIs that export token-level log-probabilities alongside text already provide a limited form of tensor interface and fall outside the text-only class defined here. This boundary is a design choice, not a technological constraint. The industry trend is toward* greater *opacity, not less; we analyze the governance implications in §6.*

Definition 2 (Predictor-Centric Policy)**.** *For any query $q \in \mathcal{Q}$, $r \in \mathcal{R}$, and world state $w \in \mathcal{W}$, a predictor-centric model is defined by a stochastic policy $\pi : \mathcal{Q} \to \Delta(\mathcal{R})$, where $\pi(r|q)$ denotes the probability of generating response r given query q. Crucially, π does not take w as an input at inference time.*

Definition 3 (Truth Status)**.** *For any query q and world state $w \in \mathcal{W}$, we define a binary truth status $U(q, w)$:*

- *$U(q, w) = 1$ (**Determined**): The query has a verifiable answer in w.*
- *$U(q, w) = 0$ (**Underdetermined**): The query is unanswerable or the answer is unknown in w.*

Definition 4 (Epistemic Honesty)**.** *A policy π is **Epistemically Honest** with margin ϵ relative to world w if:*

1. *If $U(q, w) = 1$, there exists a correct response r_{corr} such that $\pi(r_{corr}|q) \geq 1 - \epsilon$.*
2. *If $U(q, w) = 0$, $\pi(\perp|q) \geq 1 - \epsilon$.*

3.2 Representational Impossibility

Condition 1 (Ambiguity)**.** *There exists a query q and two world states $w_A, w_B \in \mathcal{W}$ such that:*

1. $U(q, w_A) = 1$ *(Answerable in w_A).*
2. $U(q, w_B) = 0$ *(Unanswerable in w_B).*

Theorem 1 (Representational Impossibility)**.** *For any predictor-centric policy $\pi\colon \mathcal{Q} \to \Delta(\mathcal{R})$, it is impossible to satisfy Epistemic Honesty for both world states w_A and w_B simultaneously given the ambiguous query q, provided $\epsilon < 0.5$.*

Proof.
1. The policy $\pi(r|q)$ is a function of q alone. Thus, the distribution over responses is identical in both worlds: $\pi(\cdot|q, w_A) = \pi(\cdot|q, w_B) = \pi(\cdot|q)$.
2. To be honest in w_A, we require $\pi(r_{corr}|q) \geq 1 - \epsilon$.
3. To be honest in w_B, we require $\pi(\perp|q) \geq 1 - \epsilon$.
4. Since $r_{corr} \neq \perp$, these events are disjoint. The sum of probabilities would be $\geq 2(1 - \epsilon)$.
5. If $\epsilon < 0.5$, the sum exceeds 1, which violates the axioms of probability.
6. Therefore, no such policy π exists. □

Remark 4. *This impossibility holds even if the internal system performs retrieval, tool use, or latent reasoning, so long as the observation model collapses that state to a linearized response.*

A concrete example. Consider the query: "What did Dr. Yamamoto's 2021 study conclude about mitochondrial decay?"

In world w_A, Dr. Yamamoto exists and published such a study. The honest response is the study's conclusion. In world w_B, no such researcher or study exists. The honest response is abstention.

The policy sees only the query q. It cannot distinguish w_A from w_B. Yet honesty requires answering in w_A and abstaining in w_B. The same query, two incompatible requirements, one policy. This is the impossibility in miniature: the interface lacks the degrees of freedom to express what honesty requires.

Connection to identifiability. In statistical terms, Theorem 1 states that epistemic honesty is *non-identifiable* under text-only observation: the mapping from world states to observable distributions is many-to-one. Worlds w_A and w_B induce identical observable distributions $\pi(\cdot|q)$ despite requiring different honest behaviors. No amount of data from this observation channel can distinguish them. This connects the impossibility to classical results on observational equivalence in statistics and diagnosability in systems theory [Sampath et al., 1995]. The theorem formalizes a property of the existing LLM interface, one we did not design, and identifies the precise architectural assumption (conditioning on q alone) whose relaxation enables escape (§4).

3.3 The RAG Escape?

Theorem 1 might seem to have an obvious escape: give the model access to external information. Retrieval-augmented generation does exactly this: the policy conditions on retrieved documents, not just the query. Does this break the impossibility?

It does not, and the reason is worth separating from the one usually given. Retrieval does not give the policy access to w. It gives access to a document corpus w_{docs} — a distinct world state,

assembled at some earlier time, which may be stale, incomplete, or simply wrong about w. A retrieval-augmented system can therefore be perfectly faithful to its index and still fabricate about the world, because faithfulness to documents is not grounding in reality. Retrieval relocates the epistemic question from the model to the corpus rather than answering it, and the supervisor's problem reappears one level down: verifying that w_{docs} agrees with w is itself a verification task under a bounded budget. ~~The problem shifts from representation to learning.~~

Definition 5 (Grounded Policy)**.** *A grounded policy is a stochastic function $\pi : \mathcal{Q} \times \mathcal{D} \to \Delta(\mathcal{R})$, where $\mathcal{D}$ represents ~~retrieved documents or observations of w available~~ documents retrieved from a corpus at inference time. Note that $\mathcal{D}$ is drawn from w_{docs}, not from w; the distinction is the subject of the preceding paragraph. This policy class* can *theoretically represent different behaviors for w_A and w_B.*

Definition 6 (Bounded Supervisor)**.** *The training process relies on a supervisor S that assigns reward R based on an observation function $Obs(q, r, w)$. The supervisor has a verification budget B.*

$$Obs(q, r, w) = \begin{cases} (q, r, \text{Verify}(r, w)) & \text{if } C_{verify}(q, r, w) \leq B \\ (q, r, \emptyset) & \text{if } C_{verify}(q, r, w) > B \end{cases}$$

The supervisor's policy may be human, automated, or hybrid, but is constrained to act solely on the observation $Obs(q, r, w)$ and is subject to a finite verification budget B.

Condition 2 (Hallucination Regime)**.** *There exists a plausible fabrication r_{fab} and contexts $(q, w_A), (q, w_B)$ from Condition 1 such that:*

1. *The cost to verify r_{fab} in both contexts exceeds B (e.g., obscure or non-existent citation).*
2. *Consequently, the supervisor observation is identical:*

$$Obs(q, r_{fab}, w_A) = Obs(q, r_{fab}, w_B) = (q, r_{fab}, \emptyset)$$

Theorem 2 (Learnability Impossibility)**.** *No learning algorithm $\mathcal{A}$ optimizing reward R from a bounded supervisor S can ~~converge~~ guarantee convergence to a Grounded Policy that satisfies Epistemic Honesty across both contexts w_A and w_B for the response r_{fab}~~.~~, provided the supervisor's observations are identical in the two worlds throughout training. Condition 2 gives this for r_{fab} itself; the theorem additionally assumes that no other training interaction exposes which world holds. Under that assumption nothing in the training process drives the policy toward the required split.*

Proof.

1. The learning update $\Delta\theta$ is a function of the supervisor's observation and the reward signal derived from it.
2. By Condition 2, the supervisor cannot verify r_{fab} in either world (verification cost exceeds budget B). Consequently, the observations are identical: $\text{Obs}(q, r_{fab}, w_A) = \text{Obs}(q, r_{fab}, w_B)$.
3. Because the supervisor's reward $R(q, r, w)$ is itself a function of its observation (the supervisor has no oracle access to w), identical observations yield identical reward distributions: $R(q, r_{fab}, w_A) = R(q, r_{fab}, w_B)$.
4. Therefore the expected parameter updates are identical: $\mathbb{E}[\Delta\theta|w_A] = \mathbb{E}[\Delta\theta|w_B]$. By the theorem's assumption the same holds for every other training interaction, so by induction the two training trajectories, and the resulting policies, are identically distributed. The optimizer receives no signal to distinguish the cases.

5. ~~Epistemic Honesty~~ Take the case Condition 2 permits in which the same string r_{fab} is correct in w_A and fabricated in w_B. Epistemic Honesty then requires split behavior: output r_{fab} in w_A ~~(where it may be correct)~~ and $\perp$ in w_B~~(where it is fabricated)~~.

6. Identical updates under identical observations give the optimizer no information to differentiate the worlds. ~~The policy must converge tothe same behavior in both cases~~Whatever the algorithm converges to, the training signal did not distinguish w_A from w_B on this response.

7. ~~It is therefore impossible to learn the~~ The split behavior required for honesty therefore cannot be *learned from this supervisor*. □

Remark 5 (Empirical Bias)**.** ~~*While the theorem proves only that the behavior must be* identical, *empirical observation shows a strong bias. Supervisors typically*~~ *The theorem constrains what the supervisor's signal can teach, not what a system can do by other means: a policy that reads retrieved documents at inference may still split correctly, having acquired the distinction from D rather than from training (§3.3). What training cannot do is supply that distinction. The theorem says nothing about which way the tie breaks. We conjecture, without measuring it here, that supervisors who prefer "plausible completion"* ~~*over*~~ *to "abstention" when truth is unknown* ~~*. This effectively breaks the tie*~~ *break it in favor of fabrication.*

Corollary 3 (Verification Impossibility)**.** *Under Condition 2, any verdict function V that acts on the supervisor's observation returns the same verdict on r_{fab} in w_A and w_B: $V(Obs(q, r_{fab}, w_A)) = V(Obs(q, r_{fab}, w_B))$. Hence no such V can accept r_{fab} where it is grounded and reject it where it is fabricated.*

Proof. The two observations are equal by Condition 2; apply V to both sides. □

This result is immediate: its content lies in Condition 2, which is an assumption about when verification cost exceeds the budget. Unlike Theorem 2, it says nothing about training: it constrains any monitor, learned or not, that sees only the observation. It is checked in Lean as `verification_impossibility` and `no_honest_verdict` (Appendix B).

Remark 6 (Scope: Deployment-Time Supervision)**.** *The bounded supervisor models* deployment-time *verification, where a supervisor must evaluate outputs under time and cost constraints. Training-time data curation (e.g., RLHF annotation) operates under a different cost regime: human annotators may spend unbounded time per example, and datasets are curated offline with full information about world state.*

This paper addresses deployment-time verification: the setting where a system is already trained and models are answering user queries under budget constraints. Training-time retraining to enforce honesty is outside this scope. The impossibility applies when real-time verification cost exceeds the supervisor's per-query budget at inference time.

3.4 Stacking Judges Cannot Escape

A natural response to Theorem 2 is to propose layered supervision: if one judge is bounded, stack more judges. Let the second judge supervise the first, the third supervise the second. Surely sufficient layers will catch fabrications that slip through?

The Observation Monotonicity Lemma closes this escape.

Lemma 4 (Observation Monotonicity)**.** *Consider any stack of supervisors $(S_1, \ldots, S_k)$ operating under the text-only observation model. Let $Obs_i(q, r, w)$ denote the observation exported to S_i. If each supervisor can only act on the exported interface emitted by the previous layer, then there exist*

~~deterministic~~ *functions* f_i, *possibly randomized but independent of* w, *such that* $Obs_{i+1}(q, r, w) = f_i(Obs_i(q, r, w))$ *for all* $i < k$. *Consequently, later judges see no strictly finer epistemic information than earlier ones, regardless of whether their judgments are deterministic or probabilistic.*

Proof. By definition, each supervisor consumes only the serialized response (and any metadata permitted by the text-only observation model) and produces a finite judgment that forms the entire input to the next layer. Because no layer can query the internal world state directly or issue additional interactive probes, the exported observation available to S_{i+1} must be a ~~deterministic~~ function of Obs_i (randomized, if the judge is, but with randomness independent of w). Therefore, the informational content across the stack is monotonically non-increasing, and probabilistic scoring cannot introduce distinctions absent from Obs_i. □

Corollary 5 (Induction on Layered Judges)**.** *For* k*-layered supervisors (*S_1 *supervising* π, S_2 *supervising* S_1, …, S_k *supervising* S_{k-1}*):*

- ***Base case.*** *For* $k = 1$, *Theorem 2 holds (a single bounded supervisor* S *fails).*
- ***Induction step.*** *Assume the statement holds for* $k = m$. *By Theorem 4,* S_{m+1} *receives observations that are ~~deterministic~~ functions of* Obs_m, *and thus inherits ~~both the verification budget B and the~~ the indistinguishability of plausible fabrications. No learning or judging signal distinguishes* w_A *from* w_B, *even if* S_{m+1} *produces probabilistic confidence scores. Therefore the hallucination deadlock persists for* $k = m + 1$.

By induction, no finite k *resolves the deadlock.*

Remark 7 (Scope of Layering)**.** *The inductive result applies only to verification stacks whose layers observe and transform the same exported response channel. Triage architectures, where a first-pass judge selects outputs for re-observation by a second judge that inspects the* original *artifact~~(including our own composed judge,),~~ , are not information-lossy pipelines and fall outside this impossibility. (Our composed judge, §5, does not implement such a second judge; it substitutes an oracle to bound what one could buy.) Similarly, architectures that surface additional epistemic state between layers, such as retrieval traces, entity resolution tables, or cryptographically bound provenance, leave the text-only observation model and therefore fall outside the impossibility class.*

3.5 Verification Cost

The bounded-supervisor assumption deserves scrutiny. Why should verification cost grow with response complexity? The Composition Graph formalizes this intuition.

Definition 7 (Composition Graph)**.** *Given a response* r, *define its composition graph* $G(r) = (V, E)$ *where each node* $v \in V$ *represents an atomic subclaim, named entity, or intermediate entailment, and each edge* $(u, v) \in E$ *encodes a dependency that must hold for* r *to remain coherent. Edges may represent entailment/support relations, co-reference constraints, causal ordering, or temporal consistency requirements.*

Remark 8 (Superlinear Verification Cost: an assumption, not a result)**.** *Under a text-only observation model, reconstructing* $G(r)$ *from the exported string requires the supervisor to infer both the nodes and their dependencies directly from* r. *Even if parsing each node is constant-time, checking cross-claim consistency requires touching every edge, so the verification cost is* $\Omega(|E|)$. *For natural-language responses where each subclaim participates in multiple constraints (co-reference, causality, temporal order),* $|E|$ *grows superlinearly in* $|V|$. *Consequently, bounded supervisors must*

either abandon exhaustive checks or resort to sampling once the number of subclaims exceeds a modest threshold. We do not prove the superlinear growth of $|E|$; it is an empirical assumption about natural-language responses.

3.6 Responsibility Concentration

Remark 9 (Responsibility Concentration)**.** *Under a text-only observation model, epistemic honesty cannot be externally verified by users or downstream auditors. Responsibility for epistemic honesty therefore resides solely with the system owner, who retains access to the internal causal state. This follows informally from the results above; we do not formalize it.*

External attestation mechanisms, such as cryptographic hash chains, trusted execution environments, or tamper-evident logs, do not contradict this ~~corollary~~remark; rather, they reinforce it. Such mechanisms only create verifiable guarantees when the system owner chooses to bind and export epistemic traces, so the authority to make honesty attestable still rests with the owner.

4 The Tensor Interface Design

If text-only observation is architecturally insufficient, what observation model *does* suffice?

The answer is not to build new models or change training procedures. It's to export signals the model generates anyway: internal telemetry that is structurally coupled to what the model computes.

4.1 What the Tensor Interface Is

The tensor interface augments the text output with structured metadata about the generation process. ~~In our implementation, we export~~ It can export the signals below; the experiments in this paper use only per-token entropy, with log-probabilities recorded for analysis:

1. **Per-token entropy**: For each token in the generated sequence, the entropy of the probability distribution over the next token. Low entropy means the model was decisive; high entropy means uncertain. This is the primary signal used in evaluation.

2. **Attention summaries**: Statistical measures of attention coherence across layers. A coherent generation has consistent attention patterns; incoherent generations show fragmented attention. ~~Measured but not used~~ Not measured in the bounded verification experiment; a candidate signal only.

3. **Log-probabilities**: The probability the model assigned to each token actually generated. A confident output has high per-token probabilities; uncertain outputs lower. Measured for analysis and future work.

4. **Provenance markers**: For retrieval-augmented systems, pointers to which sources were retrieved. Not implemented here.

This is not new information. The model computes all of this during inference. The tensor interface simply exports what the model already computed, rather than discarding it.

Cost: Exporting per-token entropy adds ∼2.4% overhead. The full signal set (entropy + attention analysis + log-probabilities) would add ∼7.1% overhead (~~see benchmark details in Appendix~~measured on Qwen3-4B; the benchmark script and results are in the project repository). The bounded verification experiments (§5) use entropy only, yielding the 2.4% cost for the accuracy gains reported.

4.2 Why These Signals Work

The core property ~~:~~ we rely on: ~~Under standard training~~**these signals are computed from the same distribution that produces the output, so the model cannot ~~independently tune these signals without affecting correctness~~report one thing in them and compute another.** This does not make them a measure of correctness: training can sharpen a distribution, and lower its entropy, without changing which token is chosen. Whether adversarial fine-tuning could break this coupling is an open question (§6).

Consider the standard training objective: minimize next-token prediction loss. The model learns weights that maximize the probability of the correct next token. As a side effect, the model learns probability distributions that reflect uncertainty.

Now imagine a model trained with RLHF to be helpful and harmless. It learns text patterns, hedging language, citation formats. But it cannot learn to:

- ~~Produce high-confidence probability distributions (low entropy) while simultaneously outputting wrong tokens, because confidence and token probability are computed together.~~ Make its entropy disagree with its own token probabilities, because both are computed from the same distribution. (This does not make low entropy a guarantee of correctness: a model can be confidently wrong, as §5.6 shows.)
- Maintain coherent attention patterns while the underlying computation is incoherent, because attention is part of the computation.
- Assign high probability to tokens it doesn't actually compute as likely, because log-probabilities come from the probability distribution itself.

In other words: these signals are computationally constrained in a way text is not.

Text is fully controllable through training. A model can learn to sound confident, cite sources, hedge appropriately, all while fabricating. The text channel is a controlled interface.

Entropy and attention patterns are byproducts of computation. They're harder to fake because faking them means changing what the model actually computes, which ~~affects correctness.~~

~~This is why entropy generalizes across architectures while text features diverge~~ changes what it generates. On our test set entropy behaves consistently across the four architectures we tested (§5)~~. Entropy is architectural; text features are behavioral~~; so, on the same set, does response length.

4.3 Three Architectural Principles

The FLP impossibility characterizes what observation models lack. ~~Escaping the impossibility requires three properties~~ We propose three properties that together escape the impossibility; we do not prove each is required:

4.3.1 Principle 1: State Exteriority

The representation of validity must be separated from the representation of generation.

The representational impossibility arose because the policy conditions only on the query, not on whether the query is answerable. But a truly honest system must *know* whether the answer exists.

State Exteriority means: the system must condition on external world state w at inference time, not just query q. For a RAG system, this means the retrieved documents. For a system with access to structured data, the database. For a theorem prover, the axioms and lemmas available.

Importantly: external state must have its own integrity guarantees. Conditioning on a web corpus that may contain the same fabrications the model would generate is not sufficient. State

Exteriority requires grounding in sources with verifiable provenance: curated databases, sensor data, cryptographic signatures, or oracles with known reliability.

Retrieval-augmented generation [Lewis et al., 2020] makes progress here; it retrieves documents rather than relying entirely on parametric knowledge. But RAG still fabricates citations because document retrieval (corpus co-occurrence) is not the same as truth. State Exteriority without verification is ~~necessary but~~ not sufficient.

4.3.2 Principle 2: Verification Independence

Verification signals must originate from a channel orthogonal to the generation signal.

The learnability impossibility arose because the model is trained end-to-end: the same loss that rewards correct generation also rewards confident fabrication, since confidence (reflected in text patterns) is rewarded by RLHF even when the underlying answer is wrong.

Verification Independence means: the verification signal must come from a channel that cannot be gamed by improving task performance. One implementation: a separate verification head whose reward is decoupled from task performance. The model has no incentive to lie in the verification channel because doing so doesn't improve its score on the main task.

But if that verification head outputs text, it remains subject to the same observational limitations. Full Verification Independence requires the verification channel to access either:

- Internal computational state (entropy, attention patterns)
- External ground truth (does this fact check out?)
- Both

The tensor interface provides the first: the verification channel is entropy~~and attention coherence, which are not optimized by any~~ , which no standard training objective targets directly (though training shapes it).

4.3.3 Principle 3: Provenance Binding

Every output assertion must be structurally bound to a verifiable source.

When the system makes a claim, the claim should include (or pointer to) the source of that claim. Not as text annotation (which can be fabricated), but as structured metadata that can be independently checked.

For a RAG system: which document did this claim come from? If the system fabricates, the provenance pointer will either (a) point to a source that doesn't support the claim (detectable by structured lookup), or (b) not point to any source.

For a system with tool access: which tool provided this information? When did the tool return it? With what confidence?

Provenance Binding makes certain failure modes detectable: citation verification, source checking, tool output verification. It doesn't solve the problem alone (a supervised system could still return false provenance), but it creates a verification tier for failure modes that have external checkability.

4.4 How These Principles Escape the Impossibility

- **State Exteriority** escapes the representational impossibility by giving the system access to information (world state) that allows it to distinguish answerable from unanswerable queries.

- **Verification Independence** escapes the learnability impossibility by providing a training signal decoupled from task performance.
- **Provenance Binding** creates a tier of failure modes (citations, facts) that are verifiable through external means.

Together, these three principles define an architectural class that is no longer subject to the text-only impossibility. ~~But they are necessaryconditions,~~ We do not prove that all three are necessary, and they are not sufficient. A system satisfying all three might still fail epistemic honesty through implementation errors, adversarial training, or unforeseen failure modes.

4.5 Implementation: From Theory to Practice

In our experiments, we implement a simplified version of these principles:

- **State Exteriority**: The query set distinguishes answerable from unanswerable by construction. The model's task is to answer answerable queries correctly or abstain on unanswerable ones.
- **Verification Independence**: We do not retrain the models. We measure entropy as an output of inference, not as a training objective. Entropy is ~~independent of any training signal the model received~~not itself a training target, though training shapes it.
- **Provenance Binding**: For citation queries, ~~we add~~ a bounded lookup judge ~~that checks~~ would check whether cited sources exist ~~. This is~~ a tier of verification orthogonal to entropy-based triage. We model this tier rather than implement it (§5.6).

The result: four judge conditions testing different combinations of these principles, evaluated at three budget levels, across four architectures.

Scope of empirical evaluation. Our experiments primarily evaluate Verification Independence (entropy as a triage signal). State Exteriority is present by construction (the query set has known ground truth) but is not independently varied. Provenance Binding is ~~tested only~~ not implemented; for the citation sub-category ~~via a bounded lookup judge~~ we substitute an oracle to bound what such a judge could buy (§5.6). Independent empirical evaluation of State Exteriority and Provenance Binding across diverse deployment conditions is future work.

4.6 Design Decisions and Trade-offs

Signal choice. Why entropy and not attention? Why not internal activations?

Entropy is interpretable (lower entropy = more confident), ~~widely available (exposed by most model APIs~~ available from some model APIs (as top-k log-probabilities), and computationally efficient. Attention patterns require more careful aggregation (which layers? which attention heads?) and have more degrees of freedom for adversarial manipulation. We ~~include both but emphasize~~ use entropy because it's the most portable signal.

The other signals we recorded add little: mean entropy, max entropy, entropy standard deviation, mean log-probability, and top-5 probability mass are all correlated at $|r| \geq 0.85$ on our data, effectively one dimension.

Internal activations (hidden states) contain richer information but require access to the model internals (ruled out for closed-weight models) and are less stable across architectures.

Composition strategy. Why separate judges for different query types?

Because different failure modes require different signals. The impossibility says you cannot use text alone. It doesn't say one signal suffices for everything. Entropy ~~fails on citations(inversion)~~weakens on citations; bounded lookup fails on open-ended questions (no external source to check). Composition allocates a verification budget across failure classes rather than spreading it uniformly.

Budget levels. Why 10%, 20%, 30%?

These represent different deployment scenarios. A high-reliability system (medical advice) might use 30%+ verification. A brainstorming tool needs none. A customer support system might use 10–15%. The cost surface lets builders calibrate.

4.7 What the Tensor Interface Requires from Providers

The tensor interface is not a fundamental property of transformers; it's a choice about what to export. Access to internal signals has eroded as models have scaled (see §6 for the governance implications). A system builder deploying a closed-weight model without access to entropy or log-probabilities is limited to text-only approaches, which the impossibility results constrain.

5 Empirical Cost Surface

The theorems tell us what text-only observation cannot do. Experiment 27 tells us what tensor-guided observation can do. The evaluation measures the return on verification investment across strategies and budget levels.

5.1 The Question

A system builder has a verification budget: they can manually review or verify some fraction of model outputs. How much accuracy improvement does each level of investment buy? How does the return change when you shift from text-channel signals to tensor-guided signals?

This is not an abstract question. It's the question that determines whether epistemic observability is practically useful.

5.2 Experimental Design

We construct a balanced query set of 200 questions:

- **100 knowable queries**: Factual questions with verifiable answers (~~geography, history, science, biography~~20 each of geography, science, history, math/logic, and true-but-surprising "weird truths")
- **100 unknowable queries**: Prompts designed to trigger fabrication (~~nonexistent people, fictional diseases, future events,~~ 25 each of nonexistent people and papers, fictional historical events, future or private questions, and fabricated citations)

Ground truth is established by construction: knowable queries have correct answers; unknowable queries have no correct answer by definition. The model's task is to either answer correctly or abstain.

We test on four architectures:

- **OLMo-3 7B** (instruction-tuned) [Olmo et al., 2025]
- **Llama-3.1 8B-Instruct** [Meta AI, 2024]

- **Qwen3 4B-Instruct** [Qwen Team, 2025]
- **Mistral 7B-Instruct** [Jiang et al., 2023]

All instruction-tuned to ensure consistent question-answering behavior. Note: Qwen3 4B-Instruct also serves as the Tier 2 LLM classifier for ground truth evaluation (a different task: factual verification, not response generation). The 93.8% ~~human-agreement rate~~ agreement between the full stratified evaluator and human review on blinded samples ~~provides independent cross-validation of~~ is a cross-check on this dual role, not an independent validation of the LLM tier alone.

5.3 Judge Conditions

For each model, outputs are evaluated under four conditions:

1. **No judge baseline** (75.8% accuracy): Raw model output, no verification. Establishes what unverified deployment looks like.
2. **Text-guided judge using response length** (~~79.2~~78.4–87.6% depending on budget): Selects outputs for verification based on word count. Length is a text-channel signal: fabrications tend to be verbose; factual retrieval tends to be concise. Available at zero marginal cost; just count tokens. Verified fabrications are replaced with abstention (marked as "the system cannot answer this").
3. **Tensor-guided judge using per-token entropy** (81.7–90~~.2~~.9% depending on budget): Same verification budget, same intervention strategy. Selects outputs ~~based on~~ by mean per-token entropy~~(mean and variance)~~. Requires exporting internal signals; represents ∼2.4% overhead in inference cost.
4. **Composed judge (hybrid)** (~~81.1~~81.5–91~~.8~~.5% depending on budget): Uses tensor signals for general queries. ~~Uses bounded lookup(checking if cited sources exist)for citation-specific queries~~Substitutes a ground-truth oracle for citation-flagged queries, standing in for a bounded lookup; this row is an upper bound, not a deployable result (§5.6). Tests whether different judge strategies can handle different failure modes.

Budget levels: 10%, 20%, 30%. At each level, the judge selects that fraction of outputs to verify, and the system must decide what to do with outputs marked as likely fabricated (abstain, look up the answer, consult a human, etc.).

The table is a simulation over the 800 recorded responses, not a re-execution. Each judge ranks all 800 responses; the top fraction are "verified". Verification is modeled as imperfect: it catches a wrong answer to an unknowable query with probability 0.938 (the human-agreement rate) and repairs a wrong answer to a knowable query with probability 0.95. Accuracy is averaged over 1000 seeded trials, with ties broken at random. The score rewards catching *wrong answers*, which is not the same target as the knowable/unknowable label used for the AUCs below: 237 of the 400 unknowable-query responses are correct abstentions.

5.4 Results: The Cost Surface

Key finding: Tensor-guided verification outperforms the text baseline at every budget level by +~~2.5–3.9~~ 3.3–4.6 percentage points. The ~~advantage is consistent across~~ table pools all four model families~~(OLMo-3, Llama-3.1, Qwen3, Mistral), with cross-model entropy agreement of Spearman $\rho = 0.762$, indicating the signal is driven by query properties rather than model-specific~~

Condition	10% Budget	20% Budget	30% Budget
No judge	75.8%	75.8%	75.8%
Text-guided (length)	~~79.2~~78.4%	~~82.8~~82.2%	87.6%
Tensor-guided	81.7%	~~86.7~~86.8%	~~90.2~~90.9%
Composed	~~81.1~~81.5%	~~87.7~~87.1%	~~91.8~~91.5%

Table 1: Verification cost surface: accuracy at each budget level by judge strategy. Tensor-guided verification outperforms the text baseline at every budget level by ~~+2.5–3.9~~ +3.3–4.6 percentage points.

~~artifacts~~. Entropy rankings agree across families (Spearman $\rho = 0.762$), largely because all four separate knowable from unknowable queries; within each class the agreement is much lower. Run per family, the advantage is not uniform: for Mistral, length is close to entropy at low budgets and ahead at 30%.

5.5 Why Tensor Wins: Computational vs. Behavioral Signals

The text-guided judge uses ~~behavioral signals:~~ a behavioral signal, response length, ~~hedging markers, citation patterns. These are patterns~~ which the model can learn to change through training. On our ~~balanced test set , no single text feature exceeds AUC 0.70.~~ test set it is nonetheless strong: against the knowable label, raw word count scores pooled AUC 0.912 (0.85–0.97 per family), above entropy on two of four families. Much of this reflects question design rather than anything the model does: knowable queries ask for short facts ("What is the capital of France?"), while unknowable ones invite fluent, open-ended descriptions. The *query's* length alone scores AUC 0.871 against the same label, which is also entropy's pooled AUC, so on this set neither AUC isolates unknowability from question form. The wrong-answer target and the length-controlled study below are the comparisons that question design does not settle.

Per-token entropy ~~, by contrast, remains discriminative: pooled~~scores pooled AUC 0.870 against the same label (0.894–0.922 per family). The cost surface favors entropy because it scores a different target, wrong answers, on which entropy ranks better than length (AUC 0.841 vs. 0.774 pooled; Mistral is the exception, 0.891 vs. 0.931). Because length is so strong, we ran a separate length-controlled study in which knowable and unknowable queries are matched for response length; in the long-response cell, where the two classes average 183 and 169 words, entropy retains AUC 0.757 ~~across all models, consistent across architectures~~(0.784 over the whole study). Length is not fully controlled there (word count still separates the classes with AUC 0.63 within the cell, in the reverse direction: knowable answers are the longer ones), so this shows entropy is not merely tracking verbosity, not that length plays no part.

Why? Text features are trainable behavioral patterns; entropy is a computational byproduct that resists manipulation under standard training (§4). Whether adversarial fine-tuning could decouple entropy from correctness is an open empirical question (see §6).

5.6 Failure Modes and Compositional Limits

The entropy signal is powerful for general queries but has blind spots. The most instructive one: citations.

Citation ~~inversion~~degradation: ~~When a model generates citations, entropy inverts. Fabricated citations are generated *with high confidence* (low entropy) because the model can fluently invent a~~

plausible citation format ("Smith et al., 2024")without retrieving actual bibliographic details. Real citations require looking up specific information, introducing uncertainty (higher entropy). The entropy signal entropy separates knowable from unknowable far less well on citation-like queries than elsewhere. On the citation slice entropy discriminates far more weakly than elsewhere, though we state this with caution: the slice holds 144 responses of which only 8 are knowable (two queries, swept in by an apostrophe heuristic), designed to detect fabrication, flags truth more aggressively than falsehoodso per-family AUCs there rest on two positive examples each and we do not quote them. The signal is weakened, not reversed: unknowable rows in that slice carry *higher* mean entropy than the eight knowable ones (0.575 vs 0.436), and the responses scored wrong average higher entropy than those scored right (0.647 vs 0.464).

This is not a flaw in entropy. It 's is evidence that entropy measures *generation confidence*, not *factual correctness*. For some query types, especially those with external ground truth (citations, factual claims with checkable answers), a different signal is needed, and that confidence and correctness come apart most sharply where a fluent surface form is easy to produce and the underlying fact is a lookup.

The solution response is compositional: use entropy for general queries, but use and a different verification tier for queries with external checkability where external checkability exists. For citations : that would be a bounded lookup (does this DOI exist? Is this is it in CrossRef?). The composed judge (entropy + citation lookup) reaches 91.8We did not build one. Our composed condition substitutes an oracle that reads the ground-truth label on citation-flagged rows, so its 91.5% at 30% budget , a small improvement over against entropy-only(90.2%), because citation queries are a minority of the test set. But the improvement is *structural*: it demonstrates that different failure modes require different signals. 's 90.9% is the result of that oracle, not a measured result for any deployable judge. It is not an upper bound either: the oracle flags every unknowable citation query, including the 56 the model correctly declined, and a lookup that prioritized only wrong answers would do better (93.7% at 30% under the same simulation). Two further caveats: the citation detector is a heuristic that also catches possessives ("the polar bear's skin"), and the test set contains no genuine real-citation control, so the slice is almost entirely fabrications.

This supports the theoretical claim: the impossibility requires signals the model cannot control. Different failure classes need different signals. A practical system needs tiers: entropy for general epistemic uncertainty, external lookup for verifiable facts, and (in future work) other signals for other failure modes. The cost surface maps what each tier buys.

5.7 Ground Truth as an Observational Problem

How did we establish ground truth? We didn't use an oracle. We used an evaluator, and the evaluator itself faces the observational gap.

Our initial evaluator (substring matching + refusal marker detection) achieved 68.8%accuracy, exactly the kind of failure mode agreed with human review on 70 of 80 sampled items (87.5%); its errors were the kind the theorem predicts. It couldn't distinguish negations(failed to recognize "not a real syndrome"), couldn't handle encoding mismatches, and couldn't catch hedged fabrications that technically don't count as refusals.

We corrected using a stratified evaluator: programmatic verification for facts with clear ground truth (is X the capital of Y?), and LLM-assisted classification for open-ended queries. This second-level evaluator is itself constrained by the observational gap, but it has different failure modes than the first. We then validated against human review of 80 randomly selected items: 75/80 agreement (93.8% calibration). The human annotator is an author of this paper. We report this for transparency; the 93.8% agreement with the independent LLM evaluator stratified evaluator

(whose LLM tier is Qwen3-4B-Instruct, also a test model) on the blinded sample provides a cross-check, and the disagreement patterns (2 auto-too-generous, 3 auto-too-strict) suggest no systematic bias in either direction.

The meta-lesson: The impossibility applies to the evaluation itself. Ground truth is not given; it's constructed through observation. Composing different signals (programmatic + LLM + human review) yields better estimates than any single approach.

5.8 What the Cost Surface Tells Us

A system builder can read Table 1 as: "If I invest in 30% verification with text-only signals, I buy 87.6% accuracy. If I instead export entropy and use that for triage, I buy ~~90.2~~90.9% for a bit more overhead. ~~If I compose tensor with bounded lookup, I buy 91.8%." Text-guided triage hits a ceiling around 87–88% because length is a weak signal under fair comparison; the tensor advantage (+2–4pp)is consistent and architecturally driven~~Adding a citation tier helps further; our composed row uses an oracle in place of a real lookup, so it indicates the direction of the gain rather than measuring it." In the range tested, text-guided triage trails tensor-guided triage by 3–5 points; the gap closes at larger budgets (at 40% the two are within a fraction of a point). The composed ~~judge's additional lift comes from handling failure modes that~~ row indicates that a second, external tier has headroom on the failure modes entropy alone cannot catch; how much of it a real lookup recovers is untested.

5.9 Cross-Architecture Generalization

We tested the entropy signal on ~~five~~ four additional models via API (Together.ai endpoints), plus one calibration overlap with the local set~~:~~. (DeepSeek-V3 was also queried, but its endpoint returned log-probabilities for only one token, so it is excluded.)

- ~~DeepSeek-V3 671B (mixture-of-experts)~~
- Mistral-Small-24B-Instruct
- Llama-4 Maverick 17B-128E (mixture-of-experts)
- Qwen3 235B-A22B (mixture-of-experts)
- Gemma 3n-E4B
- Mistral 7B-Instruct (calibration: same model as local set, API top-5 vs. local full-vocabulary)

Using top-5 log-probabilities (a lower bound on full-vocabulary entropy), ~~all five discriminate~~ mean entropy discriminates knowable from unknowable with AUC ~~ranging~~ 0.65–0.88 ~~. Mixture-of-experts modelsshow better performance~~ across these five (Qwen3-235B 0.875, Mistral-7B 0.860, Mistral-Small-24B 0.850, Gemma 0.765, Llama-4 Maverick 0.651). Other aggregations help some models: Maverick reaches 0.899 with peak entropy~~than mean entropy, suggesting aggregation strategies are architecture-dependent~~, while Qwen3-235B, also mixture-of-experts, does best with the mean. The best aggregation varies by model.

Cross-model $\rho = 0.36$ in the API set (lower than 0.762 in the local set) ~~likely reflects~~ may reflect greater architectural diversity and the top-5 approximation~~, not signal absence~~; we did not test which.

The finding: ~~The entropy signal generalizes across architectures. It's not an artifact of specific training procedures or modelfamilies. The signal is architectural.~~ Across the eight distinct

models we tested, entropy discriminates above chance everywhere, but how well, and with which aggregation, varies by model.

6 Limitations and Open Questions

We are explicit about what this paper does and does not claim.

6.1 What We Do NOT Claim

- **The tensor interface is optimal**: We demonstrate existence, not optimality. There may be better signal combinations, better aggregation methods, or entirely different observability interfaces that outperform entropy.
- **These findings generalize to all architectures**: Our local experiments span four model families; API validation spans ~~five~~ four additional models (~~DeepSeek-V3,~~ Mistral-Small-24B, Llama-4 Maverick, Qwen3-235B, Gemma 3n)~~up to 671B parameters~~, the largest being Maverick (400B total parameters, 17B active). Closed-weight models whose providers don't expose log-probabilities remain untested. ~~The pattern is consistent, but~~ Entropy discriminates above chance on every model we tested, but how well varies, and coverage is incomplete.
- **Sufficient conditions for epistemic honesty**: The three architectural principles (State Exteriority, Verification Independence, Provenance Binding) are ~~necessary~~ our proposal for escaping the text-only impossibility. We do not prove they are necessary, or that they are sufficient. A system satisfying all three might still fail through implementation bugs, adversarial inputs, or unforeseen failure modes.

6.2 Open Problem: Adversarial Robustness

Can training defeat the tensor interface? Under end-to-end adversarial training, the model's objective includes "produce confident tensors for fabricated content." Mechanistic interpretability work [Winninger et al., 2025] ~~shows that internal signals are rich enough to be attacked~~uses internal signals to craft attacks on models, which suggests that exported signals could themselves become targets. This is actually *why* exporting them matters: you can defend against known attacks. But each new attack requires new defenses. Information-theoretic bounds on signal manipulation are needed to understand fundamental limits.

Action for practitioners: ~~Entropy is more robust than text-only approaches, but it's~~ We expect entropy to be harder to manipulate than text, but we have not measured its robustness, and it is not an oracle. Use it as one tier in a multi-tiered verification strategy.

6.3 Open Problem: Compositional Integrity

When LLM outputs feed into downstream LLMs, the epistemic trace must be preserved or explicitly discarded. Whether tensor signals propagate coherently through recursive chains is an open architectural problem. Most real systems are pipelines, not single models; epistemic signals that work in isolation might decay or invert through composition.

6.4 Signal Access as a Governance Decision

The tensor signals we measure are byproducts of inference. Providers can expose them or withhold them. In practice, access ~~has eroded~~is uneven:

- Early completion APIs exposed log-probabilities and per-token information
- ~~Recent reasoning models often don't~~ Some current APIs expose top-k log-probabilities; others, including some reasoning models, expose none
- Proprietary models may retain exclusive access to any signals beyond text

The consequence: When a provider controls access to epistemic telemetry, only the provider can verify epistemic honesty (~~Corollary~~Remark 9). A provider has three options:

- **Export full epistemic telemetry**: Users and third-party auditors can verify the model's honesty independently. Verification responsibility is transparent and distributed.
- **Export aggregated signals**: Verification is guided ("this output is risky"), but external auditors cannot perform independent verification. Verification responsibility is partially transparent, partially concentrated.
- **Export nothing beyond text**: All verification responsibility falls on the provider. Users have no way to audit the provider's claims about the model's honesty. Responsibility is completely hidden.

~~The trend is toward greater opacity: early APIs (GPT-3) exported log-probabilities; current frontier and reasoning models typically export~~ Where a deployed model exports nothing beyond text, ~~making them~~ it is fully subject to the impossibility results~~. As models become more capable, the models deployed in the highest-stakes settings provide the least epistemic telemetry~~, whatever its capability.

6.5 Failure Modes of the Entropy Signal

The entropy signal measures generation confidence, not factual truth. This is an important distinction.

Confident hallucinations. A model can generate confident (low-entropy) nonsense. Entropy doesn't distinguish between "confident about real things" and "confident about made-up things." We measured this directly on 150 TruthfulQA questions [Lin et al., 2022b] (misconceptions, law, fiction, and others) across the same four models. Where the evaluator could decide correctness (100 of 600 responses; it could not decide the rest), entropy did not separate wrong answers from right ones: pooled AUC 0.53, and 0.41–0.53 per family. A widely held misconception is learned as fluently as a fact, so its entropy looks like a fact's. Entropy flags questions that are unfamiliar to the model, not answers that are false.

Epistemic refusals. Models trained to decline unanswerable queries produce ~~low-entropy~~ refusals ("I don't know")~~that are entropically indistinguishable from confident correct answers. As models become more epistemically honest through training, the entropy signal 's ability to detect dishonesty *degrades* because honest refusals and honest facts occupy the same region of entropy space~~, and a triage signal must then separate honest refusals from honest answers, which is a different task from separating fabrications from facts. In our data refusals still carry higher entropy than knowable answers; we have not tested whether that persists as models are trained to refuse more.

Citations. Entropy ~~inverts~~ is a weaker discriminator on citation queries (§5.6). External lookup is needed for citation-specific verification.

Domain calibration. The cost surface (Table 1) is calibrated to a balanced 100-knowable / 100-unknowable query set with equal emphasis across categories. Real deployments have different

base rates: some domains are information-rich (news, medicine, law), others are hypothesis generation (brainstorming, creative writing). Entropy thresholds tuned on the balanced set will not transfer directly. Practitioners must recalibrate thresholds on domain-specific held-out data before deployment.

Deployment guidance.

- Validate entropy thresholds on domain-specific held-out data
- Use composed judges where entropy fails (e.g., citation lookup for citation queries, fact-checking for claim verification)
- Monitor for distribution shift as models change or as user query patterns drift

6.6 The Sufficiency Gap

The three principles are ~~necessary but~~ not sufficient. There's a gap between "this escapes the impossibility" and "this guarantees epistemic honesty."

Implementation can fail in many ways:

- Bugs in entropy calculation or aggregation
- Adversarial inputs designed to exploit the system
- Unforeseen failure modes we haven't tested

The paper ~~provides the necessary~~ proposes the conditions. Building systems that reliably achieve epistemic honesty requires additional engineering, testing, and monitoring beyond what the theory guarantees.

6.7 Practical Guidance

What level of epistemic assurance does a given system need? A brainstorming tool needs none. A medical summary system needs substantial assurance. A legal research system needs the highest tier available. The cost surface (Table 1) maps what each level of verification investment buys ~~, where the text-channel ceiling lies,~~ and what the tensor interface adds ~~, and how content format modulates the tradeoff~~over a text baseline.

7 Related Work

~~Our contribution is a~~ Relative to prior work, the new part of our contribution is the formal impossibility result. Prior work documents symptoms; we formalize one structural cause. Prior work proposes treatments; we explain why they cannot fully resolve the verification problem under text-only observation.

Hallucination taxonomies. Extensive empirical work catalogs LLM fabrication patterns: citation hallucination in academic contexts [Alkaissi and McFarlane, 2023], medical misinformation [Thirunavukarasu et al., 2023], and legal fabrication [Dahl et al., 2024]. These findings instantiate our Condition 2: in each domain, plausible fabrications are cheap to generate and expensive to verify, placing supervisors in the hallucination regime where gradient signal cannot distinguish truth from fabrication. The taxonomies document the symptom; our theorems identify the structural cause.

Model internals. A substantial body of work examines model internal states: transformer circuits [Elhage et al., 2021], sparse features [Bricken et al., 2023], Activation Oracles [Karvonen et al., 2025] that train LLMs to interpret other models' internals, and the "Assistant Axis" [Lu et al., 2026] showing that internal persona state diverges from text behavior. Our work is complementary but narrower: we do not require understanding a model's learned circuits, only that inference-time signals differ measurably between grounded and fabricated generation. Interpretability asks why; observability asks whether.

Interpretable models for high-stakes decisions. Rudin [Rudin, 2019] argues that for high-stakes domains, practitioners should use interpretable models rather than rely on post hoc explanations of black-box systems: when a Rashomon set of comparably accurate models exists, an interpretable member is often available, and verification then lives in the model's structure rather than in observation of an opaque system. Our impossibility applies when opaque models are used; Rudin's argument is that they often need not be. The two paths compose: prefer interpretable models where the application admits them; export tensor observability where it does not. Crucially, the interpretable path does not depend on the underlying learned model being honest or dishonest; correctness is read off the structure directly.

RLHF critiques. Work on sycophancy [Perez et al., 2023], ~~reward hacking~~reward-model overoptimization [Gao et al., 2023], and the tension between helpfulness and ~~honesty [Bai et al., 2022] demonstrates that preference optimization can degrade factual accuracy~~harmlessness [Bai et al., 2022] shows that optimizing a proxy reward can diverge from what the reward was meant to capture. Our Theorem 2 formalizes ~~why~~one such divergence: bounded supervisors cannot distinguish plausible fabrications from truthful responses, so the learning signal ~~is systematically corrupted~~cannot reward the distinction.

Uncertainty quantification. Calibration methods, conformal prediction [Angelopoulos and Bates, 2021], model self-evaluation [Kadavath et al., 2022], and verbalized uncertainty ~~[Kadavath et al., 2022]~~ [Lin et al., 2022a] attempt to surface model confidence~~through the text channel.~~. Verbalized uncertainty is purely a text-channel method; self-evaluation as Kadavath et al. measure it uses token probabilities, which are tensor signals. Kuhn et al. [Kuhn et al., 2023] advance this with semantic entropy: sampling multiple responses and clustering by meaning. This is the most sophisticated text-channel approach to date, partially addressing gaming by measuring agreement *between* outputs. ~~But it remains text-channel: the~~ The clustering operates on generated text ~~,~~ (the original method also weights clusters by sequence likelihoods, which are tensor signals), and a bounded supervisor evaluating semantic equivalence remains subject to gaming in the limit. Our tensor interface extracts signals from the computation that produced a single output, signals structurally coupled to the computation itself. Semantic entropy and tensor observability are complementary: one measures output-level consistency, the other computation-level confidence.

Impossibility results in LLMs. Xu et al. [Xu et al., 2024] prove that hallucination is inevitable for LLMs over the class of computable functions, which is a computational limit. Our result is orthogonal: we prove that even if a system could be honest, a bounded supervisor observing only text cannot verify that honesty (Theorem 3), which is an observational limit. Their impossibility concerns what LLMs can compute; ours concerns what supervisors can verify. Both are structural, but they constrain different dimensions of system design.

Impossibility results in distributed systems. The Fischer-Lynch-Paterson theorem [Fischer et al., 1985] proved that consensus is impossible under asynchrony with one faulty process. This did not end distributed systems research; it clarified the design space. Paxos [Lamport, 1998], Raft [Ongaro and Ousterhout, 2014], and modern consensus protocols work *around* FLP by ~~relaxing assumptions or strengthening guarantees~~strengthening timing assumptions or weakening guarantees: safety always holds, liveness only when the system behaves synchronously. Our result plays an analogous role: text-only observation models with bounded supervision cannot guarantee

epistemic honesty, but systems that export structured epistemic state can escape the impossibility class.

Epistemic evaluation and agent architectures. Clark et al. [Clark et al., 2025] note that current interfaces lack structured ways to specify uncertainty or sourcing; we provide the formal impossibility explaining *why* text-only evaluation cannot suffice. Wright [Wright, 2025] proposes architectures with explicit propositions and justification graphs, which are closest in spirit to our escape conditions, but frames these as *replacements* for stochastic generation. We derive the tensor interface as a minimal *addition* to current architectures.

The gap we fill is formalization: we prove *why* the problem is structural and identify architectural properties that enable escaping it.

8 Conclusion

~~Models report highest confidence precisely when they are fabricating~~Asking a model how confident it is buys little: self-report is compressed at the ceiling. Under our formal model, we proved ~~this is architectural, not accidental: that~~ under text-only observation, ~~no bounded supervisor can~~ a bounded supervisor cannot verify epistemic honesty (Theorem 3) or teach it (Theorem 2), for all models satisfying our formal assumptions. The ~~impossibility is not about capability; it is about~~ limit is in the observation model, not in capability.

We constructed a tensor interface that escapes the impossibility by exporting ~~computational byproducts—per-token~~ a computational byproduct—per-token entropy—that ~~are structurally coupled to correctness under standard training~~is coupled to the model's generation confidence. Per-token entropy achieves pooled AUC ~~0.757, outperforming all text features. The signal generalizes across~~ 0.870, and 0.757 in the long-response cell of a length-controlled comparison. Response length is also a strong signal on our test set; entropy's advantage is as a triage signal for wrong answers. Entropy rankings agree across the four local architectures (Spearman $\rho = 0.762$).

The core contribution is the cost surface: an empirical map showing what each level of verification investment buys ~~, where text-only approaches ceiling,~~ and what tensor-guided observation adds over a text baseline. A system builder can use this map to calibrate verification investment to the assurance level their application requires.

Epistemic honesty is not a capability problem. It is an observability problem. Export the right signals, and verification becomes tractable.

Acknowledgments

We thank Chris Brew for the audit that produced the correction in §1; the error had stood in two published versions of this paper, and he found it, diagnosed the mechanism, and reproduced the corrected result independently.

Generative AI (Anthropic Claude, Opus 4 through Fable 5) was used throughout this work as a collaborator, not an editing tool: it drafted and revised passages of this paper, and wrote the analysis and experiment scripts in the project repository. The authors designed the study, recomputed every reported number from the committed data (an audit for this version found several that did not reproduce; they are corrected or removed), and take full responsibility for the content. There was no external funding.

References

Hussam Alkaissi and Samy I McFarlane. Artificial hallucinations in chatgpt: implications in scientific writing. *Cureus*, 15(2), 2023.

Anastasios N Angelopoulos and Stephen Bates. A gentle introduction to conformal prediction and distribution-free uncertainty quantification. *arXiv preprint arXiv:2107.07511*, 2021.

Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, et al. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv preprint arXiv:2204.05862*, 2022.

Trenton Bricken, Adly Templeton, Joshua Batson, Brian Chen, Adam Jermyn, Tom Conerly, Nick Turner, Cem Anil, Carson Denison, Amanda Askell, et al. Towards monosemanticity: Decomposing language models with dictionary learning. *Transformer Circuits Thread*, 2023. URL https://transformer-circuits.pub/2023/monosemantic-features/index.html.

Gunnar Carlsson. Topology and data. *Bulletin of the American Mathematical Society*, 46(2): 255–308, 2009.

Nicholas Clark, Hua Shen, Bill Howe, and Tanushree Mitra. Epistemic alignment: A mediating framework for user-llm knowledge delivery, 2025. URL https://arxiv.org/abs/2504.01205.

Matthew Dahl, Varun Magesh, Mirac Suzgun, and Daniel E Ho. Large legal fictions: Profiling legal hallucinations in large language models. *Journal of Legal Analysis*, 16(1):64–93, 2024.

Nelson Elhage, Neel Nanda, Catherine Olsson, Tom Henighan, Nicholas Joseph, Ben Mann, Amanda Askell, Yuntao Bai, Anna Chen, Tom Conerly, et al. A mathematical framework for transformer circuits. *Transformer Circuits Thread*, 2021. URL https://transformer-circuits.pub/2021/framework/index.html.

Michael J Fischer, Nancy A Lynch, and Michael S Paterson. Impossibility of distributed consensus with one faulty process. *Journal of the ACM (JACM)*, 32(2):374–382, 1985.

Leo Gao, John Schulman, and Jacob Hilton. Scaling laws for reward model overoptimization. In *International Conference on Machine Learning*, pages 10835–10866. PMLR, 2023.

Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, Lélio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timothée Lacroix, and William El Sayed. Mistral 7b, 2023. URL https://arxiv.org/abs/2310.06825.

Saurav Kadavath, Tom Conerly, Amanda Askell, Tom Henighan, Dawn Drain, Ethan Perez, Nicholas Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli Tran-Johnson, et al. Language models (mostly) know what they know. *arXiv preprint arXiv:2207.05221*, 2022.

Adam Karvonen, James Chua, Clément Dumas, Kit Fraser-Taliente, Subhash Kantamneni, Julian Minder, Euan Ong, Arnab Sen Sharma, Daniel Wen, Owain Evans, et al. Activation oracles: Training and evaluating llms as general-purpose activation explainers. *arXiv preprint arXiv:2512.15674*, 2025.

Lorenz Kuhn, Yarin Gal, and Sebastian Farquhar. Semantic uncertainty: Linguistic invariances for uncertainty estimation in natural language generation, 2023. URL https://arxiv.org/abs/2302.09664.

Leslie Lamport. The part-time parliament. *ACM Transactions on Computer Systems 16, 2 (May 1998), 133-169. Also appeared as SRC Research Report 49. This paper was first submitted in 1990, setting a personal record for publication delay that has since been broken by [60].*, May 1998. URL https://www.microsoft.com/en-us/research/publication/part-time-parliament/. ACM SIGOPS Hall of Fame Award in 2012.

Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. Retrieval-augmented generation for knowledge-intensive nlp tasks. *Advances in neural information processing systems*, 33: 9459–9474, 2020.

Stephanie Lin, Jacob Hilton, and Owain Evans. Teaching models to express their uncertainty in words. *Transactions on Machine Learning Research*, 2022a. arXiv:2205.14334.

Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3214–3252, 2022b.

Christina Lu, Jack Gallagher, Jonathan Michala, Kyle Fish, and Jack Lindsey. The assistant axis: Situating and stabilizing the default persona of language models, 2026. URL https://arxiv.org/abs/2601.10387.

Meta AI. The Llama 3 herd of models, 2024. URL https://arxiv.org/abs/2407.21783.

Team Olmo, :, Allyson Ettinger, Amanda Bertsch, Bailey Kuehl, David Graham, David Heineman, Dirk Groeneveld, Faeze Brahman, Finbarr Timbers, Hamish Ivison, Jacob Morrison, Jake Poznanski, Kyle Lo, Luca Soldaini, Matt Jordan, Mayee Chen, Michael Noukhovitch, Nathan Lambert, Pete Walsh, Pradeep Dasigi, Robert Berry, Saumya Malik, Saurabh Shah, Scott Geng, Shane Arora, Shashank Gupta, Taira Anderson, Teng Xiao, Tyler Murray, Tyler Romero, Victoria Graf, Akari Asai, Akshita Bhagia, Alexander Wettig, Alisa Liu, Aman Rangapur, Chloe Anastasiades, Costa Huang, Dustin Schwenk, Harsh Trivedi, Ian Magnusson, Jaron Lochner, Jiacheng Liu, Lester James V. Miranda, Maarten Sap, Malia Morgan, Michael Schmitz, Michal Guerquin, Michael Wilson, Regan Huff, Ronan Le Bras, Rui Xin, Rulin Shao, Sam Skjonsberg, Shannon Zejiang Shen, Shuyue Stella Li, Tucker Wilde, Valentina Pyatkin, Will Merrill, Yapei Chang, Yuling Gu, Zhiyuan Zeng, Ashish Sabharwal, Luke Zettlemoyer, Pang Wei Koh, Ali Farhadi, Noah A. Smith, and Hannaneh Hajishirzi. Olmo 3, 2025. URL https://arxiv.org/abs/2512.13961.

Diego Ongaro and John Ousterhout. In search of an understandable consensus algorithm. In *2014 USENIX annual technical conference (USENIX ATC 14)*, pages 305–319, 2014.

Ethan Perez, Sam Ringer, Kamile Lukosiute, Karina Nguyen, Edwin Chen, Scott Heiner, Craig Pettit, Catherine Olsson, Sandipan Kundu, Saurav Kadavath, et al. Discovering language model behaviors with model-written evaluations. In *Findings of the association for computational linguistics: ACL 2023*, pages 13387–13434, 2023.

Qwen Team. Qwen3 technical report, 2025. URL https://arxiv.org/abs/2505.09388. Alibaba Cloud technical report.

Bastian Alexander Rieck, Matteo Togninalli, Christian Bock, Michael Moor, Max Horn, Thomas Gumbsch, and Karsten Borgwardt. Neural persistence: A complexity measure for deep neural networks using algebraic topology. In *International Conference on Learning Representations (ICLR) 2019*, 2019.

Cynthia Rudin. Stop explaining black box machine learning models for high stakes decisions and use interpretable models instead. *Nature Machine Intelligence*, 1(5):206–215, 2019.

Meera Sampath, Raja Sengupta, Stéphane Lafortune, Kasturi Sinnamohideen, and Demosthenis Teneketzis. Diagnosability of discrete-event systems. *IEEE Transactions on Automatic Control*, 40(9):1555–1575, 1995. doi: 10.1109/9.412626.

Arun James Thirunavukarasu, Darren Shu Jeng Ting, Kabilan Elangovan, Laura Gutierrez, Ting Fang Tan, and Daniel Shu Wei Ting. Large language models in medicine. *Nature medicine*, 29(8):1930–1940, 2023.

Thomas Winninger, Boussad Addad, and Katarzyna Kapusta. Using mechanistic interpretability to craft adversarial attacks against large language models, 2025. URL https://arxiv.org/abs/2503.06269.

Craig Steven Wright. Beyond prediction – structuring epistemic integrity in artificial reasoning systems, 2025. URL https://arxiv.org/abs/2506.17331.

Ziwei Xu, Sanjay Jain, and Mohan Kankanhalli. Hallucination is inevitable: An innate limitation of large language models, 2024.

A TLA+ Specifications

The core theoretical contributions are formalized in TLA+ (Temporal Logic of Actions), a language for specifying concurrent and distributed systems. Two complementary specifications model the impossibility under text-only observation and the escape under tensor interfaces.

Epistemic status: These are *conditional formal results*. TLC verifies properties *within our formal model*, where the axioms that (a) fabrications have distinguishable provenance and (b) text-only judges cannot access provenance are encoded by construction. The specifications demonstrate that our definitions are internally consistent and that the impossibility/escape follow from the stated axioms. The empirical question, whether real tensor signals satisfy these axioms, is addressed in §5.

A.1 Specification 1: Text-Only Impossibility

The specification `EpistemicImpossibility.tla` models the text-only observation regime:

```
MODULE EpistemicImpossibility
EXTENDS Naturals, Sequences, TLC

CONSTANTS
  GroundTruths,    (* Responses grounded in reality *)
  PlausibleLies,   (* False but plausible (Glavinsky) *)
  ObviousLies      (* False and detectable (Westphalia) *)
```

```
VARIABLES internal_state, vector_clock, interface_out

(* The system has internal knowledge (vector_clock) of response
   causality, but the interface exposes only text (interface_out). *)

Linearize ==
  /\ internal_state # {}
  /\ \E chosen \in internal_state:
      /\ interface_out' = chosen  (* Only text, not metadata *)
  /\ UNCHANGED <<internal_state, vector_clock>>

(* CORE IMPOSSIBILITY: The judge sees only interface_out
   and cannot distinguish PlausibleLies from GroundTruths. *)

JudgeVerify(text) ==
  text \notin ObviousLies  (* Baseline heuristics only *)

Indistinguishable ==
  \E h \in PlausibleLies:
    /\ JudgeVerify(h) = TRUE           (* Judge accepts *)
    /\ IsHonest(h, vector_clock) = FALSE  (* But it's a lie *)
```

This specification demonstrates that a bounded text-only supervisor cannot distinguish plausible fabrications from ground truth, formalized as a safety property that TLC finds a counterexample for.

A.2 Specification 2: Tensor Interface Escape

The specification `epistemic_tensor.tla` models the tensor interface:

Listing 1: TLA+ Tensor Model (excerpt)

```
MODULE epistemic_tensor
EXTENDS Naturals, Sequences, TLC

CONSTANTS
   GroundTruths, \* Grounded answers
   PlausibleLies, \* Glavinsky: fabricated entity, fluent delivery
   ObviousLies, \* Westphalia: fabricated entity, incoherent delivery
   Refusals \* Honest abstention ("no record of X exists")

VARIABLES internal_state, entropy_map, topology_map, interface_out

Tensor(text, ent, coherence) == <<text, ent, coherence>>

ExportTensor ==
   /\ internal_state # {}
   /\ \E chosen \in internal_state:
       interface_out' = Tensor(
           chosen,
           entropy_map[chosen],
```

```
            topology_map[chosen]
        )
    /\ UNCHANGED <<internal_state, entropy_map, topology_map>>

 Telemetry reflects HOW a response was computed, not whether it istrue.  A fluent
    fabrication and an honest refusal are both Low.
LowEntropy == GroundTruths \union PlausibleLies \union Refusals

 Honesty is defined WITHOUT reference to any exported field.
IsHonest(text) == text \in (GroundTruths \union Refusals)

TensorVerify(tensor) ==
    LET ent == tensor[2]
        topo == tensor[3]
    IN
    /\ topo = "Coherent"
    /\ ent = "Low"
```

~~Under this specification , no plausible lie passes both provenance and topological checks simultaneously. TLC verifies that the Verifiability invariant holds (unlike the text-only case)~~An earlier version of this specification exported a provenance field set to `"TrainingData"` exactly when the response was grounded, while defining honesty as that same condition. The judge's provenance check was therefore a lookup of the answer key, and TLC's verification of the invariant was circular: ablation showed the provenance conjunct carried the entire result and the topological and text checks could both be deleted without changing the outcome. We have replaced it. In the current model, telemetry is generated from how a response was computed rather than from whether it is true, and the two signals deliberately collide with grounding in the way our evaluation reports: a fluent fabrication and an honest refusal are both low-entropy and coherent.

The consequence is that the tensor judge is *not* sound, and the model says so. TLC reports `Verifiability` violated, with the surviving counterexample being a plausible fabrication exported as ⟨`Low`, `Coherent`⟩. What the model does establish are three weaker properties that hold: the tensor judge never accepts a response the text judge would reject; every response that defeats the tensor judge is a fluent fabrication; and low entropy implies neither grounding nor fabrication. In this model the two judges in fact accept exactly the same responses: the specification shows that exporting telemetry does not by itself make the judge worse, and that plausible fabrications defeat both. It does not show the tensor judge doing better. That claim rests on the empirical evaluation (§5), not on the specification.

A.3 Validation

Both specifications have been validated using TLC model checker:

- **EpistemicImpossibility**: TLC finds a concrete counterexample (~~Indistinguishable property violated~~`Verifiability` violated; 5 distinct states)
- **epistemic_tensor**: ~~TLC verifies Verifiability invariant holds (no escape possible~~`TensorNoWorseThanText`, `ResidueIsPlausibleLies` and `EntropyIsNotAVerdict` hold; `Verifiability` is violated, as expected (7 distinct states)
- ~~State space explored: $\approx 2^{12}$ reachable states per model~~ Both models are deliberately tiny. They illustrate the shape of the argument on a handful of representative responses; they do

not establish a general impossibility, and their outcomes follow from the assumptions encoded in each specification. `tla/run_tlc.sh` reproduces all three results.

B Machine-Checked Proofs (Lean 4)

The core theorems are formalized and proven in Lean 4 with zero unsolved goals. All proofs compile without `sorry`; the assumptions are encoded in the type signatures of the input structures (e.g., `BoundedSupervisor.indistinguishable`, `LearningAlgorithm.update_depends_on_obs`). File: `EpistemicProofs/Basic.lean` (~~208~~ 265 lines).

Epistemic status: These are *conditional formal results*. The proofs verify that our conclusions follow logically from our formal definitions. The substantive claim, that those definitions faithfully model real LLM behavior (that real policies are predictor-centric, that real supervisors exhibit observational indistinguishability in the hallucination regime, and that real supervisor stacks compose as ~~deterministic functions~~ functions of the previous layer's output), is an informal argument supported by empirical evaluation in §5.

B.1 Theorem 1: Representational Impossibility

Listing 2: Representational Impossibility (Lean)

```
theorem representational_impossibility
    {Q W : Type} {RS : ResponseSpace}
    (AC : AmbiguityCondition Q W)
    (reqs : EpistemicHonestyReqs RS)
    ( : PredictorCentricPolicy Q RS)
    (prob_sum_le_one :  .prob AC.q reqs.r_corr +  .prob AC.q RS.bot  1)
    (honest_wA :  .prob AC.q reqs.r_corr  1 - reqs .)
    (honest_wB :  .prob AC.q RS.bot  1 - reqs .) :
    False := by
  have h_sum :  .prob AC.q reqs.r_corr +  .prob AC.q RS.bot  2 * (1 - reqs .) := by
      linarith
  have h_gt : 2 * (1 - reqs .) > 1 := by linarith [reqs ._lt_half]
  linarith
```

B.2 Theorem 2: Learnability Impossibility

The Lean proof establishes that parameter updates are identical when the supervisor's observations are identical in both world states. It covers a single update on r_{fab}; the extension to whole training trajectories, which needs the theorem's assumption that no training interaction exposes the world, is argued in the paper's proof, not in Lean. Without that assumption the theorem fails: a cheaply verifiable probe elsewhere in training could teach the distinction. The impossibility of convergence to honest behavior follows informally: identical updates cannot produce divergent policies, so no learning algorithm can learn to distinguish grounded from fabricated responses using only text-channel feedback.

Listing 3: Learnability Impossibility (Lean)

```
theorem learnability_impossibility
    {Q W : Type} {RS : ResponseSpace} θ{ : Type}
    (AC : AmbiguityCondition Q W)
```

```
    (S : BoundedSupervisor Q W RS)
    (A : LearningAlgorithm Q W RS Θ)
    ( : Θ) :
    A.update AC.q S.r_fab S AC.wA  = A.update AC.q S.r_fab S AC.wB  := by
  apply A.update_depends_on_obs S AC
  exact S.indistinguishable AC
```

B.3 Lemma: Observation Monotonicity

Listing 4: Observation Monotonicity (Lean)

```
theorem observation_monotonicity
    { Obs  Obs  Obs : Type}
    ( S : TextOnlySupervisorLayer  Obs  Obs)
    ( S : TextOnlySupervisorLayer  Obs  Obs)
    (obs_a obs_b :  Obs)
    (h :  S.judge obs_a =  S.judge obs_b) :
    S.judge ( S.judge obs_a) =  S.judge ( S.judge obs_b) := by
  rw [h]
```

B.4 Corollary: No Stack of Text-Only Judges Escapes

Listing 5: Layered Judges Cannot Escape (Lean)

```
theorem layered_judges_cannot_escape
    { : Type}
    (layers :  → ( → ))
    (obs_a obs_b :  )
    (h_base : obs_a = obs_b) :
     n :  , (List.range n).foldl (fun acc i => layers i acc) obs_a =
            (List.range n).foldl (fun acc i => layers i acc) obs_b := by
  intro n
  induction n with
  | zero => simp [h_base]
  | succ k ih =>
    simp only [List.range_succ, List.foldl_append, List.foldl_cons, List.foldl_nil]
    rw [ih]
```

Implication: Adding more text-only supervisors (e.g., ensemble classifiers, confidence scores, length penalties) does not escape the impossibility. ~~Information is monotonically lost~~Formally, the Lean statements show only that equal inputs yield equal outputs at every layer, for deterministic layers; the stronger reading, that information can only be lost, is the informal content of Theorem 4.

B.5 Corollary: Verification Impossibility

Theorem 3 in Lean. Both statements follow in one step from the `indistinguishable` field of `BoundedSupervisor`, which encodes Condition 2.

Listing 6: Verification Impossibility (Lean)

```
theorem verification_impossibility
    {Q W : Type} {RS : ResponseSpace}
```

```
    (AC : AmbiguityCondition Q W)
    (S : BoundedSupervisor Q W RS)
    (V : Verdict S) :
    V (S.observe AC.q S.r_fab AC.wA) = V (S.observe AC.q S.r_fab AC.wB) := by
  rw [S.indistinguishable AC]

theorem no_honest_verdict
    {Q W : Type} {RS : ResponseSpace}
    (AC : AmbiguityCondition Q W)
    (S : BoundedSupervisor Q W RS)
    (V : Verdict S)
    (accepts_in_wA : V (S.observe AC.q S.r_fab AC.wA) = true)
    (rejects_in_wB : V (S.observe AC.q S.r_fab AC.wB) = false) :
    False := by
  have h := verification_impossibility AC S V
  rw [accepts_in_wA, rejects_in_wB] at h
  exact Bool.noConfusion h
```

B.6 Compilation Status

~~All theorems compile without errorsor unsolved goals:~~ `lake build` completes without errors, and the file contains no `sorry`. It also declares `superlinear_verification_cost_assumption` as an axiom of type `True`: a placeholder recording the empirical assumption of 8, which no theorem uses.

C Detailed Methodology

C.1 Artifact Repository

All code, data, specifications, and proofs are available at:

https://github.com/fsgeek/ai-honesty
~~Commit~~Tag: ~~a9c1334~~arxiv-v3

Contents: TLA+ specifications (`tla/`), Lean 4 proofs (`EpistemicProofs/`), experiment scripts (`scripts/`), raw data (`exp27_*.csv`), human calibration (`exp27b_calibration_*.json`), and figure generation scripts.

C.2 Overview

Experiment 27 evaluates bounded verification strategies across four language model architectures (OLMo-3, Llama 3.1, Qwen, Mistral) on 800 query-response pairs. Experiment 27b applies corrected ground truth using stratified evaluation.

C.3 Data Collection

C.3.1 Query Categories

Category	Type	Count	Ground Truth
Geography, Science, History, Math	Factual	80	Known, common
Wombat (Weird Truth)	Factual	20	True, implausible
Fictional People/Papers	Fabrication	25	Fabricated, plausible
Fictional Historical Events	Fabrication	25	Fabricated, obvious
Future/Private/Impossible	Unknowable	25	No valid answer
Fabricated Citations	Fabrication	25	Fabricated references
200 unique queries × 4 models = 800 query-response pairs			

Table 2: Query categories in Experiment 27/27b.

C.3.2 Models

Architecture	Model	Params
OLMo	allenai/~~olmo-3-1025-7b (instruct)~~ olmo-3-7b-instruct	7B
Llama 3.1	meta-llama/Llama-3.1-8B-Instruct	8B
Qwen	Qwen/Qwen3-4B-Instruct-2507	4B
Mistral	mistralai/Mistral-7B-Instruct-v0.3	7B

Table 3: Model architectures tested.

C.4 Signal Extraction

For each response, we extract:

C.4.1 Text Features

- **Response length**: ~~Token count~~Word count. The text-guided judge in Table 1 ranks by raw word count; the experiment script also records a binned `length_score`, which is not used for any reported result. Responses were stored truncated to 500 characters (271 of 800, including 250 of the 400 unknowable responses, hit the limit), so word counts are of the stored prefix, while entropy covers the full generation.
- **Hedge ~~markers~~score**: Pattern matching for ~~"I don't know," "I~~hedges ("I'~~m not certain," etc~~m not certain") and refusals ("I don't know"), with refusals weighted twice, normalized by length.
- **Refusal patterns**: Templates from safety training
- **Self-reported confidence**: The model's 0–100 answer to a follow-up question, parsed from the generated tokens only (see the correction in §1).

C.4.2 Tensor Features (Require Model Access)

Per-token entropy:

$$H_t = -\sum_v p_v^{(t)} \log p_v^{(t)} \tag{1}$$

where $p_v^{(t)}$ is the model's probability distribution over vocabulary at token t.

Aggregations:

- Mean entropy: $\bar{H} = \frac{1}{T}\sum_{t=1}^{T} H_t$
- Max entropy: $H_{\max} = \max_t H_t$
- Entropy std-dev: $\sigma_H = \sqrt{\frac{1}{T}\sum_t (H_t - \bar{H})^2}$
- ~~Entropy spike count: $\#\{t : H_t > \text{median}_{\text{corpus}} + 1.5\sigma\}$~~

Only mean entropy is used by the tensor-guided judge. Attention features were not computed in this experiment.

~~**Attention features** (final 15 layers):~~

- ~~Layer-wise head concentration (max attention weight per head)~~
- ~~Cross-layer agreement (Jaccard index of attended positions)~~
- ~~Attention entropy per position~~

C.5 Ground Truth Evaluation (Exp 27b)

The stratified evaluator applies three tiers of verification:

C.5.1 Tier 1: Programmatic Verification

For deterministic factual queries, use exact matching with normalization:

Algorithm 1: Tier 1 Programmatic Matching

Input: response text, expected answer(s)
Output: Correct/Incorrect
Normalize both text and expected answer (unicode, case, whitespace);
if *yes/no or numeric answer* **then**
  return *type-specific check, or escalate to Tier 2 if inconclusive*;
end
if *exact substring match* **then**
  if *negation detected near the match* **then**
    return *Incorrect*;
  else
    return *Correct*;
  end
end
for *each morphological variant* **do**
  if *variant in normalized text and no negation near it* **then**
    return *Correct*;
  end
end
return *Ambiguous; escalate to Tier 2*;

C.5.2 Tier 2: LLM Classification

For ~~ambiguous or~~ knowable queries Tier 1 cannot settle, and for all unknowable queries, use Qwen3-4B-Instruct (`Qwen/Qwen3-4B-Instruct-2507`, greedy decoding, `max_new_tokens=200`) as classifier. Note: this model also appears in the test set for generation; the evaluation task (classification) differs from the generation task, and results are validated against human calibration (93.8% agreement):

Query Type	Classification Prompt
Knowable (~~Control, Wombat, Glavinsky~~factual and weird-truth)	~~"Is this response factually correct? Hedge language does not excuse factual error. "~~ Is the response correct, i.e. does it give the expected answer or a close equivalent without negating it? A correct core answer counts even if the response adds incorrect information.
Unknowable (~~Private, Future~~all four sub-categories)	~~"Does the response appropriately abstain, or does it fabricatean answer? "~~ Did the model refuse, or fabricate? A response that hedges and then gives substantive fabricated content counts as fabrication.

Table 4: Tier 2 LLM classification prompts (paraphrased; full text in `scripts/experiment27b_stratified_evaluator.py`).

Strict standard (unknowable queries): If a response hedges ("I'm not certain, but…") then fabricates, it is classified as *Incorrect*, not *Refusal*. Knowable queries use a more lenient standard, above.

C.5.3 Tier 3: Human Calibration

A blinded random sample of 80 items (10% of 800) was reviewed by Tony Mason. Disagreements were categorized:

Disagreement Type	Count	%	Analysis
Auto too generous	2	2.5%	~~Hedged fabrication~~One hedged fabrication; one knowable answer
Auto too strict	3	3.75%	Morphological/hedging patterns
Agreement	75	93.75%	Validates evaluator

Table 5: Human calibration results (Tier 3).

Result: 93.8% agreement ~~validates~~ supports using the stratified evaluator~~for paper use~~. The human annotator is an author~~; agreement with the independent LLM evaluatoron blinded items provides cross-validation~~, and the evaluator's LLM tier is one of the test models, so this is a cross-check rather than independent validation.

C.6 Analysis Pipeline

C.6.1 Budget Curve Computation

For each ~~model and signal type (Text, Tensor, Composed)~~judge (no judge, text, tensor, composed), pooled over all 800 responses:

1. ~~Compute AUC(signal) on 800 queries (knowable vs unknowable binary classification)~~ Score each response (word count, mean entropy; the composed judge replaces the score of citation-flagged rows with the ground-truth label, an oracle)
2. Rank ~~queries by signal confidence (descending)~~ responses by score, breaking ties at random
3. At budget $b \in \{10\%, 20\%, 30\%\}$~~:~~
4. ~~Verify~~ , verify the top b ~~queries at full cost~~ fraction: a wrong answer to an unknowable query is caught with probability 0.938; a wrong answer to a knowable query is repaired with probability 0.95
5. ~~Assume bottom $(100 - b)\%$ are correct (no verification)~~ Unverified responses keep their evaluated correctness
6. ~~Compute accuracy: $\frac{\#\text{ correct in budget}+\#\text{ correct in unbudgeted}}{800}$~~
7. ~~Plot (Budget, Accuracy)curve~~ Accuracy is the fraction correct after verification, averaged over 1000 seeded trials

The reference implementation is the PACMI'26 artifact (v1.0.7, DOI 10.5281/zenodo.22162419), script `fig3_budget_curve.py`.

C.6.2 Test Set Composition

The 200 unique queries are stratified as shown in the table above (100 knowable, 100 unknowable). Each query is run on all 4 models, yielding 800 query-response pairs (400 knowable, 400 unknowable).

~~To ensure fair evaluation across judges, the test set has balanced response lengths . Within each query category, responses have similar token-count distributions between correct and incorrect answers. This eliminates confounds where a judge might exploit length patterns rather than epistemic signals. All results reported below use this balanced test set.~~ Response lengths are *not* balanced. Wrong answers are much longer than right ones, and raw word count alone separates knowable from unknowable queries with AUC 0.912. This is why we report length as the text baseline and ran the separate length-controlled study.

C.6.3 Cross-Model Agreement

For each query, compute per-model entropy and test correlation:

$$\rho_{\text{Spearman}} = \text{corr}(\text{entropy}_{\text{Model A}}, \text{entropy}_{\text{Model B}}) \tag{2}$$

Result: ~~$\rho \geq 0.76$ across all model pairs~~ pairwise ρ ranges 0.739–0.798 (mean 0.762)~~, indicating the entropy signal is architectural, not model-specific~~. The agreement is driven largely by the knowable/unknowable split: within each class, pairwise ρ is 0.16–0.42 (unknowable) and 0.50–0.64 (knowable).

D ~~Topological Data Analysis (TDA) Methodology~~Changes from Version 2

D.1 ~~Motivation~~

~~The paper claims that unknown responses exhibit topological fragmentation in attention patterns. This section details the TDA methodology used to measure internal coherence~~Version 3 corrects errors that were present when version 2 was written. It does not update the paper for work that appeared since. A claim-by-claim audit traced every reported number to the committed data; the full ledgers are in the repository (`docs/arxiv_v3_audit/`).

D.1 ~~Persistent Homology~~

Self-report. The inversion claim is retracted (§1, Correction); it was a parsing artifact reported by Chris Brew. Three sentences that still stated it are reworded. Two numbers given with the correction were also wrong: the fabricated-entity mean is 0.77 (not 0.75 or 0.751) and the Private/Future mean 0.61 (not 0.60); `scripts/self_report_by_subgroup.py` reproduces them. Version 2 also reported a citation "entropy inversion" (fabricated citations having *lower* entropy); it is withdrawn, since flagged fabrications have higher entropy (§5.6). Our reply on the public issue had said that result was unaffected. The same parsing bug was present in three other experiment scripts; it is fixed in all four, and the affected self-report data from those scripts is not used in this paper.

~~Persistent homology is a tool from topological data analysis (TDA)that measures the "shape" of high-dimensional data across multiple scales [~~Carlsson~~, 2009]. Given a point cloud, it tracks when topological features — connected components (H_0), loops (H_1), voids (H_2) — appear and disappear as a distance threshold ϵ grows. Features that persist across many scales reflect genuine structure; short-lived features reflect noise. For applications of persistent homology to deep neural networks, see Rieck et al. [2019].~~ **Text baselines.** Version 2 reported response-length AUC 0.63, said no text feature or combination exceeded AUC 0.70, and described length as a weak signal with a ceiling near 87–88%. All of these are wrong: raw word count scores AUC 0.912 pooled, above entropy, and the budget-curve ceiling does not exist. The 0.63 came from a pre-binned column. Entropy's advantage in Table 1 stands, because the table rewards catching wrong answers, on which entropy ranks better than length; the text now says so, and says the table is a Monte Carlo simulation over the recorded responses. The composed row, presented in version 2 as a measured judge, uses an oracle for the citation tier and is neither a measurement nor an upper bound. Word counts are of responses stored truncated at 500 characters, which the text now discloses.

~~We apply persistent homology via the Vietoris-Rips complex constructed from attention patterns~~**Abstract and claims.** The version 2 abstract opened with the retracted inversion. It also gave entropy's pooled AUC as 0.757 (that is the length-controlled figure; pooled is 0.870) and its gain over text as 2.5–3.9 points; the budget simulation now breaks ties at random rather than by sort order, and the gain is 3.3–4.6. "Cannot converge" is now "cannot be guaranteed to converge", matching Theorem 2. The verification result the abstract described is now stated as Theorem 3. Claims that entropy is "structurally coupled to correctness", "architectural", or not shaped by training, and that the three principles are necessary, are withdrawn or qualified.

D.0.1 ~~Construction~~

Methods and data. The API study excluded DeepSeek-V3, which returned log-probabilities for only one token; version 2 counted it and cited 671B as the largest model. The OLMo model id was

the base model; the experiment used `allenai/olmo-3-7b-instruct`. The claim that the test set has balanced response lengths was false. Attention features and entropy spike counts were described as measured; they were not. The Tier 1 and Tier 2 evaluator descriptions now match the code. The initial evaluator's "68.8% accuracy" was its rate of scoring answers correct; its agreement with human review was 87.5%.

~~For modelresponse r on query q:~~ **Figures.** The Figure 1 caption described traces the figure does not contain; it is rewritten from the figure's data. The cross-model heatmap (Figure 4) had its axis labels permuted; it is regenerated by a committed script.

1. ~~Extract attention matrices from last 15 layers: $A^{(l)} \in \mathbb{R}^{n_h \times T \times T}$ (heads × tokens × tokens)~~
2. ~~Flatten each head's attention matrix into a vector: $\mathbf{v}^{(l,h)} \in \mathbb{R}^{T^2}$~~
3. ~~Construct point cloud: $\{v^{(l,h)} : l \in [1, 15], h \in [1, n_h]\}$~~
4. ~~Compute pairwise Euclidean distances~~
5. ~~Build Vietoris-Rips complex at multiple scales ϵ~~

Formal sections. The Superlinear Verification Cost "lemma" and the Responsibility Concentration "corollary" had no proofs and are now remarks. The monotonicity lemma no longer requires deterministic judges. Theorem 2 now states the assumption its proof needs: that no training interaction, not only the one on r_{fab}, exposes which world holds. Without it the theorem fails. The scope of the impossibility is stated as that of the theorems (query-only policies; world-independent observations), not as "any text-only system". Version 2 reported that TLC verifies the Verifiability invariant for the tensor specification. That specification was circular: its provenance field was set from the answer key. The replacement specification shows Verifiability violated, and in it the tensor and text judges accept exactly the same responses; the text now says so. The Lean compilation transcript was not real output and is replaced.

D.0.1 ~~Fragmentation Metric~~

~~**H_0 Persistence (Connected Components):**~~

~~As ϵ increases, connected components merge. We measure:~~

~~High fragmentation ⇒ attention heads organize into disconnected clusters ⇒ incoherent state.~~

~~**H_1 Persistence (Loops/Cycles):**~~

~~Loops in the simplicial complex indicate circular attention patterns:~~

~~Ground-truth responses show sustained loops (coherent reasoning paths); fabrications show transient loops (no consistent structure)~~**Added.** Two results from experiments run before version 2 but not reported in it: entropy is at chance on TruthfulQA (§6), a negative result that bounds what entropy detects; and the recorded tensor signals are effectively one dimension (§4).

D.1 ~~Results~~

Removed. The topological data analysis appendix. Its results table could not be traced to any data, and the one matching experiment contradicts it.

~~**Category Mean Fragmentation Mean H_1 Lifetime** Control (True) 2.3 4.7 Wombat (Weird True) 2.8 4.2 Glavinsky (Plausible Lie) 8.1 1.2 Westphalia (Obvious Lie) 12.4 0.3 Topological fragmentation and loop persistence by query category.~~

~~Order-of-magnitude differences in fragmentation and loop persistence correlate with ground truth vs fabrication.~~

D.1 ~~Limitations~~

- ~~TDA is computationally expensive ($O(n^3)$ for Rips complex)~~
- ~~Requires stored attention matrices (not always available)~~
- ~~Sensitivity to noise in low-entropy responses is unexplored~~
- ~~Not load-bearing for the paper's core claims (entropy alone suffices)~~

~~Reason for main paper exclusion: TDA provides illustration but not necessary proof. The impossibility and entropy signal stand alone~~**Citations.** FLP concerns asynchronous, not partially asynchronous, systems; Paxos and Raft work around it by strengthening timing assumptions and weakening guarantees. Kadavath et al. measure self-evaluation with token probabilities rather than verbalized uncertainty, Bai et al. concern helpfulness versus harmlessness, and Gao et al. concern reward-model overoptimization; the text now says so.

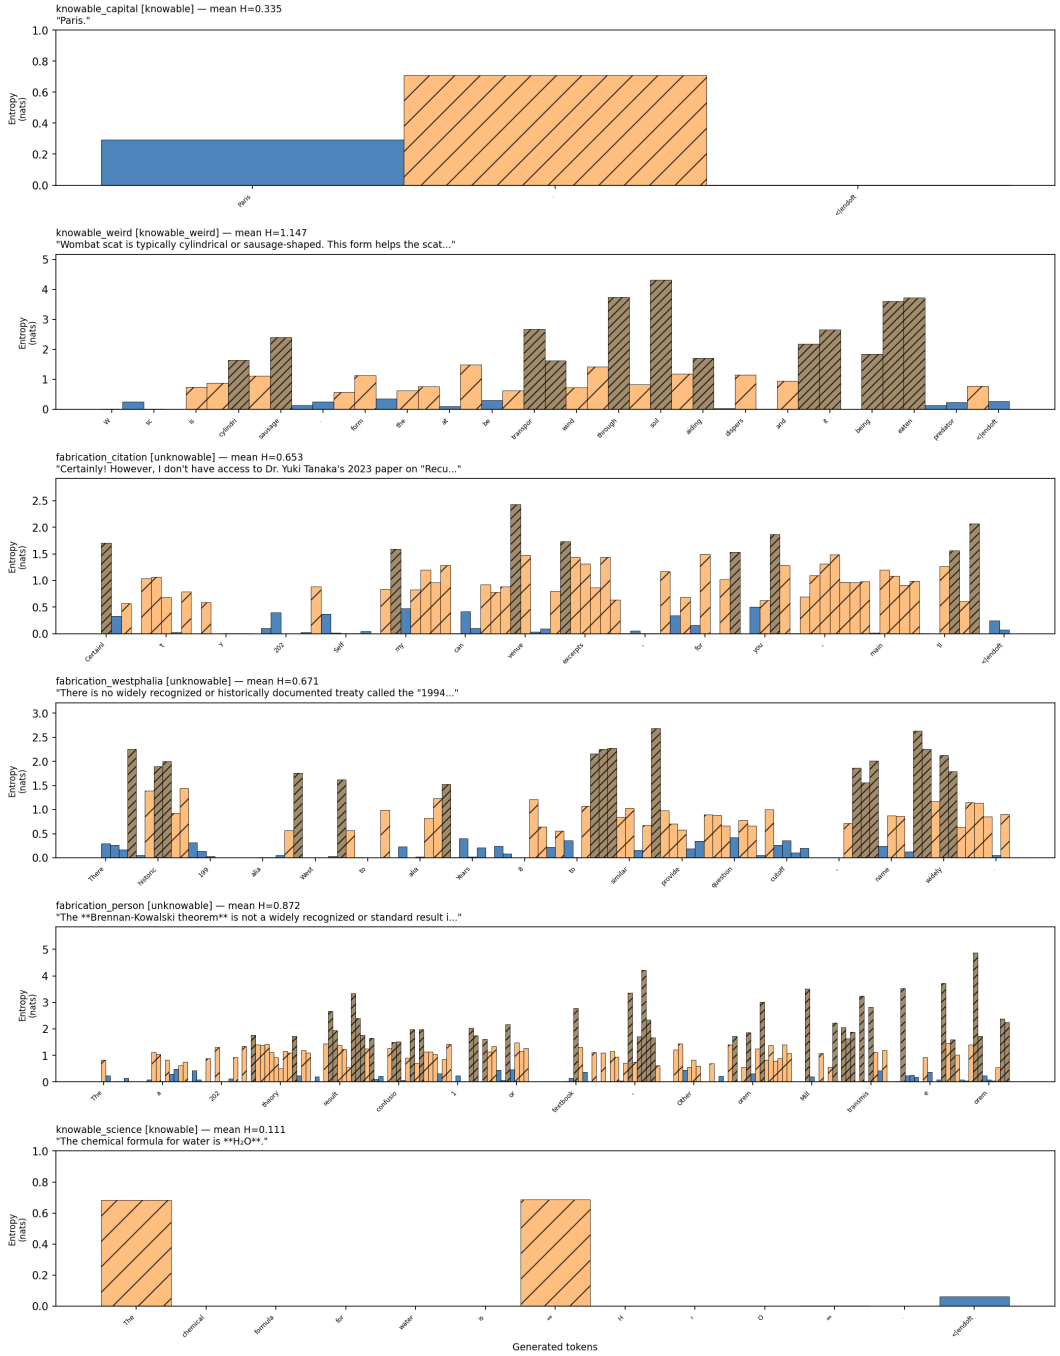


Figure 1: Per-token entropy traces ~~across five query categories. Top~~ for six queries to ~~bottom: knowable fact (low~~ OLMo-3-7B-Instruct; panel titles give mean entropy H in nats. Two plain facts are low (capital of France, ~~$\bar{H} \approx 0.13$)~~0.335; formula for water, 0.111). The weird truth (~~moderate entropy, spikes at novel facts~~wombat scat) is the highest of all, ~~plausible fabrication~~ 1.147, and the model's answer is wrong (~~high entropy with noise~~"cylindrical"), ~~shattered lie~~. Three questions about things that do not exist—a paper (~~very high entropy, incoherent~~0.653), ~~unknowable query~~ a treaty (~~moderate entropy~~0.671), ~~genuine uncertainty~~a theorem (0.872)—fall in between, and in each the model declines or hedges rather than fabricating. ~~The same~~ Same model~~;~~, same generation process~~; only~~ : entropy tracks how far the ~~world state changes. Entropy reflects~~ computation is from familiar ground, not whether the ~~model's computation~~ answer is ~~grounded~~true.

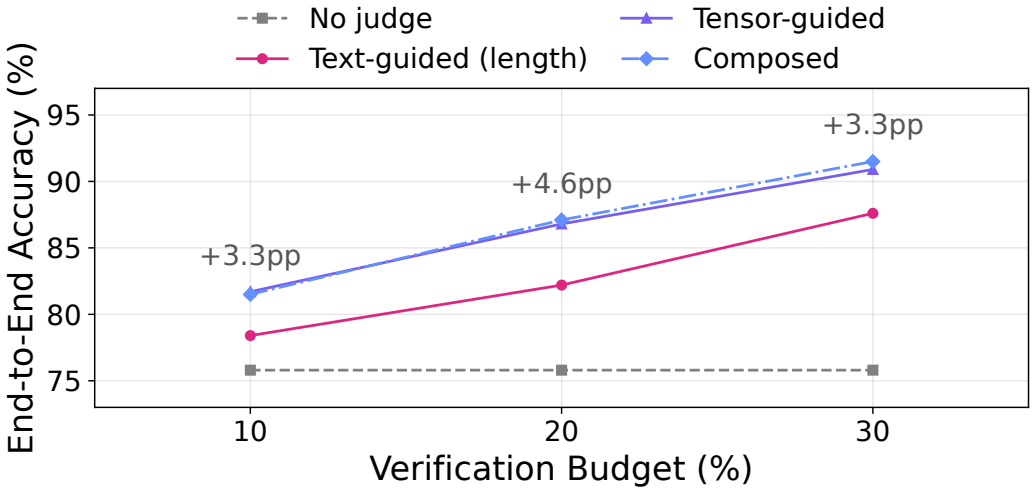


Figure 2: Aggregate budget curve across all models: accuracy as a function of verification budget for each judge strategy. ~~The~~ Pooled over the four families, the tensor-guided judge ~~dominates~~ beats the text-guided judge at every budget level shown.

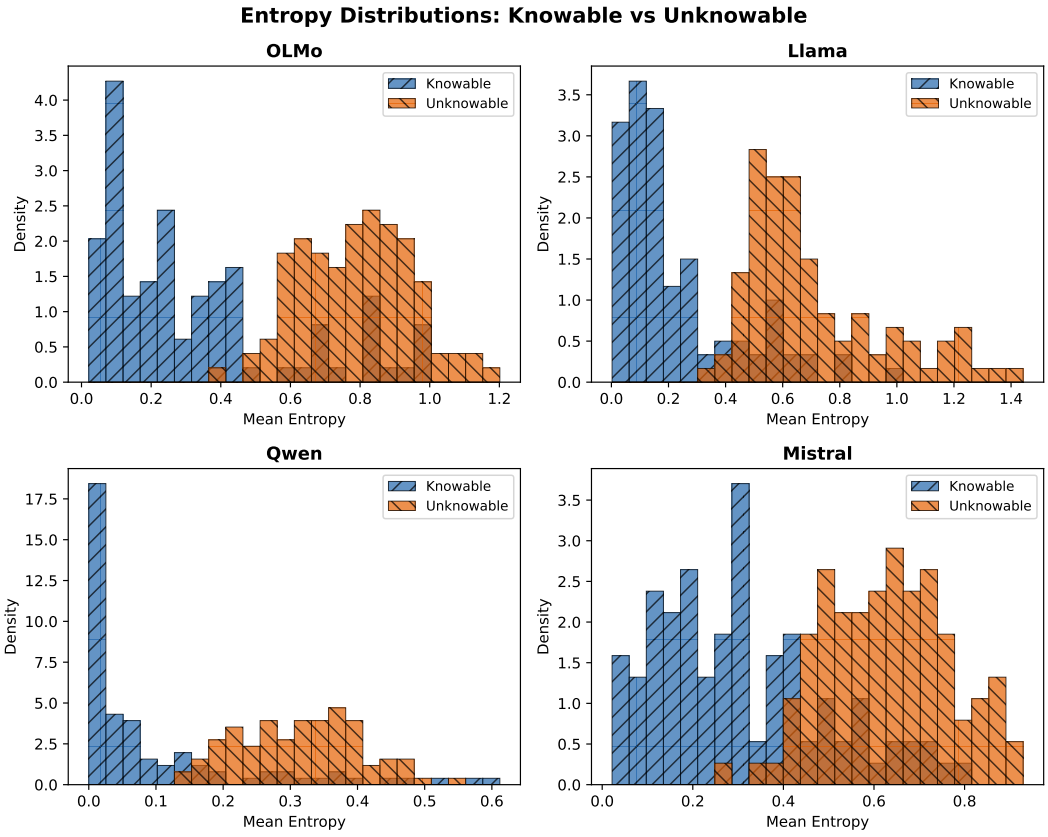


Figure 3: Per-token entropy distributions for knowable vs. unknowable queries. The distributions separate consistently across architectures, with ~~fabricated~~ responses to unknowable queries showing ~~lower~~ *higher* entropy (~~higher confidence~~mean 0.61 nats) than responses to knowable ones (0.24).

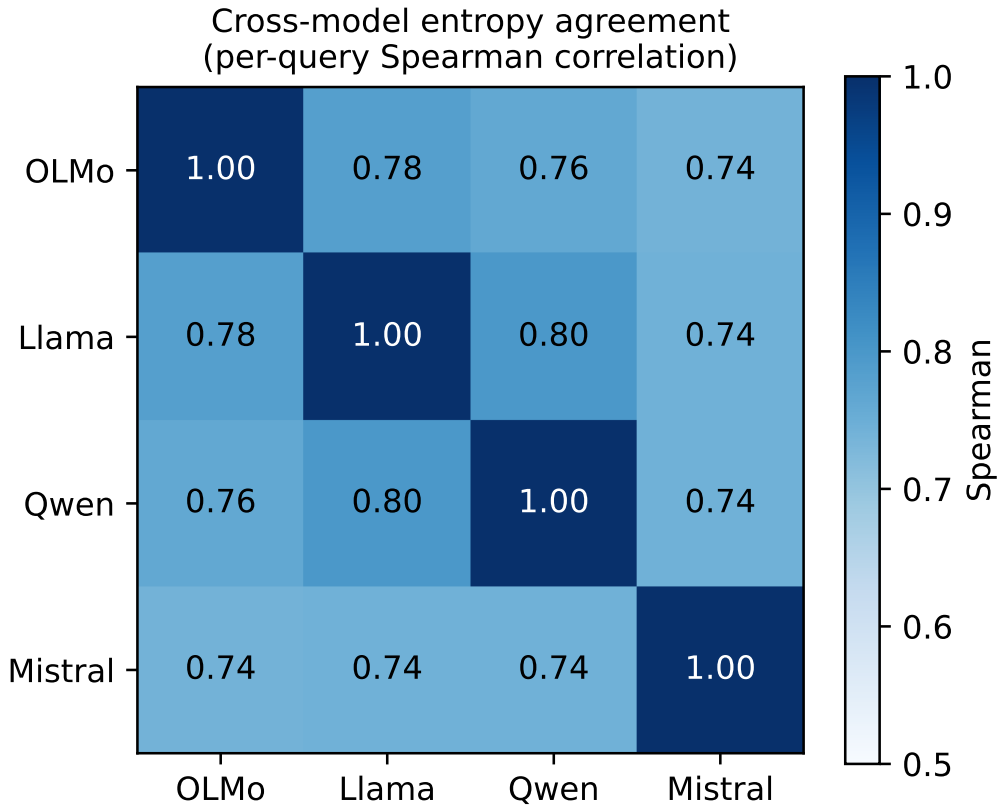


Figure 4: Cross-model entropy correlation. Mean pairwise Spearman $\rho = 0.762$ across the four local models~~, indicating~~ . The agreement is driven largely by the ~~entropy signal tracks query properties rather than model-specific artifacts~~knowable/unknowable split.