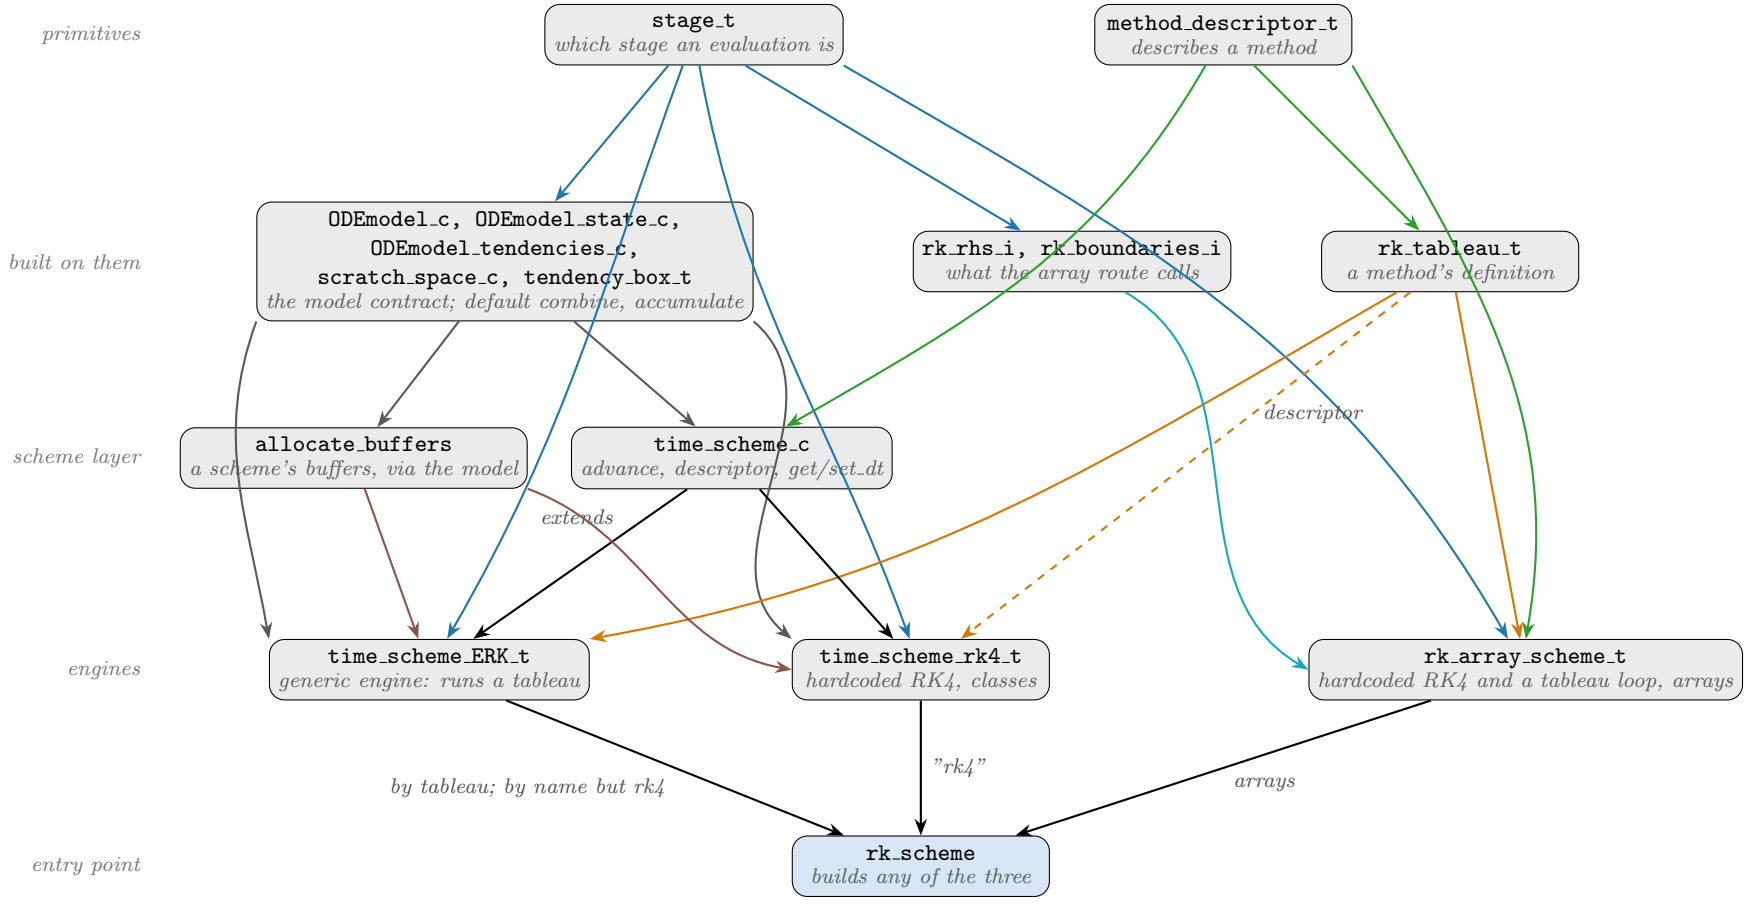

an arrow: is used to build, *coloured by the block it starts from; dashed: the descriptor only (name, order, cost, read once when built)*
left out: `status_t` *and* `stdlib_kinds`*, which everything uses*