

搭建vps

教学文档

<https://bulianglin.com/archives/nicename.html>

一、选择vps

这里我们选择性价比比较高的 digitalocean

网址: <https://cloud.digitalocean.com/>

1、下载安装客户端代理工具

<https://github.com/2dust/v2rayN/releases/tag/7.12.7>

选择 v2rayN-windows-64-SelfContained.zip

github.com/2dust/v2rayN/releases/tag/7.12.7		
	v2rayN-linux-64.zip	sha256:ae2738f...
	v2rayN-linux-arm64.ApplImage	sha256:034298c...
	v2rayN-linux-arm64.deb	sha256:a6610ef...
	v2rayN-linux-arm64.zip	sha256:8f1a36c...
	v2rayN-macos-64.dmg	sha256:41e9ef4...
	v2rayN-macos-64.zip	sha256:6116ac0...
	v2rayN-macos-arm64.dmg	sha256:dee33c0...
	v2rayN-macos-arm64.zip	sha256:70c3679...
	v2rayN-windows-64-desktop.zip	sha256:d041ecc...
	v2rayN-windows-64-SelfContained.zip	sha256:deac38f...
	v2rayN-windows-64.zip	sha256:d723ae1...
	v2rayN-windows-arm64-desktop.zip	sha256:f609e2f...
	v2rayN-windows-arm64.zip	sha256:797f31f...

二、创建服务器

PROJECTS

MANAGE

App Platform

Agent Platform

Droplets

GPU Droplets

Functions

Kubernetes

Volumes Block Stor...

Databases

Spaces Object Stor...

Container Registry

Search by resource name or public IP (Ctrl+B)

Create

?

🔔

🗨️

My Team

MT

AI Assistant

Droplets

Autoscale Pools

Search by droplet name

Name	IP Address	Created	Tags
centos-s-1vcpu-1gb-nyc1 1 GB / 25 GB / NYC1 - CentOS 9 Stream x64	64.22715.230	7分钟前	lc00734_01

PROJECTS

MANAGE

App Platform

Agent Platform

Droplets

GPU Droplets

Functions

Kubernetes

Volumes Block Stor...

Databases

Spaces Object Stor...

Container Registry

Backups & Snapshots

Network File Storage

Networking

Monitoring

By DigitalOcean

Resource Limits

Search by resource name or public IP (Ctrl+B)

Create

?

🔔

🗨️

My Team

MT

AI Assistant

New York • Datacenter 1 • NYC1

1 resource

Additional datacenter regions

VPC network - default-nyc1

All resources created in this datacenter will be members of the same VPC network. They can communicate securely over their Private IP addresses.

Choose an image

OSMarketplace (262)Custom Images

Ubuntu

RECOMMENDED

24.04 (LTS) x64

Debian

13 x64

Fedora

Requires an SSH Key

43 x64

CentOS

9 Stream x64

Summary

Compute

Plan Type: Basic

CPU Option: Regular

vCPU: 1

RAM: 1 GB

Disk: 25 GB

Bandwidth: 1000 GB

Slug: s-1vcpu-1gb

\$6.00/mo

Total cost

\$6.00/month

\$0.009/hour

Create Droplet

PROJECTS

MANAGE

App Platform

Agent Platform

Droplets

GPU Droplets

Functions

Kubernetes

Volumes Block Stor...

Databases

Spaces Object Stor...

Container Registry

Backups & Snapshots

Network File Storage

Networking

Monitoring

By DigitalOcean

Search by resource name or public IP (Ctrl+B)

Create

?

🔔

🗨️

My Team

MT

AI Assistant

Choose a Droplet Plan

BasicShared CPU

General PurposeDedicated CPU

CPU-OptimizedDedicated CPU

MemoryOptimizedDedicated CPU

CPU Options

RegularDisk Type: SSD

Premium AMDDisk Type: NVMe SSD

Premium IntelDisk Type: NVMe SSD

Select a Plan

\$4.00/mo
1 vCPU - 512 MB RAM - 10 GB SSD - 500 GB Transfer

\$6.00/mo
1 vCPU - 1 GB RAM - 25 GB SSD - 1000 GB Transfer

\$12.00/mo
1 vCPU - 2 GB RAM - 50 GB SSD - 2 TB Transfer

\$18.00/mo
2 vCPU - 2 GB RAM - 60 GB SSD - 3 TB Transfer

Summary

Compute

Plan Type: Basic

CPU Option: Regular

vCPU: 1

RAM: 1 GB

Disk: 25 GB

Bandwidth: 1000 GB

Slug: s-1vcpu-1gb

\$6.00/mo

Total cost

\$6.00/month

\$0.009/hour

Create Droplet

三、安装S-UI

1、进入服务器

Search by resource name or public IP (Ctrl+B)

Create ? ? ? My Team MT AI Assistant

Droplets

Create an Autoscale Pool Create Droplet

Droplets Autoscale Pools

Search by droplet name

Name	IP Address	Created	Tags
centos-s-1vcpu-1gb-nyc1 1 GB / 25 GB / NYC1 - CentOS 9 Stream x64	64.227.15.230	10分钟前	lc00734_01

2、打开控制台

Search by resource name or public IP (Ctrl+B)

Create ? ? ? My Team MT AI Assistant

← Back to Droplets

centos-s-1vcpu-1gb-nyc1

Active • first-project • NYC1 • default-nyc1 • CentOS 9 Stream x64

Web Console Actions

Overview Insights Networking Volumes Backups & Snapshots Activity Settings

INSIGHTS (LAST HOUR)

CPU usage	Memory
2.48%	—

CONNECTION DETAILS

Public IPv4

64.227.15.230

centos-s-1vcpu-1gb-nyc1 - DigitalOcean Droplet Web Console - Google Chrome

cloud.digitalocean.com/droplets/566177826/terminal/ui/?os_user=root

```
[root@centos-s-1vcpu-1gb-nyc1 ~]#
```

3、命令安装S-UI

在web控制页面执行下面命令

```
VERSION=1.2.2 && bash <(curl -Ls https://raw.githubusercontent.com/alireza0/s-ui/$VERSION/install.sh) $VERSION
```



```

cancel...
this is a fresh installation,will generate random login info for security concerns:
#####
username:l9/v3HfU
password:DXvDTG10
#####
if you forget your login info,you can type s-ui for configuration menu
reset admin credentials success
First admin credentials:
    Username:      l9/v3HfU
    Password:      DXvDTG10
Created symlink /etc/systemd/system/multi-user.target.wants/s-ui.service → /etc/systemd/system/s-ui.service.
s-ui v1.2.2 installation finished, it is up and running now...
You may access the Panel with following URL(s):
Local address:
http://64.227.15.230:2095/app/
http://10.10.0.5:2095/app/
http://10.116.0.2:2095/app/

Global address:
http://64.227.15.230:2095/app/

The OS release is: centos
S-UI Control Menu Usage
-----
SUBCOMMANDS:
s-ui          - Admin Management Script
s-ui start    - Start s-ui
s-ui stop     - Stop s-ui
s-ui restart  - Restart s-ui
s-ui status   - Current Status of s-ui
s-ui enable   - Enable Autostart on OS Startup
s-ui disable  - Disable Autostart on OS Startup
s-ui log      - Check s-ui Logs
s-ui update   - Update
s-ui install  - Install
s-ui uninstall - Uninstall
s-ui help     - Control Menu Usage
-----
[root@centos-s-lvcpu-lgb-nycl ~]#

```

Local address:
<http://64.227.15.230:2095/app/>
<http://10.10.0.5:2095/app/>
<http://10.116.0.2:2095/app/>

Global address:
<http://64.227.15.230:2095/app/>

First admin credentials:
 Username: l9/v3HfU
 Password: DXvDTG10

4、域名生成

在服务器中执行如下命令

```

for d in iosapps.itunes.apple.com acctcdn.msftauth.net apps.apple.com gsp-
ssl.ls.apple.com ipv6.6sc.co s.go-mpulse.net s0.awsstatic.com
aadcdn.msftauth.net catalog.gamepass.com intel.com ; do t1=$(date +%s%3N);
timeout 1 openssl s_client -connect $d:443 -servername $d </dev/null &>/dev/null
&& t2=$(date +%s%3N) && echo "$d: $((t2 - t1)) ms" || echo "$d: timeout"; done

```


```
The OS release is: centos
S-UI Control Menu Usage
-----
SUBCOMMANDS:
s-ui          - Admin Management Script
s-ui start    - Start s-ui
s-ui stop     - Stop s-ui
s-ui restart  - Restart s-ui
s-ui status   - Current Status of s-ui
s-ui enable   - Enable Autostart on OS Startup
s-ui disable  - Disable Autostart on OS Startup
s-ui log      - Check s-ui Logs
s-ui update   - Update
s-ui install  - Install
s-ui uninstall - Uninstall
s-ui help     - Control Menu Usage
-----

[root@centos-s-lvcpu-lgb-nyc1 ~]# ^C
[root@centos-s-lvcpu-lgb-nyc1 ~]# for d in iosapps.itunes.apple.com acctcdn.msftauth.net apps.apple.com gsp-ssl.ls
.apple.com ipv6.6sc.co s.go-mpulse.net s0.awsstatic.com aadcdn.msftauth.net catalog.gamepass.com intel.com ; do t1
=$(date +%s%3N); timeout 1 openssl s_client -connect $d:443 -servername $d </dev/null &>/dev/null && t2=$(date +%s
%3N) && echo "$d: ${t2 - t1} ms" || echo "$d: timeout"; done
iosapps.itunes.apple.com: 45 ms
acctcdn.msftauth.net: 66 ms
apps.apple.com: 33 ms
gsp-ssl.ls.apple.com: 32 ms
ipv6.6sc.co: 37 ms
s.go-mpulse.net: 33 ms
s0.awsstatic.com: 103 ms
aadcdn.msftauth.net: 66 ms
catalog.gamepass.com: 49 ms
intel.com: 347 ms
[root@centos-s-lvcpu-lgb-nyc1 ~]#
```

apps.apple.com: 33 ms

5、cmd终端执行命令

5.1、获取服务器公网地址

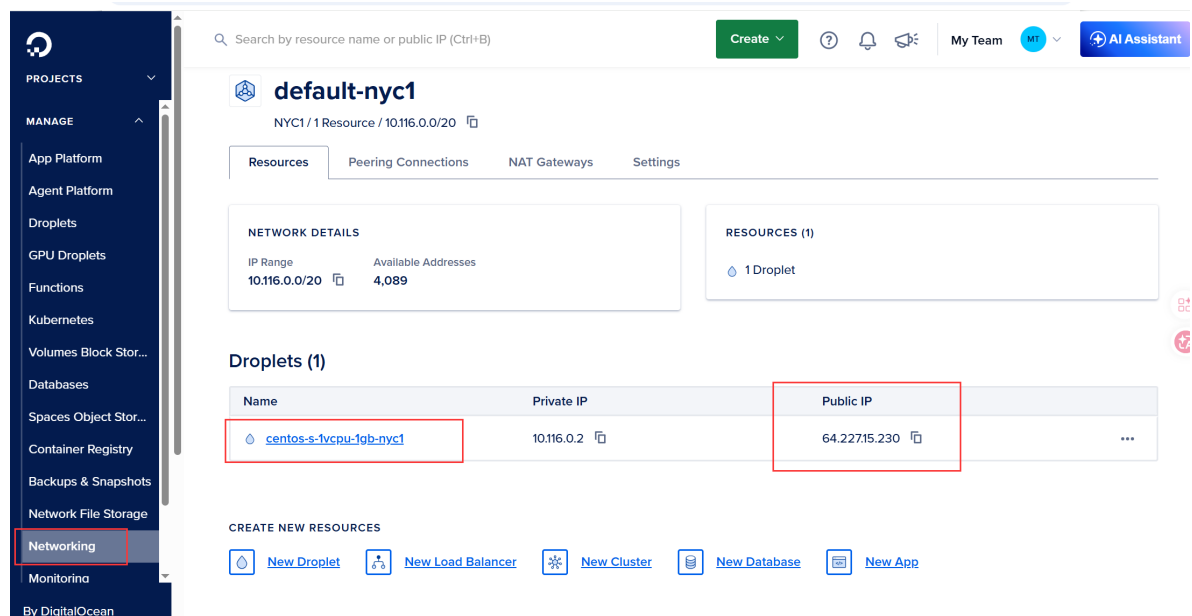

5.2、在cmd终端执行如下命令

```
ssh -L 2095:127.0.0.1:2095 root@64.227.15.230
```

这里的2095来源于上面的3.1截图中

注意，在cmd终端执行上述命令后，不要关闭cmd窗口

```
root@centos-s-1vcpu-1gb-nyc1:~  
Microsoft Windows [版本 10.0.19045.6466]  
(c) Microsoft Corporation。保留所有权利。  
  
C:\Users\10247>ssh -L 2095:127.0.0.1:2095 root@64.227.15.230  
The authenticity of host '64.227.15.230 (64.227.15.230)' can't be established.  
ED25519 key fingerprint is SHA256:eyKxko7DA4YouIKN/+BVX5YKyAR8G5b0y0j+F6EN69s.  
This key is not known by any other names.  
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes  
Warning: Permanently added '64.227.15.230' (ED25519) to the list of known hosts.  
root@64.227.15.230's password:  
Activate the web console with: systemctl enable --now cockpit.socket  
  
Last login: Tue Apr 21 07:06:07 2026 from 198.211.111.194  
[root@centos-s-1vcpu-1gb-nyc1 ~]#
```

5.3、修改ip并登入web界面


Global address:

http://64.227.15.230:2095/app/ 修改为 http://127.0.0.1:2095/app/

First admin credentials:


Username: l9/v3HfU
Password: DXvDTG10



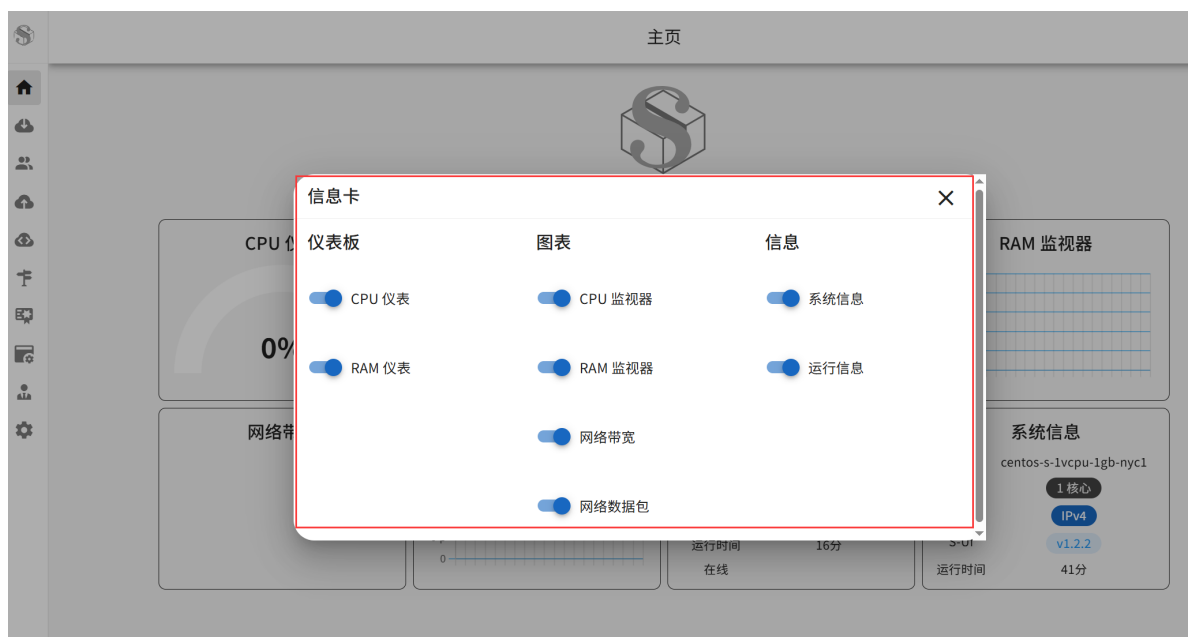

6、S-UI web页面操作

1、添加 REALITY和TLS

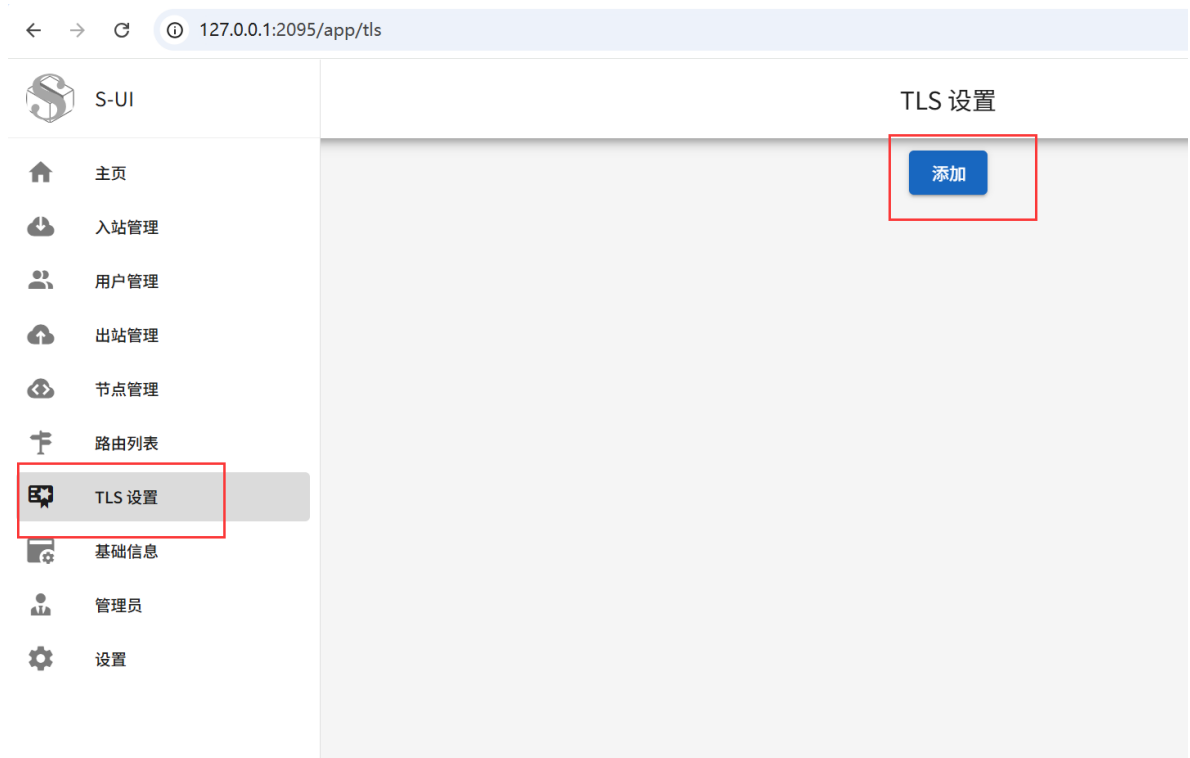

6.1.1、添加reality

添加 TLS

名称: reality 随便写一个

SNI: apps.apple.com 刚才延迟比较低的域名

握手服务器: apps.apple.com 服务器端口: 443

私钥: yD3grd1l3eubYgezthmN0cinYrsPpvaTOH9obPTEG0g 生成公钥和私钥

公钥: l0Lg_dFCww9mVXghHD3McaeQ56qhGb56vb7eXkLnKUY

Short IDs: ,e64ef27f11,65904d2c,64,fff3e9e2,c1bb,a042cc,df4e,47,04a6,718d18,61,b824,93,71,0273e2

Fingerprint: Chrome 选择一个浏览器

☒ 启用 启用UTLS

ACME


ECH

关闭 保存


TLS REALITY 选择这个

TLS 选项

6.1.2、添加tls

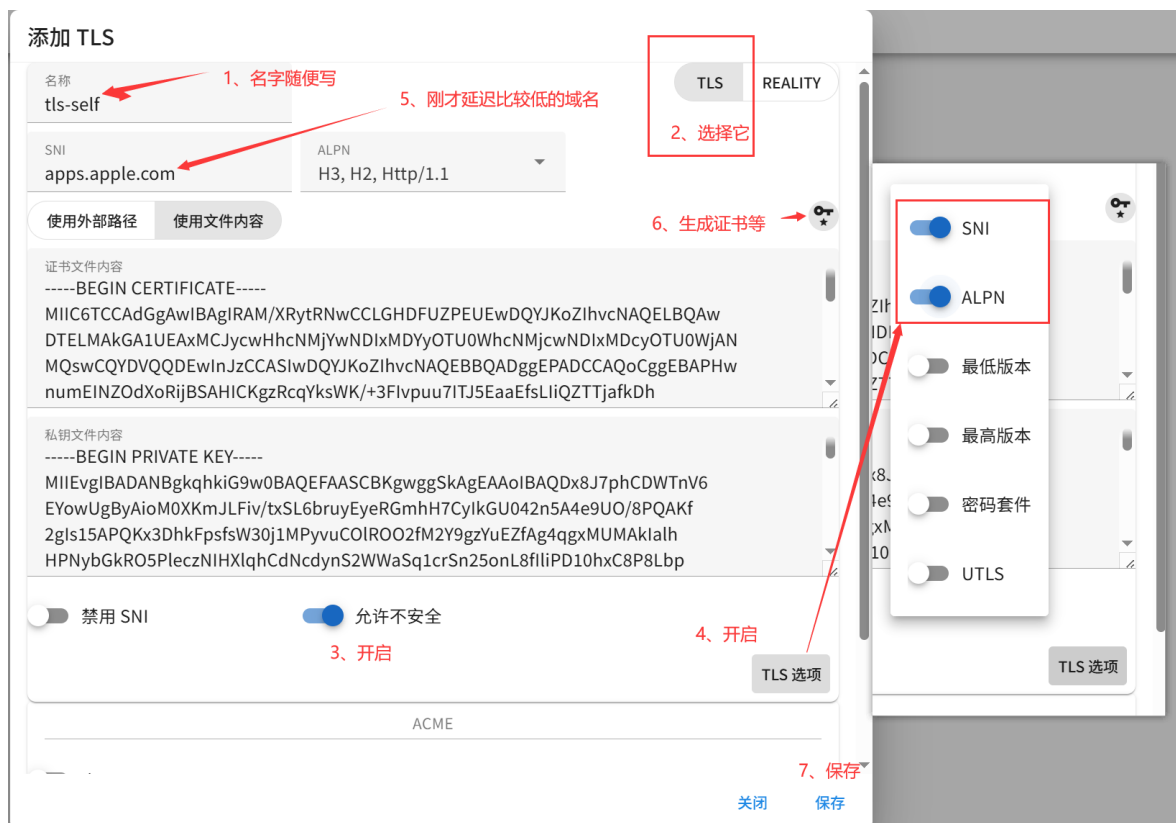

2、添加reality和tls模板的入站

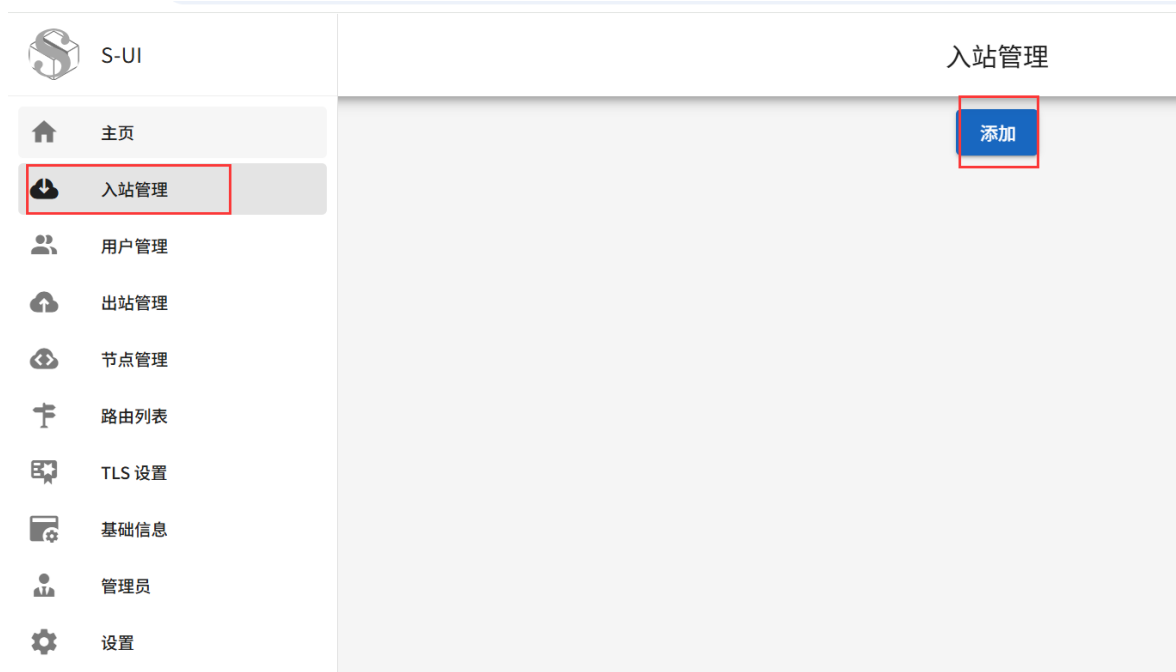

6.2.1、添加reality模板的入站

添加 入站

类型

VLESS

标签

vless-reality

服务器端

客户端

监听

地址

::

端口

443

监听选项

传输

启用传输

用户管理

无

TLS

模板

reality

多路复用

启用多路复用

关闭

保存

6.2.2、添加tls模板的入站

添加 入站

类型

TUIC

标签

tuic-443

服务器端

客户端

监听

地址

::

端口

443

监听选项

TUIC

拥塞控制

bbr

☐ Zero-RTT Handshake

认证超时

心跳包

用户管理

无

TLS

模板

tls-self

关闭

保存

3、用户管理

S-UI

主页

入站管理

用户管理

出站管理

节点管理

路由列表

TLS 设置

基础信息

管理员

设置

用户管理

添加

描述

组

入站管理

操作

流量

添加 客户端

基础

配置

链接

启用

名称

eQiPbp5b

流量

0

GiB

入站标签

vless-reality

tuic-443

组

描述

到期

无限

名称可以变更

我暂且不变

关闭

保存

6.3.1、获取二维码

名称	描述	组	入站管理	操作
eQiPbp5b			2	

订阅

链接

vless-reality





tuic-443






6.3.2、开启v2ra工具

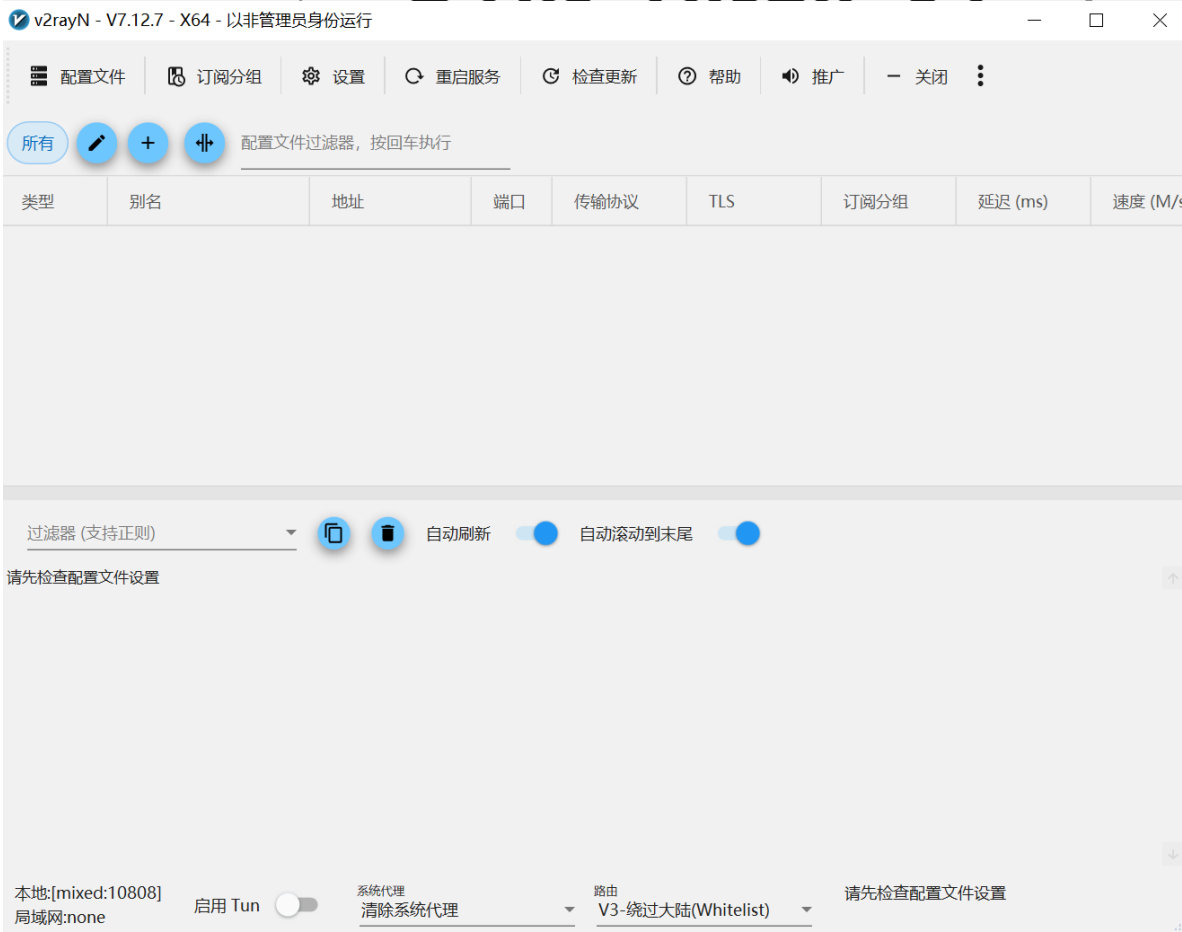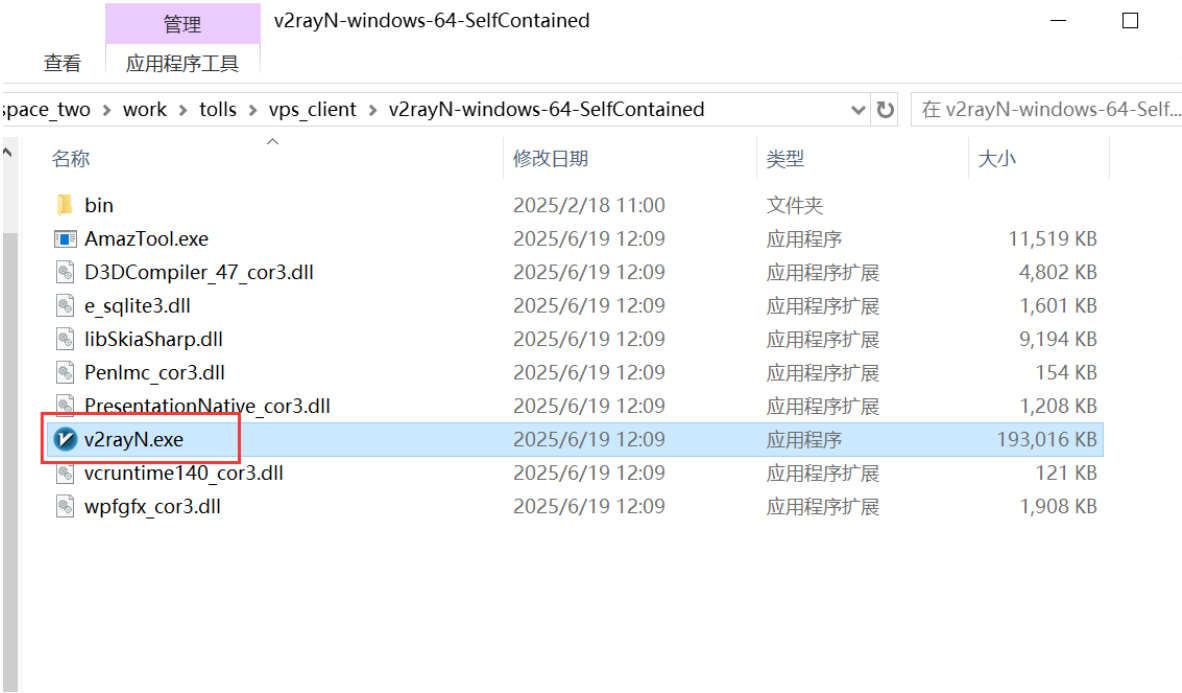

6.3.3、导入二维码

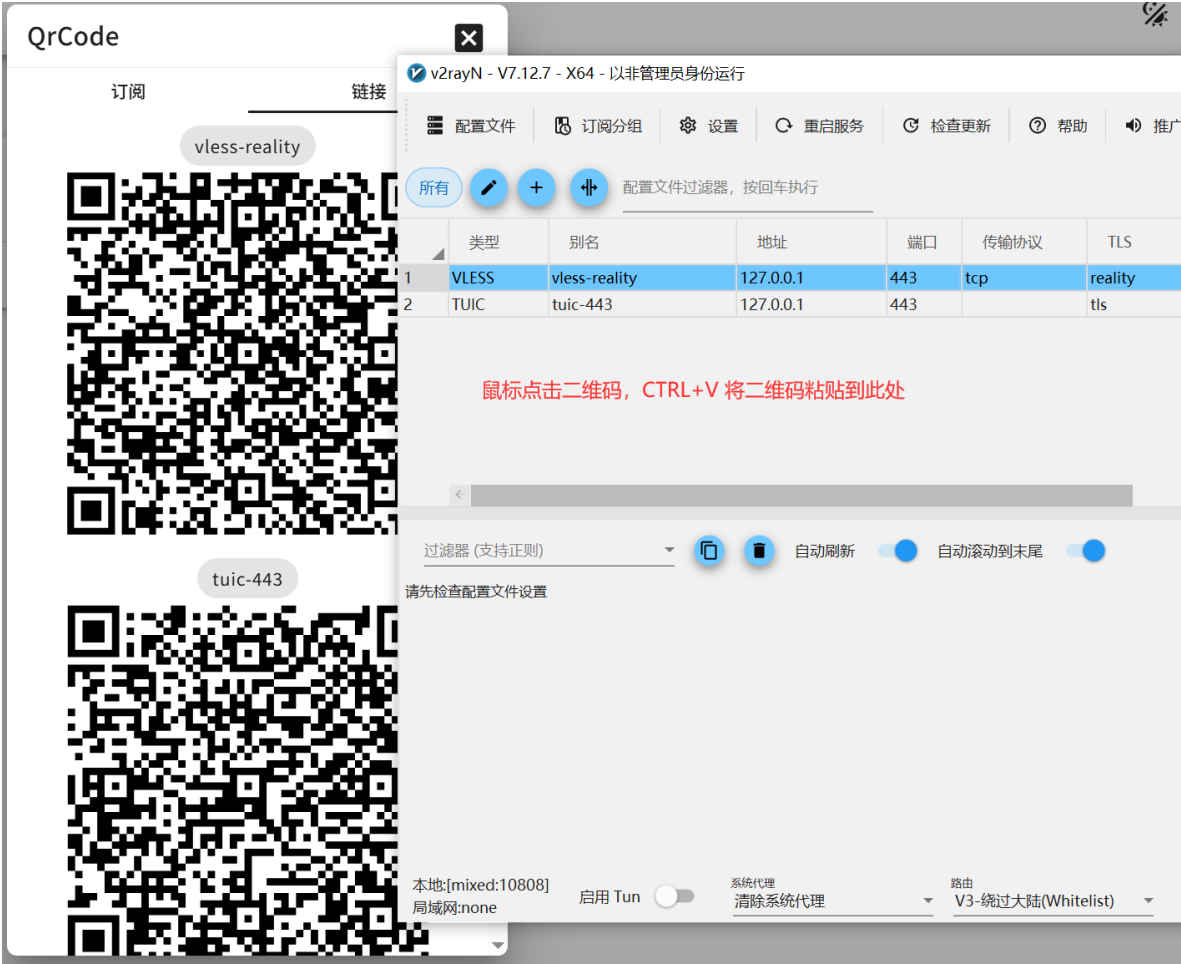

6.3.4、修改地址

VLESS

配置文件

Core 类型

别名 (remarks)

vless-reality

地址 (address)

64.227.15.230

端口 (port)

443

用户 ID (id)

40f54ebe-e1e1-43ca-ae6e-78640740c110

生成

流控 (flow)

xtls-rprx-vision

加密方式 (encryption)

none

底层传输方式 (transport)

传输协议 (network)

tcp

*默认 tcp, 选错会无法连接

伪装类型 (type)

none

*tcp 伪装类型

伪装域名 (host)

*http host 中间逗号 (,) 分隔

路径 (path)

传输层安全 (TLS)

reality

SNI

apps.apple.com

Fingerprint

chrome

确定

取消

TUIC

配置文件

sing_box

别名 (remarks)

tuic-443

地址 (address)

64.227.15.230

端口 (port)

443

用户 ID (id)

40f54ebe-e1e1-43ca-ae6e-78640740c110

密码 (password)

MDdGLntFXR

拥塞控制算法

bbr

传输层安全 (TLS)

tls

SNI

apps.apple.com

Fingerprint

Alpn

h3,h2,http/1.1

跳过证书验证 (allowInsecure)

true

确定

取消

6.3.5、延迟测试

鼠标右击第一个节点

	类型	别名	地址	端口	传输协议	TLS	订阅分组	延迟 (ms)	速度
1	VLESS	vless-reality	64.227.15.230	443	tcp	reality			
2	TUIC	tuic-443	64.227.15.230	443		tls			

- 编辑配置文件 (Ctrl+D)
- 设为活动配置文件 (Enter)
- 移除所选配置文件 (多选) (Delete)
- 移除重复的配置文件
- 克隆所选配置文件
- 分享配置文件 (Ctrl+F)
- 多配置文件产生自定义配置 (多选)
- 一键多线程测试延迟和速度 (Ctrl+E)
- 测试配置文件延迟 Tcping (多选) (Ctrl+O)
- 测试配置文件真连接延迟 (多选) (Ctrl+R)
- 测试配置文件速度 (多选) (Ctrl+T)
- 按测试结果
- 移至订阅分组
- 移至上下
- 全选 (Ctrl+A)
- 导出配置文件

过滤器 (支持正则)

请先检查配置文件设置
[VLESS] vless-reality(64***230:443)
v2rayN - V7.12.7 - X64 | D:\space_two\work\tolls\vps_client\v2rayN-windows-64-SelfContained\v2rayN.exe | Microsoft Windows NT 10.0.19045.0
启动服务 (2026/04/21 16:10:44) ...
[VLESS] vless-reality(64***230:443)
Xray 25.5.16 (Xray, Penetrates Everything.) 800b8b5 (go1.24.3 windows/amd64)
A unified platform for anti-censorship.
2026/04/21 16:10:46.528686 [Info] infra/conf/serial: Reading config: &{Name=config, ...}
2026/04/21 16:10:46.797261 [Warning] core: Xray 25.5.16 started
2026/04/21 16:10:46.902649 from tcp:127.0.0.1:55473 accepted tcp:www.google.com:443
2026/04/21 16:10:49 当前延迟: 259 ms, none

本地:[mixed:10808] 启用 Tun 清除系统代理 路由 V3-
局域网:none


地址 (address) 64.227.15.230

有延迟，说明可以访问

	类型	别名	地址	端口	传输协议	TLS	订阅分组	延迟 (ms)	速度
1	VLESS	vless-reality	64.227.15.230	443	tcp	reality		241	
2	TUIC	tuic-443	64.227.15.230	443		tls		255	

过滤器 (支持正则)

启动服务 (2026/04/21 16:13:36) ...
D:\space_two\work\tolls\vps_client\v2rayN-windows-64-SelfContained\binConfigs\configTest4704529350886081329.json
WARN[0000] legacy special outbounds is deprecated in sing-box 1.11.0 and will be removed in sing-box 1.13.0, checkout documentation for migration:
<https://sing-box.sagernet.org/migration/#migrate-legacy-special-outbounds-to-rule-actions>
2026/04/21 16:13:36 测试完成
初始化配置
启动服务 (2026/04/21 16:13:39) ...
D:\space_two\work\tolls\vps_client\v2rayN-windows-64-SelfContained\binConfigs\configTest5732467496591977967.json
Xray 25.5.16 (Xray, Penetrates Everything.) 800b8b5 (go1.24.3 windows/amd64)

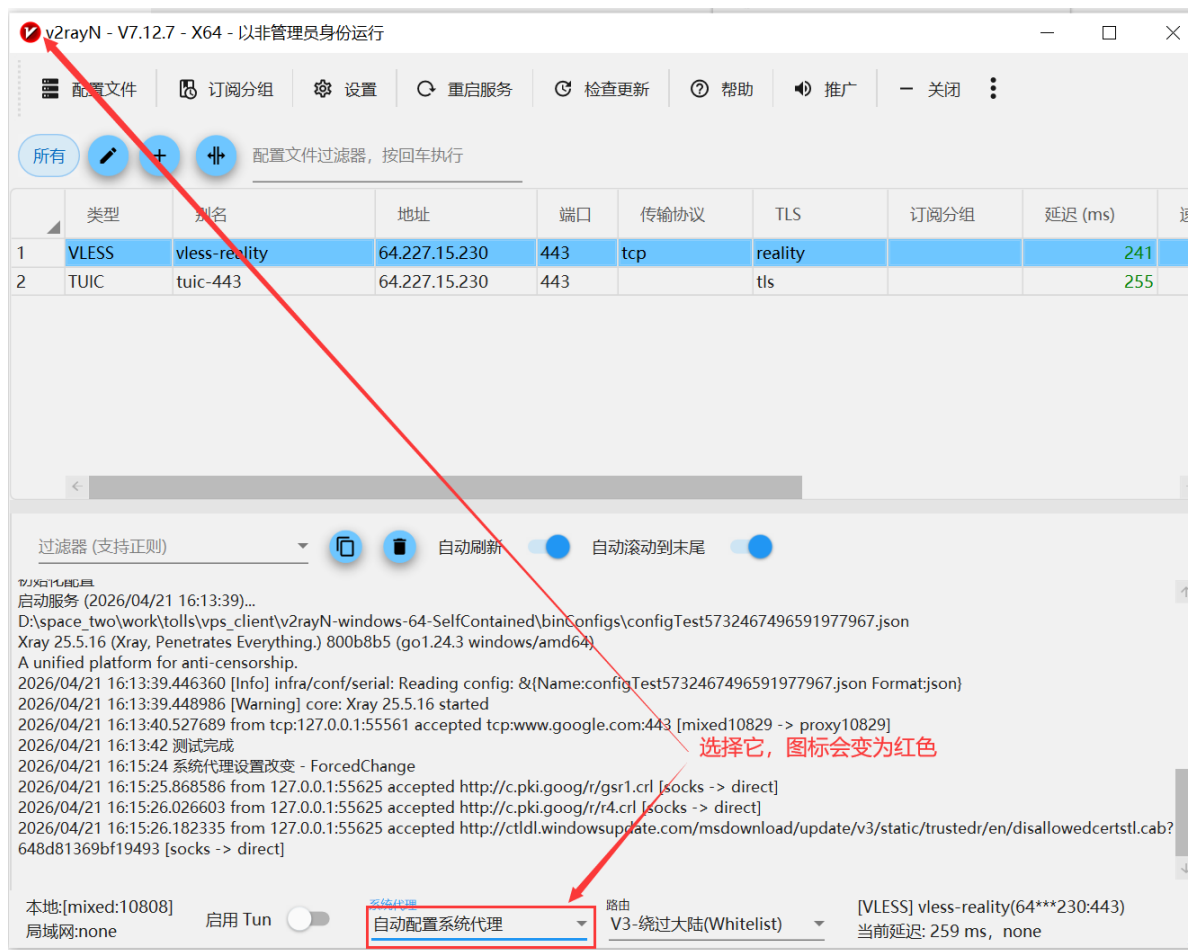


7、配置VPN工具

1、配置小火箭



2、配置手机端hiddfy

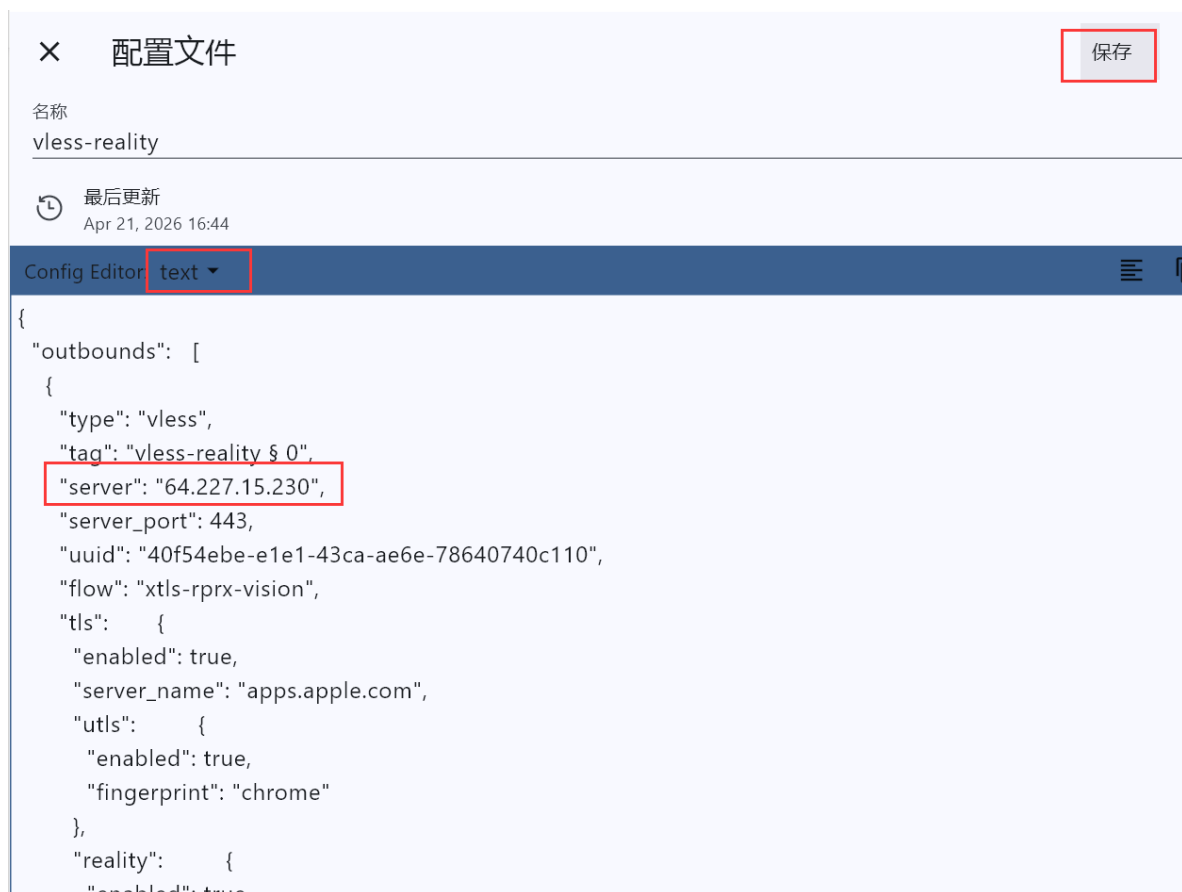

四、web段开启S-UI

1、打开cmd

2、输入如下命令

```
ssh -L 2095:127.0.0.1:2095 root@64.227.15.230
```

3、输入密码

之后，要保存全程cmd命令框不关闭

```

root@centos-s-lvcpu-1gb-nyc1:~
Microsoft Windows [版本 10.0.19045.6466]
(c) Microsoft Corporation。保留所有权利。

C:\Users\10247>ssh -L 2095:127.0.0.1:2095 root@64.227.15.230
The authenticity of host '64.227.15.230 (64.227.15.230)' can't be established.
ED25519 key fingerprint is SHA256:eyKxko7DA4YouIKN/+BVX5YKyAR8G5b0y0j+F6EN69s.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '64.227.15.230' (ED25519) to the list of known hosts.
root@64.227.15.230's password:
Activate the web console with: systemctl enable --now cockpit.socket

Last login: Tue Apr 21 07:06:07 2026 from 198.211.111.194
[root@centos-s-lvcpu-1gb-nyc1 ~]#

```

4、进入S-UI操作页面

在window系统中不开启 hiddify 等vpn工具时，可看如下操作

5、打开 v2rayN

6、修改系统代理

7、修改ip地址

