

Kingdomino: Enter the Virtual World

Hai Duong, Tran

CSE, Frankfurt University of Applied Sciences
Frankfurt am Main, Germany
hai.tran2@stud.fra-uas.de

Pham Minh Tuan, Bui

CSE, Frankfurt University of Applied Sciences
Frankfurt am Main, Germany
pham.bui@stud.fra-uas.de

Abstract—This paper presents a digital adaptation of the board game Kingdomino, developed using Java and the LibGDX framework. Our implementation leverages an event-driven architecture, a flood-fill algorithm for scoring, and shader-based rendering to enhance the user experience. We explore key aspects of game logic, including tile placement validation, turn-based mechanics, and dynamic UI interactions. The paper details the design choices, algorithms, and modular structure of the system, ensuring efficiency and scalability. Additionally, we evaluate game performance through experimental results and discuss future improvements, such as AI integration and multiplayer capabilities.

Index Terms—Kingdomino, boardgame, implementation, game development, OOP

I. INTRODUCTION

Kingdomino [1] is a strategic tile placement game where players act as lords expanding their kingdoms. The objective is to construct the most prosperous territory by selecting and placing tiles that represent various terrain types, such as wheat fields, lakes, and mountains. Each tile comprises two sections that must be connected to the existing kingdom based on matching terrain types.

This paper presents a digital adaptation of Kingdomino, developed using Java and the LibGDX framework. Our implementation leverages an event-driven architecture, a flood-fill algorithm for scoring, and shader-based rendering to enhance the user experience. We explore key aspects of game logic, including tile placement validation, turn-based mechanics, and dynamic UI interactions. The paper details the design choices, algorithms, and modular structure of the system, ensuring efficiency and scalability. Additionally, we evaluate game performance through experimental results and discuss future improvements, such as AI integration and multiplayer capabilities.¹

The paper is structured as follows: Section II describes the problem and game mechanics. Section III reviews related work and algorithms. Section IV discusses teamwork and collaboration tools. Section V outlines the proposed approaches, including the event-driven architecture and input handling. Section VI and Section VII detail the implementation, including game states, tile placement, scoring mechanisms, graphical enhancements, and visual effects. Section VIII presents experimental results and performance analysis. Finally, Section IX concludes the paper and suggests future work.

¹The source code for the Kingdomino digital adaptation can be found on GitHub at <https://github.com/fuisl/kingdomino>.

II. PROBLEM DESCRIPTION

The primary goal in Kingdomino is to construct the most prestigious kingdom by strategically placing tiles within a constrained 5×5 grid. Players must explore various terrain types—fields, lakes, mountains, forests, meadows, and swamps—and connect them to their existing kingdom while adhering to specific placement rules. Each tile consists of two sections, and at least one section must match the terrain type of an adjacent tile. Crowns on tiles act as multipliers to the score of connected terrain groups, encouraging players to prioritize valuable combinations.

Players compete for tiles through a selection mechanism that balances high-value tiles with the consequence of selecting later in subsequent rounds. This creates an optimization problem where players must maximize immediate gains while strategically positioning themselves for future moves. The game concludes when each player has filled their grid or can no longer place tiles, with scoring determining the winner based on terrain connectivity and crown placements.



Fig. 1. Kingdomino Board Game.

A. Formal Description

The game involves the following components and constraints:

1) Components:

- Tiles:** Each tile consists of two sections, each representing one of the six terrain types (fields, lakes, mountains, forests, meadows, and swamps). Certain tiles include crowns, which serve as score multipliers.
- Kingdom:** A 5×5 grid where tiles are placed. Each player starts with a central tile (wild type) and builds outward.

- **Selection Order:** Players select tiles in descending order of tile value (higher numbers first) and use their selection to determine the order in subsequent rounds.

2) *Rules:*

• **Placement:**

- Tiles must connect to at least one adjacent tile with the same terrain type (horizontally or vertically).
- The grid is limited to 5×5 dimensions; any tile that cannot be placed is discarded.

• **Scoring:**

- Points are calculated as the product of the number of connected tiles of the same terrain and the number of crowns within the connected group.
- Bonuses include:
 - * +10 points for placing the central castle at the grid's center.
 - * +5 points for completing a full grid.

• **Game Variants:**

- A 7×7 grid variant for advanced play.
- Multi-round gameplay (Dynasty mode) with cumulative scores.

3) *Objective:* Maximize the total score by constructing a kingdom that balances large connected terrain groups with crown placements, while competing against other players for optimal tile selection.

B. Examples of Gameplay

Gameplay is explained in Appendix A.

III. RELATED WORK

Board games like Carcassonne [2] and Patchwork [3] offer valuable insights into the mechanics of tile placement and scoring, making them relevant to our implementation of Kingdomino. Carcassonne challenges players to build cities, roads, and fields by placing tiles based on terrain type, a mechanic that closely aligns with Kingdomino's terrain-matching rules. Similarly, Patchwork emphasizes the efficient use of a constrained grid, much like Kingdomino's 5×5 board, where players must optimize placement for maximum scoring. These games demonstrate how simple mechanics can result in complex decision-making, a feature we aim to replicate in our project.

In addition to inspiration from traditional board games, the implementation of Kingdomino leverages several key computational and architectural techniques. The scoring mechanism, for instance, utilizes a flood-fill algorithm [4] to evaluate the connected terrain groups and their associated scores. This algorithm, commonly employed in image processing and graph traversal [5], provides an efficient way to traverse and calculate properties of contiguous regions. Its application in Kingdomino ensures accurate and performant scoring calculations, even as the board becomes increasingly complex during gameplay.

The game is designed using an event-driven architecture [4], [6], where interactions such as tile placement and scoring updates are managed asynchronously through an EventManager. This approach is prevalent in modern game frameworks and engines, such as LibGDX, Unity [7], and Unreal Engine [8], and ensures a clear separation between game logic and user input. By decoupling these components, the design achieves improved modularity and scalability, enabling future enhancements such as AI integration or multiplayer features. The intention was to implement Entity-Component-System (ECS) architecture [9] to further improve the game's performance and scalability. But we did not strictly follow this architecture for flexibility and simplicity.

Furthermore, the aesthetic design of Kingdomino draws from pixel-art-inspired games, including Balatro [10], which use vibrant colors and minimalist textures to create a visually engaging experience. This style has been adopted to maintain the simplicity of the board game while enhancing the digital adaptation with a modern and nostalgic visual appeal.

Finally, the use of the LibGDX framework [11] streamlines development, particularly in rendering, asset management, and input handling. By leveraging tools such as TextureAtlas [12] for managing game assets and InputMultiplexer for handling player interactions, the framework supports an efficient implementation of Kingdomino's mechanics and aesthetics. This integration aligns with industry-standard practices for creating scalable, interactive applications.

Incorporating these approaches and inspirations, the implementation of Kingdomino aims to balance simplicity, efficiency, and engagement, ensuring a faithful and enjoyable digital representation of the original board game.

IV. TEAMWORK

We divided the project into backend (game logic) and frontend (GUI), using GitHub [13] ecosystem for tracking and communication. We also followed SCRUM planning techniques.²

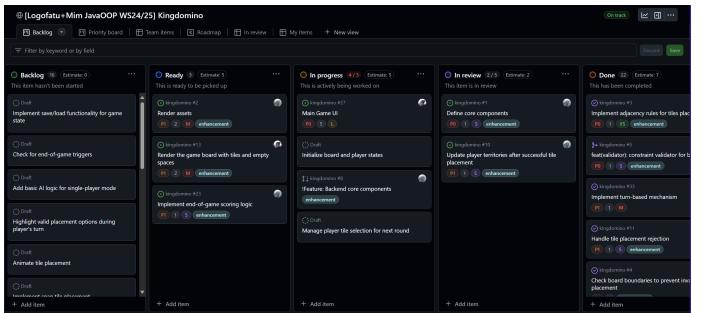


Fig. 2. Kanban Board implements SCRUM planning technique.

A. Roles and Responsibilities

Hai Duong Tran handled backend logic, including tile placement rules, scoring, and game flow. He also integrated the

²see our initial planning on GitHub Project at <https://github.com/users/fuisl/projects/15>

flood-fill algorithm and worked on shaders and effects. Pham Minh Tuan Bui focused on the GUI, rendering game elements with LibGDX, and work on creating our original assets for this project. He also worked on visual aesthetics. Both members contributed to the success of this project.

We collaborated on various aspects not just within our scope and responsibilities. We held regular meetings, and conducted code reviews to maintain quality and consistency. This approach enhanced productivity and understanding of the project.

B. Collaboration Tools and Workflow

We communicated primarily through GitHub Issues and Pull Requests for tracking and code reviews. Each member worked on separate branches, ensuring main branch stability. Code reviews were conducted via Pull Requests (Fig 4), maintaining code quality. We also used Messenger and in-person meetings for communication, documenting progress through commit messages and digital drafts.

C. Gitflow Workflow

We adopted the Gitflow workflow [14] for version control, which is an industry-standard branching model for Git [15]. This approach helps manage the development process by organizing branches and ensuring a clear path from development to production.

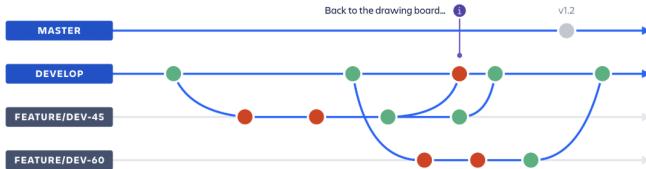


Fig. 3. Gitflow Workflow.

The Gitflow workflow consists of the following branches:

- **main**: The main branch containing production-ready code.
- **dev**: The integration branch for features and fixes.
- **feature/***: Branches for developing new features.
- **release/***: Branches for preparing releases.
- **hotfix/***: Branches for quick fixes to production code.

This workflow allows for parallel development, efficient collaboration, and a structured release process.

V. PROPOSED APPROACHES

A. Event-Driven Architecture

Kingdomino's digital adaptation uses an event-driven architecture to manage user interactions, game state transitions, and visual effects efficiently. This approach decouples game logic, input handling, and rendering, improving performance, modularity, and maintainability.

Although LibGDX does not explicitly provide an event-driven architecture, we designed the game to integrate

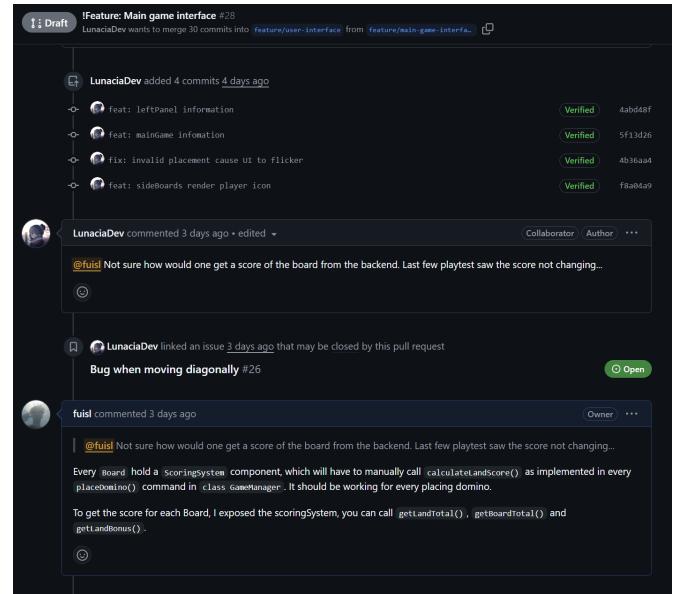


Fig. 4. A conversation in one Pull Request.

LibGDX's event handling system with our custom event system, effectively implementing our own game engine. This hybrid approach allows us to leverage LibGDX's rendering and input processing capabilities while implementing our event-driven logic for custom background tasks and UI interactions.

B. Custom Game Engine

1) **Event**: The Event class encapsulates actions that can be executed immediately or after a delay. It supports different types of triggers:

- **IMMEDIATE**: Executes the event as soon as it is created.
- **BEFORE**: Executes an action and then enforces a delay before completing.
- **AFTER**: Executes an action only after a specified delay.
- **CONDITION**: Executes when a certain condition is met.
- **EASE**: Implements smooth transitions for visual effects.

Each event has attributes such as blocking, blockable, complete, and delay, allowing for controlled execution within the game loop.

2) **EventManager**: The EventManager is the central hub for executing game events, maintaining concurrent queues for:

- **Base**: Core gameplay logic.
- **Input**: Player interactions.
- **Background**: Visual effects.
- **Sound**: Audio effects.
- **Other**: Miscellaneous actions.

The event manager ensures concurrency safety using ConcurrentLinkedQueue [16], [17], preventing race conditions when processing multiple asynchronous actions.³

³The event system may leak memory due to the creation of new events and their addition to the queue, but this is mitigated by garbage collection and the low trigger rate.

3) *GameTimer*: The GameTimer class tracks real-time, total elapsed time, and background animation timing. It synchronizes event execution by accumulating delta time (dt) and updating event processing intervals accordingly. The timer provides a consistent timing reference for executing delayed events and easing functions.⁴

4) *Ease*: The Ease class facilitates smooth animations for background effects, screen transitions, and UI enhancements.

It supports different interpolation [18] methods:

- **LERP (Linear Interpolation)**: Gradually changes a value over time.
- **ELASTIC**: Simulates spring-like motion for dynamic effects.
- **QUAD**: Creates a smooth acceleration effect.

This is particularly useful for animations such as screen shaking when an invalid move is made, or color transitions when switching player turns.

C. Input Handling

Kingdomino implements manual input event processing instead of relying on LibGDX's built-in event loop. The input handling is divided into two main components: BoardInputController and BoardInputProcessor, which handle input from controllers and keyboards, respectively. These components translate user inputs into structured events that are processed by the system.

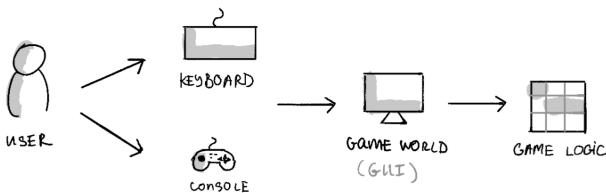


Fig. 5. Interfaces between user and game world.

1) *InputController*: AbstractInputController class handles input from game controllers. It captures axis movements and button presses, translating them into actions such as moving, rotating, placing, or discarding a domino. The controller input is processed with a dead zone to ignore small, unintended movements, ensuring precise control.

```

1 // filepath: /e:/projects/kingdomino/core/src/main/java/dev/
2   kingdomino/game/AbstractInputController.java
3 public abstract class AbstractInputController implements
4   ControllerListener {
5   @Override
6   public boolean buttonDown(...) { return handleStatus; }
7
8   @Override
9   public boolean buttonUp(...) { return handleStatus; }
10
11  @Override
12  public boolean axisMoved(...) { return handleStatus; }
13}
  
```

⁴The GameTimer accumulates time without resetting, which can eventually lead to an overflow if the game is left running for an extended period

2) *InputProcessor*: AbstractInputProcessor class implements the InputProcessor interface with all input events from keyboard. It is being rejected by default. Specific input events can be handled by extending this class and overriding the relevant methods.

```

1 // filepath: /e:/projects/kingdomino/core/src/main/java/dev/
2   kingdomino/game/AbstractInputProcessor.java
3 package dev.kingdomino.game;
4
5 import com.badlogic.gdx.InputProcessor;
6
7 public abstract class AbstractInputProcessor implements
8   InputProcessor {
9   @Override
10  public boolean keyDown(int keycode) { return false; }
11
12  @Override
13  public boolean keyUp(int keycode) { return false; }
14  // ...existing code...
15}
  
```

3) *Input Handlers*: The BoardInputHandler and DraftInputHandler classes are responsible for translating the inputs received from instance of AbstractInputController and AbstractInputProcessor into signals that the system can process. These handlers manage the state of the game and ensure that inputs are processed correctly based on the current game state.

```

1 // filepath: /e:/projects/kingdomino/core/src/main/java/dev/
2   kingdomino/game/BoardInputHandler.java
3 public class BoardInputHandler {
4   // ...existing code...
5   public boolean keyDown(Action action) {
6     if (gameManager.getCurrentState() != GameManager.
7       GameState.TURN_PLACING) {
8       return false;
9     }
10    update(); // update states
11    Event e = null;
12    switch (action) {
13      // ...existing code...
14      case MOVE_RIGHT:
15        // ...existing code...
16      case ROTATE_CLOCKWISE:
17        // ...existing code...
18      case PLACE_DOMINO:
19        // ...existing code...
20      case DISCARD_DOMINO:
21        // ...existing code...
22      default:
23        break;
24    }
25    if (e != null) {
26      eventManager.addEvent(e.copy(), "input", false);
27      updated = true;
28    }
29    return true; // returning true indicates the event
30    was handled
31  }
32  // ...existing code...
33}
  
```

To get the event from the input, each input has to translate the keycode into a corresponding action using the translateKeyCodeToAction method, which maps specific key presses to game actions such as moving, placing, or discarding a domino.

Simmilarly, DraftInputHandler class handles translated input events for selecting next dominoes with its own set of actions.

```

1 // filepath: /e:/projects/kingdomino/core/src/main/java/dev/
  kingdomino/game/DraftInputHandler.java
2 public boolean keyDown(Action action) {
3     // ...existing code...
4     switch (action) {
5         case MOVE_UP:
6             // ...existing code...
7         case MOVE_DOWN:
8             // ...existing code...
9         case SELECT_DOMINO:
10            // ...existing code...
11        default:
12            break;
13    }
14    //...existing code...
15 }

```

4) Key Features of Input Handling: The input handling system in Kingdomino features deferred execution, where actions are queued and processed asynchronously, state-based processing that ensures input is handled only in relevant game states, and feedback integration that triggers audio and visual feedback for invalid actions.

5) Input Handling: The input handling system in Kingdomino features deferred execution, where actions are queued and processed asynchronously, state-based processing that ensures input is handled only in relevant game states, and feedback integration that triggers audio and visual feedback for invalid actions.

Algorithm 1 Handling Movement Events

Require: Player input (WASD keys or joystick)
Ensure: Updated domino position

```

Capture player input
if Input is valid then
    Create a move event with delay for smooth input
    Add event to event manager queue
    Play sound effect for invalid move
    Trigger screen shake effect
end if

```

D. User Interface

The user interface (fig 11) (UI) of Kingdomino is designed for intuitive and engaging gameplay. It includes the game board, player information, and interactive controls, ensuring all necessary information is easily accessible. This section details the design and implementation of the UI components, including layout design, main widgets, and user interaction.

1) User Interface Layout Design: We chose to design the user interface based on tables, where each component or table is placed within a cell as demonstrated in 6.

We mimic how the game state of Kingdomino is distributed in real life by having the current player's game board being placed prominently in the center of the screen, whilst other informations that the player can find are placed to the side. We also decided to show how many points each player is currently scoring with their board as well, because it could enable more strategic choice if players know exactly how their board is doing compared to other, instead of focusing on picking the tile that would yield the most point for their board.

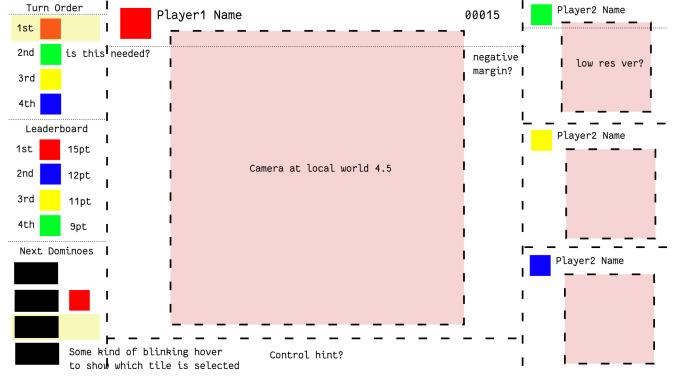


Fig. 6. First UI design prototype.

VI. IMPLEMENTATION DETAILS

A. Game States

In the implementation of Kingdomino, the game progresses through a series of well-defined states. Each state represents a distinct phase of the game, ensuring a structured flow from the beginning to the end. The primary game states include:

- Init:** The initial state where the game components are set up and initialized.
- Setup:** This state involves preparing the game board, shuffling tiles, and setting up players for the game.
- Turn Start:** Marks the beginning of a player's turn, where the current player and available tiles are determined.
- Turn Placing:** The state where the player places their selected tile on the board according to the game rules.
- Turn Choosing:** The state where the player selects a tile for the next round.
- Turn End:** Concludes the current player's turn and transitions to the next player.
- Game Over:** The final state when the game ends, and no more moves can be made.
- Results:** Displays the final scores and determines the winner based on the game rules.

Each state transitions to the next based on player actions and game logic. The following diagram illustrates the state transitions:

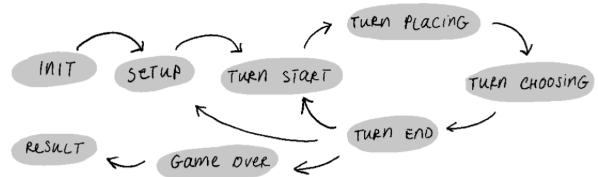


Fig. 7. Game State Transitions.

B. Game Units and High-Level Architecture

Tile is the essential, smallest accessible unit for this game. Tile holds 2 most important attributes: TerrainType and Number of Crowns.

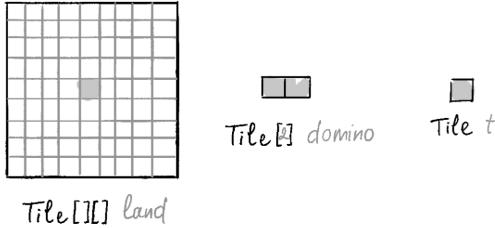


Fig. 8. Units of Tile.

Board is 2-dimensional array of type Tile. Though Board has more attributes and methods which supports interactions between GameManager and Board, Tile[][] is where Tile being store and perform logic on.

On the other hand, Domino is an interface between human player and Board. It holds informations about location, validator, etc., which related to action that can be performed on Board (like moving, rotating or placing Domino). The actual Domino will not be placed in Board, only the two Tile that composes Domino would be added. Domino will then be discarded.

C. Tile Placement and Board Validation

1) *Domino and DominoController*: The Domino class represents a domino in the game, consisting of two tiles and a controller. It provides methods to rotate, move, and set the position of the domino. The DominoController class handles the rotation and placement of dominos, maintaining the state of the tiles and their positions.

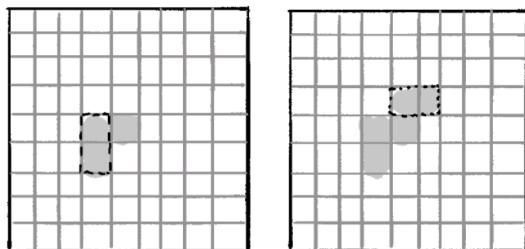


Fig. 9. Placing Domino.

```

1 // filepath: /e:/projects/kingdomino/core/src/main/java/dev/
  kingdomino/game/Domino.java
2 public class Domino {
3     // ...existing code...
4     public void rotateDomino(boolean clockwise, boolean
5         shouldOffset) {
6         dominoController.rotateDomino(clockwise,
7             shouldOffset);
8     }
9     // ...existing code...

```

```

1 // filepath: /e:/projects/kingdomino/core/src/main/java/dev/
  kingdomino/game/DominoController.java
2 public class DominoController {
3     // ...existing code...
4     public void rotateDomino(boolean clockwise, boolean
5         shouldOffset) {
6         lastRotationIndex = rotationIndex;

```

```

6         rotationIndex = (rotationIndex + (clockwise ? 1 : 3)
7             ) % 4;
8
9         // rotate the 2nd Tile with 1st Tile as center
10        tileRotator.rotate(posTileA, posTileB, rotationIndex
11            , shouldOffset);
12
13        lastAction = 1;
14    }
// ...existing code...

```

2) *TileRotator*: The TileRotator class is responsible for rotating tiles around a center position. It uses a predefined set of directions to determine the new position of the tile after rotation.

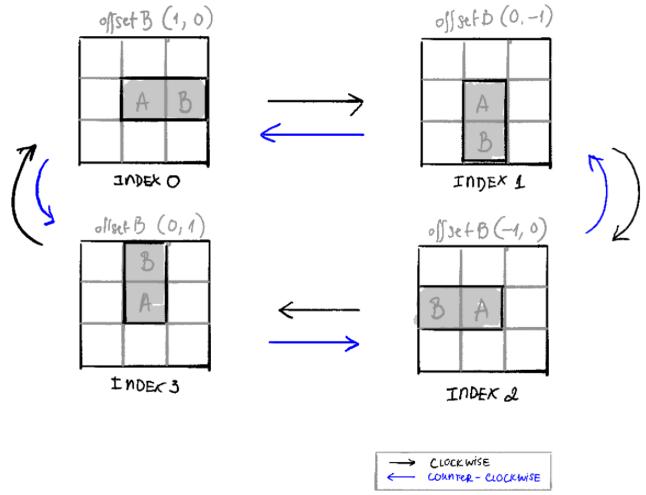


Fig. 10. Rotate Domino by moving TileB relative to TileA.

The rotation logic for the domino can be described as follows:

If rotating clockwise: index = (index + 1) mod 4

If rotating counter-clockwise: index = (index + 3) mod 4

```

1 // filepath: /e:/projects/kingdomino/core/src/main/java/dev/
  kingdomino/game/TileRotator.java
2 public class TileRotator {
3     // ...existing code...
4     public void rotate(Position center, Position tilePos,
5         int rotationIndex, boolean shouldOffset) {
6         Position newPos = center.add(directions[
7             rotationIndex]);
8         tilePos.set(newPos);
9     }
// ...existing code...

```

3) *Tile Placement Validation*: The TileValidator class is responsible for validating the placement of tiles on the game board. It ensures that tiles are placed within bounds and are free from occupation. The following code snippet shows the implementation of the TileValidator class:

```

1 // filepath: /e:/projects/kingdomino/core/src/main/java/dev/
  kingdomino/game/TileValidator.java
2 public class TileValidator {

```

```

3 // ...existing code...
4 public boolean isTilePlaceable(Tile tile, int x, int y)
5 {
6     return isTileFree(x, y) && isTileWithinBound(x, y);
7 }
8 // ...existing code...
9 public boolean isTileWithinBound(int x, int y) {
10    if (x < minX || x > maxX) {
11        if (abs(x - minX) + 1 > size || abs(x - maxX) +
12            1 > size) {
13            return false;
14        }
15        if (y < minY || y > maxY) {
16            if (abs(y - minY) + 1 > size || abs(y - maxY) +
17                1 > size) {
18                return false;
19            }
20        }
21    }
22    return true;
23 }
24 // ...existing code...
25 public boolean isTileFree(int x, int y) {
26    if (isTileWithinLand(x, y)) {
27        return land[y][x] == null;
28    }
29    return false;
30 }
31 // ...existing code...

```

D. Scoring Mechanism

The flood-fill algorithm is a computer graphics algorithm used to determine the area connected to a given node in a multi-dimensional array. It is commonly used in tools like paint bucket in graphics editors to fill bounded areas with color.

In the context of Kingdomino, the flood-fill algorithm is utilized to calculate the score by identifying and evaluating connected groups of the same terrain type. The algorithm traverses the game board, starting from a given tile, and recursively explores all adjacent tiles of the same terrain type. This allows the game to efficiently compute the size of each connected terrain group and apply the scoring rules based on the number of crowns within these groups.

Below is a pseudocode representation of the recursive 4-way flood-fill algorithm:

Algorithm 2 Flood-fill Algorithm

Require: Tile

Ensure: Flood-filled Region

if Tile is not inside Region **then return**

end if

Set the node

Perform Flood-fill one step to the south of Tile

Perform Flood-fill one step to the north of Tile


Perform Flood-fill one step to the west of Tile

Perform Flood-fill one step to the east of Tile

return

This algorithm is in its original form. For Kingdomino with multiplicative scoring system, we need to modify the algorithm to calculate both the spanned region (area) and also count the number of crowns within the connected group. See Listing 1 for the implementation details.

To better illustrate the concept of flood-fill, consider the following example with a 9×9 grid:

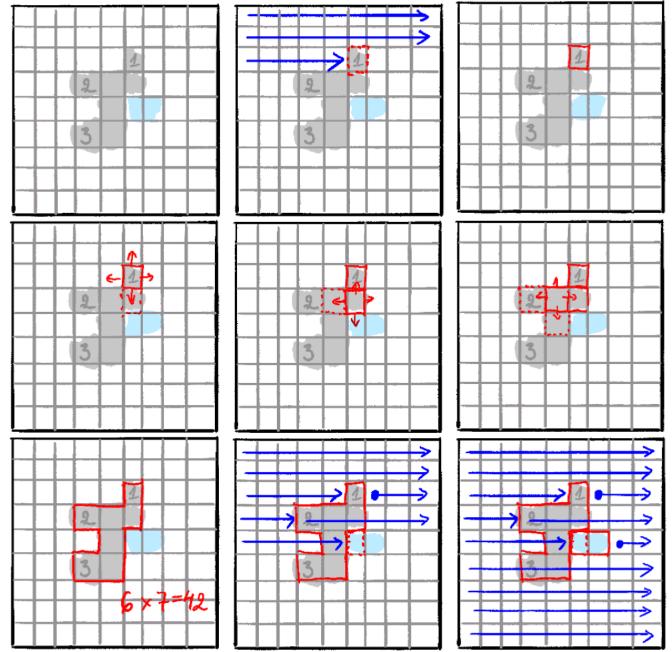

In this example, the algorithm starts at the selected tile (highlighted in red). It then recursively explores all adjacent tiles of the same terrain type, marking them as visited and counting the number of crowns within the connected group. The process continues until all connected tiles of the same terrain type have been evaluated, resulting in the final score for that terrain group.

Below is the actual implementation of the flood-fill algorithm in Kingdomino:

```

1 private int floodFill(int x, int y, TerrainType terrain,
2     boolean[][] visited) {
3     if (x < 0 || x >= land.length || y < 0 || y >= land.
4         length) {
5         return 0;
6     }
7
8     if (land[y][x] == null || visited[y][x] || land[y][x]
9         .getTerrain() != terrain) {
10        return 0;
11    }
12
13    totalCrown += land[y][x].getCrown();
14    visited[y][x] = true;
15
16    return 1 +
17        floodFill(x + 1, y, terrain, visited) +
18        floodFill(x - 1, y, terrain, visited) +
19        floodFill(x, y + 1, terrain, visited) +
20        floodFill(x, y - 1, terrain, visited);
21 }

```

Listing 1. Flood-Fill Algorithm

E. UML/Class Diagram

F. Used Libraries and Environment

VII. GRAPHICAL ENHANCEMENT AND VISUAL EFFECTS

A. Visual and Effects

Juicing up a game [19] refers to adding small, often subtle, visual and audio effects that enhance the player's experience and make the game feel more responsive and engaging. These enhancements, although not essential to the core gameplay mechanics, play a crucial role in creating a polished and enjoyable user experience. Here are some key reasons why juicing up the game is important:

- **Enhanced Feedback:** Visual and audio effects provide immediate feedback to the player's actions, making the game feel more responsive. For example, a screen shake effect when an invalid move is made or a sound effect when a tile is placed correctly can significantly improve the player's interaction with the game.
- **Increased Engagement:** Juicing up the game with dynamic animations, smooth transitions, and appealing visual effects can capture the player's attention and keep them engaged for longer periods. This is particularly important in maintaining player interest and encouraging repeated play.
- **Improved Aesthetics:** A well-juiced game often looks and feels more polished and professional. The use of shaders, color transitions, and other visual enhancements can elevate the overall aesthetic appeal of the game, making it more attractive to players.
- **Emotional Impact:** Subtle effects like background music, sound effects, and visual cues can evoke emotions and create a more immersive experience. This emotional connection can enhance the player's enjoyment and satisfaction with the game.
- **User Experience:** Juicing up the game contributes to a smoother and more intuitive user experience. By providing clear visual and audio cues, players can better understand the game mechanics and navigate the game environment with ease.

In our implementation, juicing up the game involves incorporating shader-based rendering for visual effects, dynamic background transitions, screen shake effects, and carefully designed audio feedback. These enhancements not only make the digital adaptation of the board game more engaging but also ensure that players have a memorable and enjoyable experience.

Kingdomino's digital adaptation incorporates various visual and audio effects to enhance the user experience, making the game feel more responsive and engaging. Inspired by the talk "Juice it or lose it" by Martin Jonasson & Petri Purho⁵, we aimed to create a game that feels alive and responds to player actions with minimal input.

⁵This is far one of the most inspiring videos I personally found. Check out the video at <https://youtu.be/Fy0aCDmgnxg>.

1) **Background Effects:** The BackgroundManager class manages dynamic background effects using shader-based rendering. Key features include:

- **Color Transitions:** Smooth transitions between different background colors to indicate changes in game states or player turns.
- **Spinning Effects:** Controlled spinning of the background to add a sense of motion and excitement during gameplay.
- **Screen Shake:** A subtle screen shake effect to provide feedback for significant events, such as invalid moves or special actions.

Algorithm 3 Shake Algorithm

Require: Object, Duration, Magnitude

Ensure: Object's position is shaken and reset

Initialize time to 0

Record object's original position (originalX, originalY)

while time is less than duration **do**

 Increment time by delta

 Calculate currentMagnitude as magnitude scaled by remaining duration

 Generate random offsets (offsetX, offsetY) within currentMagnitude

 Set object's position to (originalX + offsetX, originalY + offsetY)

end while

Reset object's position to (originalX, originalY)

2) **Audio Effects:** The AudioManager class handles the game's audio effects, providing immediate feedback for player actions. Key features include:

- **Background Music:** Continuous background music that sets the tone for the game.
- **Sound Effects:** Various sound effects for actions such as tile placement, selection, rotation, and scoring in order to provide immediate feedback for each action the player take.

3) **Shader-Based Rendering:** Kingdomino leverages shader-based rendering using OpenGL Shader language to enhance visual effects and provide a more immersive experience. Two primary shaders are used: the CRT shader and the background shader. The shader codes are an adaptation of existing shaders of Balatro [10] which adapted from Löve2D written in Lua to LibGDX Framework using with Java.

a) **CRT Shader:** The CRT shader simulates the appearance of an old CRT monitor, adding effects such as distortion, scanlines, noise, and bloom. It consists of a vertex shader and a fragment shader.

- **Vertex Shader (crt.vert):** Applies transformations to simulate a parallax effect based on screen scale.
- **Fragment Shader (crt.frag):** Implements various visual effects, including barrel distortion, edge feathering, glitch offsets, chromatic aberration, scanlines, and noise overlay.

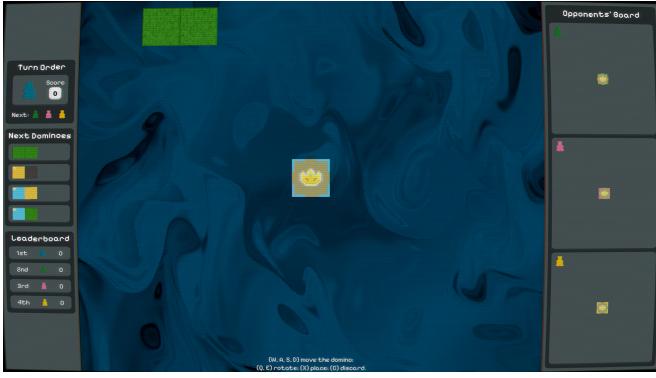


Fig. 11. Final GUI with shaders (background and CRT overlay) on.



Fig. 12. Final GUI without shaders.

b) Background Shader: The background shader creates dynamic and visually appealing backgrounds with effects like spinning and color transitions.

- **Vertex Shader (background.vert):** Passes texture coordinates to the fragment shader.
- **Fragment Shader (background.frag):** Applies pixelation, swirl, and paint effects based on time and spin parameters, along with color blending for a vibrant background.

These visual and audio enhancements contribute to a more engaging and immersive gaming experience, making Kingdomino not just a digital adaptation but a lively and responsive game that captivates players.

B. Game Textures

Aside from the image of the King which was taken by Adam Carmichael [20] and the font Pixelify Sans [21], all of the game's texture are hand-drawn. The tile are created from a 48x48 pixel square of the color representative of its terrain type, before applying Perlin Noise [22] so as to reduce the monotonousness of the texture. We deliberately choose low texture size as large, detailed texture would become inelligible by the CRT Shader.

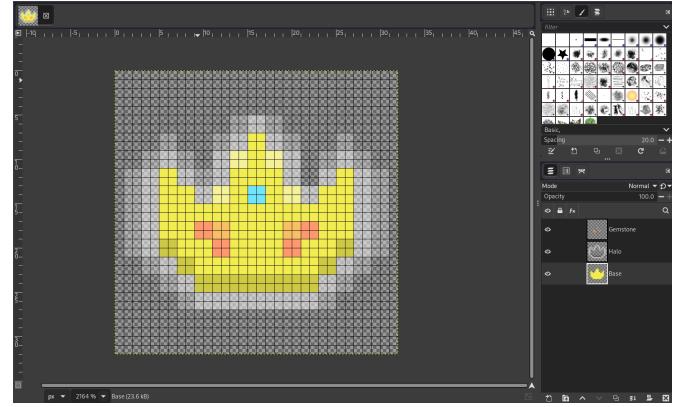


Fig. 13. Original design file of the Crown.

VIII. EXPERIMENTAL RESULTS

A. Performance Analysis

To investigate the performance of the game, we used VisualVM version 2.1.10 [23] to profile the game's resource consumption whilst running. The game is run on a Linux machine with Fedora Sway Spin 41 using OpenJDK Java 17. For profiling memory, we used the Startup Profiler plugin [24], configured to Java 17 with 64-bit architecture, listen to port 5140. For profiling performance, we launched the game, then attached VisualVM. The reason is that we wanted to identify bottleneck within the game logic, but if we used Startup Profiler, it will record draw calls which would cause other performance hotspot to be drowned out, as draw calls take up majority of execution time. Our findings are as follow:



Fig. 14. Resource usage graph of the game

1) Memory Usage: The CPU usage spike at the start of the game is normal, as the game is loading all needed assets from disk to memory, as well as initializing its classes. The memory usage graph suggested that the application is allocating many objects over time, causing the heap usage to increase. Most of these objects were not referenced, as shown when the garbage collector were running, the heap usage go back to previous normal level.

Our data suggested that the Event, Ease and Position class are causing the problem. However the performance impact is

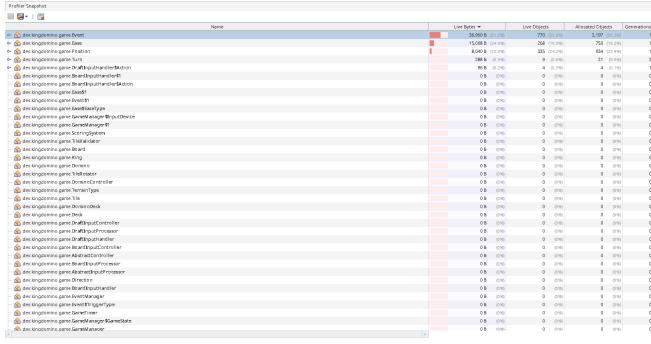


Fig. 15. Memory usage of game classes, sorted by live bytes at the end of the profiling session.

minimal as the garbage collector is only invoked at about once every two minutes.

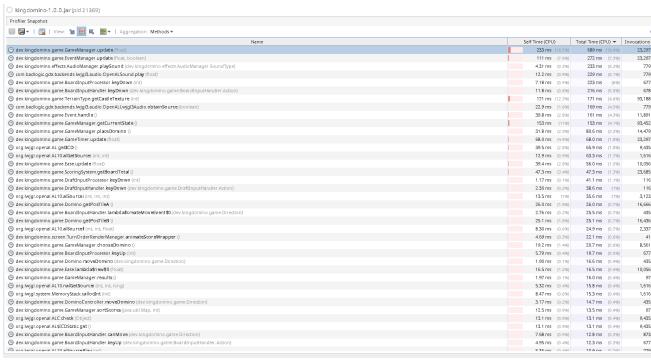


Fig. 16. CPU time usage of game method, sorted descending

2) *CPU Usage:* The CPU time usage of the game's method is generally correlated to the invocation count, with high usage correspond to high CPU time consumption. The time used per call is minimal, suggesting that our implementation is efficient.

B. Correctness and Scalability

C. UI/Gameplay Smoothness

IX. CONCLUSIONS AND FUTURE WORK

Lorem ipsum dolor sit amet, consectetur adipiscing elit.

A. What We Learned

B. Future Development

APPENDIX A GAMEPLAY MECHANIC

Kingdomino is a strategic tile placement game where players aim to construct the most prosperous kingdom by selecting and placing tiles representing various terrain types. The game is played over a series of rounds, with each player taking turns to select and place tiles. Below is a detailed explanation of the gameplay mechanics based on the given game rules.

A. Setup

- Each player receives a starting tile and a king token.
- Shuffle the domino tiles and place them in a draw pile.
- Draw the first set of tiles equal to the number of players and arrange them in ascending order.
- Randomly determine the player order for the first round.

B. Turn Sequence

Each round consists of the following phases:

- Tile Selection:* 1. Players take turns selecting a tile from the available set. 2. The player with the lowest-numbered tile from the previous round selects first. 3. Place the selected tile in front of the player and position the king token on it.

- Tile Placement:* 1. Players place their selected tile on their 5×5 grid. 2. Tiles must be placed adjacent to an existing tile, with at least one section matching the terrain type of an adjacent tile. 3. If a tile cannot be placed, it is discarded.

- Next Round Preparation:* 1. Draw a new set of tiles equal to the number of players and arrange them in ascending order. 2. Players select tiles for the next round based on the order of their current tiles.

C. Scoring

- At the end of the game, players calculate their scores based on the connected terrain groups and crowns. 2. Points are calculated as the product of the number of connected tiles of the same terrain and the number of crowns within the connected group. 3. Bonuses include:

- +10 points for placing the central castle at the grid's center.
- +5 points for completing a full grid.

D. Game End

- The game ends when all tiles have been placed or discarded.
- The player with the highest score wins the game.

E. Example of Gameplay

Consider a two-player game: 1. Player A selects a tile with a forest and a crown, placing it adjacent to their starting tile. 2. Player B selects a tile with a lake and a meadow, placing it adjacent to their starting tile. 3. In the next round, Player B selects first due to having the lower-numbered tile. 4. The game continues until all tiles are placed, and scores are calculated based on connected terrain groups and crowns.

REFERENCES

- [1] Wikipedia contributors, "Kingdomino — Wikipedia, the free encyclopedia," 2024, [Online; accessed 19-January-2025]. [Online]. Available: <https://en.wikipedia.org/w/index.php?title=Kingdomino&oldid=1243538299>
- [2] —, "Carcassonne (board game) — Wikipedia, the free encyclopedia," 2024, [Online; accessed 19-January-2025]. [Online]. Available: [https://en.wikipedia.org/w/index.php?title=Carcassonne_\(board_game\)&oldid=1254238483](https://en.wikipedia.org/w/index.php?title=Carcassonne_(board_game)&oldid=1254238483)
- [3] —, "Patchwork (board game) — Wikipedia, the free encyclopedia," 2024, [Online; accessed 19-January-2025]. [Online]. Available: [https://en.wikipedia.org/w/index.php?title=Patchwork_\(board_game\)&oldid=1212675183](https://en.wikipedia.org/w/index.php?title=Patchwork_(board_game)&oldid=1212675183)

- [4] ——, “Flood fill — Wikipedia, the free encyclopedia,” 2024, [Online; accessed 19-January-2025]. [Online]. Available: [https://en.wikipedia.org/wiki/Flood_fill#Stack-based_recursive_implementation_\(four-way\)](https://en.wikipedia.org/wiki/Flood_fill#Stack-based_recursive_implementation_(four-way))
- [5] ——, “Graph traversal — Wikipedia, the free encyclopedia,” 2024, [Online; accessed 19-January-2025]. [Online]. Available: https://en.wikipedia.org/w/index.php?title=Graph_traversal&oldid=1250833600
- [6] ——, “Event-driven architecture — Wikipedia, the free encyclopedia,” https://en.wikipedia.org/w/index.php?title=Event-driven_architecture&oldid=1262812523, 2024, [Online; accessed 19-January-2025].
- [7] Unity Technologies, “Unity,” 2023, game development platform. [Online]. Available: <https://unity.com/>
- [8] Epic Games, “Unreal engine,” 2023, game development platform. [Online]. Available: <https://www.unrealengine.com/>
- [9] Wikipedia contributors, “Entity component system — Wikipedia, the free encyclopedia,” 2024, [Online; accessed 19-January-2025]. [Online]. Available: https://en.wikipedia.org/w/index.php?title=Entity_component_system&oldid=1265223349
- [10] ——, “Balatro (video game) — Wikipedia, the free encyclopedia,” 2025, [Online; accessed 19-January-2025]. [Online]. Available: [https://en.wikipedia.org/w/index.php?title=Balatro_\(video_game\)&oldid=1270307614](https://en.wikipedia.org/w/index.php?title=Balatro_(video_game)&oldid=1270307614)
- [11] Badlogic Games, “Libgdx,” 2024, java game development framework. [Online]. Available: <https://libgdx.com/>
- [12] Wikipedia contributors, “Texture atlas — Wikipedia, the free encyclopedia,” 2024, [Online; accessed 19-January-2025]. [Online]. Available: https://en.wikipedia.org/w/index.php?title=Texture_atlas&oldid=1256529720
- [13] GitHub, “GitHub,” Accessed: 01-February-2025. [Online]. Available: <https://github.com/>
- [14] Atlassian, “Gitflow workflow,” 2025, [Online; accessed 01-February-2025]. [Online]. Available: <https://www.atlassian.com/git/tutorials/comparing-workflows/gitflow-workflow>
- [15] Wikipedia contributors, “Git — Wikipedia, the free encyclopedia,” 2024, [Online; accessed 01-February-2025]. [Online]. Available: <https://en.wikipedia.org/wiki/Git>
- [16] Oracle, “Concurrentlinkedqueue — Java Platform SE 8,” 2025, [Online; accessed 01-February-2025]. [Online]. Available: <https://docs.oracle.com/javase/8/docs/api/java/util/concurrent/ConcurrentLinkedQueue.html>
- [17] Stack Overflow contributors, “How to use concurrentlinkedqueue?” 2025, [Online; accessed 01-February-2025]. [Online]. Available: <https://stackoverflow.com/questions/616484/how-to-use-concurrentlinkedqueue>
- [18] Wikipedia contributors, “Interpolation — Wikipedia, the free encyclopedia,” 2024, [Online; accessed 01-February-2025]. [Online]. Available: <https://en.wikipedia.org/wiki/Interpolation>
- [19] Reddit contributors, “Game juice: The difference between a good game and a great game,” 2025, [Online; accessed 01-February-2025]. [Online]. Available: https://www.reddit.com/r/IndieDev/comments/1adnvs8/game_juice_the_difference_between_a_good_game_and/
- [20] Adam Carmichael, “KingDominoProject,” Accessed: 01-February-2025. [Online]. Available: <https://github.com/Adam-Carmichael/KingDominoProject>
- [21] Stefie Justprince, “Pixelify Sans,” Accessed: 01-February-2025. [Online]. Available: <https://github.com/eifetx/Pixelify-Sans>
- [22] Wikipedia contributors, “Perlin noise — Wikipedia, the free encyclopedia,” Accessed: 01-February-2025. [Online]. Available: https://en.wikipedia.org/wiki/Perlin_noise
- [23] Oracle, “VisualVM: Home,” Accessed: 01-February-2025. [Online]. Available: <https://visualvm.github.io/>
- [24] ——, “VisualVM: Startup Profiler,” Accessed: 01-February-2025. [Online]. Available: <https://visualvm.github.io/startupprofiler.html>