

— FULLONBAAN —
INFOR ERP CONSULTING & TRAINING



INFOR IDM

— ♦ —
Administration

TECHNICAL USER GUIDE

— ♦ —

*A screen-by-screen walkthrough of the Administration workspace in the
Infor Document Management Control Center — Document Types, Attributes,
ACLs, Value Sets, Import / Export.*

PREPARED BY

FullOnBaan

Infor ERP Consulting & Training

EDITION: APRIL 2026 • APPLIES TO: INFOR IDM 2026.04.02-02 — CLOUD

www.fullonbaan.com • fullonbaan@gmail.com

Copyright & Legal Notice

Infor Document Management — Administration Technical User Guide

First Edition • April 2026

© 2026 FullOnBaan. All rights reserved.

TRADEMARKS

Infor, the Infor logo, Infor Document Management (IDM), Infor OS, Infor LN, Infor M3, Infor Syteline, Infor CSI, Baan, Infor Ming.le, ION, Infor Birst, Infor EAM, Infor HCM and all related marks are trademarks or registered trademarks of Infor (US), Inc. and/or its affiliates and subsidiaries. All other product names, company names, brand names, trademarks and logos mentioned in this publication are the property of their respective owners and are used for identification purposes only. Reference to these trademarks is not intended to suggest sponsorship, endorsement or affiliation.

DISCLAIMER

This guide is produced by FullOnBaan for educational and training purposes only. It is not affiliated with, endorsed by, sponsored by, or supported by Infor (US), Inc. or any of its subsidiaries. Screenshots, menu paths and field descriptions are based on the Infor Document Management 2026.04.02-02 release and the publicly available Infor documentation; they may differ from the version installed in your tenant. The information is supplied in good faith and is believed to be accurate at the time of publication, but no representation or warranty of any kind is given regarding completeness, accuracy, reliability or suitability.

The Administration operations described in this guide — creating and editing Document Types, Attributes, ACLs, ACL Rules, Value Sets, and Import / Export — directly control the content data model and the row-level permissions of every document stored in the IDM repository. Readers are solely responsible for testing any change in a non-production environment first and for following their organisation's change-management and approval processes. In no event shall FullOnBaan, the author, or any contributor be liable for any direct, indirect, incidental, consequential or special damages arising from the use of, or the inability to use, the information contained in this guide.

FAIR USE & EDUCATIONAL CONTENT

This publication is made available as part of the FullOnBaan training ecosystem and is intended for licensed Infor customers, consultants and students. Product screenshots are reproduced under fair-use for the purpose of commentary, education and technical training. Readers may print a single copy for their personal study and reference; redistribution in whole or in part, whether electronic or printed, and any form of resale, require prior written consent from the publisher.

PUBLISHED BY

FullOnBaan — Infor ERP Consulting and Training

Website: www.fullonbaan.com

Email: fullonbaan@gmail.com

Phone: +91 63605 93122

LinkedIn: linkedin.com/company/fullonbaan

YouTube: youtube.com/@FullOnBaan

Table of Contents

Infor IDM — Administration Technical User Guide

1. Introduction to the IDM Administration Workspace	4
2. The IDM Control Center Home	7
3. The Administration Tile	10
4. Opening the Document Type List	13
5. Document Type — General Tab	15
6. Document Type — Attributes Tab	18
7. Document Type — ACL Tab	21
8. Document Type — Related Documents Tab	23
9. Document Type — ACL Rules Tab	25
10. General Tab Variation — Sales_Invoice	27
11. General Tab Variation — Purchase Order	29
12. General Tab Variation — Invoice (Base Type)	31
13. Value Set — General Tab	33
14. Value Set — Values Tab	35
15. Import / Export	37
Appendix A — Best Practices Checklist	40
Appendix B — Troubleshooting Quick Reference	41
Appendix C — Reference Links	42

1. Introduction to the IDM Administration Workspace

This guide provides a comprehensive, screen-by-screen walk-through of the Administration area inside the Infor Document Management (IDM) Control Center. Infor IDM is the content-services platform that underpins every Infor ERP application in the CloudSuite — Infor LN, Infor M3, Infor Syteline (CSI), Infor Baan and Infor OS itself all rely on IDM to store, classify, retrieve and govern unstructured content.

The Administration workspace is where a tenant's content data model lives. It is where document types are defined, where controlled vocabularies (value sets) are maintained, and where the entire classification framework is exported for promotion between environments. Everything an end-user sees in the IDM viewer, in the Infor Ming.le contextual apps, and in ION-driven document flows is ultimately a by-product of the configuration captured on these screens.

1.1 Who should read this guide

- IDM administrators responsible for onboarding new document types for an LN, M3, Syteline, CSI or Baan implementation.
- Infor OS security architects who define ACLs, IDM-Owners-based ownership and role-based access to documents.
- Functional consultants modelling attribute-driven retrieval (indexed attributes, value sets, Business Context attributes).
- Technical consultants who need to promote the content data model between Development, Test, Acceptance and Production environments using the Import/Export facility.
- Auditors and governance leads reviewing how sensitive financial, legal or HR documents are secured through ACL and ACL Rules.

1.2 Prerequisites – who can open these screens

Access to Control Center > Administration requires membership of one of the following Infor OS Security Roles:

- IDM-Administrator — full access to every node under Administration, Configuration, Tools, Development, System Health and Document Output.
- IDM-ContentAdministrator — restricted administrator that can maintain Document Types and Value Sets but cannot edit tenant-wide configuration.

- Infor-SystemAdministrator — the platform-wide super-admin role; should be used as a break-glass account only.

Without one of these roles, the left navigation pane in the Control Center will either hide the Administration node or open its children in read-only mode. Role assignment is performed in Infor OS Security Admin (IFS); IDM itself does not grant roles.

1.3 Core concepts you should understand first

Concept	What it does
Document Type	The schema for a class of content. Defines the searchable name, the display name, the attributes, the ACL, the bundling rules and the retention behaviour. Every document stored in IDM must be an instance of exactly one Document Type.
Attribute	A metadata field attached to a Document Type. Each attribute has a data type (String, Short, Long, Decimal, Double, Date, Timestamp, Bool, Value Set) and may be marked required, unique, indexed, or tied to a controlled value set.
Value Set	A named, controlled vocabulary (for example Department = {Engineering, Marketing, Sales}). Value sets centralise picklists so that multiple document types can reuse the same list.
Business Context Attribute	A special class of attribute that is synchronised from the Business Context Model (BCM). BCM attributes are the keys that allow ERP BODs to retrieve IDM documents with a single click in Ming.le.
Indexed Attribute	An attribute that is stored in the full-text index for high-performance filtering. Two free indexed attributes are supplied per Document Type by default.
ACL (Access Control List)	A named set of IFS security roles and their permissions (Read, Edit, Delete, CheckIn, CheckOut, ChangeAcl, Force Undo CheckOut, Secure Attributes, Archive). Every Document Type has one default ACL; additional ACLs can be applied to individual documents.
ACL Rule	A conditional expression evaluated at check-in that selects which ACL is applied to a new document. Used when the access profile varies by attribute value (for example different ACLs for Confidential vs Public invoices).
Related Documents (Bundle)	An XQuery-driven rule that automatically attaches related documents (for example every invoice belonging to the same sales order) when the parent is opened.
Import / Export	The configuration-promotion facility. Every Document Type, Value Set, Result List, Business Context Model, Retention Policy, Entity Filter, Language, ION Configuration, MIME Type and Saved Search can be

Concept	What it does
	exported as a single XML file and re-imported into another tenant.

Tip

The Administration workspace is only one part of the IDM Control Center — it sits alongside Configuration, Configuration Management, Tools, Development, System Health and Document Output. This guide covers the Administration node in depth; the siblings are covered in the companion guides Infor IDM Configuration, Infor IDM Tools, Infor IDM Development, Infor IDM System Health and Infor IDM Document Output.

2. The IDM Control Center Home

When an administrator opens Document Management from the Infor OS application switcher, the IDM Control Center is the first page that appears. The Home view is a dashboard of tiles; each tile groups a related set of administration functions and clicking a tile opens the corresponding configuration screen.

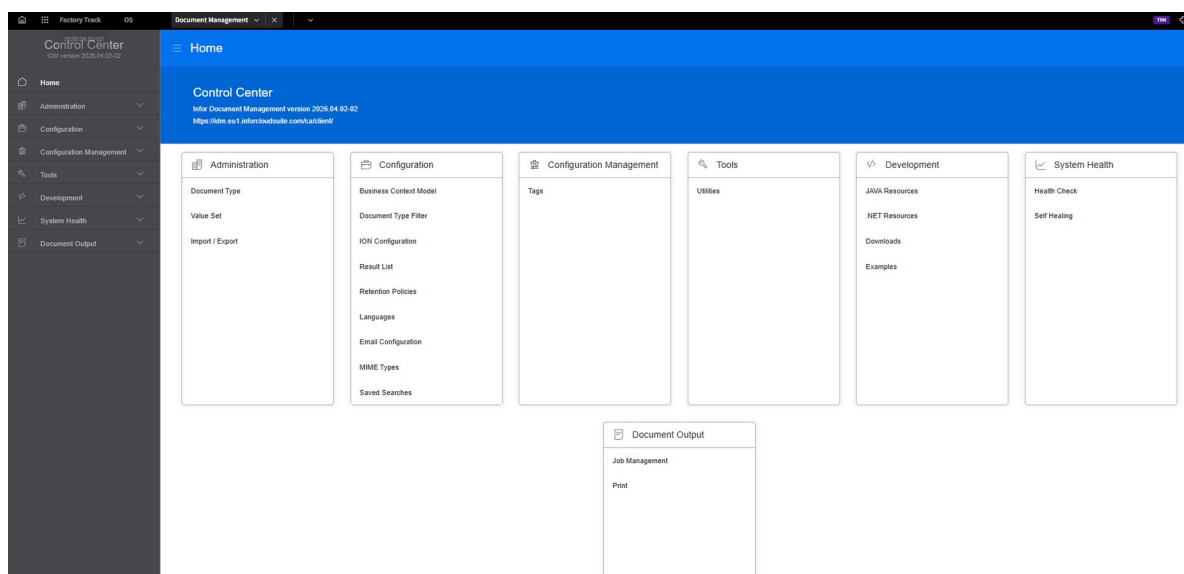


Figure 1. Control Center Home — the landing page for the Infor Document Management administrator.

2.1 Top application ribbon

The dark ribbon across the top of the page is part of the Infor OS shell, not of IDM itself. It shows:

- Home icon — returns to the Infor OS portal.
- Application switcher (9-dot grid) — opens the catalogue of tenant applications.
- Pinned apps — such as Factory Track and OS — depending on the user's pin list.
- Active tab — the currently open application (Document Management).
- TRN badge — indicates the environment is Training (other values are DEV, TST, PRD).
- Plus icon — add a new pinned tab.
- User avatar — profile, sign-out and personalisation.

2.2 Left navigation — the Administration tree

The collapsible left pane is the primary navigation tool inside IDM. At the top it displays the product name Control Center followed by the installed version (in the captured screenshot, IDM version 2026.04.02-02). Recording the version is important when logging a support ticket — many symptoms change behaviour between monthly updates.

Node	Purpose
Home	Returns to this landing dashboard.
Administration	Maintains the content data model — Document Type, Value Set, Import/Export. This is the focus of the current guide.
Configuration	Tenant-wide settings — Business Context Model, Document Type Filter, ION Configuration, Result List, Retention Policies, Languages, Email Configuration, MIME Types, Saved Searches.
Configuration Management	Catalogue of Tags used to group related configuration items.
Tools	Utilities node — includes the IDM Utilities tool, Debug and Diagnostics.
Development	Developer resources — JAVA Resources, .NET Resources, Downloads, Examples.
System Health	Operational monitoring — Health Check and Self Healing.
Document Output	Job Management and Print queues — entry points to Document Output Management (DOM).

2.3 Home dashboard tiles

The main canvas shows seven tiles — six arranged in a row and one (Document Output) below. Each tile lists every direct child of its parent node and clicking any line opens that child directly. The dashboard is therefore both a map of the application and a fast-launch menu. The tiles visible in the captured screenshot are:

Tile	Items	Where it is covered
Administration	Document Type, Value Set, Import / Export	Chapters 3 – 15 of this guide
Configuration	Business Context Model, Document Type Filter, ION Configuration, Result List, Retention Policies, Languages, Email Configuration, MIME Types, Saved Searches	Infor IDM Configuration guide
Configuration Management	Tags	Infor IDM Configuration guide
Tools	Utilities	Infor IDM Tools guide

Tile	Items	Where it is covered
Development	JAVA Resources, .NET Resources, Downloads, Examples	Infor IDM Development guide
System Health	Health Check, Self Healing	Infor IDM System Health guide
Document Output	Job Management, Print	Infor IDM Document Output guide

Best practice

Bookmark the Control Center URL once — usually <https://idm.<region>.inforcloudsuite.com/ca/client/> — and do all IDM administration from there rather than from the embedded panels inside other Infor applications. The dedicated Control Center carries the full set of administrator features; panels embedded in other apps can strip functionality.

3. The Administration Tile

The Administration tile is the gateway to the three screens that describe the content data model. If this tile is empty or missing, it means the signed-in user does not hold the IDM-Administrator or IDM-ContentAdministrator role — check the user in Infor OS Security Admin before troubleshooting anything else.

 **Home**

Control Center

Infor Document Management version 2026.04.1

<https://idm.eu1.inforcloudsuite.com/ca/client/>



Administration

Document Type

Value Set

Import / Export

Figure 2. Administration tile — Document Type, Value Set, and Import / Export.

3.1 Items on the tile

Item	What it does
Document Type	Opens the Document Type list. Each entry is a schema that defines a class of content (Invoice, Purchase Order, Bank Statement, etc.) — including its attributes, ACL, bundles and search behaviour.
Value Set	Opens the Value Set list. A Value Set is a reusable, controlled list of values (for example a Department list or a Purchase-Order Status list) that can be referenced from attributes on many Document Types.
Import / Export	Opens the tenant-wide configuration promotion tool. Use it to move Document Types, Value Sets and other configuration objects between environments (DEV → TST → PRD) without manual re-entry.

3.2 Why this structure matters

IDM deliberately separates the schema (Document Type) from the vocabulary (Value Set) and from the tenant shell (Configuration). A healthy implementation keeps these three layers clean:

- Document Types describe what a document is and what it must carry. They are created once per content class and rarely change in production.
- Value Sets describe the allowed values for controlled attributes. They are shared across Document Types and may grow and shrink as master data evolves.
- Import / Export is the promotion pipeline. It is what prevents configuration drift between environments and what enables reliable DR rebuilds.

Governance

Before you create a new Document Type, first confirm whether one of the existing types (File, Document, or the domain-specific ones like LCLSP_Documents) would fit. New Document Types fragment the repository and make cross-cutting queries harder to write.

4. Opening the Document Type List

Clicking Document Type from either the Administration tile or the left navigation opens the Document Type maintenance screen. The screen has three panes: the secondary left pane lists every Document Type registered in the tenant, the central toolbar ribbon exposes Save Changes, Copy and Delete, and the right-hand pane holds five tabs — General, Attributes, ACL, Related Documents and ACL Rules — that together describe the selected type.

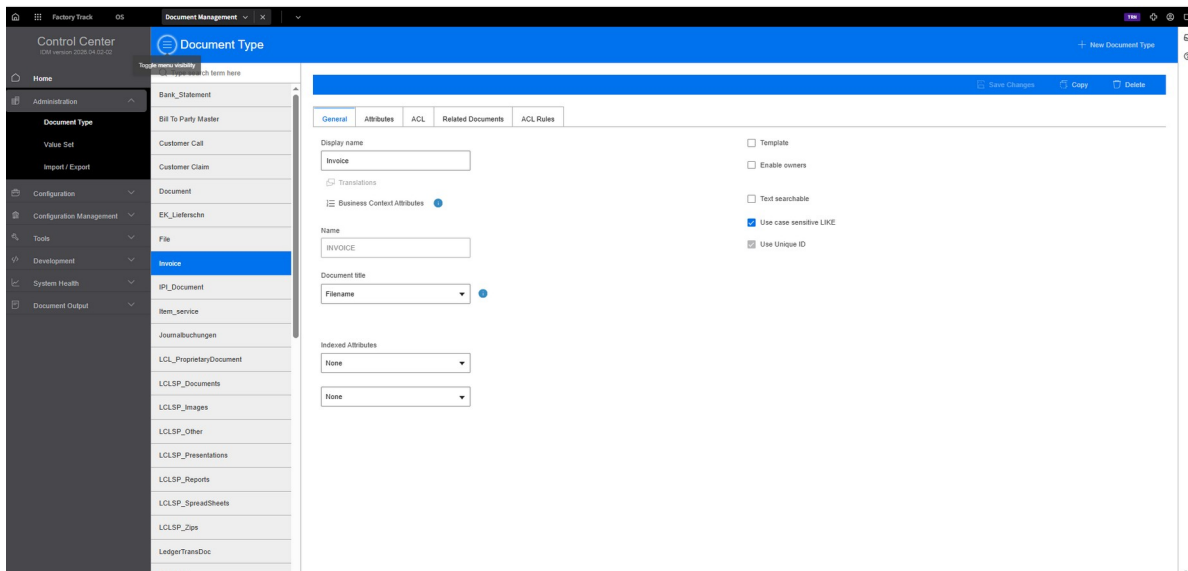


Figure 3. Document Type maintenance — Invoice is selected; the five tabs are visible on the right.

4.1 Toolbar icons and controls

Control	Purpose
Toggle menu visibility (hamburger)	Collapses or expands the top-level left navigation so you can work with more horizontal space on the Document Type detail.
Type search term here	Full-text filter over the Document Type list. Type a partial name to jump to the relevant entry.
+ New Document Type	Opens the New Document Type wizard (not shown in this screenshot). The wizard walks through Name, Display Name, Attributes and the initial ACL.
Save Changes	Commits every unsaved change on every tab of the selected type. Always save before moving to another Document Type.
Copy	Creates a clone of the selected Document Type, preserving Attributes, ACL and bundling rules. Useful for variant types like Sales_Invoice and Purchase_Invoice.

Control	Purpose
Delete	Permanently removes the selected Document Type. Disabled if there is at least one document instance of that type in the repository.

4.2 The Document Type list

The list on the left is alphabetical and scrollable. In the captured screenshot, the visible types include Bank_Statement, Bill To Party Master, Customer Call, Customer Claim, Document, EK_Lieferschn, File, Invoice (selected), IPI_Document, Item_service, Journalbuchungen, LCL_ProprietaryDocument, LCLSP_Documents, LCLSP_Images, LCLSP_Other, LCLSP_Presentations, LCLSP_Reports, LCLSP_SpreadSheets, LCLSP_Zips, LedgerTransDoc and more.

The LCLSP_ prefix identifies generic document types installed by the Localisation Service Pack. The LCL_ prefix identifies localisation-specific types. Types without a prefix are either generic (File, Document) or business-specific (Invoice, Purchase Order). A mature tenant will typically have 50 – 200 Document Types; very large installations can exceed 500.

4.3 The five tabs

Tab	Purpose	Covered in
General	Display name, internal name, document title, template/owner flags, text-searchable and case-sensitive LIKE, language, unique-ID behaviour, indexed attributes.	Chapter 5
Attributes	The typed metadata fields that every instance of this document must carry.	Chapter 6
ACL	The Access Control Lists that are available to documents of this type. One is marked Default.	Chapter 7
Related Documents	Bundling rules that automatically attach related documents when this document is opened.	Chapter 8
ACL Rules	Conditional rules that override the default ACL based on attribute values at check-in.	Chapter 9

Watch out

Unsaved changes on one tab are not automatically committed when you click a sibling tab. Always click Save Changes in the toolbar — or the floppy-disk icon, depending on version — before navigating away. The UI warns you, but the warning is easy to dismiss.

5. Document Type – General Tab

The General tab captures the most fundamental properties of a Document Type. The example chosen is Bank_Statement — a typical financial-operations document that illustrates every flag an administrator is likely to set.

The screenshot shows the 'Document Type' configuration page for 'Bank_Statement'. The left sidebar lists various document types, with 'Bank_Statement' selected. The main panel has tabs for 'General', 'Attributes', 'ACL', 'Related Documents', and 'ACL Rules'. The 'General' tab is active, showing fields for 'Display name' (Bank_Statement), 'Name' (Bank_Statement), and 'Document title' (Filename). There are checkboxes for 'Template', 'Enable owners', 'Test searchable', 'Use case sensitive LIKE', and 'Use Unique ID'. A 'Language' dropdown is set to 'simple'. At the bottom, there are dropdowns for 'Indexed Attributes' and 'None'.

Figure 4. General tab — the Bank_Statement Document Type.

5.1 Field reference

Field	Description	Typical value
Display name	The human-readable label shown in every search grid, upload dialog and Ming.le panel. Can be localised via Translations.	Bank_State ment
Translations (icon)	Opens the Translations panel. Only enabled after the Document Type has been saved at least once. Adds a localised Display name per language defined in Configuration > Languages.	—
Business Context Attributes (icon)	Opens a dialog that lets you add attributes synchronised from the Business Context Model. BCM attributes become the keys that connect ERP BODs to IDM documents.	—
Name	Internal, immutable identifier used by the API, by ION, and in XML exports. Always UPPERCASE and never contains spaces. Cannot be changed after first save.	Bank_State ment
Document title	The rule that composes the Title of a new document. Choose Filename (use the uploaded file's name), Attribute (use the	Filename

Field	Description	Typical value
	value of one attribute), or a Template (concatenate multiple fields).	
Indexed Attributes (two slots)	Up to two attributes are promoted into the full-text index for fast filtering. Typical choices are the two fields users filter by most often (for example Accounting Entity + Transaction Type for a Bank Statement).	None / None
Template (checkbox)	If ticked, instances of this type are treated as templates rather than content. Template documents are surfaced in the New Document dialog as blank starting points.	Yes for this example
Enable owners (checkbox)	Turns on the IDM-Owners role on this Document Type. When enabled, only the creator / owner sees the document by default; everyone else must obtain access through the ACL.	Yes for this example
Text searchable (checkbox)	Extracts text from the file (PDF, Office, text/rtf, etc.) and adds it to the full-text index. Enables Quick Search to find documents by content.	Yes
Language (dropdown)	Language used by the full-text indexer to apply stemming and stop-word rules. simple disables stemming — appropriate for mixed-language tenants.	simple
Use case sensitive LIKE (checkbox)	When on, attribute LIKE searches respect letter case. When off, searches are case-insensitive (the more common choice).	Yes
Use Unique ID (checkbox)	Applies the tenant-wide unique-ID rule. Disabled and greyed-out on existing types that were created before the rule was enabled.	Greyed-out

5.2 How the flags interact

- Template + Enable owners is the classic pattern for document libraries where templates are owned by a small group of editors and published to many readers.
- Text searchable + Language = simple is the most portable combination — stemming is disabled so a Chinese, German and English tenant can share the same type.
- Use case sensitive LIKE is normally only turned on for very large tenants where the performance impact of case-insensitive indexing becomes material.

5.3 Usage steps — creating a Document Type

1. Click + New Document Type on the toolbar and complete the wizard.
2. On the General tab, set the Display name and Name.

3. Choose Filename or Template as the Document title rule.
4. Enable the flags that match the governance intent (Template, Enable owners, Text searchable).
5. Save Changes — the Translations and Business Context Attributes icons now become active.
6. Proceed to the Attributes tab to add the typed metadata fields.

Watch out

Once a Document Type has at least one document instance stored in the repository, the Name field is frozen — changing it would break every existing reference. Take the time to choose a clean, ALL_UPPERCASE name on first save.

6. Document Type – Attributes Tab

The Attributes tab lists every typed metadata field attached to the Document Type. Attributes are the fuel of IDM search, ION routing and downstream analytics — a rich Attribute list drives a good user experience, while a sparse list forces users to rely on the file name.

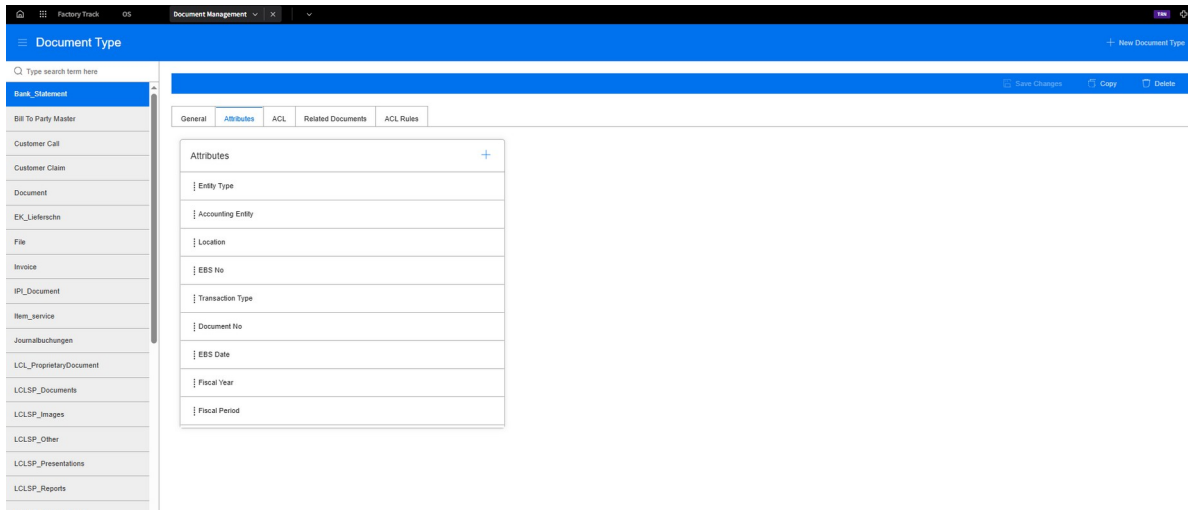


Figure 5. Attributes tab — Bank_Statement with nine business attributes defined.

6.1 Example attribute list

The Bank_Statement example shows a typical finance-operations attribute set:

Attribute	What it represents	Typical data type
Entity Type	The kind of entity the statement relates to (Customer, Supplier, Internal).	Value Set (String)
Accounting Entity	The financial company whose books the statement posts into. Usually sourced from the Enterprise Hierarchy.	Value Set (String)
Location	The plant, warehouse or site the statement applies to.	Value Set (String)
EBS No	The electronic bank statement number assigned by the source system.	String
Transaction Type	Classification of the transaction (for example Debit, Credit, Reversal).	Value Set (String)
Document No	The underlying document number (invoice, purchase order, payment).	String
EBS Date	Statement posting date.	Date

Attribute	What it represents	Typical data type
Fiscal Year	The accounting year the statement belongs to.	Short
Fiscal Period	The period within the fiscal year (1 – 12 or 1 – 13).	Short

6.2 Columns and controls

Control	Purpose
+ icon	Opens the Attribute details form in the right-hand slide-out. Use to add a new attribute.
Drag handle (six dots next to each attribute)	Reorders the attributes. Order influences the default column order in search result grids.
Click attribute row	Opens the Attribute details form for editing.

6.3 Attribute details form fields

When an attribute is selected, the details slide-out exposes:

Field	Description
Display Name	Required. The label shown on search grids and upload dialogs. Auto-generates an internal Name.
Data Type	Required. One of String, Short, Long, Decimal, Double, Date, Timestamp, Bool or Value Set. Default is String.
Value Set	Required when Data Type is Value Set. References a vocabulary maintained under Administration > Value Set.
Default Value	Optional. Pre-populates the attribute on new documents.
Min / Max	Optional range validation for numeric types (Short, Long, Decimal, Double) and Date / Timestamp types.
Required	When ticked, a document cannot be saved unless the attribute carries a value.
Unique	When ticked, the combination of (Document Type, attribute value) must be unique across the repository. Typical for Document No fields.
Multiple values	Allows the attribute to hold more than one value — for example multiple Location codes on an internal memo.

Best practice

Attach a Value Set to every categorical attribute — never let users type free text into fields like Department, Transaction Type or Fiscal Period. Free text fragments the master data, breaks reporting and forces painful data-clean-up projects six months in.

7. Document Type – ACL Tab

The ACL tab (Access Control List) defines the security profiles available to documents of the selected type. Every IDM document carries exactly one ACL. When a document is created it inherits the Default ACL; an administrator or an ACL Rule can re-assign a different ACL later.

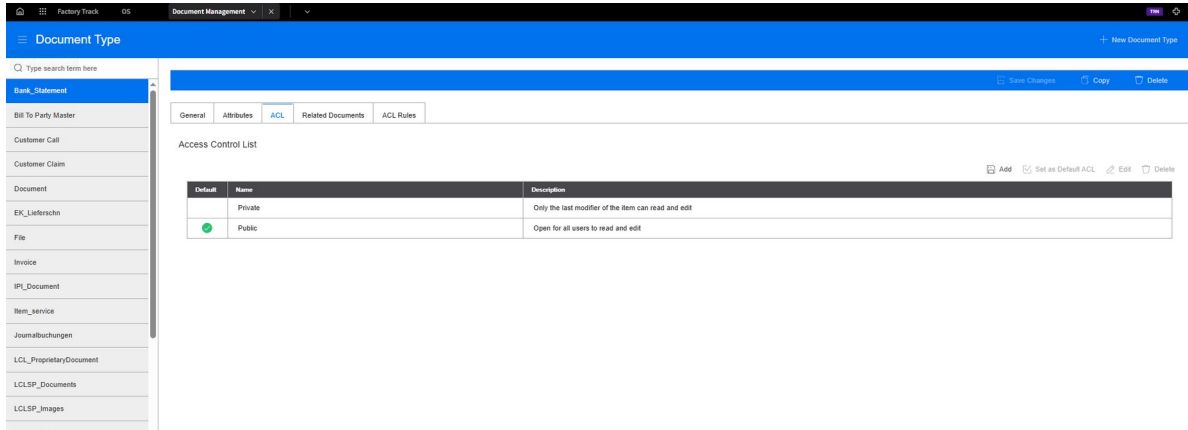


Figure 6. ACL tab — the out-of-the-box Private and Public ACLs.

7.1 Columns in the Access Control List grid

Column	Meaning
Default	A single ACL in the list is marked as the Default (green tick). New documents created for this Document Type inherit the Default ACL unless an ACL Rule overrides it.
Name	The ACL identifier. IDM ships with two built-in ACLs — Private and Public. Custom ACLs can be added with any name.
Description	Human-readable description of the security intent. Example: Only the last modifier of the item can read and edit.

7.2 Built-in ACLs

ACL	Behaviour
Private	Only the last modifier of the item can read and edit. Suitable for sensitive personal content that should not leak across teams.
Public	Open for all users to read and edit. Suitable for widely shared reference content (policies, manuals, bulletins).

7.3 Toolbar buttons

Button	Action
Add	Opens the Add ACL wizard — name the ACL, supply a description, and configure the IFS Security Roles with permissions.
Set as Default ACL	Promotes the selected ACL to Default so new documents inherit it.
Edit	Modifies the selected ACL. Disabled for the two system ACLs in some versions.
Delete	Removes the selected ACL from this Document Type. Confirmation is required.

7.4 Permissions inside an ACL

Each ACL is a set of rows — one row per IFS Security Role — with a checkbox per permission. The nine permissions recognised by IDM are:

Permission	What it grants
Read	The ability to view the document.
Edit	The ability to edit a document.
Delete	The ability to soft-delete a document.
CheckIn	The ability to unlock a document after editing.
CheckOut	The ability to lock a document for editing.
ChangeAcl	The ability to change the security of the document.
Force Undo CheckOut	The ability to undo a check-out performed by another user.
Secure Attributes	The ability to edit attributes that are flagged Secure on the Document Type.
Archive	The ability to archive a document in accordance with the retention policy.

Principle of least privilege

Do not grant ChangeAcl and Force Undo CheckOut to everyday users — those two permissions together let any user hijack any document in the repository. Reserve them for IDM-Administrator and incident-response roles.

8. Document Type – Related Documents Tab

The Related Documents tab defines bundling rules. A bundle is a logical grouping: when a parent document is opened, IDM automatically attaches every related document that matches the bundling rule. Typical uses are attaching every invoice that references the same purchase order, or every contract amendment that references the same master agreement.

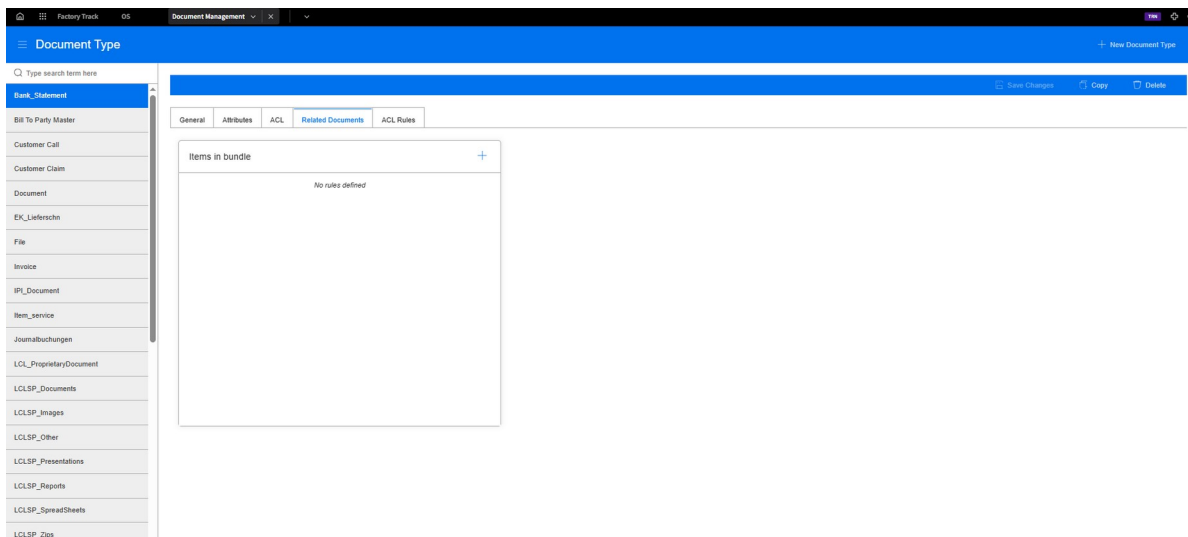


Figure 7. Related Documents tab — empty Items in bundle list on a new Document Type.

8.1 Items in bundle

The list on this tab is called Items in bundle. Each row is one bundling rule. In the captured screenshot the list is empty — a common state for Document Types that do not participate in any cross-document relationship. The label No rules defined is shown whenever the list is empty.

8.2 How bundling rules work

Clicking the + icon opens the rule editor. A bundling rule is expressed either as:

- An attribute-matching rule — IDM will automatically bundle every document of another Document Type whose Attribute X matches Attribute Y of the parent. This is the most common form and requires no coding.
- An XQuery expression — for complex relationships, an XQuery expression is evaluated each time the parent is opened and every document returned by the query is bundled.

8.3 Example — bundling invoices onto a purchase order

7. Select the Purchase_Order Document Type and open the Related Documents tab.

8. Click + to add a new rule.
9. Choose Invoice as the related Document Type.
10. Set the match expression: Invoice.Purchase_Order_No = Purchase_Order.PO_Number.
11. Save Changes.
12. From now on, opening a Purchase Order inside IDM or Ming.le shows every matching Invoice in the Related panel without any further user action.

Watch out

XQuery-based bundles are evaluated on every open — a poorly written expression can slow the viewer to a crawl. Profile complex XQuery on a representative test dataset before turning it on in Production.

9. Document Type – ACL Rules Tab

ACL Rules let you override the Default ACL conditionally — based on the attribute values captured at check-in. Where the ACL tab answers which ACLs exist?, the ACL Rules tab answers which ACL applies to which document?.

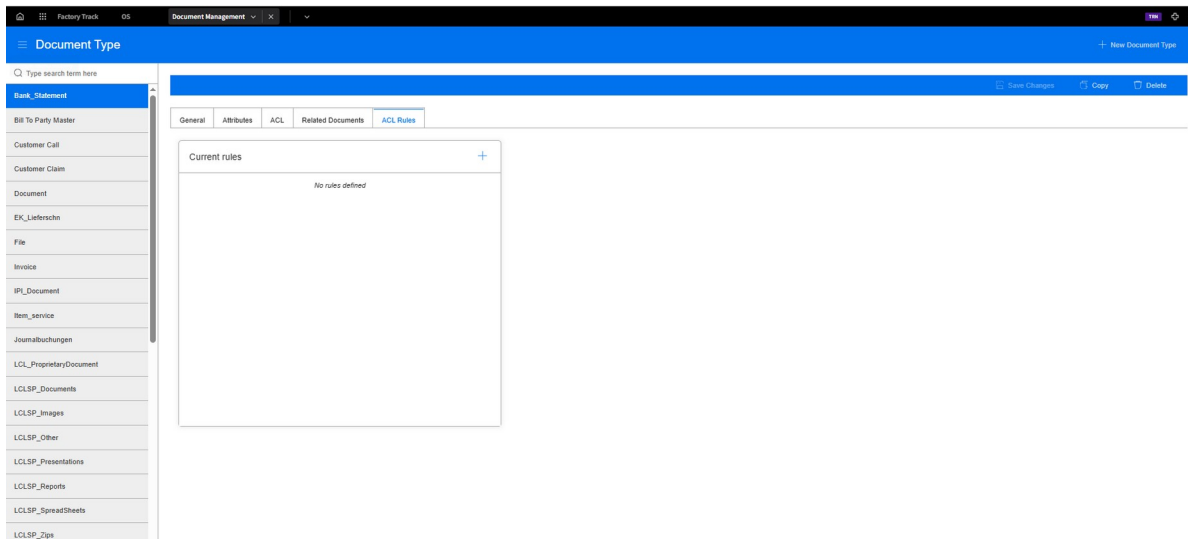


Figure 8. ACL Rules tab — Current rules list on a new Document Type.

9.1 Current rules

The list on this tab is called Current rules. Each row represents one conditional rule. In the captured screenshot the list is empty (No rules defined) — the common state immediately after a Document Type is created. Rules are evaluated top-down; the first match wins. If no rule matches, the Default ACL from the ACL tab is applied.

9.2 How a rule is structured

Element	Meaning
Name	A unique identifier for the rule. Use a descriptive name such as Confidential-EU or Public-Marketing.
Condition	A boolean expression evaluated against the attributes of the new document. Typical operators are =, !=, <, >, IN, LIKE.
ACL to apply	The ACL that is assigned to the document when the condition evaluates to true.
Order	The evaluation order. Rules at the top are checked first; as soon as a rule matches the remainder are skipped.

9.3 Example — splitting invoices by classification

Suppose the Invoice Document Type carries a Classification attribute with the values Public, Internal and Confidential. A typical rule-set is:

Rule order	Condition	ACL to apply
1	Classification = 'Confidential'	Confidential-Finance (custom)
2	Classification = 'Internal'	Internal-Readable (custom)
3	(fallback — no rule matches)	Public (Default)

9.4 Usage steps — adding an ACL rule

13. Click + in the Current rules list.
14. Provide a descriptive Name.
15. Compose the condition using the attributes exposed by this Document Type.
16. Select the ACL to apply from the dropdown (sourced from the ACL tab).
17. Arrange the order by dragging the rules; remember the first match wins.
18. Save Changes.

Best practice

Always keep the Default ACL as the safest fallback. If your Default is Public and all your rules miss, the document silently becomes world-readable — which may violate regulatory obligations. Invert the model: default to the most restrictive ACL and relax via rules.

10. General Tab Variation – Sales_Invoice

This chapter walks through a second example of the General tab — the Sales_Invoice Document Type — to reinforce how the same fields are used for different business content. Sales invoices are outbound financial documents and so they are treated differently from a Bank Statement, particularly with respect to ownership and searchability.

The screenshot shows the 'Document Type' configuration page in Infor IDM. The left sidebar lists various document types, with 'Sales_Invoice' selected. The main area displays the 'General' tab for this document type. Fields include 'Display name' (Sales_Invoice), 'Name' (Sales_Invoice), and 'Document title' (Filename). Checkboxes for 'Template', 'Enable owners', and 'Text searchable' are all checked. A 'Language' dropdown is set to 'sample'. There are also checkboxes for 'Use case sensitive LIKE' and 'Use Unique ID'.

Figure 9. General tab — Sales_Invoice.

10.1 Field values in this example

Field	Value	Why
Display name	Sales_Invoice	The label end-users see in the Infor Ming.le Sales panel.
Name	Sales_Invoice	Internal name. Note the preservation of the underscore — it is a convention used heavily in Baan / LN integrations.
Document title	Filename	The file name of the PDF (the rendered invoice) is used as the document title so that Sales teams recognise it immediately.
Template	Enabled (ticked)	A blank sales-invoice shell is provided as a template so users can generate new invoices with the right metadata skeleton.
Enable owners	Enabled (ticked)	Owners — normally the account manager — retain edit rights regardless of the tenant-wide ACL.
Text searchable	Enabled (ticked)	PDF text is extracted and indexed — critical for cross-

Field	Value	Why
		invoice search by customer name, item number and description.
Language	simple	Disables stemming so that customer names in non-English languages are not truncated.
Use case sensitive LIKE	Enabled (ticked)	Preserves the exact case on invoice numbers — important when invoice IDs mix letters and digits.
Use Unique ID	Enabled (but greyed)	The tenant-wide uniqueness rule is active but cannot be toggled for existing document instances.

10.2 When to use Template

Ticking Template transforms instances of the Document Type into reusable starting points. Real-world examples:

- A blank Sales Invoice with the company letterhead and VAT registration already pre-printed.
- A Customer Call template with standard sections for Agenda, Decisions and Follow-ups.
- A Bank Statement dump in the exact columnar layout expected by the controller.

When a user selects New Document in the IDM Document Type picker, every type marked Template shows up in a special Templates group at the top of the picker.

Tip

Templates and real content can share the same Document Type — the Template flag does not restrict the repository. This keeps the schema simple at the cost of a small governance overhead: somebody must decide which documents are templates and keep them in the right folder.

11. General Tab Variation – Purchase Order

A third example of the General tab — this time for a Purchase Order type that is deliberately configured without templates or ownership. It illustrates the minimal configuration that still makes the type usable.

Figure 10. General tab — Purchase Order with only the uniqueness flag active.

11.1 Field values in this example

Field	Value	Why
Display name	Purchase Order	Human-readable label shown in Ming.le and IDM search grids.
Name	PO_POC_POR_POPRN	A compressed internal name that merges four Infor LN session mnemonics — Purchase Order (PO), PO Confirmation (POC), PO Requisition (POR) and PO Print (POPRN). It tells the API which LN sessions can generate or consume this document.
Document title	Filename	Keeps the external file name as the title.
Template	Off	Purchase Orders are real transactional documents, not templates.
Enable owners	Off	Purchase Orders are owned by the Procurement team as a whole; individual ownership is not appropriate.
Text searchable	Off	Turned off for performance — PO volume is high and the document is retrieved by structured attributes (PO Number, Supplier)

Field	Value	Why
		far more often than by content.
Language	(default)	No stemming.
Use case sensitive LIKE	Enabled	Preserves case on PO numbers that mix letters and digits.
Use Unique ID	Enabled (greyed)	Applied at tenant scope.

11.2 Lesson from this configuration

- The combination Template = off, Enable owners = off, Text searchable = off is the most lightweight Document Type — ideal for high-volume transactional content where structured attributes are the sole retrieval path.
- Turning Text searchable off on a high-volume type can save gigabytes of storage in the full-text index.
- The Name field shows how Infor tenants sometimes encode the source ERP sessions directly into the Document Type name — a convention worth carrying over from LN and Baan to preserve traceability.

Why this matters

Every unnecessary flag you tick translates into index storage, ingestion time and licensing consumption. Treat flags like Text searchable, Enable owners and Template as opt-in features and turn them on only when the business case is clear.

12. General Tab Variation – Invoice (Base Type)

The third and last General-tab example is a base Invoice Document Type. Many tenants maintain a base Invoice plus specialised descendants (Sales_Invoice, Purchase_Invoice, etc.). The base type often carries the conservative defaults that every child inherits when it is cloned.

The screenshot shows the 'Document Type' configuration page in the Infor IDM Document Management application. The left sidebar lists various document types, with 'Invoice' selected. The main area displays the 'General' tab for the 'Invoice' document type. The configuration includes fields for 'Display name' (Invoice), 'Name' (INVOICE), and 'Document title' (Filename). On the right, there are checkboxes for 'Template', 'Enable owners', 'Text searchable', 'Use case sensitive LIKE' (checked), and 'Use Unique ID' (checked). The 'Indexed Attributes' section shows two dropdown menus, both set to 'None'.

Figure 11. General tab — the base Invoice Document Type.

12.1 Field values in this example

Field	Value
Display name	Invoice
Name	INVOICE
Document title	Filename
Template	Off
Enable owners	Off
Text searchable	Off
Use case sensitive LIKE	Enabled
Use Unique ID	Enabled (greyed)

12.2 Inheritance in practice

There is no formal class inheritance between Document Types in IDM — each type is an independent row. The pattern called inheritance here is a convention: administrators clone the base type via the Copy toolbar button and then customise the child. The base Invoice in the screenshot is therefore a seed that is copied and extended into Sales_Invoice, Purchase_Invoice, Credit_Note, etc.

12.3 Naming conventions

Pattern	Example	Purpose
UPPERCASE	INVOICE, PURCHASEORDER	Used for base types to make them easy to spot in the list.
Camel_Snake	Sales_Invoice, Bank_Statement	Used for specialised, commonly used types.
Prefixed	LCLSP_Documents, LCL_ProprietaryDocument	Reserved for Localisation Service Pack and localisation-specific types.

Governance

Agree your Document Type naming convention before any project starts. After year one there are rarely fewer than 30 types in a tenant; without a convention the list becomes impossible to navigate.

13. Value Set – General Tab

A Value Set is a named, controlled vocabulary. The primary use is to back attributes whose allowed values are drawn from a closed list — for example a Department, a Transaction Type or a Status. The Value Set screen has two tabs: General describes the set itself, and Values lists the actual allowed entries.

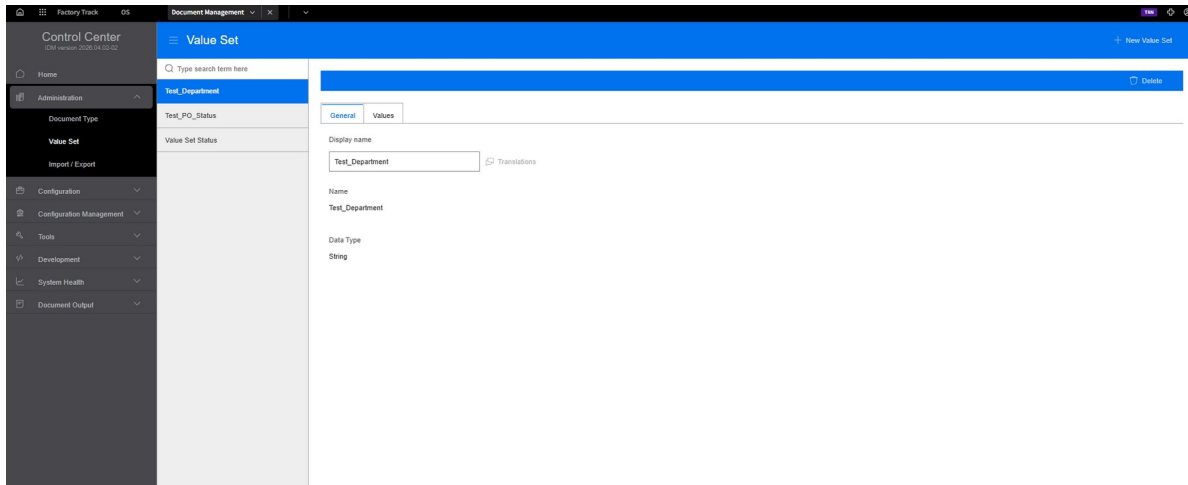


Figure 12. Value Set – General tab — Test_Department with Data Type String.

13.1 Field reference

Field	Description
Display name	The label shown in every attribute picker that references this Value Set. Can be translated via the Translations icon.
Translations	Enables locale-specific Display names. Only active after the Value Set has been saved.
Name	Immutable internal identifier used by the API, ION and XML exports.
Data Type	The data type of the values in the set. Most common is String. Other supported types include Short, Long, Decimal, Double, Date, Timestamp and Bool.

13.2 Toolbar

Control	Action
+ New Value Set	Creates a new Value Set. Select Name, Display name and Data Type in the dialog.

Control	Action
Delete	Removes the selected Value Set. Disabled if any Document Type references it as an attribute source.
Search (left pane)	Full-text filter over the Value Set list. Useful when the tenant has many sets.

13.3 Usage steps

19. Open Administration > Value Set.
20. Click + New Value Set on the toolbar.
21. Provide a Display name (for example Department), an immutable Name, and a Data Type (String is the most common).
22. Save — the Values tab unlocks.
23. Switch to the Values tab to add the individual entries (see chapter 14).
24. Return to any Document Type and configure an attribute with Data Type = Value Set and Value Set = your new set.

Tip

Prefix test / throwaway Value Sets with Test_ (as with Test_Department and Test_PO_Status in the screenshot) so they can be filtered out of transport bundles when moving configuration from DEV to PRD.

14. Value Set – Values Tab

The Values tab lists every allowed entry in the Value Set. For the Test_Department example the allowed values are Engineering, Marketing and Sales. Each entry has two fields — Name (the internal identifier) and Value (the human-readable label) — which may be identical but are stored separately so that the Name can remain stable even if the Value is translated or renamed.

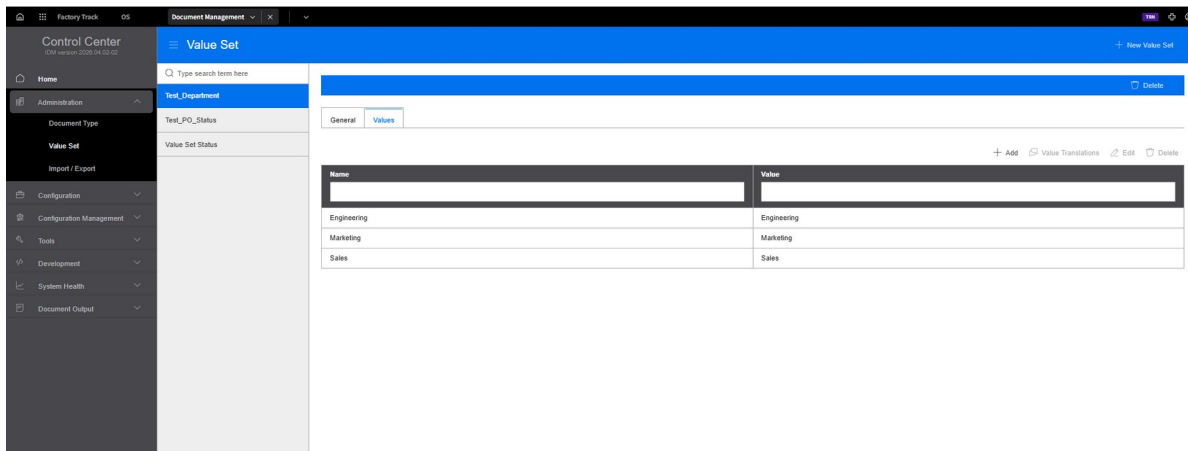


Figure 13. Value Set – Values tab — Test_Department with three entries and a ready-to-fill Add row.

14.1 Columns

Column	Meaning
Name	Internal identifier of the value. Immutable after first save. Used by the API, by ION and by XML exports.
Value	The human-readable label shown in pickers, search grids and IDM viewer panels. Can be translated via Value Translations.

14.2 Toolbar

Button	Action
Add	Adds a new blank row at the top of the grid. Fill in Name and Value, then click outside the row or press Tab to commit.
Value Translations	Opens a panel that lets you provide localised labels per configured tenant language.
Edit	Opens the selected row for editing. Only Value and translations are editable; Name is locked.

Button	Action
Delete	Removes the selected value. Disabled if any stored document references the value.

14.3 Example — a Purchase Order status set

A realistic Purchase Order status set could contain:

Name	Value (English)	Value (German)
DRAFT	Draft	Entwurf
APPROVED	Approved	Freigegeben
SENT	Sent to Supplier	An Lieferanten gesendet
CLOSED	Closed	Geschlossen
CANCELLED	Cancelled	Storniert

14.4 Usage steps — adding a value

25. Open the Value Set and switch to the Values tab.
26. Click + Add.
27. Type the Name (ALL_UPPERCASE, no spaces).
28. Type the Value (the human-readable label).
29. Click outside the row to commit; or click Value Translations to add localised labels.
30. Save Changes from the toolbar.

Watch out

Deleting a value that is already stored on thousands of documents will either be blocked outright or will orphan those documents depending on the version. Prefer to add a superseded label (Engineering → Engineering (legacy)) and introduce a new value, then migrate documents with an ION flow rather than deleting master data.

15. Import / Export

The Import / Export screen is the configuration-promotion facility of IDM. Everything that describes the content data model and the tenant-wide configuration — Document Types, Value Sets, Result Lists, Business Context Models, Retention Policies, Entity Filters, Languages, ION Configuration, MIME Types, Saved Searches — can be exported into a single XML file and re-imported into another environment. This is how administrators move configuration from Development to Test to Production without manual re-entry.

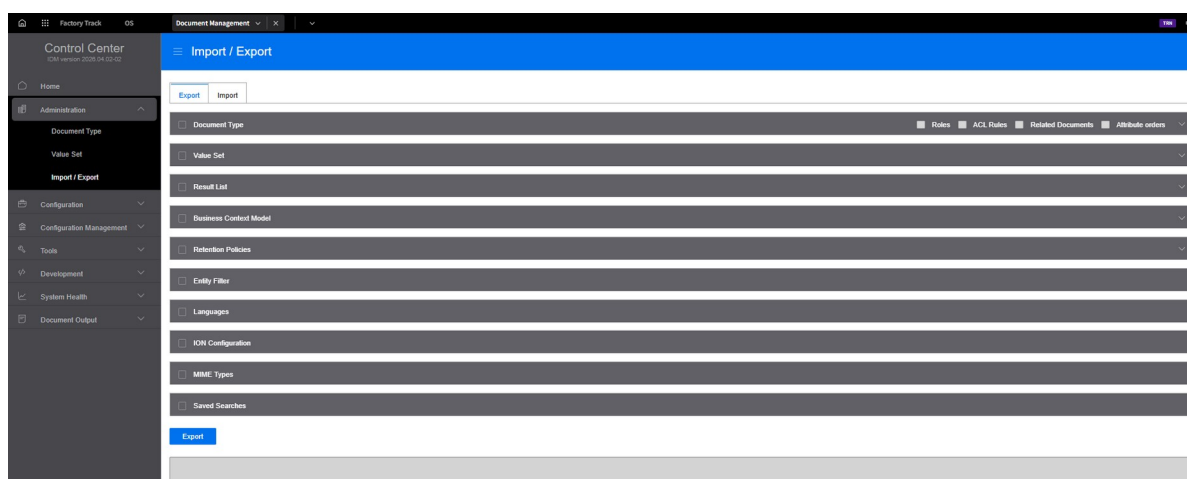


Figure 15. Import / Export — the Export tab with every exportable category collapsed.

15.1 Export tab

The Export tab lists every category that can be exported. Each row is collapsible — expand it to select individual items, or tick the row header to include every item in the category.

Category	What it exports	Cross-dependencies
Document Type	The full Document Type definition — General tab, Attributes, ACL, Related Documents, ACL Rules. Optional flags on the right (Roles, ACL Rules, Related Documents, Attribute orders) let you exclude parts of the definition.	References Value Sets, Roles, Languages.
Value Set	The Value Set header and every entry, including translations.	Referenced by Document Type attributes.
Result List	The saved result-list layouts that determine default columns and sort orders in search results.	References Document Types and Attributes.

Category	What it exports	Cross-dependencies
Business Context Model	The BCM that maps ERP object keys to IDM attributes. Essential for Ming.le contextual linking.	References Document Types and Attributes.
Retention Policies	The retention rules (retain for N years, then archive or delete) per Document Type.	References Document Types.
Entity Filter	Conditional filters that hide documents from users whose security context does not match.	References Document Types and Accounting Entities.
Languages	The list of tenant-enabled languages used for translations.	Referenced by Value Sets and Document Types.
ION Configuration	ION-specific settings — active flag, user, document types, workflow configuration.	References Document Types.
MIME Types	The file-type catalogue (extension → MIME type → Document Type suggestion).	References Document Types.
Saved Searches	Pre-built searches visible in the IDM search launcher.	References Document Types and Attributes.

15.2 Export behaviour

- Click Export at the bottom of the tab to generate the XML file.
- The XML contains every item you ticked plus every dependency — for example exporting a Document Type automatically includes every referenced Value Set in the same file.
- The exporter writes documentTypeFilter, resultLists, bcModels and ion-namespaced elements (ion:isActive, ion:user, ion:documentTypes, ion:workflowConfiguration) into the XML.
- Save the XML with a date-stamped file name (for example idm-export-2026-04-23-prd.xml) and store it in source control so that every change is versioned.

15.3 Import tab

The Import tab (not captured in the screenshot) accepts exactly one XML file at a time. The import pipeline:

31. Click Select XML file and pick the export you want to apply.

32. IDM validates the file. Only files produced by the matching Export tab are accepted — hand-crafted XML will be rejected.
33. IDM shows a preview of every item contained in the file and marks each one New (will be created) or Overwrite (will replace the existing item).
34. Deselect any item you do not want to apply.
35. Click Import. Items are applied atomically; a failure on any single item rolls the whole import back.

15.4 Recommended promotion pipeline

36. Maintain configuration only in DEV — never edit directly in PRD.
37. Export daily from DEV into a version-controlled repository (git).
38. Promote to TST once per sprint by importing the latest DEV export.
39. Run regression tests in TST.
40. Promote to ACC for business acceptance testing.
41. Promote to PRD within a scheduled change window, after approval.
42. Repeat the PRD import on the DR tenant to keep the two in sync.

Why this matters

Without Import / Export, keeping a complex IDM configuration in sync across DEV, TST, ACC and PRD is a losing battle — six months of manual edits will drift the environments beyond reconciliation. Import / Export is cheap, fast, and the single most effective governance control in the IDM toolkit.

Appendix A – Best Practices Checklist

- Document every Document Type in a single spreadsheet (Name, Display Name, Owner, Template flag, Text-searchable flag, ACL, creation date).
- Always define a Value Set for any attribute that will be filtered or reported on — never allow free text on categorical fields.
- Keep the built-in Private and Public ACLs untouched; build custom ACLs with descriptive names (Confidential-Finance, Internal-HR-Readable, etc.).
- When adding an ACL Rule, keep the Default ACL as the most restrictive fallback so that a missed rule never silently escalates permissions.
- Promote configuration through Import / Export only — never edit directly in Production.
- Store every exported XML file in source control (git). Tag each import with the change-ticket number.
- Turn Text searchable off on high-volume Document Types where retrieval is purely by structured attributes — full-text indexing is storage-expensive.
- Review Document Types without recent activity every quarter and archive obsolete ones.
- Use the LCLSP_ / LCL_ prefixes only for localisation content; keep business content in un-prefixed or team-specific naming conventions.
- Always include the IDM version (visible in the Control Center header) when logging a support ticket — behaviour changes between monthly updates.

Appendix B – Troubleshooting Quick Reference

Symptom	Where to look	Likely cause
User cannot see a document	ACL tab and ACL Rules tab of the Document Type	The effective ACL does not grant Read to any role held by the user.
Document shows wrong title	General tab → Document title setting	Document title is set to Filename but the uploaded file was re-named after upload; or set to an Attribute that is empty.
Document not searchable by content	General tab → Text searchable flag and Language dropdown	Text searchable is off, or the Language choice does not match the document language.
Save Changes button is disabled	General tab → Name field	Name is empty or contains invalid characters (spaces are not allowed).
+ New Document Type is missing	Infor OS Security Admin → user roles	The signed-in user is not a member of IDM-Administrator.
ACL Rule never triggers	ACL Rules tab → Order column	Another rule earlier in the list matches first; reorder so the narrower rule is at the top.
Value cannot be added to a Value Set	Values tab → Add row	The Name is not unique, or the Value Set has not been saved yet after the General tab was edited.
Import fails validation	XML file generator and the Import tab	The XML was not produced by the matching Export tab, or was edited by hand. Re-export from the source tenant.
Related documents do not appear	Related Documents tab → Items in bundle	The bundling rule attribute names do not match exactly between parent and child (case-sensitive).

Appendix C – Reference Links

Infor OS Security Administration Guide (Cloud): [docs.infor.com – Security Cover](https://docs.infor.com/Security-Cover)

IDM Administration — Document Types, Value Sets, ACLs: [IDM administration overview](#)

Using the Export Tab in IDM: [IDM Export reference](#)

ACL and Permissions Reference: [ACL guide](#)

Defining an ACL for Document Owners: [IDM-Owners ACL reference](#)

Attribute Details Form Fields: [Attributes reference](#)

FullOnBaan – Infor ERP Consulting and Training: www.fullonbaan.com

FullOnBaan Training Courses: courses.fullonbaan.com

FullOnBaan Knowledge Repository (37,000+ threads): repo.fullonbaan.com

— End of Guide —