

# Learning to Search for Targets

- A Deep Reinforcement Learning Approach to Visual Search in Unknown Environments

---

*Inlärd sökning efter mål*

**Oskar Lundin**

Supervisor : Sourabh Balgi  
Examiner : Jose M. Peña

External supervisor : Fredrik Bissmarck

## Upphovsrätt

Detta dokument hålls tillgängligt på Internet - eller dess framtida ersättare - under 25 år från publiceringsdatum under förutsättning att inga extraordinära omständigheter uppstår.

Tillgång till dokumentet innebär tillstånd för var och en att läsa, ladda ner, skriva ut enstaka kopior för enskilt bruk och att använda det oförändrat för ickekommersiell forskning och för undervisning. Överföring av upphovsrätten vid en senare tidpunkt kan inte upphäva detta tillstånd. All annan användning av dokumentet kräver upphovsmannens medgivande. För att garantera äktheten, säkerheten och tillgängligheten finns lösningar av teknisk och administrativ art.

Upphovsmannens ideella rätt innefattar rätt att bli nämnd som upphovsman i den omfattning som god sed kräver vid användning av dokumentet på ovan beskrivna sätt samt skydd mot att dokumentet ändras eller presenteras i sådan form eller i sådant sammanhang som är kränkande för upphovsmannens litterära eller konstnärliga anseende eller egenart.

För ytterligare information om Linköping University Electronic Press se förlagets hemsida <http://www.ep.liu.se/>.

## Copyright

The publishers will keep this document online on the Internet - or its possible replacement - for a period of 25 years starting from the date of publication barring exceptional circumstances.

The online availability of the document implies permanent permission for anyone to read, to download, or to print out single copies for his/hers own use and to use it unchanged for non-commercial research and educational purpose. Subsequent transfers of copyright cannot revoke this permission. All other uses of the document are conditional upon the consent of the copyright owner. The publisher has taken technical and administrative measures to assure authenticity, security and accessibility.

According to intellectual property law the author has the right to be mentioned when his/her work is accessed as described above and to be protected against infringement.

For additional information about the Linköping University Electronic Press and its procedures for publication and for assurance of document integrity, please refer to its www home page: <http://www.ep.liu.se/>.

## Abstract

Visual search is the perceptual task of locating a target in a visual environment. Due to applications in areas like search and rescue, surveillance and home assistance, it is of great interest to automate visual search. An autonomous system can potentially search more efficiently than a manually controlled one and has the advantages of reduced risk and cost of labour. In many environments, there is structure that can be utilized to find targets quicker. However, manually designing search algorithms that properly utilize structure to search efficiently is not trivial. Different environments may exhibit vastly different characteristics, and visual cues may be difficult to pick up. A learning system has the advantage of being applicable to any environment where there is a sufficient number of samples to learn from.

In this thesis, we investigate how an agent that learns to search can be implemented with deep reinforcement learning. Our approach jointly learns control of visual attention, recognition and localization from a set of sample search scenarios. A recurrent convolutional neural network takes an image of the visible region and the agent’s position as input. Its outputs indicate whether a target is visible and control where the agent looks next. The recurrent step serves as a memory that lets the agent utilize features of the explored environment when searching. We compare two memory architectures: an LSTM, and a spatial memory that remembers structured visual information. Through experimentation in three simulated environments, we find that the spatial memory architecture achieves superior search performance. It also searches more efficiently than a set of baselines that do not utilize the appearance of the environment and achieves similar performance to that of a human searcher. Finally, the spatial memory scales to larger search spaces and is better at generalizing from a limited number of training samples.

# Acknowledgments

I would like to thank my supervisor, Fredrik Bissmarck, for guidance and valuable advice throughout the thesis. Additionally, I want to thank my other colleagues at FOI for their good company and many interesting discussions. My supervisor from Linköping University, Sourabh Balgi, and my examiner, Jose M. Peña, have provided feedback and suggestions which I greatly appreciate. Finally, I want to express my gratitude towards my family for their unconditional support and encouragement throughout my studies.

Oskar Lundin  
Linköping, June 2022

# Contents

<b>Abstract</b>	<b>iii</b>
<b>Acknowledgments</b>	<b>iv</b>
<b>Contents</b>	<b>v</b>
<b>List of Figures</b>	<b>vii</b>
<b>List of Tables</b>	<b>viii</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Outline . . . . .	1
1.2 Motivation . . . . .	1
1.3 Aim . . . . .	2
1.4 Research Questions . . . . .	3
1.5 Delimitations . . . . .	3
<b>2 Theory</b>	<b>4</b>
2.1 Background . . . . .	4
2.1.1 Visual Search and Attention . . . . .	4
2.1.2 Active Vision and Object Search . . . . .	5
2.1.3 Deep Learning . . . . .	5
2.1.4 Reinforcement Learning . . . . .	7
2.2 Related Work . . . . .	10
2.2.1 Search with Deep Reinforcement Learning . . . . .	11
2.2.2 Memory Architectures . . . . .	14
2.2.3 Generalization and Inductive Bias . . . . .	15
2.2.4 Evaluation of Agents . . . . .	16
<b>3 Method</b>	<b>18</b>
3.1 Environments . . . . .	18
3.1.1 Problem Statement . . . . .	18
3.1.2 Gaussian Environment . . . . .	20
3.1.3 Terrain Environment . . . . .	20
3.1.4 Camera Environment . . . . .	20
3.2 Agents . . . . .	21
3.2.1 Architecture . . . . .	22
3.2.2 Training . . . . .	25
3.3 Experiments . . . . .	25
3.3.1 Search Performance and Behavior . . . . .	25
3.3.2 Size of Search Space . . . . .	27
3.3.3 Number of Training Samples . . . . .	27
3.4 Implementation . . . . .	27

<b>4</b>	<b>Results</b>	<b>28</b>
4.1	Search Performance and Behavior . . . . .	28
4.2	Size of Search Space . . . . .	29
4.3	Number of Training Samples . . . . .	31
<b>5</b>	<b>Discussion</b>	<b>33</b>
5.1	Results . . . . .	33
5.1.1	Reflection on Search Performance . . . . .	33
5.1.2	Scalability To Larger Search Space Sizes . . . . .	34
5.1.3	Generalizing from Limited Training Sets . . . . .	35
5.2	Method . . . . .	35
5.2.1	Image Observations, Detections and Indications . . . . .	36
5.2.2	Position, Movement and Search Space Dimensionality . . . . .	36
5.2.3	Implications of Reward Signal . . . . .	37
5.2.4	Neural Network Architecture and Memory . . . . .	37
5.2.5	Reinforcement Learning for Visual Search . . . . .	38
5.2.6	Replicability, Reliability and Validity . . . . .	38
5.2.7	Source Criticism . . . . .	39
5.3	The work in a wider context . . . . .	39
<b>6</b>	<b>Conclusion</b>	<b>41</b>
6.1	Future Work . . . . .	42
	<b>Bibliography</b>	<b>43</b>
<b>A</b>	<b>Learning Curves</b>	<b>51</b>
<b>B</b>	<b>Search Paths</b>	<b>53</b>
<b>C</b>	<b>Memory Visualization</b>	<b>57</b>

# List of Figures

2.1	Partially observable Markov decision process . . . . .	8
3.1	Gaussian environment . . . . .	21
3.2	Terrain environment . . . . .	22
3.3	Camera environment . . . . .	23
3.4	Neural network architecture . . . . .	23
4.1	Learning curves for different search space sizes. . . . .	30
4.2	Learning curves for varying training set sizes. . . . .	32
A.1	Learning curves for Gaussian environment. . . . .	51
A.2	Learning curves for terrain environment. . . . .	52
A.3	Learning curves for camera environment. . . . .	52
B.1	Scene for search paths . . . . .	53
B.2	Random baseline search path . . . . .	54
B.3	Greedy baseline search path . . . . .	54
B.4	Exhaustive baseline search path . . . . .	55
B.5	Handcrafted baseline search path . . . . .	55
B.6	Temporal memory agent search path . . . . .	56
B.7	Spatial memory agent search path . . . . .	56
C.1	Spatial memory visualization . . . . .	57

# List of Tables

3.1	PPO hyperparameters . . . . .	25
4.1	Performance metrics for each environment. . . . .	29





# 1 Introduction

The ability to search for and locate things in our environments is fundamental to our daily lives as humans. We are constantly looking for things, be it the right book in a bookshelf, a certain keyword in an article, or birds in the sky. In many cases, it is critical that this search is strategic, efficient, and fast. Animals need to quickly identify predators, and drivers need to be able to search for pedestrians crossing the road they are driving on.

At the root of the visual search problem is partial observability. A searcher can only perceive, or pay attention to, a limited region of the searched environment at once. Therefore, which regions to observe and in what order becomes an important decision. Humans are able to utilize features of the environment to guide our search [67, 25, 50]. For example, we know to look for berries at the forest floor, and not to look for boats on land.

This thesis investigates the implementation of agent that learn to locate targets in their environments. Specifically, we look at how agents that learn to utilize visual cues to search more efficiently can be implemented with deep reinforcement learning.

## 1.1 Outline

The motivation and aim of the thesis are introduced in the remainder of this chapter. Relevant theory, such as background information and related work, is covered in Chapter 2. Methodology for answering the research questions is laid out in Chapter 3. Experimental results are covered in Chapter 4 and discussed in Chapter 5. Finally, Chapter 6 concludes the thesis with some remarks and suggestions for future work.

## 1.2 Motivation

Automated visual search has applications in several areas, such as search-and-rescue, surveillance, fire detection and home assistance. Employing autonomous vehicles instead of human-controlled ones for such tasks can both reduce risk and cost of labor. Additionally, autonomous agents can potentially search more efficiently.

However, while visual search is often seemingly effortless to us humans, it is a complex process. Understanding human visual search and recreating it in machines has proven to be a great challenge [25]. An autonomous searcher has to both be able to recognize useful features

and know how to use them to guide its search. Doing this requires some contextual scene understanding.

Although we can teach machines to search by encoding human knowledge, this is typically a complex and laborious process. Communicating to a machine how to acquire and understand visual information is difficult. Useful features may be subtle and tricky to pick up, even for humans. Furthermore, properly utilizing such features to minimize search time is not trivial [71, 5].

Systems that rely on handcrafted rules for search are also restricted to the contexts they were designed for. Visual features that can be used to search efficiently in one environment may not be present in the next. Before deploying such a system in a new environment, the particulars of that environment have to be encoded. Real-world search scenarios exhibit high variance that can be infeasible to teach to a machine.

An alternative to manually encoding search strategies in machines is to instead use a learning system. Reinforcement learning [62] (RL) is a general paradigm for implementing agents that learn how to act in order to achieve some goal. In recent years RL has been combined with deep learning [30] with tremendous success, forming the field of deep RL. Deep RL agents have surpassed human performance in arcade games [49], board games [60], and even complex real-time strategy games [65]. Several works have also applied deep RL to tasks involving complex control problems with visual input [44, 47, 74, 45].

This makes it interesting to see whether deep RL can also be applied to visual search. A learning system could learn patterns and strategies that are difficult for humans to pick up and utilize to minimize search times. Given a sufficient number of samples, such a system could learn to search in arbitrary environments.

### 1.3 Aim

The aim of this thesis is to investigate how an agent that learns to search for targets using visual input can be implemented with deep RL. The goal of the agent is to locate all targets in its environment in minimum time. Such an agent should learn the search strategies from a set of training scenarios, and be able to carry out the strategies in unseen environments. Specifically, we consider scenarios where the agent can only observe a small portion of its environment at any given time through a camera. The agent should locate targets by indicating where in the environments they are. To do this, it must actively choose where to look in order to gain new information about the environment.

We postulate that an efficient searcher is able to learn and utilize structure in the searched environments to find targets quicker. In other words, it should try to prioritize searching regions where targets are most likely to be found according to previous experience. The distribution of targets can be correlated with the appearance of the searched scene. A searcher should be able to pick up such correlations and utilize them. Furthermore, a searcher could benefit from being able to integrate information over time. Knowledge that was acquired during earlier stages of a search can be useful for making decisions later. In most search scenarios, it is desirable that the agent avoids searching the same region multiple times. It may also be useful to remember structured visual information of the explored regions of the searched environment. This can provide insights into what is in their proximity.

If a deep reinforcement learning agent is to be trained and deployed for a real-world search task, there is likely a limited set of samples to learn from. Therefore, it is also of interest to investigate how many samples are required to infer how to search efficiently in similar environments.

In contrast to several past works addressing similar problems [44, 45, 29, 16, 59, 26], we are interested the implementation of agents that learn to utilize arbitrary visual structure to search more efficiently. This thesis contributes with:

- A set of environments to train and evaluate visual search agents.

- An approach for learning efficient visual search task with deep reinforcement learning.
- A thorough evaluation of two learning agents with different neural network architectures.
- A discussion of the proposed method in terms of applicability and usefulness.

## 1.4 Research Questions

The following research questions are addressed in the thesis:

1. How can an agent that learns to efficiently search for targets be implemented with reinforcement learning?
2. How does the learning agent compare to random walk, greedy search, and a human searcher with prior knowledge of the searched environment?
3. How well does the learning agent generalize from a limited number of training samples to unseen in-distribution scene samples?

## 1.5 Delimitations

We focus on the behavioral and decision-making aspects of a visual search agent, and delimit ourselves from difficult detection problems. For this reason, targets will deliberately be made easy to detect once visible. Furthermore, we make the assumption that the searched environment is static. The appearance of the environment and the location of the targets does not change from one observation to the next. Finally, we are specifically interested in deep reinforcement learning solution methods.



## 2 Theory

The problem considered in this thesis is at the junction of several fields, each with their own history and recent advancements. In this chapter, we cover background theory that is relevant for the topic of this thesis. We also survey related work that considers problems similar to ours.

### 2.1 Background

What constitutes intelligent search behavior is closely linked to how we humans search. This has been an active area of study in neuroscience for a long time [67, 25, 50]. The same is true for machine perception and decision-making [3, 10]. In recent years, deep learning has led to great improvements in the ability of machines to perceive sensory input like images [73]. Somewhere between machine perception and decision-making lies deep reinforcement learning, which is the combination of deep learning [30] and reinforcement learning [62]. All of these fields provide necessary and useful perspective to our considered problem.

#### 2.1.1 Visual Search and Attention

The perceptual task of searching for something in a visual environment is usually referred to as *visual search* [66]. The object or feature that is being searched for is referred to as the *target*, and the other objects or features in the environment as *distractors*. This task has been studied extensively in psychology and neuroscience.

Two big limitations of performance in visual search are processing power, and limited observability. Processing high-dimensional sensory input like images is expensive, and environments are often too large and complex to view all at once. An observer that searches a scene for targets has to direct its *visual attention* to one region at a time. Humans scan environments by directing their gaze (*overt attention*) and shifts of attention in the current visible region (*covert attention*) [37]. While covert attention tends to be reactionary, overt attention is often more strategic.

Humans control overt attention through both eye movements and head movements. Eye movement is almost instant between locations, and the cost of directing attention with eye movements is constant regardless of distance. This is not true for head movements, and in general not true for robotic systems: movements induced by motors tend to come at a cost

that is proportional to the distance moved, both in time and energy. The cost of directing overt attention means that there is a need to do so strategically.

If the searched environment is a random field, visual search is akin to a random process [50]. Experiments in humans have shown that search in featureless environments is consistent with random walk with no memory. Optimal search algorithms in such environments would be exhaustive, such as those found in coverage path planning [28]. Humans have also been shown to use the history of observations to improve visual search efficiency. Simple memory mechanisms, like some inhibition-of return mechanism [37] that prevents searching visited locations twice, improve search time in random fields considerably.

Natural environments are in fact seldom completely random, but instead tend to exhibit some structure. When finding targets, there is usually something about this structure that can be utilized to improve search performance. Such regularities can be learned from experience and used during future searches. Improvements in human search performance have been measured when certain locations have higher probabilities of containing targets [25, 67]. Furthermore, if targets often co-occur with other visible elements they tend to be easier to find [25, 67].

### 2.1.2 Active Vision and Object Search

Much of past and present research in machine perception involves a passive observer which samples and perceives images from a fixed distribution. Animal perception, in contrast, is active – we do not only see, but also decide where to look. In the *active vision* paradigm, the observer has some control of its sensory input [3].

Active vision, and *active perception* in general, is a problem of intelligent data acquisition. An active observer must control its sensory inputs to constrain the interpretation of its environment. One of the difficulties of active perception tasks is that they are scene and context dependent. A thorough understanding of the data acquisition parameters and the goal of the visual processing is needed [10].

In active vision, searching for objects with a camera in unknown environments is referred to as *object search* or *active object localization*. A searching observer has to both recognize and localize its targets, while controlling its sensory input. To search effectively, it must also model its environment and perform path planning [18].

Solving the object search problem optimally involves determining a sequence of camera controlling actions that maximizes the probability of finding the target while satisfying a cost constraint. The state of the searcher is uniquely determined by the control parameters of the camera. Actions that adjust these parameters and adjust the observed region come at some cost in time or energy. Finally, the agent has some prior knowledge of the probability of targets which it updates after each observation. Finding an optimal solution in three-dimensions has been shown to be NP-complete, necessitating approximate solutions [5, 71].

### 2.1.3 Deep Learning

Deep learning is a family of techniques in which hypothesis are represented as computation graphs with tunable weights. The computation graphs are inspired by biological neurons in the brain and are referred to as *neural networks*. Deep neural networks consist of *nodes* arranged in *layers*: one input layer, zero or more hidden layers and one output layer. Each layer receives an input *representation* [12] from the previous layer and outputs a transformed representation to the next layer. Given some input, a neural network optimizes its output representation with regard to some criterion. Usually, a loss function  $\mathcal{L}$  is minimized by updating the weights  $\mathbf{w}$  of the network with some variant of *gradient descent* with learning rate  $\alpha$ :

$$\mathbf{w} \leftarrow \mathbf{w} - \alpha \nabla_{\mathbf{w}} \mathcal{L}(\mathbf{w}) \quad (2.1)$$

The only requirement on the function computed by each node is that it is differentiable. As long as this holds, layers can be stacked arbitrarily and the gradients can be computed with the chain rule. This way, errors in the output can be passed back through the network (*back-propagation*) and used to update the weights. [56, 30]

The architecture of a neural network imposes some bias onto the learning that is expected to be useful for generalizing to unseen samples. We now describe three neural network architectures that will be used in this work.

### Feedforward Neural Network

A feed-forward neural network, also known as a multi-layer perceptron (MLP) [30], only has connections in one direction. Each node in the network receives inputs from its predecessors and outputs the result of a function of those inputs. The output  $y$  of each node is usually computed by taking the weighted sum of its inputs  $\mathbf{x}$  and applying some non-linear function

$$y_j = g_j(\mathbf{w}_j^T \mathbf{x}), \quad (2.2)$$

where  $y_j$  is the output of node  $j$ ,  $g_j$  is a non-linear *activation function*,  $\mathbf{w}_j$  is the vector of weights leading into node  $j$ , and  $\mathbf{x}$  is the vector of inputs to the node. By convention, each layer also has some *bias* that allows the total weighted input to  $g_j$  to be non-zero even when the outputs from the previous layer are zero. The bias is included as an extra input  $x_0$  fixed to 1, and an extra tunable weight  $w_{0,j}$ . The non-linearity ensures that a network with at least two layers can approximate any continuous function. [56]

### Convolutional Neural Network

Convolutional neural networks (CNNs) contain spatially local connections. They have patterns of weights, called *kernels*, that are replicated across units in each layer. With some input vector  $\mathbf{x}$  of size  $n$  and a vector kernel  $\mathbf{k}$  of size  $l$ , the (discrete) convolution operation  $\mathbf{z} = \mathbf{x} * \mathbf{k}$  is defined as

$$z_i = \sum_{j=1}^l k_j x_{j+1-\frac{l+1}{s}}, \quad (2.3)$$

where  $s$  is the *stride*. This operation can be generalized up to more than one dimension, such as 2 dimensions for images and 3 dimensions for volumes. With multiple input channels, kernels are stacked into a *filter*. The outputs of each kernel are then summed over, giving one output channel per filter.

There are several advantages to using CNNs for structured input data where neighboring values are correlated. Kernels are smaller than the input, which means that fewer parameters have to be stored. These *sparse interactions* give CNNs reduced memory requirements, as well as improved statistical and computational efficiency.

Furthermore, the same parameters are also used for more than one function in the CNN. *Parameter sharing* across input locations mean that layers in a CNN have *equivariance* to translation. The output of one kernel is the same regardless of the input location. This property of CNNs is useful for images where similar features may be useful regardless of their location in the input. [30]

### Recurrent Neural Network

Recurrent neural networks (RNNs) extend feed-forward networks by allowing cycles in the computation graph. Each cycle has a delay so that some *hidden state* from the previous computation is used as input to the current computation. A recurrent layer with input  $\mathbf{x}_t$ , output  $\mathbf{y}_t$  and hidden state  $\mathbf{z}_t$  is defined by

$$\begin{aligned} \mathbf{z}_t &= f_{\mathbf{w}}(\mathbf{z}_{t-1}, \mathbf{x}_t) \\ \mathbf{y}_t &= g_y(\mathbf{w}_{z,y}, \mathbf{z}_t), \end{aligned} \quad (2.4)$$

where  $f_{\mathbf{w}}$  is the update process for the hidden state and  $g_y$  is the activation function for the hidden layer. This model can be turned into a feed-forward network over a sequence of input vectors  $\mathbf{x}_1, \dots, \mathbf{x}_T$  and observed outputs  $\mathbf{y}_1, \dots, \mathbf{y}_T$  by *unrolling* it for  $T$  steps. The weights are shared across all time steps. This means that RNNs can operate on inputs of arbitrary lengths. The hidden state is used as a summary of all previous items in the sequence. Thus, RNNs make a Markov assumption. [56]

In practice, conventional RNNs struggle with learning long-term dependencies. During back-propagation, gradients can tend to zero for long sequences, something known as the vanishing gradient problem [30]. An architecture that addresses this issue is long short-term memory (LSTM) [36]. LSTM units consist of an *input gate*, *forget gate*, *output gate* and *cell*. These are defined by the following set of equations:

$$i_t = \sigma(\mathbf{w}_i[x_t, h_{t-1}]) \quad (2.5)$$

$$f_t = \sigma(\mathbf{w}_f[x_t, h_{t-1}]) \quad (2.6)$$

$$o_t = \sigma(\mathbf{w}_o[x_t, h_{t-1}]) \quad (2.7)$$

$$\tilde{c} = \tanh(\mathbf{w}_c[x_t, h_{t-1}]) \quad (2.8)$$

$$c_t = f_t \circ c_{t-1} + i_t \circ \tilde{c}_t \quad (2.9)$$

$$h_t = o_t \circ \tanh(c_t) \quad (2.10)$$

Here,  $x_t \in \mathbb{R}^d$  is the input,  $h_t \in \mathbb{R}^h$  is the *hidden state* and  $c_t \in \mathbb{R}^h$  in the *cell state* of the units. The initial values are  $c_0 = 0$  and  $h_0 = 0$  and the operator  $\circ$  is the element-wise product. The matrices  $w_i$ ,  $w_f$ ,  $w_o$  and  $w_c \in \mathbb{R}^{h \times (h+d)}$  are the weights for the input gate, forget gate, output gate, and cell respectively (with implicit biases). The hidden state  $h_t$  is used as output of the LSTM and depends on both the input, the previous hidden state and the cell state. Because the cell state  $c_t$  is updated using a combination of the previous cell state and a candidate cell state  $\tilde{c}_t$ , the cell is able to remember values over arbitrarily many time steps  $t$ .

### 2.1.4 Reinforcement Learning

Reinforcement learning (RL) [62] is a subfield of machine learning concerned with learning from interaction how to achieve a goal. This section introduces the fundamental concepts of RL.

#### Partially Observable Markov Decision Processes

The problem of learning from interaction to achieve some goal is often framed as a Markov decision process (MDP). A learning *agent* interacts continually with its *environment*. The agent takes the *state* of the environment as input, and select an *action* to take. This action updates the state of the environment and gives the agent a scalar *reward*. It is assumed that the next state and reward depend only on the previous state and the action taken. This is referred to as the *Markov* property. [38]

In an MDP, the agent can perceive the state of the environment with full certainty. For many problems, including the one we consider here, this is not the case. The agent can only perceive a partial representation of the environment's state. Such a process is referred to as a partially observable Markov decision process (POMDP). A POMDP is formally defined as a 7-tuple  $\langle \mathcal{S}, \mathcal{A}, \mathcal{T}, \mathcal{R}, \Omega, \mathcal{O}, \gamma \rangle$ , where

- $\mathcal{S}$  is a finite set of states,

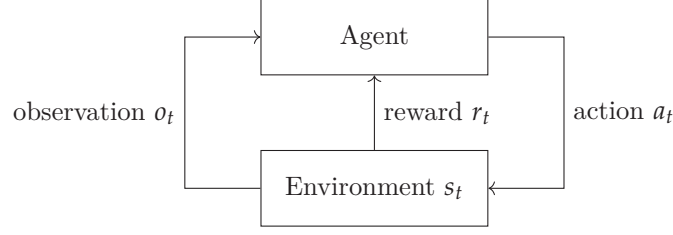


Figure 2.1: Interaction between agent and environment in a partially observable Markov decision process.

- $\mathcal{A}$  is a finite set of actions,
- $\mathcal{T} : \mathcal{S} \times \mathcal{A} \rightarrow \Pi(\mathcal{S})$  is a state-transition function,
- $\mathcal{R} : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$  is a reward function,
- $\Omega$  is a finite set of observations,
- $\mathcal{O} : \mathcal{S} \times \mathcal{A} \rightarrow \Pi(\Omega)$  is an observation function, and
- $\gamma \in [0, 1]$  is a discount factor.

Assume that the environment is in state  $s_t \in \mathcal{S}$ , and the agent selects action  $a_t \in \mathcal{A}$ . Then,  $T(s_t, a_t, s_{t+1})$  is the probability of ending in state  $s_{t+1}$  and  $r_t = R(s_t, a_t)$  is the expected reward gained by the agent. The agent also receives an observation  $o_t \in \Omega$  with probability  $\mathcal{O}(s_{t+1}, a_t, o_t)$ . [38] Figure 2.1 illustrates the interaction between agent and environment.

The agent and environment interact over a sequence of discrete time steps  $t = 0, 1, \dots, T$ , giving rise to an *episode* of length  $T$ . At each time step  $t$ , the goal of the agent is to select the action that maximizes the expected *discounted return*:

$$\mathbb{E} \left[ \sum_{k=t+1}^T \gamma^{k-t-1} r_k \right] \quad (2.11)$$

Since the agent receives partial observations of the environment's state, it has to act under uncertainty. This makes finding exact solutions to POMDPs computationally complex, and virtually intractable. Approximate solutions are more common, where the agent usually maintains an internal *belief state* [38] which it acts on. The belief state summarizes the agent's previous experience and is therefore dependent on the full *history* of actions and observations. It does not need to summarize the whole history, but generally only the information that helps the agent maximize the expected reward. From here on we will use the belief state and the environment state  $s$  interchangeably.

### Policies and Value Functions

The behavior of the agent is described by its *policy*. A policy  $\pi$  is a mapping from perceived environment states to actions. Policies are often stochastic and specify probabilities for each action, with  $\pi(a|s)$  denoting the probability of taking action  $a$  in state  $s$ . [62]

Most RL solutions methods also approximate a *value function*. A value function  $V_\pi$  estimates how good it is to be in a state. The value function  $V_\pi(s)$  is the expected (discounted) return when starting at state  $s$  and following policy  $\pi$  until the end of the episode. There are two common alternative value functions: The *Q-function*  $Q_\pi(s, a)$  gives the value of state  $s$  under policy  $\pi$  where  $a$  is the first action taken. Given a Q-function, *action-value* methods choose the action greedily at every state as  $\arg \max_a Q_\pi(s, a)$ . The *advantage function*  $A_\pi(s, a)$  instead represents the relative advantage of actions,  $A_\pi = Q_\pi - V_\pi$ . [62]



For problems with large state and action spaces, it is common to represent value functions with *function approximation*. In such cases, it is common to encounter states that have never been encountered before. This makes it important that the estimated value function can generalize from seen to unseen states. With examples from the true value function, an approximation can be made with supervised learning methods. We write  $\hat{V}(s, \mathbf{w}) \approx V_\pi(s)$  for the approximate value of state  $s$  with some weight vector  $\mathbf{w} \in \mathbb{R}^d$ . [62]

An alternative to action-value methods is to approximate the policy itself. *Policy gradient* methods learn a parametrized policy that select actions without a value function. We denote a parametrized policy as  $\pi(a|s, \theta)$  with  $\theta \in \mathbb{R}^{d'}$  as the parameters to the policy. The policy parameters are usually learned based on the gradient of some performance measure  $L(\theta)$ . As long as  $\pi(a|s, \theta)$  is differentiable with respect to its parameters, the parameters can be updated to optimize for the objective. [61]

Advantages of policy parametrization over action-value methods include stronger convergence guarantees [61] and more flexibility in parametrization [62]. However, less is known about if and how fast policy gradient methods converge to globally optimal policies [1]. In practice, value functions are often still used to learn the policy parameter, but they are not needed for action selection. Such methods are called *actor-critic* methods, with actor referring to the learned policy and critic referring to the learned value function. In these cases, there might also be some overlap between the weights  $\mathbf{w}$  of the value function estimate and  $\theta$  of the policy estimate.

One important aspect of RL with function approximation is that it is applicable to partially observable problems. If there is a state variable that is not observable, as for partially observable environments, the parametrization can be chosen such that the approximate value does not depend on that state variable. [62]

### Design Challenges

One of the challenges that arises in reinforcement learning is the exploration-exploitation trade-off. An RL agent should *exploit* knowledge gained from previous experiences and prefer actions that has yielded reward in the past. It should also *explore* in order to learn better actions to take in the future. Agents that fail to both exploit and explore will lead to failure at the task, and striking a good balance between the two is non-trivial. [62]

Another challenge is the design of reward signals. For some tasks, like certain video games, the objective is simply to maximize the score obtained. In this case there is an inherent reward signal and the agent achieves its task simply by maximizing this inherent signal. Other times, we have a task we want the agent to solve and have to design a reward signal around that task. Designing rewards is not straight-forward and can often have unintended effects [62]. Special care has to be taken to ensure that the reward encourages the desired behavior.

Here, the problem of *sparse rewards* also comes into play. The agent has to be rewarded frequently enough to allow it to achieve its goal once. If rewards are too sparse, the agent may explore aimlessly and take too long to achieve its goal. If the received reward is temporally distant from the action that caused it, the agent may have difficulty connecting the two. This is known as the *credit assignment problem* [43].

In practice, rewards are typically designed through trial-and-error. Through *reward shaping* [42], the reward is designed to guide the agent towards achieving its goal by giving additional rewards along the way. Several iterations of a reward signal are tried until one yields expected and sufficient results.

### Deep Reinforcement Learning

As mentioned in Section 2.1.4, RL usually involves approximating policies and value functions. Neural networks have good properties for function approximation and have been used for RL

with success. One early example is TD-Gammon [63], a neural network trained with RL that reached expert Backgammon performance in 1995.

More recently, successes in deep learning have led to significant advancements in the field of RL. In 2015, Mnih et al. [49] extend [48] and introduce DQN, which combines deep neural networks with RL. DQN successfully plays Atari games using only visual input. It approximates the Q-function  $Q(s, a)$  with a CNN architecture, and selects actions greedily. To incorporate some memory, images from the 4 previous time steps are stacked and used as input to the neural network. The input is fed through three convolutional layers and a hidden fully connected layer, all with ReLU activation functions. The output layer has one output for each valid action, representing Atari controller buttons.

DQN inspired many several follow-up works which use deep neural networks to approximate policy and/or value functions. Such methods are often referred to as deep reinforcement learning (deep RL) methods.

### Proximal Policy Optimization

Proximal policy optimization (PPO) [58] is a family of policy-gradient algorithms that have been reported to strike a good balance between simplicity, stability and ease of tuning while achieving strong results on several tasks [58, 33, 20, 65, 6]. PPO alternates between sampling agent-environment interactions over  $T$  time steps and optimizing the policy using those interactions. The parameters  $\theta$  of the policy  $\pi$  are updated with the objective

$$\mathcal{L}_{\text{CLIP}}(\theta) = \hat{\mathbb{E}}_t [\min(r_t(\theta)\hat{A}_t, \text{clip}(r_t(\theta), 1 - \epsilon, 1 + \epsilon)\hat{A}_t)]. \quad (2.12)$$

The expectation  $\hat{\mathbb{E}}$  indicates the empirical average over a finite batch of samples collected under the old policy with parameters  $\theta_{\text{old}}$ . Here,  $r_t(\theta) = \frac{\pi(a_t|s_t, \theta)}{\pi(a_t|s_t, \theta_{\text{old}})}$  and  $\hat{A}_t$  is an estimate of the advantage function. The clip range  $\epsilon$  is used to clip the surrogate objective, putting a pessimistic bound on the product of the probability ratio and the advantage estimate. This in turn ensures that the size of the policy updates is limited.

In an actor-critic approach, the advantage is estimated using a learned state value function  $V(s)$  as

$$\hat{A}_t = \delta_t + (\gamma\lambda)\delta_{t+1} + \dots + (\gamma\lambda)^{T-t+1}\delta_{T-1} \quad (2.13)$$

where  $\delta_t = r_t + \gamma V(s_{t+1}) - V(s_t)$ . If the policy and value functions estimations share parameters, for example in a multi-headed neural network architecture, a loss function that combines the policy loss and the value function error term must be used. It is also common to introduce an entropy bonus to ensure sufficient exploration. The full PPO objective for an actor-critic approach is:

$$\mathcal{L}_t(\theta) = \hat{\mathbb{E}}_t [\mathcal{L}_{\text{CLIP}}(\theta) - c_1 \mathcal{L}_{\text{VF}}(\theta) + c_2 S[\pi](s_t, \theta)] \quad (2.14)$$

Here,  $\mathcal{L}_{\text{VF}}$  is a squared-error loss between the value function approximation and the actual state value. The coefficient  $c_1$  scales the impact of the value loss on the parameter updates. The final term,  $S[\pi]$ , denotes the entropy of the action probabilities  $\pi$ . Policies with higher entropy, or policies where action probabilities are closer to equal, can be favored by selecting a large coefficient  $c_2$ . Algorithm 1 shows the steps of the PPO algorithm.

## 2.2 Related Work

Works that consider tasks that are related to searching for targets in unknown environments can be found in several fields under many names. In this section we survey some of the more relevant ones, focusing on those that employ RL methods. We also cover work that relates to our posed research questions.

**Algorithm 1** Proximal Policy Optimization.

---

```

for iteration = 1, 2, ... do
  for actor = 1, 2, ..., N do
    run policy  $\pi_{\theta_{\text{old}}}$  for  $T$  time steps
    compute advantage estimates  $\hat{A}_1, \dots, \hat{A}_T$ 
  end for
  optimize  $\mathcal{L}$  wrt  $\theta$ , with  $K$  epochs and mini-batch size  $M \leq NT$ 
   $\theta_{\text{old}} \leftarrow \theta$ 
end for

```

---

**2.2.1 Search with Deep Reinforcement Learning**

There have been numerous rigorous attempts to implement robotic object search systems using non-learning methods. Forssén et al. [26] implement a mobile robot that searches for specific objects within a cluttered environment. Their robot explores by moving towards unexplored regions and looks around to identify potential objects. Each object is examined from multiple perspectives and ranked by probability of being the queried object. Shubina and Tsotsos [59] model the search problem as in [71], and solve it using a greedy action selection strategy. They do not take environment appearance into account, and rely on prior knowledge of target distribution being provided as a spatial probability map. Some works also take appearance and semantics of the environment into account to search more efficiently [7, 8].

These systems solve more complex tasks than the one we consider, such as handling multiple target object categories and navigating in obstructed environments. However, they are also restricted by their reliance on human knowledge to act well in their environments. While reinforcement learning is not among the more traditional solution methods for active vision tasks [18], learning systems that are less dependent on expert knowledge have the potential to be more generally applicable.

**Sequential Visual Attention**

Minut and Mahadevan [44] propose a sequential model of selective visual attention for visual search tasks. An agent is tasked with finding a particular object in a scene. A policy for controlling a fixed pan-tilt-zoom camera is learned with reinforcement learning. The goal of the agent is to aim the camera at the region where a target is most likely to be found. It has to decide where to fixate next based on visual information only. Despite being limited to a single environment, this is an early example of visual search modeled as an RL problem.

Mnih et al. [47] take inspiration from visual attention and foveated vision found in humans and propose to use a similar mechanism for computer vision tasks. Applying a CNN to large images can be expensive, as the complexity scales linearly with the number of image pixels. They introduce a recurrent model that extracts information from images by adaptively selecting a sequence of smaller regions to process at high resolution. At each time step, the agent receives an image observation of the environment. Through actions, the agent selects a limited region of this observation to view in high resolution. It is given a reward that is dependent on the task the agent should perform. It can access this image via a bandwidth-limited sensor which it focuses on a limited region. The agent maintains an internal state using an LSTM layer. Though the model is not differentiable, it is trained using RL with a policy gradient method. The authors evaluate the agent for image classification and a game-like task. They find that the model outperforms a similar convolutional architecture for cluttered object classification tasks. This is attributed to its ability to focus its attention on important regions.

### Active Object Detection

In computer vision, *object detection* is the task of detecting semantic objects of a certain class in images. Detecting an object entails *recognizing* that it is present in an image, and *localizing* it by determining its bounding box. State-of-the-art object detection methods employ deep learning techniques, usually a convolutional architecture, to recognize objects [73]. For localization, a region proposal process considers the whole image and returns a set of bounding box candidates. The object recognizer is then run on each region proposal. Region proposals are akin to visual attention, as they limit the region of the image that is processed by the recognizer.

Although we do not focus on difficult recognition problems in this work, object localization is highly relevant. The difference is that images in object detection are passively sampled - they are drawn from some distribution and all are independent. Furthermore, the entire scene that is searched for objects is visible in the image. In *active object detection*, the analyzed images are instead chosen to help the detector perform its task better.

Caicedo and Lazebnik [16] propose to use deep reinforcement learning for active object localization in images where the object to be localized is fully visible. An agent is trained to successively improve a bounding box using translating and scaling transformations. They use a reward signal that is proportional to how well the current box covers the target object. An action that improves the region is rewarded with +1, and given a punishment of -1 otherwise. They find that this reward communicates more clearly which transformations keep the object inside the box and which take the box away from the target. When there is no action that improves the bounding box, the agent may select an indication action (which would be the only action that does not give a negative reward) which resets the box. This way the agent may select additional bounding boxes. Each indication action modifies the environment by marking it so that the agent may learn to not select the same region twice.

A similar work by Ghesu et al. [29] present an agent for anatomical landmark detection trained with deep RL. Different from [16] is that the entire scene is not visible at once. The agent sees a limited region of interest in an image, with its center representing the current position of the agent. The actions available to the agent translate the view up, down, left and right. A reward is given to the agent that is equal to the supervised relative distance-change to the landmark after each action. Three datasets of 891 anatomical images are used. The agent starts at random positions in the image close to the target landmark and is tasked with moving to the target location. While achieving strong results (90% success rate), the scenes and targets are all drawn from a distribution with low variance. Most real-world search tasks exhibit larger variance than a population of anatomical images of the human body.

Chen and Gupta [19] use a spatial memory for context reasoning in object detection. They argue that object detection systems require memory to perform well. Furthermore, they pose that this memory should capture the spatial layout of the scene in order to model object-object relationships. Their proposed memory remembers features and locations of past detections in an image and uses this to improve future ones. A CNN is used to extract features from the memory and used together with the original image as input to a standard region proposal network. The approach gives a small improvement over the standalone region proposal network.

### Visual Navigation

Visual navigation is the process of determining a suitable path between a start point and destination point using visual input. Visual navigation has been studied for use in both autonomous ground vehicles, where obstacles have to be avoided, and for unmanned aerial vehicles which typically don't have the problem of avoiding obstacles [13]. Visual search can be considered analogous to a visual navigation in unrestricted environments.

In recent years, several works have used deep RL to solve various visual navigation tasks. These have mostly been focused on learning navigation between two points in indoor environments, where the goal is either specified as an image of a target object or indirectly as a distance from the agent’s location. There are multiple simulated environments for such tasks [41, 68, 57].

Zhu et al. [74] create a model for target-driven visual navigation in indoor scenes with deep RL. An observer is given a partial image of its scene as well as an image of the target object, and is tasked with navigating to the object in the scene with a minimal number of steps. The agent moves forwards, backwards, and turns left and right at constant step lengths. A reward signal with a constant time penalty is used to incentivize task completion in few steps. They compare their approach to random walk and the shortest path, with promising results. This setup is quite similar to the one considered in this report, but the authors make a few assumptions that we do not. Their method is trained and evaluated on 32 scenes, each of which contain a fixed number of object instances. They focus on learning spatial relationships between objects in these specific scenes, and have scene-specific layers to achieve this. Thus, while they show that they can adapt a trained network to a new scene, their approach is unable to zero-shot generalize to new scenes.

Ye et al. [70] propose an alternative architecture to [74] which, in addition to an image of the camera view and the target object, uses the output of an object recognition module to select actions. Specifically, the output of the localization component is fed as input. This allows the agent to know if the target object is in view, and where. The object recognition module is trained separately from the policy. While this requires a set of images of potential target objects labeled with their class and location, it also illustrates how object recognition can be offloaded to a separate module in reinforcement learning agents that benefit from such functionality.

Yang et al. [69] propose to use semantic scene priors to improve navigation towards objects in unseen scenes. The agent observes its environment through a camera. Prior knowledge of spatial relations between objects types is encoded as a graph, which is encoded with a graph convolutional network. Their agent is also told what object to look for in the form of an encoded word. The encoded object graph and word is used as input together with the camera image to an actor-critic network that selects actions that navigate towards the target object. As the agent collects experiences, it also updates its prior knowledge of spatial relationships between objects. It is shown that prior knowledge encoded in such a way improves the agent’s ability to navigate to objects.

Mnih et al. [46] use a recurrent policy with only RGB images to navigate in a labyrinth. 3D labyrinths are randomly generated, and an agent is tasked with finding objects in them. The same architecture as in [49] is used, but with 256 LSTM cells after the final hidden layer. At each episode, a maze is randomly generated with objects that give rewards then traversed scattered around. They train the agent using an actor-critic approach and manage to get the agent to successfully navigate in unseen but similar environments.

Mirowski et al. [45] propose a new approach to tackle a similar maze navigation problem as [46]. They introduce a new architecture, that in addition to an image, also observes the reward, velocity and the action from the previous time step. Observing the reward may help the agent learn features of desirable frames, but also limits the set of possible reward signals as the reward has to be present during testing. As in [46], the agent has a recurrent LSTM layer. The architecture is trained using an auxiliary depth prediction objective. The authors argue that understanding the depth of the searched environment helps the agent navigate it better. This agent is evaluated against three baselines on both static and randomly generated maze environments. It is found that an agent that only receives image observations performs worse than one that also has an LSTM layer. Adding the previous reward, action and velocity to the observations bring modest performance improvements. The depth prediction is found to improve performance in all environments, indicating that the correct auxiliary task can help learning.

Dhiman et al. [24] critically investigate deep RL for navigation, using a CNN and RNN architecture as in [32] and [45]. They ask whether deep RL algorithms are inherently able to gather and exploit environmental information for during navigation. Experimentally, they find that an agent is able to exploit environment information when trained and tested on the same map. When trained and tested on different maps, the agent does not seem to be able to exploit environment information to navigate more effectively. The authors use relatively a small training set of less than 1000 samples, but do not consider that their agents could have overfit to this set. Finally, they find that the agent is not able to consistently find optimal navigation paths in seen environments when its starting position is randomized.

### 2.2.2 Memory Architectures

A recurring theme in the related work above is the use of memory architectures. In most cases where active sensing is involved, memory is a requirement for good performance. As mentioned in Section 2.1.4, effective behavior in partially observable processes usually requires some form of memory. Agents need to summarize the history of interactions with their environment for good action selection. Works that don't use memory rely on either full observability, like [16], or low variance so that search can be done reactively, like [29]. Memory is intuitively important for the search task we consider here, as integrating features over time should lead to more efficient search strategies.

Anderson et al. [4] emphasize the importance of memory mechanisms that support the construction of rich internal representations of environments in navigation agents. They argue that the nature of the internal representation is central to the study of embodied navigation. Simple agents that are purely reactive and act on the sensory input at the current time step only work for simple tasks. Simple memory mechanisms, like the frame stacking used in [49] can model velocity and work well in certain environments where reactive action is sufficient. Once a task requires integration of features over longer time, more advanced memory is required.

Augmentations like recurrent update mechanisms add more potential. Hausknecht and Stone [32] investigate the effects of adding memory in the form of a recurrent step to DQN in order to tackle POMDPs. They use the same convolutional network as [49], but only use the most recent frame as input and replace the hidden layer with a recurrent LSTM layer. It is found that the agent is able to integrate information over time and achieves comparable performance to the original DQN agent. Several other works use a recurrent step to solve tasks that require memory, like [47] and [46]. General-purpose recurrent neural networks can in theory remember anything, but have practical issues like the ones described in Section 2.1.3. Furthermore, they might not be easily trained for all tasks.

Specialized memory architectures can provide better performance for their intended tasks. Oh et al. [51] propose one such memory that can retain information over a fixed limited number of time steps. During each time step, the agent encodes its observation and shifts it into the memory. It also reads the memory using a soft attention [9] mechanism whose weights are determined by the encoded observation. This way, the agent can recall information from the past that is useful to the present. The authors evaluate this architecture in several visual navigation tasks, where image observations are encoded with a CNN. In their tests, their memory architecture performs better than LSTM layers, and generalizes better to unseen environments.

LSTM is an example of a temporal memory – it remembers information across time. Many works in visual navigation investigate the use of spatial memories rather than temporal ones. In these works, the term spatial refers to the fact that they are addressed with a position in the environment. Agents can use such memories to write and read structured information of their environment. Parisotto and Salakhutdinov [52] introduce a general-purpose spatial memory architecture. They assume that the environment can be discretized into a set of positions. The agent retains a feature map with one feature vector per position it can occupy in the environment. At each time step, the agent reads the feature map from the previous time



step and writes information to the slot for its current position. This architecture is shown to outperform LSTM and the architecture in [51] on a set of navigation tasks which require remembering over many time steps. Several similar architectures have been proposed [34, 31, 17].

### 2.2.3 Generalization and Inductive Bias

In RL, generalization refers to an agent’s ability to act well in environments that have not been seen during training. This is vital if RL is to be applied to real-world problems where conditions are diverse and unpredictable. Agents have to be robust to such variations without being trained on them (*zero-shot* policy transfer). In the case of visual search, we want a system that can search in novel environments by generalizing from those seen during training.

While deep neural networks have proved to be effective function approximators for RL, they are also prone to *overfitting*. High-capacity models trained over a long time may memorize the distribution seen during training rather than general patterns. While studied in supervised learning, overfitting and generalization has generally been neglected in deep RL [40]. Training and evaluation stages are typically not separated. Instead, the final return on the training environments is used as a measure of agent performance. This results in agents that perform badly on environments that are only slightly different from those seen during training.

Zhang et al. [72] study overfitting and generalization in deep RL. With experiments, they show that RL agents are capable of memorizing training data, even when completely random. When the number of training samples exceeds the capacity of the agent, they overfit to them. When exposed to new but statistically similar environments during testing, test performance could vary significantly despite consistent training performance. The authors argue that good generalization requires the *inductive bias* of the algorithms to be compatible with the bias of the problems. The inductive bias refers to a priori algorithmic preferences, like neural network architecture. When comparing MLPs with CNNs, they find that MLPs tend to be better at fitting the training data but worse at generalizing. When rewards are spatially invariant, CNNs generalize much better than MLPs. The authors advocate for carefully designed testing protocols for detecting overfitting. The effectiveness of stochastic-based evaluation depends on the properties of the task. Agents could still learn to overfit to random training data. For this reason, they recommend isolation of statistically tied training and test sets.

In a similar spirit, Cobbe et al. [21] construct distinct training and test sets to measure generalization in RL. They find that agents can overfit to surprisingly large training sets, and that deep convolutional architectures can improve generalization. Methods from supervised learning, like L2 regularization, dropout, data augmentation and batch normalization are also shown to aid with generalization.

Many current deep RL agents do not optimize the true objective that they are evaluated against, but rather a handcrafted objective that incorporates biases to simplify learning. Stronger biases can lead to faster learning, while weaker biases potentially lead to more general agents. Hessel et al. [35] investigate the trade-off between generality and performance from the perspective of inductive biases. Through experimentation with common reward sculpting techniques, they find that learned solutions are competitive with domain heuristics like handcrafted objectives. Learned solutions also seem to be better at generalizing to unseen domains. For this reason, they argue for avoiding biases determined with domain knowledge in future research.

Cobbe et al. [20] introduce a benchmark for sample efficiency and generalization in RL. They make use of procedural generalization, dependent on a random seed, to decide many parameters of the initial state of the environment. This forces agents to learn policies that are robust variation and avoid overfitting. To evaluate sample efficiency of agents in the benchmark, they train and test on the full distribution of states. To evaluate generalization, they limit the number of training samples and then test on held out levels. When an episode ends, a new sample is drawn from the training set. Agents may train for arbitrarily many time

steps. The number of training samples required to generalize is dependent on the particulars and difficulty of the environment. The authors choose the training set size to be near the region when generalization begins to take effect. Empirically they find that larger model architectures improve both sample efficiency and generalization. Agents strongly overfit to small training sets and need many samples to generalize. Interestingly, training performance improves as the training set grows past a certain threshold. The authors attribute this to the implicit curriculum of the distribution of levels.

Kirk et al. [40] survey generalization in deep RL. They distinguish between methods that try to generalize from training to testing sets by increasing their similarity, and those that attempt to handle their differences. To handle differences between training and test sets, an agent’s policy should rely only on features which will behave similarly in the training and testing context. If the similarities between training and testing contexts are known, they can be encoded as inductive bias for stronger generalization. When there is no specific inductive bias to encode, standard regularization can be used. Finally, when we can not rely on specific inductive biases or standard regularization, we have to rely on learning invariances from training and hope that these generalize to testing.

They further propose a formalism for collections of problems called contextual MDPs (CMDPs). A CMDP is an MDP  $\mathcal{M}$  (or POMDP) in which the state can be decomposed into  $s = \langle c, s' \rangle$ , where  $s \in \mathcal{S}$  is the underlying state and  $c \in \mathcal{C}$  is the *context*. The context takes the role of a seed and determines the sample drawn from the underlying distribution of task instances. In a CMDP, separate train and test tasks can be defined by creating  $\mathcal{C}_{\text{train}} \subseteq \mathcal{C}$  and  $\mathcal{C}_{\text{test}} \subseteq \mathcal{C}$  such that  $\mathcal{C}_{\text{train}} \cap \mathcal{C}_{\text{test}} = \emptyset$ . It is argued that the only choice when evaluating generalization with procedurally generated environments is the training set size. Evaluation has to be performed on the full distribution of (held out) contexts.

#### 2.2.4 Evaluation of Agents

An issue in state-of-the-art deep RL is reproducibility. There is often non-determinism, both in the methods and environments used. Furthermore, many methods have intrinsic variance which can make published results difficult to interpret. In some cases, training an algorithm in an environment twice can result in learning curves that do not fall within the same distribution [33]. This has meant that reproducing state-of-the-art deep RL results is difficult. A common solution is to report average results and variance across multiple different runs.

However, the sample inefficiency of current deep RL algorithms together with the rise in popularity of more challenging benchmarks has led to long training times. This has made it less feasible to measure performance over many training runs, which in turn has led to a shift to only evaluating a few runs ( $N \leq 5$ ) per task [2]. This is problematic, as several analyses indicate that as many as  $N = 20$  runs are required for statistically significant results [23, 22].

Henderson et al. [33] investigate reproducibility methods in deep RL empirically, focusing on policy gradient methods. They try to reproduce results in works with published code bases, and investigate how various modifications affect results.

They find that hyperparameters and the choice of network architecture for policy and value function approximation can influence performance significantly. Furthermore, rescaling rewards can have a large effect, although it is difficult to predict how. It is found that ReLU activations tend to perform best across environments and algorithms. For PPO, the use of large networks may require changing other hyperparameters like learning rate. Confidence bounds with sample bootstrapping is used to show that PPO is among the more stable algorithms.

For certain environments, successful optimization does not always lead to behavior that is satisfactory. It is therefore important to not only show returns in learning curves, but also demonstrations of the learned policy in action. Interestingly, implementation differences that are not reflected in publications can have a dramatic impact on performance. It is therefore necessary to enumerate implementation details and package code bases with publications. Performance of baseline experiments should also match original baseline publication code.



Finally, [33] make the point that more emphasis should be placed on applying RL algorithms to real-world tasks. It could be more useful to propose a set of tasks that an algorithm could be used for than to show performance on fictional tasks.

Anderson et al. [4] discuss problem statements and evaluation measures for embodied navigation agents, and make a set of recommendations. A navigation agent should be equipped with a special action that indicates that it has concluded the episode. The agent should be evaluated at the time this action is made, and not at some more favorable time step. Proximity to a goal should be measured using geodesic distance, the shortest distance in the environment. They recommend success weighted by (normalized inverse) path length (SPL) as the primary measure of navigation performance. With  $N$  test episodes, SPL is computed as

$$\text{SPL} = \frac{1}{N} \sum_{i=1}^N S_i \frac{l_i}{\max(p_i, l_i)} \quad (2.15)$$

where  $S_i$  is a binary indicator of success,  $l_i$  is the shortest path distance from the agent's starting position to the goal, and  $p_i$  is the length of the path actually taken in the episode. SPL takes the quality of the solution into account: If 50% of test episode are successful and the agent takes the optimal path in all of them, its SPL is 0.5. By measuring SPL of human subjects, what is a good score can be calibrated.



## 3 Method

In this chapter, we present our proposed methodology for answering the research questions. The visual search problem is modelled as a sequential decision-making process. A set of environments for the visual search problem is presented together with an approach for solving them with deep RL. Finally, we describe a set of experiments to evaluate our approach.

### 3.1 Environments

To implement and evaluate agents that learn search to visually search for targets, we use three different simulated environments. Each of the environments have different characteristics that test the applicability of the evaluated approach to different search scenarios. In all environments, the appearance of the scenes and the location of targets are correlated to some degree. This means that the agent should be able to learn common characteristics of each environment and use those to search more efficiently.

As [20] and [46], we leverage procedural generation in all environments. This gives us control over the difficulty of the environments as well as the number of training and test samples the agent is exposed to. In the next sections, the visual search task that is tested by the environments is stated formally. The particulars of each of the three environments are also described.

#### 3.1.1 Problem Statement

The problem of searching for targets in unknown environments can be modelled as a sequential decision-making process in which an agent alternates between receiving visual sensory input and guiding its attention. The goal of the agent is to locate all targets in a minimum amount of time by guiding its attention in the environment and actively detecting when targets are visible. For the purposes of this thesis, we adopt the formalism in [40] and let the task be a contextual POMDP  $\mathcal{M}$  with states  $\mathcal{S}$ , actions  $\mathcal{A}$ , reward  $\mathcal{R}$  and observations  $\Omega$ .

#### State Set

The underlying state of the environment at each time step  $t$  is defined as follows:

$$s_t = \langle c, S, T_t, V_t \rangle \in \mathcal{S}. \quad (3.1)$$

Here,  $c \in \mathbb{M}$  is a *seed* that is used to generate samples of each environment.  $S \subset \mathbb{R}^d$  is the searched space, which we refer to as the *scene*. A set of undetected targets  $T_t = \{t_0, t_1, \dots, t_N\}$  are placed in the scene so that  $t_i \in S$ . The agent perceives a subspace  $V_t \subset S$  of the environment which we refer to as the *view*. If  $T_t \cap V_t \neq \emptyset$  there are  $|T_t \cap V_t|$  undetected targets in view.

### Action Set

The agent selects between the following set of actions:

$$a_t \in \{\text{INDICATE, UP, DOWN, LEFT, RIGHT}\} \quad (3.2)$$

The first action, **INDICATE**, is used by the agent to detect that a target is visible. Once a target has been detected, it is removed from the set of targets in the next time step,  $T_{t+1}$ . The remaining actions are used to transform the view in the next time step,  $V_{t+1}$ , to a new subspace of  $S$ . In our three environments, the agent may select between four moving actions, **UP**, **DOWN**, **LEFT**, and **RIGHT**, that move the view in each cardinal direction.

### Reward Signal

The goal of the agent is to select actions that bring each target into view and detect them once they are visible, while minimizing the number of total time steps. The reward signal should be designed so that the agent learns this behavior by maximizing the expected reward. We use the following reward signal:

$$r_t = \mathcal{R}(s_t, a_t) = h - 0.01 + 0.005d + 0.005e \quad (3.3)$$

The reward signal consists of four different terms. The first term is set to  $h = |T_t \cap V_t|$  if  $a_t = \text{INDICATE}$ , and  $h = 0$  otherwise. This term is equal to the number of targets that were found at this time step. The second term,  $-0.01$ , is a constant time penalty ensures that the agent is rewarded for quick episode completion. Through experimentation, we find that a larger time penalty than  $-0.01$  dominates the reward for finding targets. This is potentially related to the number of time steps per episode – with a time penalty that is too large, the reward  $h$  for finding targets has a relatively small impact on episode return for long episodes.

The two next terms are bonus rewards, intended to speed up learning by further encouraging desired behavior. The term  $d = 1$  if  $a_t$  moves the view  $V_t$  is closer to then nearest target in  $T_t$  than  $V_{t-1}$  and  $d = 0$  otherwise. Similarly,  $e = 1$  if  $a_t$  moves the view  $V_t$  to a previously unexplored subspace of  $S$ , otherwise  $e = 0$ . Importantly, the coefficients of 0.005 on these bonuses ensure that their sum is not larger than the magnitude of the time penalty. This is to ensure that exploration and moving towards targets does not seem more important to the agent than finishing the episode quickly. Therefore, the bonuses may guide the agent towards finding targets but do not cause it to steer away from the underlying goal.

### Observation Set

The observations that the agent receives at each time step are:

$$o_t = \langle x_t, p_t \rangle \in \Omega, \text{ where} \quad (3.4)$$

$$x_t \in \mathbb{R}^{3 \times 64 \times 64}, \text{ and} \quad (3.5)$$

$$p_t = \langle p_{t,0}, p_{t,1} \rangle \in \{0, \dots, H-1\} \times \{0, \dots, W-1\}. \quad (3.6)$$

The first part of each observation,  $x_t$ , is a  $64 \times 64$  RGB image of the current view  $V_t$  as it is perceived by the agent. The second part of each observation,  $p_t$ , is the current position of the

agent that uniquely identifies the view  $V_t$ . For each possible view  $V$  there is a position  $p$  that represents the position of the camera. In our environments, the camera can take any position in a two-dimensional grid. As the seed determines the initial view  $V_0$ , it also determines the initial position  $p_0$ . Finally, the seed determines the appearance of the searched scene and therefore the image observations that the agent perceives.

### 3.1.2 Gaussian Environment

The first environment is the simplest environment, where the correlation between scene appearance and target probability is clear. During each episode reset, a  $1024 \times 1024$  RGB image is generated conditioned on the seed. The seed determines the center of three (approximate) two-dimensional Gaussian distributions in the image. The normalized sum of the distributions is used to determine the intensity of the blue channel of the image. It is also used as a probability density function from which the three target locations are sampled, meaning that the higher the intensity in the blue channel, the more likely it is that a target will be there. Targets are characterized by red  $8 \times 8$  squares.

The image is divided into a grid of  $10 \times 10$  steps, one per position  $p_t$ . The image  $x_t$  is the  $64 \times 64$  sub-image at the current position in the grid. Each moving action translates the agent one step in corresponding cardinal direction in the grid.

The idea with this environment is to test whether an agent is able to utilize scene characteristics to search quicker. An efficient searcher in this environment should prioritize locations where the intensity in the blue channel is high. It should be able to use the gradient of the underlying Gaussian function to move towards locations with higher target probabilities, while avoiding revisiting locations and intelligently planning its search path.

### 3.1.3 Terrain Environment

The second environment is similar to the first one, but intended to simulate a search scenario in realistic terrain. Actions and observations behave the same as in the first environment. At the start of each episode, a  $1024 \times 1024$  height map is generated using gradient noise. The height map is used to determine the color of an image of the same size. Lower heights are filled with blue ocean, and higher areas with green grass and brown mountains. Three red targets are located with uniform probability along the shores, between mountains and water. Green trees are also scattered around each scene, whose positions are sampled from the same distribution as that of the targets.

While this environment is similar to the first environment, it is less clear how to search efficiently in it. There is higher variance between scene samples. It is also less clear how the scene appearance is correlated to the probability of targets. Although targets are never located in oceans or on mountains, these may still have to be traversed during searches. For instance, if two targets are on separate islands the agent must travel over ocean to find both. One can draw parallels between this environment and search-and-rescue scenarios with UAVs.

### 3.1.4 Camera Environment

The third environment is a three-dimensional version of the second one. The height map is turned into a three-dimensional mesh, and the agent is placed at its center. Targets are, as before, placed along island edges.

The agent observes the scene through a pan-tilt perspective camera. Moving actions rotate the camera instead of translating it. The **LEFT** and **RIGHT** actions control the yaw of the camera, while **DOWN** and **UP** control its pitch.

The yaw angle is divided into 20 steps between 0 and 360 degrees. This angle wraps around, so that the agent can look around freely. Similarly, the pitch angle is divided into 10 steps

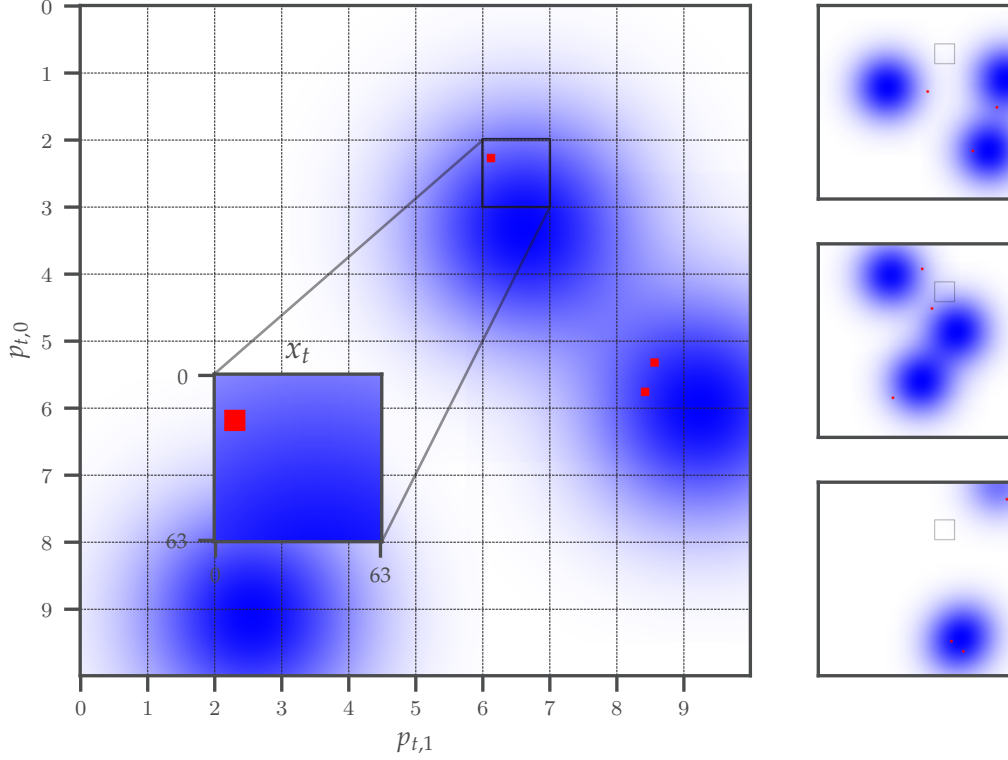


Figure 3.1: Four samples of the first environment. Agent observes  $64 \times 64$  image at position (2,6). There are three blue spots and three red targets in each scene. Targets are more likely where the intensity of the spots is high.

between 0 (straight forward) and -90 degrees (straight down), but without wrapping around. This means that the camera can take  $20 \times 10 = 200$  different positions.

Targets are always visible from at least one camera position. They may be visible from multiple positions, and the agent is expected to use the `INDICATE` action only when a target is as close to the center of the view image as possible. This environment is intended to model more realistic scenarios where the image is more difficult to interpret. In some scenarios it can be important that objects are not only localized, but localized accurately.

### 3.2 Agents

To design a reinforcement learning agent that effectively solves the task, we draw inspiration from several previous works and adapt them to better suit this particular task. The final agent should be able to recognize targets, regardless of where they appear in view. As environments are procedurally generated, a partial image observation of the scene is not sufficient for the agent to localize itself in it. It is likely important for the agent to have access to its location, especially for large search spaces. It should also be able to integrate features over time in order to remember which locations have been visited. Remembering visual features of these locations may also be of importance, as it can provide clues for what is in their proximity.

Due to the advantages described in Section 2.1.4, we limit ourselves to policy gradient methods. Specifically, we employ an actor-critic approach that estimates a policy and value function with a multi-headed neural network. The neural network architecture should reflect the aforementioned requirements.

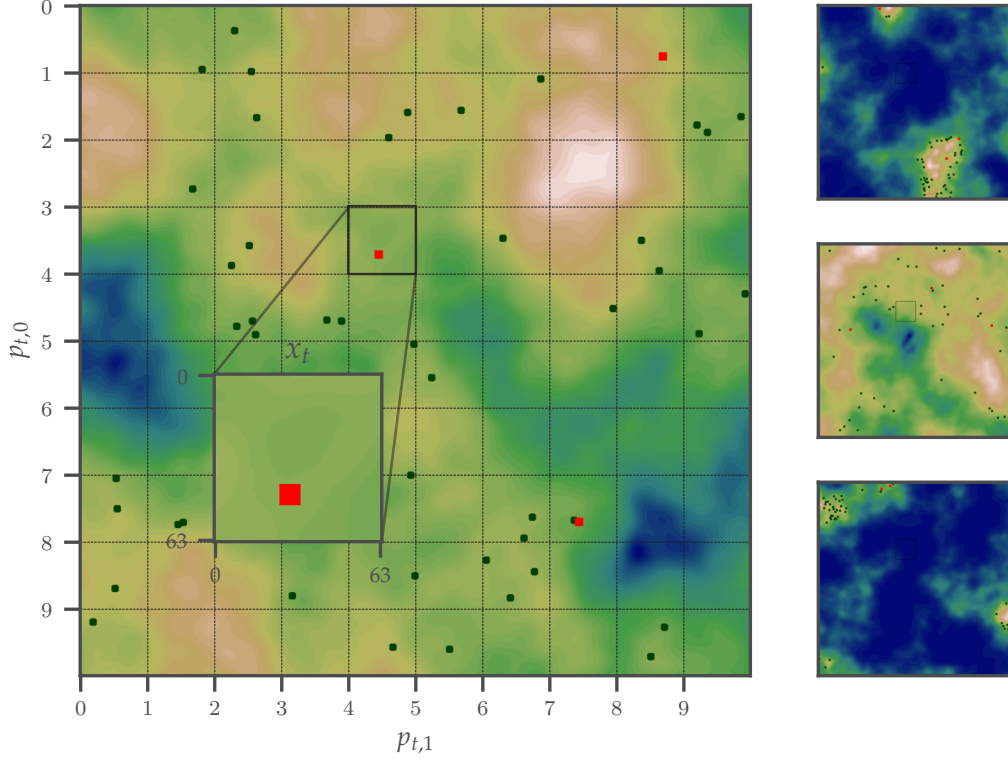


Figure 3.2: Four samples of the second environment. Terrain seen from above with red targets scattered and green trees scattered along shores. Agent observes  $64 \times 64$  image at position  $(4,3)$ .

### 3.2.1 Architecture

We design our neural network architecture as follows: A CNN takes the observed image  $x_t$  and encodes it into a latent representation  $y_t$ . This allows the agent to extract translation invariant features from observed images. The latent representation, as well as the current position of the agent  $p_t$  is used as input to an RNN with recurrent state  $z_t$  and output  $h_t$ . Feeding both an image representation and the position of the agent to a recurrent step lets the agent remember visited locations and their appearance. The output of the recurrent step is in turn connected to an actor MLP head and a critic MLP head, which approximate the policy  $\pi$  and value function  $v$  respectively. The architecture of the neural network is presented in Figure 3.4.

For the CNN, we use the same architecture as [49]. The input image  $x_t \in \mathbb{R}^{3 \times 64 \times 64}$  is fed through three convolutional layers: the first layer convolves 32 filters of size  $8 \times 8$  with stride 4, the second convolves 64 filters of size  $4 \times 4$  with stride 2, and the third layer convolves 64 filters of size  $3 \times 3$  with stride 1. This is followed by a final fully connected hidden layer with 512 outputs for the latent representation  $y_t \in \mathbb{R}^{512}$ .

Both the policy and value network are fully connected networks. The value network has one output for the value estimate. The policy network has 5 outputs, the logits for each action. Applying the softmax operation on this output gives the final action probabilities. All network layers have ReLU activation functions, as suggested by [33].

Two agents with different RNN architectures are compared: one temporal, and one spatial. While a temporal memory can retain location and appearance information over time, it is not clear how this information is stored and whether it can be utilized properly. We hypothesize that agents using temporal memories may struggle with learning good policies in large search

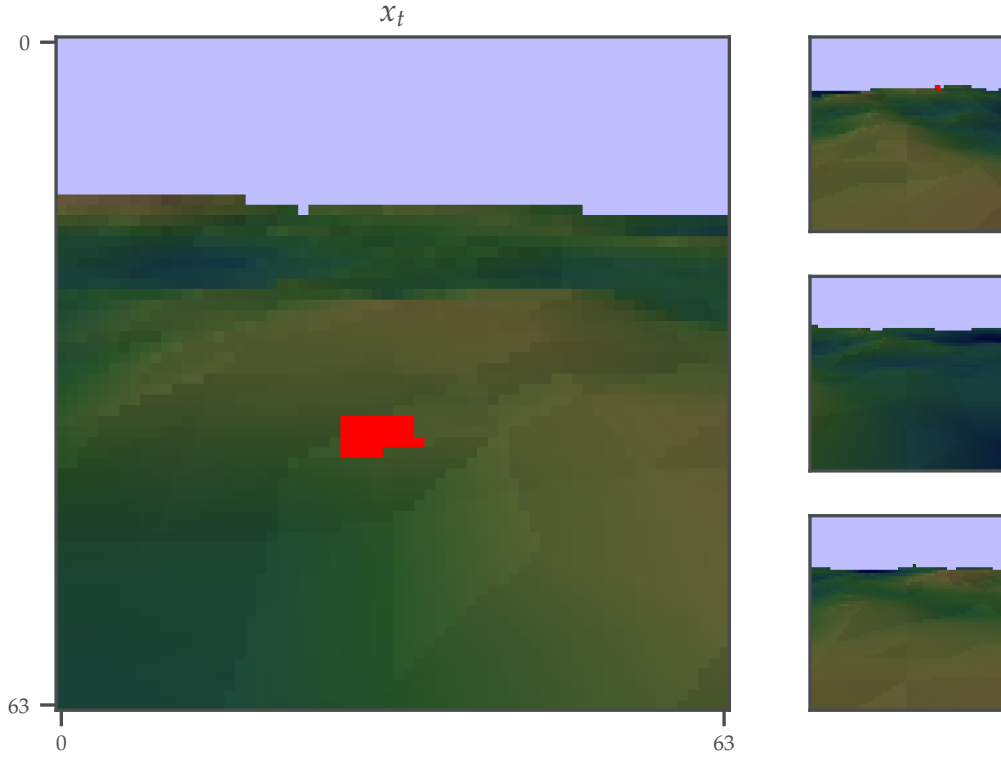


Figure 3.3: Four samples from the camera environment. Terrain seen from a pan-tilt camera. Each image shows the image observation at the initial position. The pan and tilt of the camera can be adjusted to move the view around.

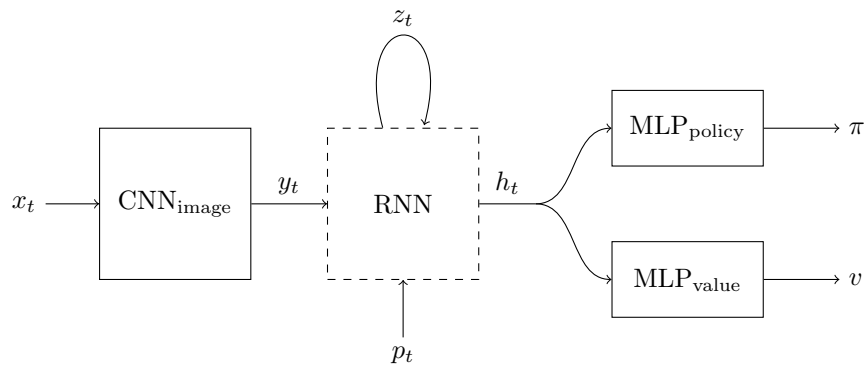


Figure 3.4: The neural network architecture used for estimating the policy and value functions from image and position observations.

spaces and those that require scene understanding, such as reasoning over previously visited locations. Several results from works in embodied visual navigation indicate that spatial memories can give better results than temporal ones [52, 34, 31, 17]. Taking inspiration from this, we investigate whether a spatial memory can be more useful than a temporal one when searching for targets.

### Temporal Memory

The temporal memory is a single LSTM [36] layer as proposed by [32] and used in [46], [45], and [31]. As input to the LSTM, we use the latent image representation  $y_t$  concatenated with one-hot encodings of each dimension of  $p_t$ . The LSTM layer has 128 hidden cells so that  $h_t$  has 128 dimensions. Finally,  $z_t$  contains the hidden state  $h_t$  and cell state  $c_t$  of the LSTM.

$$z_t = \langle h_t, c_t \rangle = \text{LSTM}([y_t, \text{onehot}(p_{t,0}), \text{onehot}(p_{t,1})], h_{t-1}, c_{t-1}) \quad (3.7)$$

### Spatial Memory

The spatial memory is composed of a readable and writable feature map. This is a simplified version of the architecture suggested by [52], similar in spirit to the architectures in [34], [31] and [17]. It is defined by the following set of operations:

$$\rho_t = \text{CNN}_{\text{read}}(z_t) \quad (3.8)$$

$$\omega_t = \text{MLP}_{\text{write}}([y_t, \rho_t, z_t^{(p_t)}]) \quad (3.9)$$

$$q_t = \text{MLP}_{\text{position}}([\text{onehot}(p_{t,0}), \text{onehot}(p_{t,1})]) \quad (3.10)$$

$$h_t = [\rho_t, \omega_t, q_t] \quad (3.11)$$

$$z_{t+1}^{(p')} = \begin{cases} \omega_t & \text{if } p' = p_t \\ z_t^{(p')} & \text{if } p' \neq p_t \end{cases} \quad (3.12)$$

Here,  $z_t \in \mathbb{R}^{64 \times 10 \times 10}$  is a feature map with one 64-dimensional feature vector per possible position  $p_t$ . The initial feature map is  $z_0 = 0$ . At each time step, the agent reads from this map using a CNN with three convolutional layers. Each layer has 32 filters of size  $3 \times 3$ , and uses a padding of 1. A final fully connected layer produces a 64-dimensional read vector  $\rho_t$ . An MLP takes the read vector concatenated with  $y_t$  and the feature vector stored in the map at the current position  $z_t^{(p_t)}$ , and produces a 64-dimensional write vector  $\omega_t$ . Another MLP takes a one-hot encoding of the position as input and outputs a 64-dimensional vector  $q_t$ . The read vector  $\rho_t$ , the write vector  $\omega_t$ , and the position vector  $q_t$  are concatenated and used as input  $h_t$  to the value and policy networks. Finally, the feature map is updated so that  $z_{t+1}$  contains the write vector  $\omega_t$  at position  $p_t$ .

By storing a representation of the observed image at its corresponding position in the feature map, the agent builds up an internal representation of the explored scene while searching<sup>1</sup>. Passing this structured representation through a set of convolutional layers yields an encoding of the entire explored scene which retains structured visual information. This means that they can make use of visual features of previously explored locations, spatial relationships between these features, and the current position of the agent when approximating the policy and value function. Since writes to the feature map are dependent on the previously stored feature vector at each position, the agent is also able to store new information every time it visits a position.

<sup>1</sup>An illustration of the contents of the feature map  $z_t$  of a trained agent after a finished search can be found in Appendix C.



Table 3.1: PPO hyperparameters used during training.

Parameter	Value
total time steps	$25 \times 10^6$
discount factor $\gamma$	.999
advantage factor $\lambda$	.95
parallel environments $N$	64
time steps per rollout $T$	256
epochs per rollout $K$	3
mini-batches size $M$	2048
value loss coefficient $c_1$	0.5
entropy bonus coefficient $c_2$	0.01
clip range $\epsilon$	.2
learning rate $\alpha$	$5 \times 10^{-4}$
reward normalization	yes
learning rate schedule	linear

### 3.2.2 Training

We train our neural networks with PPO [58], as described in Section 2.1.4. Early experiments show that PPO gives good results, stable learning curves and good sample efficiency, which is in line with results reported by [6]. Furthermore, we use similar hyperparameters to [20]. These are presented in Table 3.1. Many parallel environments seem to both speed up and stabilize training. As suggested by [6], we initialize the policy output weights so that their mean is 0 and their standard deviation is low ( $10^{-2}$ ).

We normalize the reward using a moving average. This is done to limit the scale of the error derivatives. Early experiments show that not normalizing the reward destabilized learning. Similar results have been reported by [6] and [48]. The Adam optimizer [39] is used in all experiments. Finally, we decay the learning rate linearly so that it is zero at the final time step. We find that this helps the agent with finding a better local optimum.

## 3.3 Experiments

We conduct three different experiments to evaluate our architectures and answer the research questions in 1.4. Following the recommendations of [33, 22, 2], we report mean and standard deviation across a handful of seeds.

### 3.3.1 Search Performance and Behavior

To evaluate the quality of the learned policy, we compare the policies learned by our two architectures to a set of baseline policies: one random, one greedy, and one exhaustive. The random policy (Algorithm 2), selects random moving actions. The greedy policy (Algorithm 3) keeps track of visited positions, and greedily selects actions that explore new positions. If no such actions exist, it selects a random moving action. The exhaustive policy (Algorithm 4) behaves similarly to the second one. Instead of sampling exploring actions randomly, it selects exploring actions from a predetermined order. In rectangular search spaces without obstacles, this policy leads to search paths that cover the whole search space with a small amount number of revisited positions.

All baselines automatically indicate when a target is visible. We feel that offloading the detection from the baselines is reasonable. Having the baselines randomly indicate that targets are visible would lead to excessively long search paths in moderately large search spaces. By giving this advantage to the baselines, the emphasis of the comparison is put on the search path planning.

---

**Algorithm 2** Random baseline policy.

---

```

if there is a target at  $p_t$  then
   $a_t \leftarrow \text{INDICATE}$ 
else
   $\mathcal{A}_{\text{move}} \leftarrow \{\text{UP}, \text{RIGHT}, \text{DOWN}, \text{LEFT}\}$ 
   $a_t \leftarrow \text{sample from } \mathcal{A}_{\text{move}}$ 
end if

```

---



---

**Algorithm 3** Greedy baseline policy.

---

```

if there is a target at  $p_t$  then
   $a_t \leftarrow \text{INDICATE}$ 
else
   $\mathcal{V} \leftarrow \{p_t, p_{t-1}, \dots, p_0\}$ 
   $\mathcal{A}_{\text{move}} \leftarrow \{\text{UP}, \text{RIGHT}, \text{DOWN}, \text{LEFT}\}$ 
   $\mathcal{A}_{\text{explore}} \leftarrow \{a | a \in \mathcal{A}_{\text{move}} \text{ moves the agent to an unvisited location } p \notin \mathcal{V}\}$ 
  if  $\mathcal{A}_{\text{explore}} \neq \emptyset$  then
     $a_t \leftarrow \text{sample from } \mathcal{A}_{\text{explore}}$ 
  else
     $a_t \leftarrow \text{sample from } \mathcal{A}_{\text{move}}$ 
  end if
end if

```

---



---

**Algorithm 4** Exhaustive baseline policy.

---

```

if there is a target at  $p_t$  then
   $a_t \leftarrow \text{INDICATE}$ 
else
   $\mathcal{V} \leftarrow \{p_t, p_{t-1}, \dots, p_0\}$ 
   $\mathcal{A}_{\text{move}} \leftarrow \{\text{UP}, \text{RIGHT}, \text{DOWN}, \text{LEFT}\}$ 
   $\mathcal{A}_{\text{explore}} \leftarrow \{a | a \in \mathcal{A}_{\text{move}} \text{ moves the agent to an unvisited location } p \notin \mathcal{V}\}$ 
  if  $\mathcal{A}_{\text{explore}} \neq \emptyset$  then
     $A_{\text{order}} \leftarrow \langle \text{UP}, \text{RIGHT}, \text{DOWN}, \text{LEFT} \rangle$ 
     $a_t \leftarrow \text{the first } a \text{ in } A_{\text{order}} \text{ such that } a \in \mathcal{A}_{\text{explore}}$ 
  else
     $a_t \leftarrow \text{sample from } \mathcal{A}_{\text{move}}$ 
  end if
end if

```

---

To get a better sense of how our agents compare to handcrafted search algorithms, use an additional baseline agent in the Gaussian environment. This handcrafted baseline (Algorithm 5) selects actions that move the agent towards bluer regions.

For each of the three environments, we train our learning agents on the full distribution of samples. Using a fixed set of 100 held out test samples, we measure the search path length and success rate of each learning agent and baseline. When measuring the average search path length, we only include successful searches. Finally, we investigate how the search performance of our approach compares to that of a human with prior knowledge of each environment.

We also report the SPL metric [4] for all agents, where the shortest path length is the optimal travel distance between the targets and the initial position of the agent. The distance between two points is computed as the minimal number of actions to transform the view between the two. Although finding the optimal path is not realistic in partially observable environments, SPL can still be useful when compared to that of a human. For each metric and agent, we report both the mean and standard deviation across three runs.

---

**Algorithm 5** Handcrafted baseline policy (Gaussian environment).

---

```

if there is a target at  $p_t$  then
   $a_t \leftarrow \text{INDICATE}$ 
else
   $\mathcal{V} \leftarrow \{p_t, p_{t-1}, \dots, p_0\}$ 
   $\mathcal{A}_{\text{move}} \leftarrow \{\text{UP}, \text{RIGHT}, \text{DOWN}, \text{LEFT}\}$ 
   $\mathcal{A}_{\text{explore}} \leftarrow \{a | a \in \mathcal{A}_{\text{move}} \text{ moves the agent to an unvisited location } p \notin \mathcal{V}\}$ 
  if  $\mathcal{A}_{\text{explore}} \neq \emptyset$  then
     $b_t \leftarrow \text{the blue channel of } x_t$ 
     $A_{\text{order}} \leftarrow \mathcal{A}_{\text{explore}} \text{ ordered by the directional derivative of } b_t \text{ wrt the action direction}$ 
     $a_t \leftarrow \text{the first } a \text{ in } A_{\text{order}}$ 
  else
     $a_t \leftarrow \text{sample from } \mathcal{A}_{\text{move}}$ 
  end if
end if

```

---

### 3.3.2 Size of Search Space

The number of steps required to locate all targets in a scene is dependent on the size of the search space. In small search spaces, the difference in performance between an intelligent searcher and a less intelligent one may be difficult to quantify. Furthermore, a large scene is more difficult to search intelligently - more capacity is needed to remember visited locations and plan future steps.

To investigate how well each architecture scales to different search space sizes, we train them on three variants of the Gaussian environment. The scene image is scaled up so that there are  $10 \times 10$ ,  $15 \times 15$  and  $20 \times 20$  possible camera positions in each environment. We train and test both agents on the full distribution of samples from all three search space sizes respectively. By varying the search space size in each environment, we can get a feel for how the size affects training times and the quality of the learned policies. For each agent and search space size, we report how the average length and success rate changes while learning.

### 3.3.3 Number of Training Samples

In realistic scenarios, training agents on an unlimited number of samples is not possible. It is more likely that there is a limited set of samples for an agent to learn from. For this reason, it is interesting to quantify how the number of training samples influences generalization to the full distribution.

We do this by training our two agents on 500, 1000, 5000 and 10000 samples of the terrain environment. Both agents are tested on held out samples from the full distribution of samples, as suggested by [20]. This should illustrate how many samples are needed to generalize, as well as whether overfitting occurs. For each agent and training set size, we report how the average length and success rate changes while learning.

## 3.4 Implementation

The environment is implemented with the Gym [14] interface. The agents and RL algorithms are implemented in Python, with PyTorch [53] for automatic differentiation of the computation graphs. PPO [58] was implemented following the official implementation by the original authors, and verified by testing on the benchmarks used in the original paper. All experiments are conducted on an Intel Core i9-10900X CPU and an NVIDIA GeForce RTX 2080 Ti GPU. Source code for environments, models and algorithms has been made publicly available <sup>2</sup>.

---

<sup>2</sup><https://github.com/fumlig/visualesearch>



## 4 Results

This chapter presents the results comparing our two deep RL agents to baseline and human-controlled agents. In addition to the results here, learning curves for all environments are shown in Appendix A, Some sample search path for our agents and baselines are shown in Appendix B.

### 4.1 Search Performance and Behavior

Table 4.1 shows the average search path length, success rate and SPL metric on a fixed set of 100 levels from each environment. The average search path length is computed from episodes in which the agents successfully finds all targets. These metrics are presented for our two agents trained on the full distribution of environments, as well as for the baselines and human searchers. Appendix A contains learning curves for each environment, and Appendix B contains example search paths from each baseline and learning agent.

Overall, our two agents and human searchers achieve similar success rates, path lengths and SPL scores. Our spatial memory agent achieves the most competitive search path lengths and SPL scores in the Gaussian and terrain environments. Our temporal memory agent select search paths that are on average longer than the paths chosen by our spatial memory agent and human searchers. In the camera environment, the temporal memory agent is better both in terms of average length and SPL score. Interestingly, the temporal memory agent achieves SPL scores comparable to that of the spatial memory agent despite choosing much longer path lengths.

Human searchers seemed to be successful in utilizing using environment cues to guide search, but frequently forgot which positions had been visited. In the camera environment, human searchers found it difficult to identify when targets should be indicated, as the discretization of the search space did not always align targets closely to the center of the screen. This is more of a side effect of the implementation than an indication of poor search performance.

The random baseline policy achieves the worst SPL, success rate and average search path length in all three environments. The greedy baseline policy is closer to the remaining agents. The exhaustive baseline policy achieves an average search path length that is lower than our temporal memory agent. Its SPL score, however, is only higher than the those of the other

Table 4.1: SPL, success rate and average search path length on successful episodes from three runs on a fixed set of a 100 samples from each environment.

Gaussian environment			
Agent	SPL	Success	Length
random	$0.06 \pm 0.01$	$0.92 \pm 0.06$	$369.07 \pm 24.93$
greedy	$0.17 \pm 0.00$	$1.00 \pm 0.00$	$147.12 \pm 2.38$
exhaustive	$0.21 \pm 0.00$	$1.00 \pm 0.00$	$83.37 \pm 2.88$
handcrafted	$0.33 \pm 0.00$	$1.00 \pm 0.00$	$65.20 \pm 1.41$
human	$0.23 \pm 0.03$	$1.00 \pm 0.00$	$80.97 \pm 13.49$
temporal	$0.24 \pm 0.03$	$0.99 \pm 0.01$	$101.25 \pm 13.32$
spatial	$0.29 \pm 0.02$	$0.99 \pm 0.01$	$72.16 \pm 5.97$
Terrain environment			
Agent	SPL	Success	Length
random	$0.06 \pm 0.01$	$0.89 \pm 0.04$	$366.05 \pm 26.96$
greedy	$0.17 \pm 0.01$	$1.00 \pm 0.00$	$141.01 \pm 2.31$
exhaustive	$0.22 \pm 0.00$	$1.00 \pm 0.00$	$84.11 \pm 0.84$
human	$0.26 \pm 0.02$	$1.00 \pm 0.00$	$76.73 \pm 5.33$
temporal	$0.25 \pm 0.02$	$1.00 \pm 0.01$	$103.76 \pm 11.69$
spatial	$0.27 \pm 0.01$	$1.00 \pm 0.00$	$79.60 \pm 6.88$
Camera environment			
Agent	SPL	Success	Length
random	$0.04 \pm 0.00$	$0.62 \pm 0.03$	$545.09 \pm 56.25$
greedy	$0.12 \pm 0.01$	$0.97 \pm 0.01$	$255.60 \pm 10.44$
exhaustive	$0.37 \pm 0.00$	$1.00 \pm 0.00$	$67.03 \pm 0.00$
human	$0.68 \pm 0.08$	$1.00 \pm 0.00$	$38.10 \pm 5.72$
temporal	$0.70 \pm 0.02$	$1.00 \pm 0.00$	$42.36 \pm 2.05$
spatial	$0.66 \pm 0.03$	$1.00 \pm 0.00$	$42.90 \pm 1.73$

two baselines. The handcrafted baseline for the Gaussian environment performed better than all other agents in this environment.

## 4.2 Size of Search Space

The results of the search space experiments in the Gaussian environment are presented in Figure 4.1. Results were collected across four different runs, and the plots show the mean and standard deviation. For the search space of  $10 \times 10$ , both architectures initially improve their policy quickly. Past a certain time step, they keep improving at a reduced pace. At the end of training, the spatial memory architecture has reached a policy that seems to find targets quicker than the temporal memory. Both seem to be able to find all three targets in every episode.

For the larger search space sizes with  $15 \times 15$  and  $20 \times 20$  the difference between the two architectures is greater. While the spatial memory seems to consistently find targets in a number of steps that is comparable to the number of positions in the search space, the search paths of the agent with the temporal memory are substantially longer. Furthermore, the variance across runs increases with the search space size.

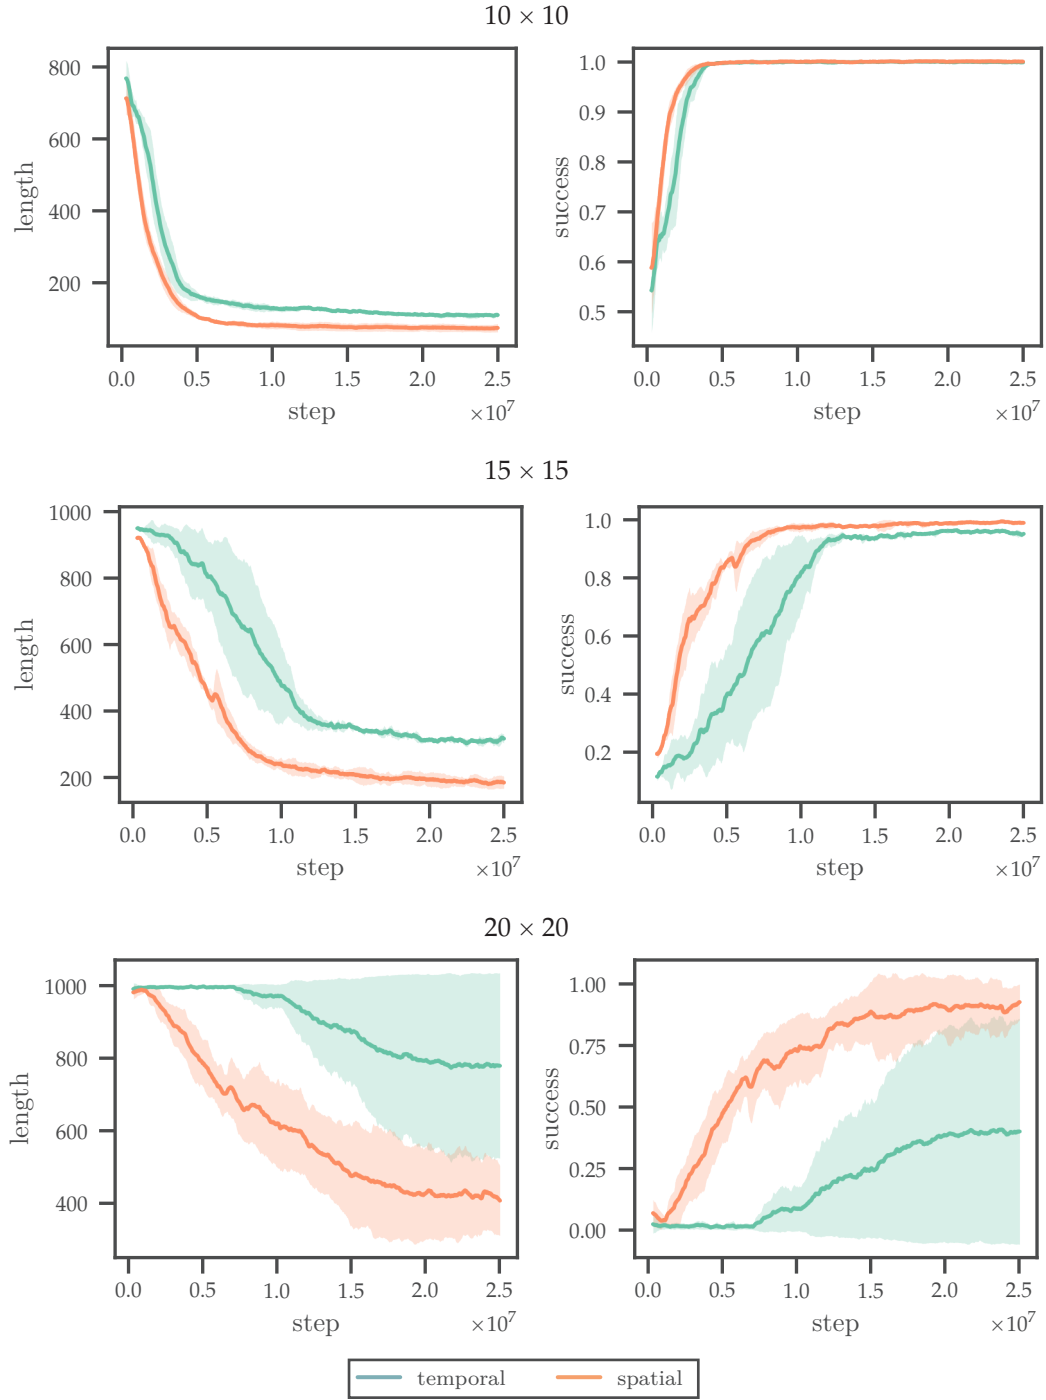


Figure 4.1: Episode length and success rate curves during training for three different search space sizes. Mean and standard deviation across 4 runs.

### 4.3 Number of Training Samples

Figure 4.2 shows how the average length and success rate in the terrain environment is affected by the number of samples seen during training. These metrics are presented for the limited training set and unlimited testing set respectively.

It seems like both architectures can overfit to training sets of as many as 1000 samples. For smaller training set sizes, search path lengths on the test get gradually worse past a certain time step. Interestingly the LSTM architecture seems to overfit more severely to small training sets. Its performance on the test set decreases substantially past a certain time step. The spatial memory architecture does not overfit as severely. For both architectures, as many as 10000 training samples are needed to generalize to the full distribution of scenes and achieve the same performance on the training and test sets.

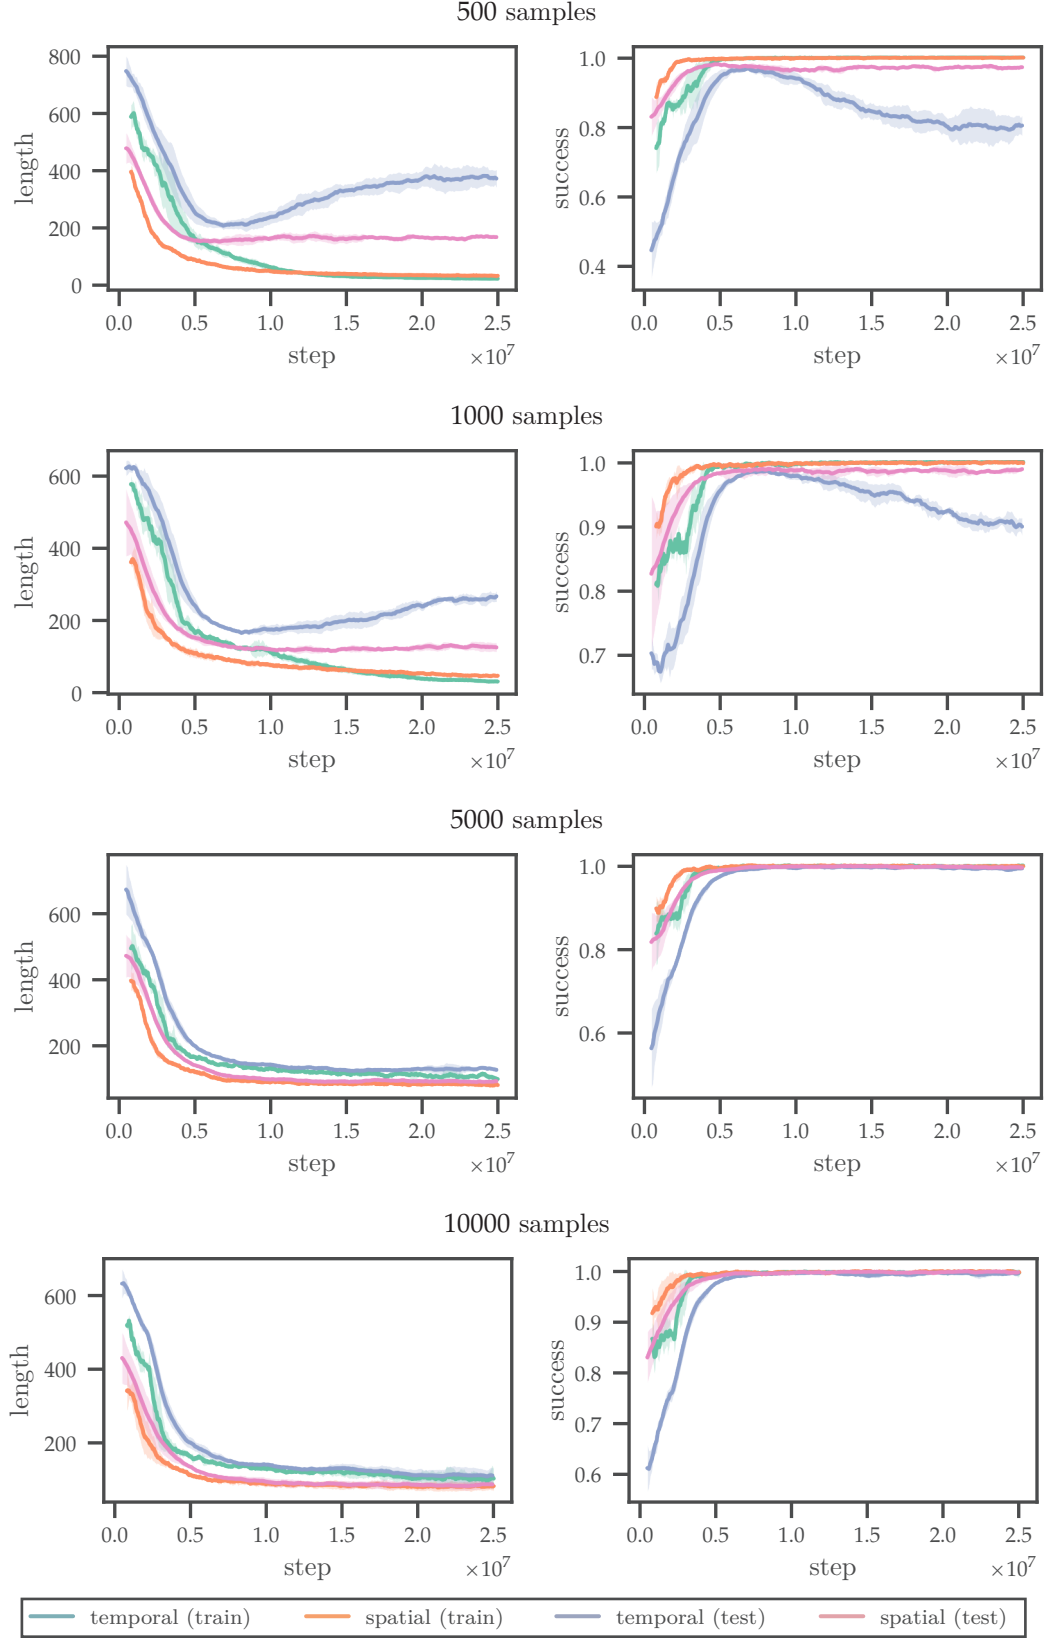


Figure 4.2: Episode length and success rate curves for different training set sizes in terrain environment. Mean and standard deviation across 3 seeds.





## 5 Discussion

In this chapter, we reflect on the results obtained from each experiment. We also critically discuss and evaluate our chosen methodology. Finally, we briefly consider some ethical and societal concerns when learning systems in the real-world.

### 5.1 Results

The results of the experiments provide insight into the performance, behavior and scalability of our approach. By comparing each agent qualitatively and quantitatively, we can answer the research questions in Section 1.4.

#### 5.1.1 Reflection on Search Performance

To evaluate the search performance, we first consider the average search path length of each agent. It is useful to compare the path length to the number of points in each search space. The Gaussian and terrain environments contain  $10 \times 10 = 100$  searchable positions, and the camera environment contains  $10 \times 20 = 200$  searchable positions. A search path length above this suggests many revisited positions. The exhaustive baseline policy provides a good measure for what sort of path lengths can be achieved when only avoiding revisiting positions. Both the random and greedy baseline policies select search paths that are on average much longer than the number of positions, suggesting several redundant steps. This is further reinforced by the sample search paths in Figures B.2, B.3 and B.4.

The handcrafted policy for the Gaussian environment is relatively simple, and can certainly be improved. Despite this, it outperforms all other agents. This indicates that neither of our two learning agents have found policies that are close to optimal.

Notably, our temporal memory agent chooses search paths that are substantially longer than those selected by our spatial memory agent and human searchers. This is especially true for the Gaussian and terrain environments, which indicates that redundant have been taken. Our spatial memory agent achieves better average lengths in these two environments.

We see that search paths are particularly short in the camera environment, despite its larger search space. This has two reasons: First, targets may be visible in the periphery from a large set of camera positions. Once targets are visible, it is simpler for an agent to select actions that center them. Second, targets are not distributed uniformly across many samples

of the camera environment. They are most commonly found near the horizon. In the Gaussian and terrain environments, where the distribution is approximately uniform over many samples, the search path lengths are closer to the number of positions in the search space.

Our temporal memory agent performs especially well in the camera environment. We suspect that this is due to the fact that less emphasis is placed on remembering over many time steps. Search in this environment can be more reactive. When inspecting the search patterns used by our temporal memory agent in this environment, we see that it has learned to alternate between scanning across the horizon and locating targets in its periphery. The baselines are unable to utilize this imbalance in target distributions. The exhaustive policy is an exception, where the deterministic ordering of actions happened to favor that distribution.

By looking at some sample search paths, we see that our two agents both seem to utilize scene appearance to guide their search. This claim is supported further by the memory visualization in Appendix C. However, they also tend to revisit positions, and it is not clear that this is good. Figures B.6 and B.7 illustrate this well – both agents are drawn to areas with high probability but seem to revisit positions redundantly. Some of these revisits could be attributed to the stochastic policy. Making the policy completely deterministic by selecting the action with the highest probability is not a solution, as it tends to lead to dead states or loops where the agent does not progress.

Worth noting is that revisiting positions is not always the wrong choice. One such example is when the current position of the agent is directly between two targets. The optimal path to find both of these is to first go to any one of them, and then to go back towards the other one by revisiting positions.

Next, we consider the SPL score of each agent. When averaged over many episodes, the SPL score should be a better measure of search path quality than average length, as it also accounts for how close each path is to the optimal one. From the definition of the SPL metric in Equation 2.15, we see that it favors search paths whose length are close to the shortest one in each sample. Finding the shortest path in a search scenario such as the one we consider here is not feasible. However, it still serves as a useful normalization method as it is an indication of how difficult each sample is to solve.

Both our two agents and human searchers achieve similar SPL scores in all three environments. While the exhaustive baseline policy achieves average path lengths that are close to those of our two agents and human searchers, its lower SPL score suggests that it is less successful in finding close to optimal solutions. In all three environments, one of our agents achieve a higher SPL score, although we would not consider this significant due to the large variance.

Under these metrics, both learning agents achieve comparable performance to that of a human searcher. Overall, it would seem like the spatial memory architecture is most suited where large search spaces have to be explored strategically, while our temporal memory architecture is sufficient for search problems where search spaces can be explored reactively. As neither performs better than a relatively simple handcrafted policy, they are not as good as is possible and also not optimal.

### 5.1.2 Scalability To Larger Search Space Sizes

In order to be useful for real-world search tasks, an agent should be able to search in sufficiently large spaces. In Section 4.2 we saw that both of our learning agents achieve comparable performance on the  $10 \times 10$  search space. Both quickly converge towards a high success rate and reasonable search path lengths. The spatial memory is consistently capable of finding all targets in less steps than the number of searchable positions, and the temporal memory is not far behind.

For larger search spaces, the slight difference is accentuated. The temporal memory agent converges to search paths that are longer than needed, suggesting that it is not capable of remembering visited locations. In the  $20 \times 20$  search space, it seems to have converged to path

lengths of around 800, and has a success rate of less than 50%. By the end of training, the search paths of the spatial memory agent are near the total number of positions, and it has a success rate of around 90%. Furthermore, the training does not seem to have fully converged.

It seems reasonable to state that the spatial memory scales better to large search spaces in terms of performance, when compared to the temporal memory. Searching efficiently in large search spaces places extra emphasis on remembering what has already been explored. From our results, it would seem like an LSTM struggles with remembering such precise information over many time steps. Similar results were presented by [51].

A hypothesis is that our temporal memory agent would handle larger search spaces with more parameters. We experimented with stacking multiple LSTM layers, but found that it led to overfitting and unstable learning, even with dropout. Further analysis is needed to see if such augmentations can make it more comparable to the spatial memory in terms of performance.

Even though we have investigated how our learning agents scale to larger search spaces, it should be noted that realistic search spaces are often considerably larger. This poses a problem for both agents, as the number of trainable parameters scales with the search space size in both of them. One solution is to keep search spaces small: Large (and continuous) spaces could be discretized into smaller ones at the cost of precision. It is also possible to modify the architectures so that what they remember is limited. In the case of the temporal memory, it might be sufficient to only remember recent interactions. Similarly, in the case of the spatial memory, a possibility is to use an egocentric recurrent feature map and only remember interactions in close proximity of the agent [52].

### 5.1.3 Generalizing from Limited Training Sets

The hope that a learning agent can pick up patterns that are not visible to humans (or easily communicated to machines) is only relevant if it can do so from a reasonable number of samples. From the results in Section 4.3, we see that both of our learning agents can overfit to small training sets. This is in line with what is reported by [21, 20, 72]. Past a certain number of interactions with small a small training set, performance on a held out test set decreases. This effect is well known in supervised learning, but important to keep in mind for reinforcement learning. If any sort of generalization is expected from our agents, they should be tested on held out samples.

Interestingly, our spatial memory agent seems to be better at generalizing from a limited number of samples – for 500 and 1000 samples, its performance on the test set does not decrease as severely as our temporal memory agent. Furthermore, the test performance of our spatial memory agent is strictly better than that of our temporal memory agent in all training set sizes. This suggests that the spatial memory provides a more suitable inductive bias for the considered problem.

It should be stated that these numbers are not representative of all visual search scenarios. The amount of samples needed to generalize to other search tasks may be different from the amount needed for the terrain environment we used in Section 4.3. While the terrain environment exhibits more subtle patterns than the Gaussian environment, it is free from noise and is relatively low in variance compared to realistic scenarios. However, the results do offer insights into how these two architectures compare when it comes to generalization from a limited number of samples.

## 5.2 Method

The method chosen covers a fairly broad category of visual search tasks, but focuses on the research questions in Section 1.4. Some details of the chosen methodology have implications for its applicability and validity.

### 5.2.1 Image Observations, Detections and Indications

The image observations are fundamental to the visual search problem. We have elected to test our agents in environments with  $64 \times 64$  image observations. In many cases, images of this size are not sufficient to convey the full meaning of a scene. Cues that may guide attention or are needed to correctly detect targets could require higher detail.

To scale up our approach to such scenarios, it could be sufficient to modify the CNN architecture. CNNs have been used for detection in images of higher resolution [73]. At a certain point, however, high-dimensional images could become a speed bottleneck. This is important to consider in many real-time applications. For such cases, some covert attention mechanism such as the one proposed in [47] could be considered.

While we explicitly delimit ourselves from difficult detection problems in this work, detection is likely to be difficult in most real-world search scenarios. Further investigations are needed to evaluate how viable the approach is for more realistic scenes, where variance is higher, and it is more difficult to interpret image observations. One option could be to incorporate an existing object detection architectures into our deep RL approach, as in [70]

Related to the detection of targets is our choice of including an indication action. It could be argued that explicitly indicating when targets are in view is redundant. Indications could instead happen implicitly when targets are in view. This is true if the focus is only on how environment cues can be used to guide visual attention during search. Including explicit indication actions is in our view more interesting, as it requires some form of intentionality and is necessary for actually locating targets.

Furthermore, the indication action has several useful applications. One can imagine a task in which target detection is done through some external object detection that is expensive to run. In such a case, the indication could be used by the agent to convey that it is likely that a target is in view, and it is worth spending resources on running the detection process.

### 5.2.2 Position, Movement and Search Space Dimensionality

To aid our agents with navigating, we chose to give them access to their current position at each time step. An agent can generally not localize itself with just an image of an unseen environment. Furthermore, the position is needed to index the spatial memory architecture.

An issue with including the position of the agent in its observations is that it becomes reliant on a certain search space shape. If our agent is trained in a  $10 \times 10$  search space it will not be able to handle smaller or larger spaces. With just image observations, the agent can be deployed in search spaces of arbitrary shape.

Another aspect to consider is whether the position can be provided to the agent. It seems reasonable to assume that the position can be provided to the agent. In certain scenarios it is possible to determine the global position of an agent with some sensor (for example using GPS). If how each action moves the agent is well-defined, the relative position can be used instead of the absolute one. This could be the case with a motor controlled pan and tilt camera.

There are alternatives to giving the agent its position that achieve similar effects. By having the agent observe its last action  $a_{t-1}$  it can learn to navigate relative to its starting position. This technique is used in [45].

The action space we chose in this work contains four different moving actions that change the position of the agent in two dimensions. This is reasonable for several real-world search tasks such as search and rescue with a UAV, where the actions correspond to translations in each cardinal direction. Another example is surveillance with a pan-tilt-camera, where the actions could correspond to pitch and yaw rotations. However, many vision systems have more degrees of freedom. Camera sensors often have zoom functionality, which in practice requires additional actions for zooming in and out, and adds an extra dimension to the search space.

Similarly, if an agent is able to both move and look around we get additional dimensions to consider.

There are no inherent limitations in our two architectures that prevent them from handling more than two search dimensions. The temporal memory simply has to encode an additional component of the agent’s position. The spatial memory can store a higher dimensional feature map. Its read operation can be modified to use convolutions in higher dimensions, as noted by [52].

### 5.2.3 Implications of Reward Signal

Finally, our reward signal assumes certain knowledge of the scenes: The environment (or the provider of the reward signal) has to keep track of visited positions. It also has to know where targets are located – even when they are not visible. While the reward is not needed when acting according to the policy, it is needed when learning. This has implications for what kind of environments can be used for learning. One can imagine a scenario where the locations of targets are not known, but a black-box system is responsible for detecting them and providing positive feedback to the agent. In this case, the bonus for moving towards targets is not computable.

In the terrain environment, we found that the additional reward bonuses were required for convergence to good policies. One reason for this could be that a sparse reward led to too subtle connections between environment appearance and good actions. This in turn makes assigning credit assignment to the correct actions difficult. With a small bonus for desired behavior, reinforcements are more frequent and may aid with picking up subtle patterns.

However, a specialized reward like ours risks introducing bias that inhibit learning by leading to poor local optima. One example of such a bias is the bonus reward for moving towards targets. In general, always picking the nearest unvisited node in a graph does not yield the shortest travel path between all nodes. Several works argue for minimizing such biases, as learning systems can sometimes find better solutions without them [35]. There is often a trade-off between strong bias/fast learning and weak bias/more general agents. For our set of environments, this particular reward seems to work well, but this might not be the case for search in other types of scenes.

### 5.2.4 Neural Network Architecture and Memory

The neural network architecture used in this work consists of a CNN, an RNN and two MLPs for estimating the policy and value function. This network architecture has many configurable parameters, whose values have been chosen somewhat arbitrarily. The space of possible architecture parameters is huge, and infeasible to search exhaustively. There is certainly the possibility that some part of our architecture is a capacity bottleneck for search performance.

Using a CNN is standard when encoding images, and using the encoding to select actions has in a way become synonymous with deep RL. We have chosen to use the same architecture as [48], as it is likely to be sufficient for the level of detail in our environments. Furthermore, this particular CNN architecture has become common in deep RL literature. Still, it is possible that another CNN architecture could have yielded better search performance.

The choice of policy and value MLPs is also somewhat arbitrary. We found that small tweaks did not affect performance much. Some have reported that a deeper value network yields better performance in some cases [6]. This could be investigated further.

Instead, emphasis has been placed on two RNN which serve as the memory of the agent: one spatial, and one temporal. This follows from the observation that memory is crucial for effective search in structured and moderately large environments. The memory represents the agent’s beliefs of its environment, and the semantics of the memory constrain the agent’s ability to achieve its task. Both memory architectures were chosen to match the desired properties listed in Section 1.3: an agent should be able to remember visited positions and

their appearance, and use them to prioritize locations where targets are likely to be found. We argue that both RNN architectures achieve this as both are capable of remembering positions and encoded images. Whether the architectures are sufficient to enable the agent to learn an optimal policy for the task is another question.

Using an LSTM is common for POMDPs [32, 46, 45], and has the advantage of being general – it can be used to remember any features over time. Its disadvantage is that how it remembers is difficult to predict.

The spatial memory seems like an obvious choice for this particular task. It stores visual features of the explored scene in an explicit structure, and is read using an operation that is suited for such information. In our experiments we saw that the spatial memory performed better than the temporal one, but it has some disadvantages as well.

First, it relies on the agent knowing its position so that it can index the memory properly. Second, the feature map of the memory grows with the size of the search space. This is not an inherent feature of the LSTM (although an LSTM may need to grow to be able to act well in large search spaces).

### 5.2.5 Reinforcement Learning for Visual Search

It is worth considering whether using a learning agent is suitable for visual search problems. Several of the works which we cover in Section 2.2 utilize other solution methods with apparent success. Such methods can sometimes be probably correct and efficient. It is not obvious that RL is a good choice, and it has even been shown experimentally to struggle with generalizing to unseen samples in certain navigation scenarios [24]. One could imagine that it is possible to compute an optimal strategy for certain environments.

The perspective we take with this work is that non-learning solution methods may offer these guarantees, but designing such solutions for every search scenario is laborious. The characteristics of environments can vary considerably which may drastically affect how a manual approach is implemented. Interpreting and utilizing patterns in arbitrary scenes may even be difficult for us humans. If we cannot understand patterns ourselves, we can not expect to communicate how to search to machines. Furthermore, there have been several examples of learning systems surpassing humans in specific tasks [60, 65].

These two points alone are strong arguments for exploring whether learning systems can be good searchers. We would argue that RL is a suitable framework for implementing such learning systems. Our approach seems to be able to utilize environment appearance to search more efficiently. It is less clear whether the behavior is close to optimal or not. In addition to the points above about neural network architecture and reward signal, it is not known whether policy gradient methods converge to globally optimal policies [1]. More work is needed to evaluate the ability of the two agents to learn optimal search behavior.

### 5.2.6 Replicability, Reliability and Validity

As discussed in Section 2.2.4, reproducibility is a problem in current deep RL research. This comes with the risk of stagnating the field by inhibiting correct interpretation of results [33]. In this work, we have taken certain precautions to avoid such issues.

For each experiment, we have collected results across at least 3 runs. While several sources state that as many as 10 runs are needed for significant results [22, 2], such undertakings are not feasible without sufficient compute resources. Our hope is that 3 runs gives a sense for the variance involved in our approach. However, more runs would be preferred.

We have placed emphasis on evaluating our approach on samples that have not been seen previously. This ensures that our agents have not simply remembered the training levels, but actually generalized to unseen samples. One issue we would like to note is that we have used a relatively small number of test samples when measuring search performance. This is to make it feasible to collect results for human searchers. Ideally, we would have tested on a larger set.



The three metrics we have used (success rate, average search path length, and SPL) all offer different insights into the performance of agents. They should not be used as absolute measures, but rather to compare different agents in the same environments. The SPL metric has been used in several previous works for navigation tasks [4, 69]. SPL considers both the taken search path length, the shortest path length and whether the agent was successful in each episode. This makes it a useful measure of the quality of the search paths chosen by an agent.

However, SPL is not a perfect metric. As noted by [11], it fails to consider the fact that some failures are less of a failure than others. For example, an agent might have been close to discovering a target at some time step but missed it. It might be desirable to give a higher score to such search paths than ones that are never close to targets. The binary success indicator introduces high variance into the metric. They also note that it is not suitable for comparison across different datasets, as obtaining high SPL scores is more difficult for short paths. All of our agents have achieved relatively high success rates, so the issue of failure does not seem like a major concern. We have also only compared SPL within the same datasets.

Finally, it is possible that there are errors in our implementation. We have tested our PPO implementation against standard tasks, but there is still the possibility of errors in the algorithm, environments or evaluation. Source code has been made available so that others can reproduce and scrutinize our results.

### 5.2.7 Source Criticism

Deep RL is a relatively new research field, with lots of progress in recent years. This coupled with known reproducibility problems of published work discussed in Section 2.2.4 means that being critical of sources is of particular importance.

The used sources are all exclusively scientific literature or textbooks. The textbooks used [56, 62, 30] are well-known and themselves well-sourced. Most of the scientific literature is published in peer-reviewed journals. A few of the referenced works are preprints that have not been through a standard peer review process. All of these sources are well cited and can be relied on with some confidence. An attempt has been made to find several references each piece of information used in our theory and methodology.

## 5.3 The work in a wider context

The capabilities of artificial intelligence (AI) are growing, and it is having a progressively wider societal impact. This progress is expected to continue, and many are of the opinion that human-level AI may arrive in this century [54]. Such an intelligence may be of great benefit. AI could help solve some of today’s greatest environmental, societal and economic problems [64].

Crucially, it can also have a negative impact if not designed properly. A common definition of an intelligent system is ones that acts rationally by perceiving and acting in order to maximally achieve its objective [54]. A sufficiently intelligent agent with malicious capabilities and the wrong objective can pose a great danger. This is a major concern among many researchers and the broader public [55, 15, 64, 54]

The system presented in this work also exemplifies the duality in utility of AI systems to some extent. A system that can search efficiently by utilizing environment cues has positive applications in helping robots, rescue scenarios, fire detection, etc. It can also be used for malicious purposes, such as autonomous weapons and mass surveillance.

This poses the question of how to avoid AI systems having negative impact on the world. Following the above definition of an intelligent system, such scenarios can be seen as a failure of *value alignment* [54]. We have to avoid giving intelligent agents purposes that do not align with our own. Furthermore, intelligent agents must be formally verified to act correctly, or we cannot trust that they will maximize the correct objective.

In the context of RL, we have to ensure that the reward signal an agent acts according to aligns with our purposes as humans. RL agents typically do not provide guarantees of safe operation [27]. Before a system like ours is deployed it must be verified to act according to the value alignment principle, or lack the capability to cause harm.





## 6 Conclusion

Visual search is ubiquitous in our daily lives as humans. Automated visual search systems therefore naturally have many potential applications. Building an autonomous visual search system can be done using domain knowledge, but implementing efficient searchers in arbitrary environments is not trivial.

In this work, we have asked ourselves whether a system can learn to search efficiently from a set of sample scenes with known target locations. Such a system should pick up patterns in the samples seen during training and generalize to similar but unseen test scenes. We have presented a method for this task for jointly learning control of visual attention, recognition and localization using deep reinforcement learning. Our approach can be used to train agents to look around in environments to search for multiple targets.

The agents try to locate all targets in a minimal number of time steps, by indicating when they are visible. They are designed to be capable of integrating visual information over time and reason over explored parts of their environment. This allows them to avoid searching locations multiple times while prioritizing regions where targets are likely to be found.

Using three environments with different characteristics, we have shown that agents trained with our method are capable of utilizing visual cues to guide search and localize targets. We have compared two neural network architectures for this purpose - one using a temporal memory and one using a spatial memory. In all three environments, the architecture with a spatial memory outperforms all three simple baselines in terms of average search length and success rate. Furthermore, its searches are comparable in performance to a human searcher. The temporal memory struggles with remembering precise information over many time steps, which is required for efficient search.

By comparing the search paths chosen by both agents to the shortest possible paths, we show that they on average select paths that are better than a set of general baselines that do not utilize environment cues. Furthermore, our learning agents select paths that are of equal quality or better than those selected by humans. Comparison with a simple handcrafted policy suggested that neither agent learns policies that are close to optimal. Beyond this, the quality of the searches needs further investigation.

By comparing both architectures in varying search space sizes, we have shown that a spatial memory scales better to visual search tasks in large search spaces. When trained using different numbers of training samples, both architectures overfit to these and perform worse on held out test samples. This illustrates the need for being mindful of overfitting in reinforcement

learning. With a sufficient number of training samples, they are able to generalize to unseen environment samples. We found that the spatial memory is less prone to overfitting than the temporal memory architecture for chosen search tasks.

## 6.1 Future Work

Several limitations of this work have been discussed in Chapter 5. We suggest that future work in the area of visual search with deep reinforcement learning should look closer into the following questions:

- What are the minimal conditions under which an agent can learn to search optimally?

It is possible that the presented approach does not satisfy the requirements needed to enable it to learn search behaviors that are closer to optimal. We have illustrated that our two learning agents in their current forms do not find optimal policies in at least one of the environments. The ability of our learning agents to find optimal policies could be limited by neural network architecture, choice of reinforcement learning algorithm, reward signal, etc. It is interesting to see if and how our approach can be modified slightly to find policies that are closer to optimal.

- Does the approach scale to real-world search scenarios?

We have looked at relatively simple search scenarios, where environment cues follow some clear pattern and target detection is trivial. Real-world search scenarios will exhibit a different level of complexity. Whether the proposed approach scales to such scenarios should be investigated further. Such investigations should either train agents in the real world, or in simulated environments that mirror its properties and evaluate them in the real world.

- How can the behavior of learning agents be explained and formally verified?

In this work, we have used performance on a held out test set to judge the performance of our agents. Beyond this and some qualitative evaluations, we have treated trained agents as black boxes. Before deploying learning agents in safety-critical scenarios, more guarantees are needed. How can we prove that an agent trained with reinforcement learning acts safely?



## Bibliography

- [1] Alekh Agarwal, Sham M. Kakade, Jason D. Lee, and Gaurav Mahajan. “Optimality and Approximation with Policy Gradient Methods in Markov Decision Processes”. In: *Proceedings of Thirty Third Conference on Learning Theory*. Conference on Learning Theory. PMLR, July 15, 2020, pp. 64–66. URL: <https://proceedings.mlr.press/v125/agarwal20a.html> (visited on 05/20/2022) (Cited on pages 9, 38).
- [2] Rishabh Agarwal, Max Schwarzer, Pablo Samuel Castro, Aaron Courville, and Marc G. Bellemare. “Deep Reinforcement Learning at the Edge of the Statistical Precipice”. In: *arXiv:2108.13264 [cs, stat]* (Jan. 5, 2022). arXiv: 2108.13264. URL: <http://arxiv.org/abs/2108.13264> (visited on 03/23/2022) (Cited on pages 16, 25, 38).
- [3] John Aloimonos, Isaac Weiss, and Amit Bandyopadhyay. “Active Vision”. In: *International Journal of Computer Vision* 1.4 (Jan. 1988), pp. 333–356. ISSN: 0920-5691, 1573-1405. DOI: 10/cn4mdc. URL: <http://link.springer.com/10.1007/BF00133571> (visited on 02/07/2022) (Cited on pages 4, 5).
- [4] Peter Anderson, Angel Chang, Devendra Singh Chaplot, Alexey Dosovitskiy, Saurabh Gupta, Vladlen Koltun, Jana Kosecka, Jitendra Malik, Roozbeh Mottaghi, Manolis Savva, and Amir R. Zamir. “On Evaluation of Embodied Navigation Agents”. In: *arXiv:1807.06757 [cs]* (July 17, 2018). arXiv: 1807.06757. URL: <http://arxiv.org/abs/1807.06757> (visited on 03/23/2022) (Cited on pages 14, 17, 26, 39).
- [5] Alexander Andreopoulos and John K. Tsotsos. “A Theory of Active Object Localization”. In: *2009 IEEE 12th International Conference on Computer Vision*. 2009 IEEE 12th International Conference on Computer Vision. Sept. 2009, pp. 903–910. DOI: 10.1109/ICCV.2009.5459332 (Cited on pages 2, 5).
- [6] Marcin Andrychowicz, Anton Raichuk, Piotr Stańczyk, Manu Orsini, Sertan Girgin, Raphael Marinier, Léonard Hussenot, Matthieu Geist, Olivier Pietquin, Marcin Michalski, Sylvain Gelly, and Olivier Bachem. “What Matters In On-Policy Reinforcement Learning? A Large-Scale Empirical Study”. In: *arXiv:2006.05990 [cs, stat]* (June 10, 2020). arXiv: 2006.05990. URL: <http://arxiv.org/abs/2006.05990> (visited on 04/06/2022) (Cited on pages 10, 25, 37).
- [7] A. Aydemir, K. Sjo, J. Folkesson, A. Pronobis, and P. Jensfelt. “Search in the Real World: Active Visual Object Search Based on Spatial Relations”. In: *2011 IEEE International Conference on Robotics and Automation*. 2011 IEEE International Conference on Robotics and Automation (ICRA). Shanghai, China: IEEE, May 2011, pp. 2818–2824.

- ISBN: 978-1-61284-386-5. DOI: 10.1109/ICRA.2011.5980495. URL: <http://ieeexplore.ieee.org/document/5980495/> (visited on 02/28/2022) (Cited on page 11).
- [8] Alper Aydemir, Andrzej Pronobis, Moritz Göbelbecker, and Patric Jensfelt. “Active Visual Object Search in Unknown Environments Using Uncertain Semantics”. In: *IEEE Transactions on Robotics* 29.4 (Aug. 2013), pp. 986–1002. ISSN: 1941-0468. DOI: 10.1109/TR0.2013.2256686 (Cited on page 11).
  - [9] Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. “Neural Machine Translation by Jointly Learning to Align and Translate”. In: *arXiv:1409.0473 [cs, stat]* (May 19, 2016). arXiv: 1409.0473. URL: <http://arxiv.org/abs/1409.0473> (visited on 03/30/2022) (Cited on page 14).
  - [10] R. Bajcsy. “Active Perception”. In: *Proceedings of the IEEE* 76.8 (Aug. 1988), pp. 966–1005. ISSN: 1558-2256. DOI: 10.1109/5.5968 (Cited on pages 4, 5).
  - [11] Dhruv Batra, Aaron Gokaslan, Aniruddha Kembhavi, Oleksandr Maksymets, Roozbeh Mottaghi, Manolis Savva, Alexander Toshev, and Erik Wijmans. “ObjectNav Revisited: On Evaluation of Embodied Agents Navigating to Objects”. In: *arXiv:2006.13171 [cs]* (Aug. 30, 2020). arXiv: 2006.13171. URL: <http://arxiv.org/abs/2006.13171> (visited on 03/23/2022) (Cited on page 39).
  - [12] Yoshua Bengio, Aaron Courville, and Pascal Vincent. “Representation Learning: A Review and New Perspectives”. In: *IEEE Transactions on Pattern Analysis and Machine Intelligence* 35.8 (Aug. 2013), pp. 1798–1828. ISSN: 1939-3539. DOI: 10.1109/TPAMI.2013.50 (Cited on page 5).
  - [13] Francisco Bonin-Font, Alberto Ortiz, and Gabriel Oliver. “Visual Navigation for Mobile Robots: A Survey”. In: *Journal of Intelligent and Robotic Systems* 53.3 (Nov. 2008), pp. 263–296. ISSN: 0921-0296, 1573-0409. DOI: 10.1007/s10846-008-9235-4. URL: <http://link.springer.com/10.1007/s10846-008-9235-4> (visited on 04/07/2022) (Cited on page 12).
  - [14] Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. “OpenAI Gym”. In: *arXiv:1606.01540 [cs]* (June 5, 2016). arXiv: 1606.01540. URL: <http://arxiv.org/abs/1606.01540> (visited on 03/10/2022) (Cited on page 27).
  - [15] Miles Brundage, Shahar Avin, Jack Clark, Helen Toner, Peter Eckersley, Ben Garfinkel, Allan Dafoe, Paul Scharre, Thomas Zeitsoff, Bobby Filar, Hyrum Anderson, Heather Roff, Gregory C. Allen, Jacob Steinhardt, Carrick Flynn, Seán Ó hÉigeartaigh, Simon Beard, Haydn Belfield, Sebastian Farquhar, Clare Lyle, Rebecca Crotoft, Owain Evans, Michael Page, Joanna Bryson, Roman Yampolskiy, and Dario Amodei. *The Malicious Use of Artificial Intelligence: Forecasting, Prevention, and Mitigation*. arXiv:1802.07228. arXiv, Feb. 20, 2018. DOI: 10.48550/arXiv.1802.07228. arXiv: 1802.07228[cs]. URL: <http://arxiv.org/abs/1802.07228> (visited on 05/16/2022) (Cited on page 39).
  - [16] Juan C. Caicedo and Svetlana Lazebnik. “Active Object Localization with Deep Reinforcement Learning”. In: *arXiv:1511.06015 [cs]* (Nov. 18, 2015). arXiv: 1511.06015. URL: <http://arxiv.org/abs/1511.06015> (visited on 02/03/2022) (Cited on pages 2, 12, 14).
  - [17] Devendra Singh Chaplot, Dhiraj Gandhi, Abhinav Gupta, and Ruslan Salakhutdinov. “Object Goal Navigation using Goal-Oriented Semantic Exploration”. In: *arXiv:2007.00643 [cs]* (July 1, 2020). arXiv: 2007.00643. URL: <http://arxiv.org/abs/2007.00643> (visited on 03/24/2022) (Cited on pages 15, 24).

- [18] Shengyong Chen, Youfu Li, and Ngai Ming Kwok. “Active Vision in Robotic Systems: A Survey of Recent Developments”. In: *The International Journal of Robotics Research* 30.11 (Sept. 1, 2011), pp. 1343–1377. ISSN: 0278-3649. DOI: 10.1177/0278364911410755. URL: <https://doi.org/10.1177/0278364911410755> (visited on 04/05/2022) (Cited on pages 5, 11).
- [19] Xinlei Chen and Abhinav Gupta. “Spatial Memory for Context Reasoning in Object Detection”. In: *2017 IEEE International Conference on Computer Vision (ICCV)*. 2017 IEEE International Conference on Computer Vision (ICCV). Venice: IEEE, Oct. 2017, pp. 4106–4116. ISBN: 978-1-5386-1032-9. DOI: 10.1109/ICCV.2017.440. URL: <http://ieeexplore.ieee.org/document/8237702/> (visited on 03/30/2022) (Cited on page 12).
- [20] Karl Cobbe, Christopher Hesse, Jacob Hilton, and John Schulman. “Leveraging Procedural Generation to Benchmark Reinforcement Learning”. In: *arXiv:1912.01588 [cs, stat]* (July 26, 2020). arXiv: 1912.01588. URL: <http://arxiv.org/abs/1912.01588> (visited on 03/23/2022) (Cited on pages 10, 15, 18, 25, 27, 35).
- [21] Karl Cobbe, Oleg Klimov, Chris Hesse, Taehoon Kim, and John Schulman. “Quantifying Generalization in Reinforcement Learning”. In: *arXiv:1812.02341 [cs, stat]* (July 14, 2019). arXiv: 1812.02341. URL: <http://arxiv.org/abs/1812.02341> (visited on 03/24/2022) (Cited on pages 15, 35).
- [22] Cédric Colas, Olivier Sigaud, and Pierre-Yves Oudeyer. “A Hitchhiker’s Guide to Statistical Comparisons of Reinforcement Learning Algorithms”. In: *arXiv:1904.06979 [cs, stat]* (Apr. 15, 2019). arXiv: 1904.06979. URL: <http://arxiv.org/abs/1904.06979> (visited on 05/02/2022) (Cited on pages 16, 25, 38).
- [23] Cédric Colas, Olivier Sigaud, and Pierre-Yves Oudeyer. “How Many Random Seeds? Statistical Power Analysis in Deep Reinforcement Learning Experiments”. In: *arXiv:1806.08295 [cs, stat]* (July 5, 2018). arXiv: 1806.08295. URL: <http://arxiv.org/abs/1806.08295> (visited on 05/02/2022) (Cited on page 16).
- [24] Vikas Dhiman, Shurjo Banerjee, Brent Griffin, Jeffrey M. Siskind, and Jason J. Corso. “A Critical Investigation of Deep Reinforcement Learning for Navigation”. In: *arXiv:1802.02274 [cs]* (Jan. 4, 2019). arXiv: 1802.02274. URL: <http://arxiv.org/abs/1802.02274> (visited on 03/24/2022) (Cited on pages 14, 38).
- [25] M. P. Eckstein. “Visual Search: A Retrospective”. In: *Journal of Vision* 11.5 (Dec. 30, 2011), pp. 14–14. ISSN: 1534-7362. DOI: 10.1167/11.5.14. URL: <http://jov.arvojournals.org/Article.aspx?doi=10.1167/11.5.14> (visited on 02/22/2022) (Cited on pages 1, 4, 5).
- [26] Per-Erik Forssen, David Meger, Kevin Lai, Scott Helmer, James J. Little, and David G. Lowe. “Informed Visual Search: Combining Attention and Object Recognition”. In: *2008 IEEE International Conference on Robotics and Automation*. 2008 IEEE International Conference on Robotics and Automation. May 2008, pp. 935–942. DOI: 10.1109/ROBOT.2008.4543325 (Cited on pages 2, 11).
- [27] Nathan Fulton and André Platzer. “Safe Reinforcement Learning via Formal Methods: Toward Safe Control Through Proof and Learning”. In: *Proceedings of the AAAI Conference on Artificial Intelligence* 32.1 (Apr. 26, 2018). ISSN: 2374-3468. URL: <https://ojs.aaai.org/index.php/AAAI/article/view/12107> (visited on 05/25/2022) (Cited on page 40).
- [28] Enric Galceran and Marc Carreras. “A Survey on Coverage Path Planning for Robotics”. In: *Robotics and Autonomous Systems* 61.12 (Dec. 2013), pp. 1258–1276. ISSN: 09218890. DOI: 10/f5j2n5. URL: <https://linkinghub.elsevier.com/retrieve/pii/S092188901300167X> (visited on 02/07/2022) (Cited on page 5).

- [29] Florin C. Ghesu, Bogdan Georgescu, Tommaso Mansi, Dominik Neumann, Joachim Hornegger, and Dorin Comaniciu. “An Artificial Agent for Anatomical Landmark Detection in Medical Images”. In: *Medical Image Computing and Computer-Assisted Intervention - MICCAI 2016*. Ed. by Sebastien Ourselin, Leo Joskowicz, Mert R. Sabuncu, Gozde Unal, and William Wells. Vol. 9902. Cham: Springer International Publishing, 2016, pp. 229–237. ISBN: 978-3-319-46725-2 978-3-319-46726-9. DOI: 10.1007/978-3-319-46726-9\_27. URL: [https://link.springer.com/10.1007/978-3-319-46726-9\\_27](https://link.springer.com/10.1007/978-3-319-46726-9_27) (visited on 02/03/2022) (Cited on pages 2, 12, 14).
- [30] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. *Deep Learning*. Red. by Francis Bach. Adaptive Computation and Machine Learning series. Cambridge, MA, USA: MIT Press, Nov. 18, 2016. 800 pp. ISBN: 978-0-262-03561-3 (Cited on pages 2, 4, 6, 7, 39).
- [31] Saurabh Gupta, Varun Tolani, James Davidson, Sergey Levine, Rahul Sukthankar, and Jitendra Malik. “Cognitive Mapping and Planning for Visual Navigation”. In: *arXiv:1702.03920 [cs]* (Feb. 7, 2019). arXiv: 1702.03920. URL: <http://arxiv.org/abs/1702.03920> (visited on 03/21/2022) (Cited on pages 15, 24).
- [32] Matthew Hausknecht and Peter Stone. “Deep Recurrent Q-Learning for Partially Observable MDPs”. In: *arXiv:1507.06527 [cs]* (Jan. 11, 2017). arXiv: 1507.06527. URL: <http://arxiv.org/abs/1507.06527> (visited on 03/21/2022) (Cited on pages 14, 24, 38).
- [33] Peter Henderson, Riashat Islam, Philip Bachman, Joelle Pineau, Doina Precup, and David Meger. “Deep Reinforcement Learning That Matters”. In: *Proceedings of the AAAI Conference on Artificial Intelligence* 32.1 (Apr. 29, 2018). ISSN: 2374-3468. URL: <https://ojs.aaai.org/index.php/AAAI/article/view/11694> (visited on 03/23/2022) (Cited on pages 10, 16, 17, 22, 25, 38).
- [34] Joao F. Henriques and Andrea Vedaldi. “MapNet: An Allocentric Spatial Memory for Mapping Environments”. In: *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. Salt Lake City, UT: IEEE, June 2018, pp. 8476–8484. ISBN: 978-1-5386-6420-9. DOI: 10.1109/CVPR.2018.00884. URL: <https://ieeexplore.ieee.org/document/8578982/> (visited on 03/23/2022) (Cited on pages 15, 24).
- [35] Matteo Hessel, Hado van Hasselt, Joseph Modayil, and David Silver. “On Inductive Biases in Deep Reinforcement Learning”. In: *arXiv:1907.02908 [cs, stat]* (July 5, 2019). arXiv: 1907.02908. URL: <http://arxiv.org/abs/1907.02908> (visited on 03/24/2022) (Cited on pages 15, 37).
- [36] Sepp Hochreiter and Jürgen Schmidhuber. “Long Short-Term Memory”. In: *Neural Computation* 9.8 (Nov. 1997), pp. 1735–1780. ISSN: 0899-7667. DOI: 10.1162/neco.1997.9.8.1735 (Cited on pages 7, 24).
- [37] Laurent Itti and Christof Koch. “Computational Modelling of Visual Attention”. In: *Nature Reviews Neuroscience* 2.3 (Mar. 2001), pp. 194–203. ISSN: 1471-0048. DOI: 10.1038/35058500. URL: <https://www.nature.com/articles/35058500> (visited on 04/05/2022) (Cited on pages 4, 5).
- [38] Leslie Pack Kaelbling, Michael L. Littman, and Anthony R. Cassandra. “Planning and Acting in Partially Observable Stochastic Domains”. In: *Artificial Intelligence* 101.1 (May 1998), pp. 99–134. ISSN: 00043702. DOI: 10.1016/S0004-3702(98)00023-X. URL: <https://linkinghub.elsevier.com/retrieve/pii/S000437029800023X> (visited on 03/23/2022) (Cited on pages 7, 8).
- [39] Diederik P. Kingma and Jimmy Ba. “Adam: A Method for Stochastic Optimization”. In: *arXiv:1412.6980 [cs]* (Jan. 29, 2017). arXiv: 1412.6980. URL: <http://arxiv.org/abs/1412.6980> (visited on 04/12/2022) (Cited on page 25).



- 
- [40] Robert Kirk, Amy Zhang, Edward Grefenstette, and Tim Rocktäschel. “A Survey of Generalisation in Deep Reinforcement Learning”. In: *arXiv:2111.09794 [cs]* (Jan. 30, 2022). arXiv: 2111.09794. URL: <http://arxiv.org/abs/2111.09794> (visited on 03/24/2022) (Cited on pages 15, 16, 18).
  - [41] Eric Kolve, Roozbeh Mottaghi, Winson Han, Eli VanderBilt, Luca Weihs, Alvaro Her-rasti, Daniel Gordon, Yuke Zhu, Abhinav Gupta, and Ali Farhadi. *AI2-THOR: An In-teractive 3D Environment for Visual AI*. arXiv:1712.05474. arXiv, Mar. 15, 2019. DOI: 10.48550/arXiv.1712.05474. arXiv: 1712.05474[cs]. URL: <http://arxiv.org/abs/1712.05474> (visited on 05/20/2022) (Cited on page 13).
  - [42] Maja J Mataric. “Reward Functions for Accelerated Learning”. In: *Machine Learning Proceedings 1994*. Ed. by William W. Cohen and Haym Hirsh. San Francisco (CA): Morgan Kaufmann, Jan. 1, 1994, pp. 181–189. ISBN: 978-1-55860-335-6. DOI: 10.1016/B978-1-55860-335-6.50030-1. URL: <https://www.sciencedirect.com/science/article/pii/B9781558603356500301> (visited on 03/31/2022) (Cited on page 9).
  - [43] Marvin Minsky. “Steps toward Artificial Intelligence”. In: *Proceedings of the IRE* 49.1 (Jan. 1961), pp. 8–30. ISSN: 2162-6634. DOI: 10.1109/JRPROC.1961.287775 (Cited on page 9).
  - [44] Silviu Minut and Sridhar Mahadevan. “A Reinforcement Learning Model of Selective Visual Attention”. In: *Proceedings of the Fifth International Conference on Autonomous Agents - AGENTS '01*. Montreal, Quebec, Canada: ACM Press, 2001, pp. 457–464. ISBN: 978-1-58113-326-4. DOI: 10/dbwckq. URL: <http://portal.acm.org/citation.cfm?doid=375735.376414> (visited on 02/07/2022) (Cited on pages 2, 11).
  - [45] Piotr Mirowski, Razvan Pascanu, Fabio Viola, Hubert Soyer, Andrew J. Ballard, An-drea Banino, Misha Denil, Ross Goroshin, Laurent Sifre, Koray Kavukcuoglu, Dhar-shan Kumaran, and Raia Hadsell. “Learning to Navigate in Complex Environments”. In: *arXiv:1611.03673 [cs]* (Jan. 13, 2017). arXiv: 1611.03673. URL: <http://arxiv.org/abs/1611.03673> (visited on 03/24/2022) (Cited on pages 2, 13, 14, 24, 36, 38).
  - [46] Volodymyr Mnih, Adrià Puigdomènech Badia, Mehdi Mirza, Alex Graves, Timothy P. Lillicrap, Tim Harley, David Silver, and Koray Kavukcuoglu. “Asynchronous Methods for Deep Reinforcement Learning”. In: *arXiv:1602.01783 [cs]* (June 16, 2016). arXiv: 1602.01783. URL: <http://arxiv.org/abs/1602.01783> (visited on 03/22/2022) (Cited on pages 13, 14, 18, 24, 38).
  - [47] Volodymyr Mnih, Nicolas Heess, Alex Graves, and koray kavukcuoglu koray. “Recurrent Models of Visual Attention”. In: *Advances in Neural Information Processing Systems*. Vol. 27. Curran Associates, Inc., 2014. URL: <https://proceedings.neurips.cc/paper/2014/hash/09c6c3783b4a70054da74f2538ed47c6-Abstract.html> (visited on 05/19/2022) (Cited on pages 2, 11, 14, 36).
  - [48] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Alex Graves, Ioannis Antonoglou, Daan Wierstra, and Martin Riedmiller. “Playing Atari with Deep Reinforcement Learn-ing”. In: *arXiv:1312.5602 [cs]* (Dec. 19, 2013). arXiv: 1312.5602. URL: <http://arxiv.org/abs/1312.5602> (visited on 03/21/2022) (Cited on pages 10, 25, 37).
  - [49] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Andrei A. Rusu, Joel Veness, Marc G. Bellemare, Alex Graves, Martin Riedmiller, Andreas K. Fidjeland, Georg Ostrovski, Stig Petersen, Charles Beattie, Amir Sadik, Ioannis Antonoglou, Helen King, Dhar-shan Kumaran, Daan Wierstra, Shane Legg, and Demis Hassabis. “Human-level Con-trol Through Deep Reinforcement Learning”. In: *Nature* 518.7540 (Feb. 2015), pp. 529–533. ISSN: 1476-4687. DOI: 10.1038/nature14236. URL: <https://www.nature.com/articles/nature14236> (visited on 03/22/2022) (Cited on pages 2, 10, 13, 14, 22).

- 
- [50] Ken Nakayama and Paolo Martini. “Situating Visual Search”. In: *Vision Research*. Vision Research 50th Anniversary Issue: Part 2 51.13 (July 1, 2011), pp. 1526–1537. ISSN: 0042-6989. DOI: 10.1016/j.visres.2010.09.003. URL: <https://www.sciencedirect.com/science/article/pii/S0042698910004372> (visited on 04/08/2022) (Cited on pages 1, 4, 5).
  - [51] Junhyuk Oh, Valliappa Chockalingam, Satinder, and Honglak Lee. “Control of Memory, Active Perception, and Action in Minecraft”. In: *Proceedings of The 33rd International Conference on Machine Learning*. International Conference on Machine Learning. PMLR, June 11, 2016, pp. 2790–2799. URL: <https://proceedings.mlr.press/v48/oh16.html> (visited on 05/19/2022) (Cited on pages 14, 15, 35).
  - [52] Emilio Parisotto and Ruslan Salakhutdinov. “Neural Map: Structured Memory for Deep Reinforcement Learning”. In: *arXiv:1702.08360 [cs]* (Feb. 27, 2017). arXiv: 1702.08360. URL: <http://arxiv.org/abs/1702.08360> (visited on 03/29/2022) (Cited on pages 14, 24, 35, 37).
  - [53] Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Kopf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. “PyTorch: An Imperative Style, High-Performance Deep Learning Library”. In: *Advances in Neural Information Processing Systems*. Vol. 32. Curran Associates, Inc., 2019. URL: <https://proceedings.neurips.cc/paper/2019/hash/bdbca288fee7f92f2bfa9f7012727740-Abstract.html> (visited on 05/19/2022) (Cited on page 27).
  - [54] Stuart Russell. “Provably Beneficial Artificial Intelligence”. In: *27th International Conference on Intelligent User Interfaces*. IUI ’22. New York, NY, USA: Association for Computing Machinery, Mar. 22, 2022, p. 3. ISBN: 978-1-4503-9144-3. DOI: 10.1145/3490099.3519388. URL: <https://doi.org/10.1145/3490099.3519388> (visited on 05/16/2022) (Cited on page 39).
  - [55] Stuart Russell, Daniel Dewey, and Max Tegmark. “Research Priorities for Robust and Beneficial Artificial Intelligence”. In: *AI Magazine* 36.4 (Dec. 31, 2015), pp. 105–114. ISSN: 2371-9621. DOI: 10.1609/aimag.v36i4.2577. URL: <https://ojs.aaai.org/index.php/aimagazine/article/view/2577> (visited on 05/16/2022) (Cited on page 39).
  - [56] Stuart J. Russell and Peter Norvig. *Artificial Intelligence: A Modern Approach*. In collaboration with Ming-wei Chang, Jacob Devlin, Anca Dragan, David Forsyth, Ian Goodfellow, Jitendra Malik, Vikash Mansinghka, Judea Pearl, and Michael Woolridge. Fourth Edition. Pearson Series in Artificial Intelligence. Hoboken, NJ: Pearson, 2021. 1115 pp. ISBN: 978-0-13-461099-3 (Cited on pages 6, 7, 39).
  - [57] Manolis Savva, Abhishek Kadian, Oleksandr Maksymets, Yili Zhao, Erik Wijmans, Bhavana Jain, Julian Straub, Jia Liu, Vladlen Koltun, Jitendra Malik, Devi Parikh, and Dhruv Batra. “Habitat: A Platform for Embodied AI Research”. In: (Apr. 2, 2019). DOI: 10.48550/arXiv.1904.01201. URL: <https://arxiv.org/abs/1904.01201v2> (visited on 05/20/2022) (Cited on page 13).
  - [58] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. “Proximal Policy Optimization Algorithms”. In: *arXiv:1707.06347 [cs]* (Aug. 28, 2017). arXiv: 1707.06347. URL: <http://arxiv.org/abs/1707.06347> (visited on 03/28/2022) (Cited on pages 10, 25, 27).



- [59] Ksenia Shubina and John K. Tsotsos. “Visual Search for an Object in a 3D Environment Using a Mobile Robot”. In: *Computer Vision and Image Understanding*. Special issue on Intelligent Vision Systems 114.5 (May 1, 2010), pp. 535–547. ISSN: 1077-3142. DOI: 10.1016/j.cviu.2009.06.010. URL: <https://www.sciencedirect.com/science/article/pii/S1077314210000378> (visited on 04/11/2022) (Cited on pages 2, 11).
- [60] David Silver, Aja Huang, Chris J. Maddison, Arthur Guez, Laurent Sifre, George van den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, Sander Dieleman, Dominik Grewe, John Nham, Nal Kalchbrenner, Ilya Sutskever, Timothy Lillicrap, Madeleine Leach, Koray Kavukcuoglu, Thore Graepel, and Demis Hassabis. “Mastering the Game of Go With Deep Neural Networks and Tree Search”. In: *Nature* 529.7587 (Jan. 2016), pp. 484–489. ISSN: 1476-4687. DOI: 10.1038/nature16961. URL: <https://www.nature.com/articles/nature16961%7D> (visited on 04/06/2022) (Cited on pages 2, 38).
- [61] Richard S Sutton, David McAllester, Satinder Singh, and Yishay Mansour. “Policy Gradient Methods for Reinforcement Learning with Function Approximation”. In: *Advances in Neural Information Processing Systems*. Vol. 12. MIT Press, 1999. URL: <https://proceedings.neurips.cc/paper/1999/hash/464d828b85b0bed98e80ade0a5c43b0f-Abstract.html> (visited on 05/19/2022) (Cited on page 9).
- [62] Richard S. Sutton and Andrew G. Barto. *Reinforcement Learning: An Introduction*. Second edition. Adaptive computation and machine learning series. Cambridge, Massachusetts: The MIT Press, 2018. 526 pp. ISBN: 978-0-262-03924-6 (Cited on pages 2, 4, 7–9, 39).
- [63] Gerald Tesauro. “Temporal Difference Learning and TD-Gammon”. In: *Communications of the ACM* 38.3 (Mar. 1, 1995), pp. 58–68. ISSN: 0001-0782. DOI: 10.1145/203330.203343. URL: <https://doi.org/10.1145/203330.203343> (visited on 05/19/2022) (Cited on page 10).
- [64] Ricardo Vinuesa, Hossein Azizpour, Iolanda Leite, Madeline Balaam, Virginia Dignum, Sami Domisch, Anna Felländer, Simone Daniela Langhans, Max Tegmark, and Francesco Fusco Nerini. “The Role of Artificial Intelligence in Achieving the Sustainable Development Goals”. In: *Nature Communications* 11.1 (Jan. 13, 2020), p. 233. ISSN: 2041-1723. DOI: 10.1038/s41467-019-14108-y. URL: <https://www.nature.com/articles/s41467-019-14108-y> (visited on 05/16/2022) (Cited on page 39).
- [65] Oriol Vinyals, Igor Babuschkin, Wojciech M. Czarnecki, Michaël Mathieu, Andrew Dudzik, Junyoung Chung, David H. Choi, Richard Powell, Timo Ewalds, Petko Georgiev, Junhyuk Oh, Dan Horgan, Manuel Kroiss, Ivo Danihelka, Aja Huang, Laurent Sifre, Trevor Cai, John P. Agapiou, Max Jaderberg, Alexander S. Vezhnevets, Rémi Leblond, Tobias Pohlen, Valentin Dalibard, David Budden, Yury Sulsky, James Molloy, Tom L. Paine, Caglar Gulcehre, Ziyu Wang, Tobias Pfaff, Yuhuai Wu, Roman Ring, Dani Yogatama, Dario Wünsch, Katrina McKinney, Oliver Smith, Tom Schaul, Timothy Lillicrap, Koray Kavukcuoglu, Demis Hassabis, Chris Apps, and David Silver. “Grandmaster Level in StarCraft II Using Multi-agent Reinforcement Learning”. In: *Nature* 575.7782 (Nov. 2019), pp. 350–354. ISSN: 1476-4687. DOI: 10.1038/s41586-019-1724-z. URL: <https://www.nature.com/articles/s41586-019-1724-z> (visited on 04/06/2022) (Cited on pages 2, 10, 38).
- [66] Jeremy M. Wolfe. “Visual Search”. In: *Current biology : CB* 20.8 (Apr. 27, 2010), R346. DOI: 10.1016/j.cub.2010.02.016. URL: <https://www.ncbi.nlm.nih.gov/labs/pmc/articles/PMC5678963/> (visited on 03/02/2022) (Cited on page 4).
- [67] Jeremy M. Wolfe and Todd S. Horowitz. “Five Factors That Guide Attention in Visual Search”. In: *Nature Human Behaviour* 1.3 (Mar. 8, 2017), pp. 1–8. ISSN: 2397-3374. DOI: 10.1038/s41562-017-0058. URL: <https://www.nature.com/articles/s41562-017-0058> (visited on 02/28/2022) (Cited on pages 1, 4, 5).

- [68] Fei Xia, Amir R. Zamir, Zhiyang He, Alexander Sax, Jitendra Malik, and Silvio Savarese. “Gibson Env: Real-World Perception for Embodied Agents”. In: *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*. 2018, pp. 9068–9079. URL: [https://openaccess.thecvf.com/content\\_cvpr\\_2018/html/Xia\\_Gibson\\_Env\\_Real-World\\_CVPR\\_2018\\_paper.html](https://openaccess.thecvf.com/content_cvpr_2018/html/Xia_Gibson_Env_Real-World_CVPR_2018_paper.html) (visited on 05/20/2022) (Cited on page 13).
- [69] Wei Yang, Xiaolong Wang, Ali Farhadi, Abhinav Gupta, and Roozbeh Mottaghi. “Visual Semantic Navigation using Scene Priors”. In: *arXiv:1810.06543 [cs]* (Oct. 15, 2018). arXiv: 1810.06543. URL: <http://arxiv.org/abs/1810.06543> (visited on 03/18/2022) (Cited on pages 13, 39).
- [70] Xin Ye, Zhe Lin, Haoxiang Li, Shibin Zheng, and Yezhou Yang. “Active Object Perceiver: Recognition-Guided Policy Learning for Object Searching on Mobile Robots”. In: *2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*. 2018 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS). Oct. 2018, pp. 6857–6863. DOI: 10.1109/IROS.2018.8593720 (Cited on pages 13, 36).
- [71] Yiming Ye and John K. Tsotsos. “A Complexity-Level Analysis of the Sensor Planning Task for Object Search”. In: *Computational Intelligence* 17.4 (Nov. 2001), pp. 605–620. ISSN: 0824-7935, 1467-8640. DOI: 10.1111/0824-7935.00166. URL: <https://onlinelibrary.wiley.com/doi/10.1111/0824-7935.00166> (visited on 02/28/2022) (Cited on pages 2, 5, 11).
- [72] Chiyuan Zhang, Oriol Vinyals, Remi Munos, and Samy Bengio. “A Study on Overfitting in Deep Reinforcement Learning”. In: *arXiv:1804.06893 [cs, stat]* (Apr. 20, 2018). arXiv: 1804.06893. URL: <http://arxiv.org/abs/1804.06893> (visited on 02/03/2022) (Cited on pages 15, 35).
- [73] Zhong-Qiu Zhao, Peng Zheng, Shou-Tao Xu, and Xindong Wu. “Object Detection With Deep Learning: A Review”. In: *IEEE Transactions on Neural Networks and Learning Systems* 30.11 (Nov. 2019), pp. 3212–3232. ISSN: 2162-237X, 2162-2388. DOI: 10.1109/TNNLS.2018.2876865. URL: <https://ieeexplore.ieee.org/document/8627998/> (visited on 04/05/2022) (Cited on pages 4, 12, 36).
- [74] Yuke Zhu, Roozbeh Mottaghi, Eric Kolve, Joseph J. Lim, Abhinav Gupta, Li Fei-Fei, and Ali Farhadi. “Target-driven Visual Navigation in Indoor Scenes Using Deep Reinforcement Learning”. In: *2017 IEEE International Conference on Robotics and Automation (ICRA)*. 2017 IEEE International Conference on Robotics and Automation (ICRA). May 2017, pp. 3357–3364. DOI: 10.1109/ICRA.2017.7989381 (Cited on pages 2, 13).

# A Learning Curves

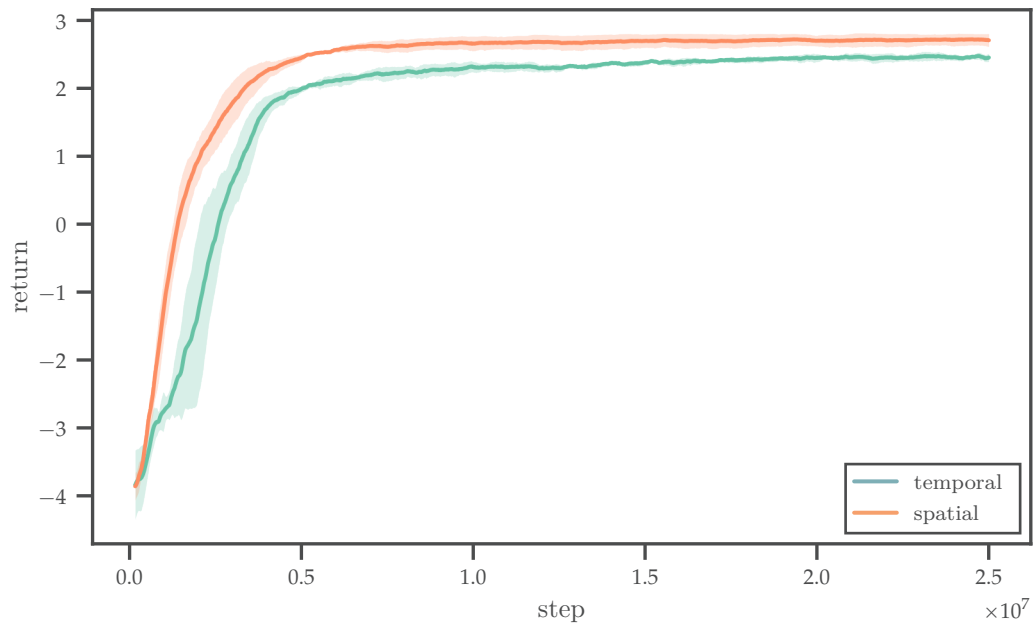


Figure A.1: Average return during training for temporal memory agent and spatial memory agent in Gaussian environment. Mean and standard deviation across 3 runs.

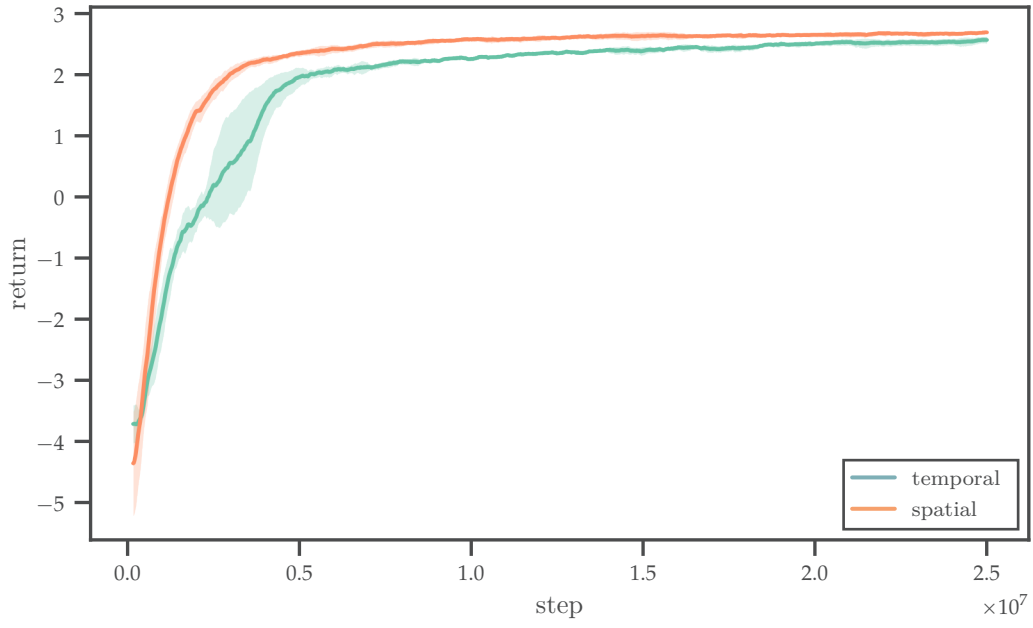


Figure A.2: Average return during training for temporal memory agent and spatial memory agent in terrain environment. Mean and standard deviation across 3 runs.

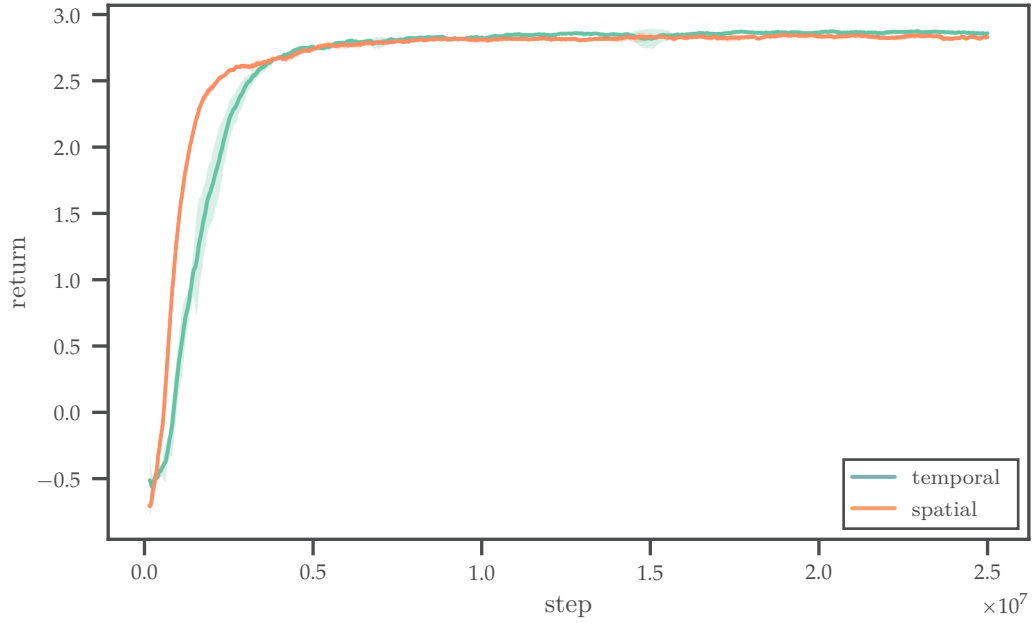


Figure A.3: Average return during training for temporal memory agent and spatial memory agent in camera environment. Mean and standard deviation across 3 runs.

## B Search Paths

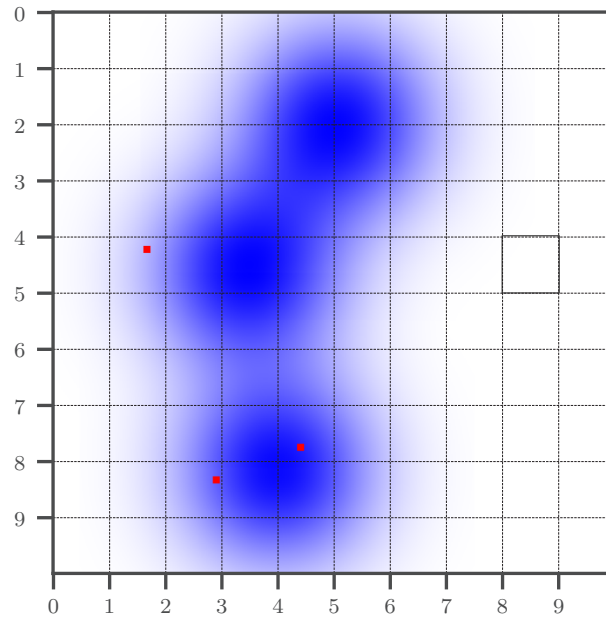


Figure B.1: Scene from Gaussian environment used for search path sample visualizations. Agent starts at position  $\langle 4, 8 \rangle$ . Targets are located at  $\langle 4, 1 \rangle$ ,  $\langle 7, 4 \rangle$  and  $\langle 8, 2 \rangle$ .

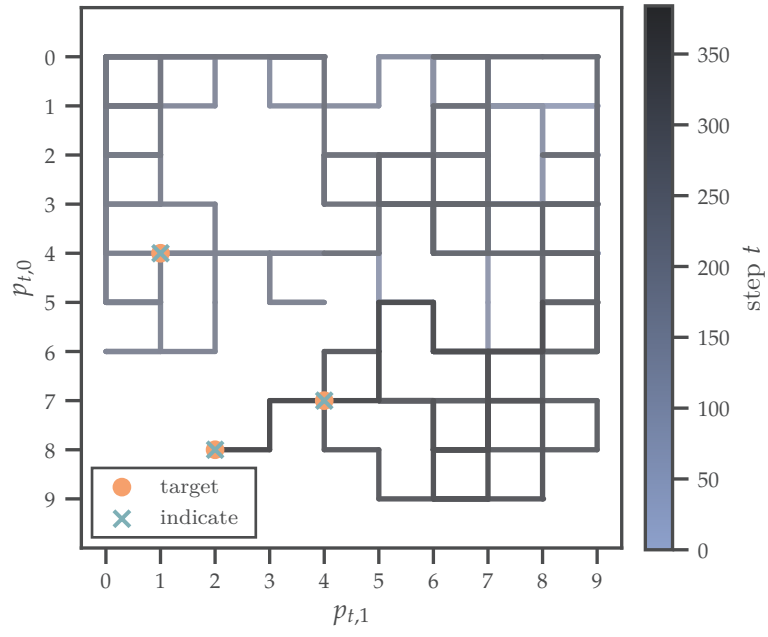


Figure B.2: Sample search path for random baseline policy in Gaussian environment.

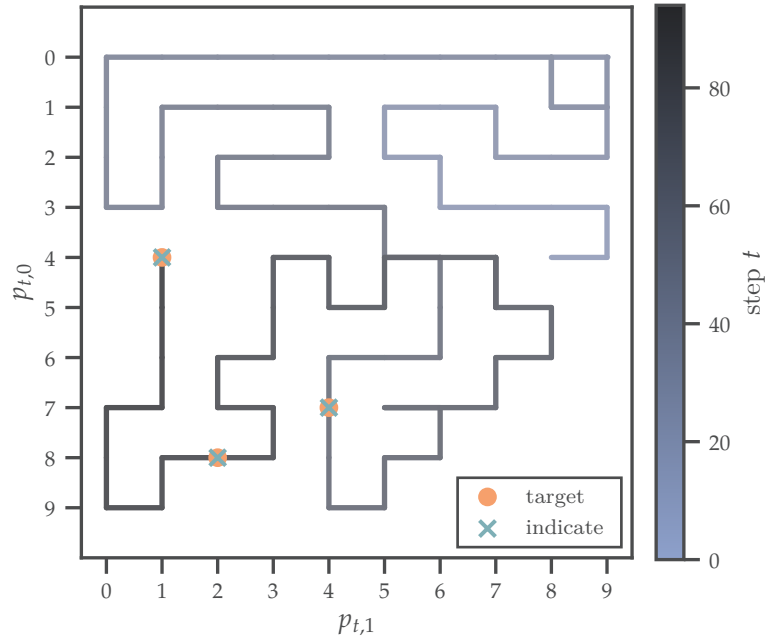


Figure B.3: Sample search path for greedy baseline policy in Gaussian environment.

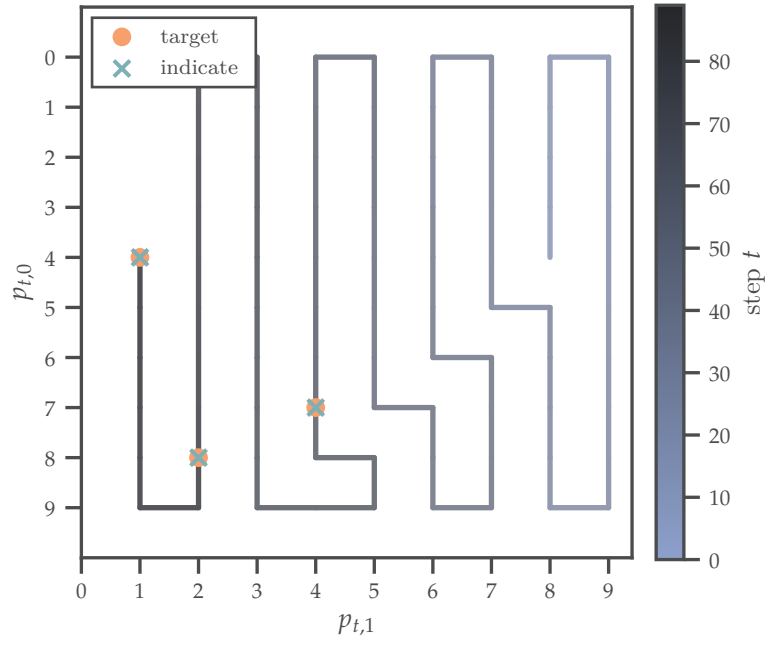


Figure B.4: Sample search path for exhaustive baseline policy in Gaussian environment.

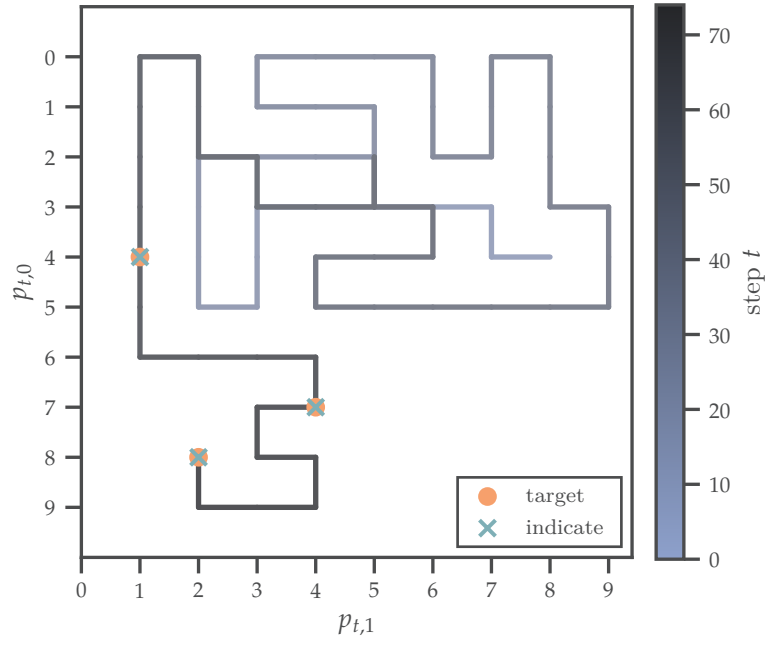


Figure B.5: Sample search path for handcrafted baseline policy in Gaussian environment.

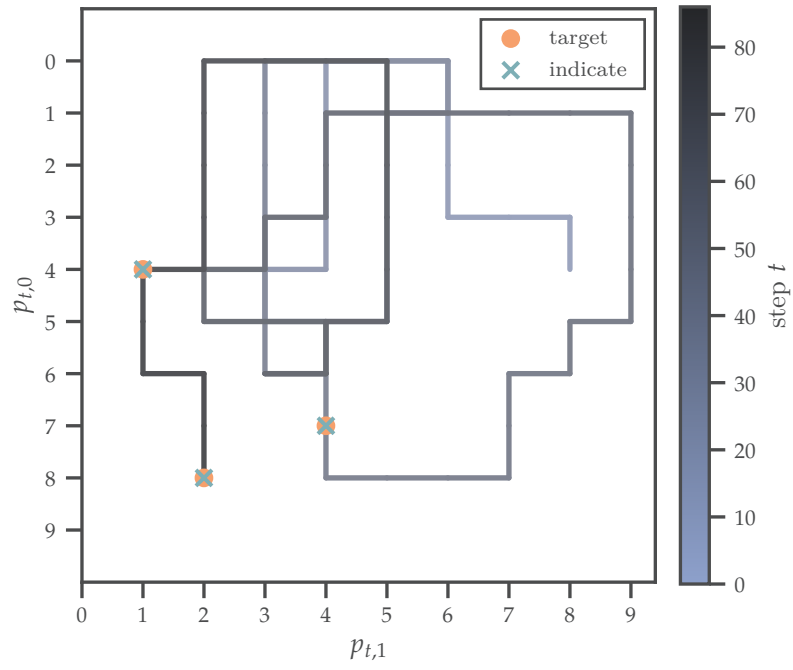


Figure B.6: Sample search path for temporal memory agent in Gaussian environment.

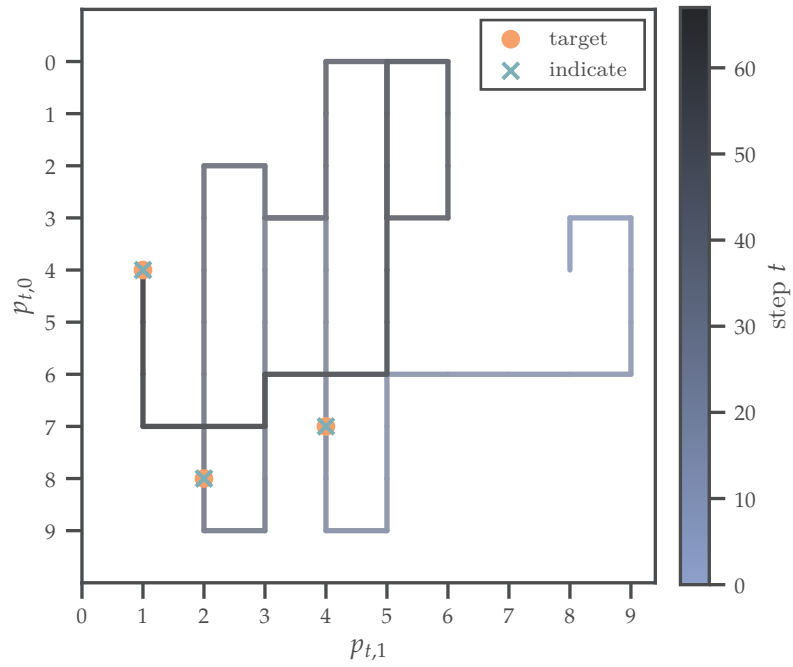


Figure B.7: Sample search path for spatial memory agent in Gaussian environment.



## C Memory Visualization

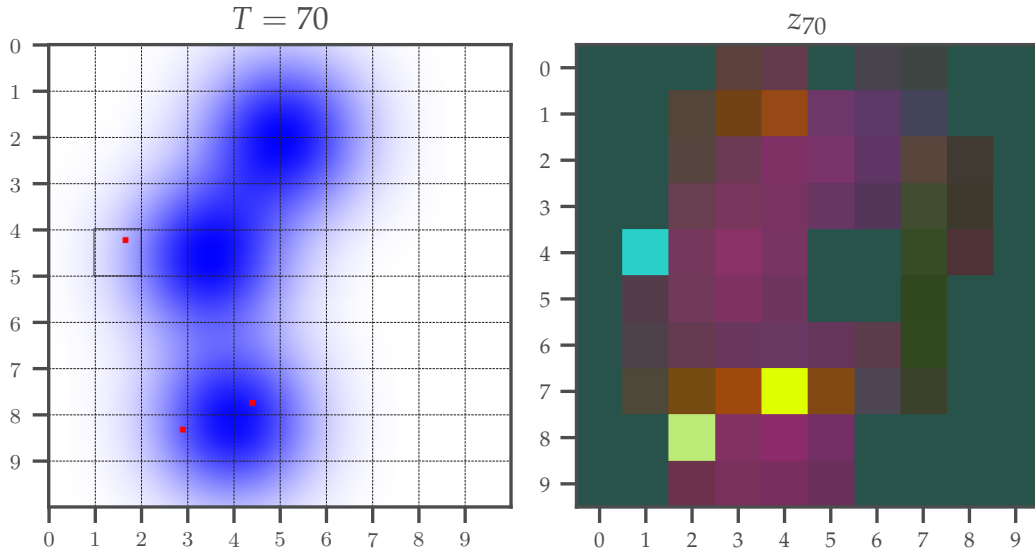


Figure C.1: Visualization of feature map in spatial memory after episode completion in Gaussian environment. To the left is the environment after the spatial memory agent has completed an episode and to the right is the agent's feature map at the same time step. A PCA decomposition of the entire map is used to determine the color of the feature vector at each position. The agent seems to use the feature map to store information about target locations. Furthermore, the difference between locations with high blue intensity and low blue intensity suggests that the agent differentiates between areas with high probability of targets and low probability of targets.