

1-

```
#include <iostream>
#include <cstdlib>

#include <locale.h>

#include <cstdarg>

using namespace std;

char hesaplamasecimmesaj(){

    cout<<endl<<"işlem seçiniz: "<<endl<<"1-Toplama 2-çıkarma 3-çarpma 4-Bölme 5-Mod Alma(Kalan
bulma)"<<endl;

}

char mesaj(){

    cout<<"Sayı girin:"<<endl;

}

float sayial(){

    float x;

    cout<<"=">";

    cin>>x;

    return x;

}

int intsayial(){

    int x;

    cout<<"=">";

    cin>>x;

    return x;

}

void toplayazdir(float *p1,float *p2){

    cout<< *p1+*p2<<endl;

}

void cikaryazdir(float *p1,float *p2){

    cout<< *p1-*p2<<endl;

}

void carpyazdir(float *p1,float *p2){
```

```

        cout<< (*p1)*(*p2)<<endl;
    }
    void bolyazdir(float *p1,float *p2){
        cout<< (*p1)/(*p2)<<endl;
    }
    void modal(int *p1,int *p2){
        if(*p1<=*p2) cout<<*p1;
        else{
            cout<<(*p1)%(*p2);
        }
    }
    void secimvehesaplama(){
        hesaplamasecimmesaj() ;
        int a;
        cin>>a;
        mesaj();
        float sayi1=sayial();
        float sayi2=sayial();
        switch(a){
            case 1:
                cout<<"Sonuc:";
                toplayazdir(&sayi1,&sayi2);
                break;
            case 2:
                cout<<"Sonuc:";
                cikaryazdir(&sayi1,&sayi2);
                break;
            case 3:
                cout<<"Sonuc:";
                carpyazdir(&sayi1,&sayi2);
                break;
            case 4:
                cout<<"Sonuc:";

```

```

        bolyazdir(&sayi1,&sayi2);

        break;

    case 5:

        cout<<"Sonuc:";

        int intSayi1 = static_cast<int>(sayial());

        int intSayi2 = static_cast<int>(sayial());

        modal(&intSayi1,&intSayi2);

        break;

    default:

        cout<<"Hatalı seçim,tekrar deneyiniz:"<<endl;

        break;

    }

}

int main() {

    setlocale(LC_ALL,"Turkish");

    secimvehesaplama();

    return 0;

}

```

The screenshot shows a C++ IDE with the following components:

- Source Code Editor:** Displays the C++ code for a calculator application. The code includes functions for addition, subtraction, multiplication, division, modulus, and a menu-driven interface. The code is written in Turkish.
- Output Window:** Shows the execution of the program. It displays the menu options, the user's input (17 and 3), and the result (51). The output also indicates that the process exited after 8.832 seconds with a return value of 0.
- Compiler Output:** Shows the compilation results, indicating that the program compiled successfully with 0 errors.

```

21 void toplayazdir(float *p1,float *p2){
22     cout<< "p1+p2<<endl;
23 }
24 void cikaryazdir(float *p1,float *p2){
25     cout<< "p1-p2<<endl;
26 }
27 void carpazdir(float *p1,float *p2){
28     cout<< ("p1")*(p2)<<endl;
29 }
30 void bolyazdir(float *p1,float *p2){
31     cout<< ("p1")/(p2)<<endl;
32 }
33 void modal(int *p1,int *p2){
34     if(*p1==*p2) cout<<"p1
35     else{
36         cout<<("p1")%(*p2);
37     }
38 }
39 void secimvehesaplama(){
40     hesaplama(secimesaj());
41     int a;
42     cin>>a;
43     mesaj();
44     float sayi1=sayial();
45     float sayi2=sayial();
46     switch(a){
47     case 1:
48         cout<<"Sonuc:";
49         toplayazdir(&sayi1,&sayi2);
50         break;
51     case 2:
52         cout<<"Sonuc:";
53         cikaryazdir(&sayi1,&sayi2);
54         break;
55     case 3:
56         cout<<"Sonuc:";
57         carpazdir(&sayi1,&sayi2);
58         break;
59     case 4:
60         cout<<"Sonuc:";
61         bolyazdir(&sayi1,&sayi2);
62         break;
63     case 5:
64         cout<<"Sonuc:";
65         modal(&sayi1,&sayi2);
66         break;
67     default:
68         cout<<"Hatalı seçim,tekrar deneyiniz:"<<endl;
69         break;
70     }
71 }
72 int main() {
73     setlocale(LC_ALL,"Turkish");
74     secimvehesaplama();
75     return 0;
76 }

```

İşlem seçiniz:
1-Toplama 2-çıkarma 3-çarpma 4-Bölme 5-Mod Alma(Kalan bulma)
3
Sayı girin:
=>17
=>3
Sonuc:51

Process exited after 8.832 seconds with return value 0
Press any key to continue . . . |

Derleyici Kaynaklar Derleme Mesajları Hata ayıkla Arama sonuçları Kapat

Derlemeyi durdur

Compilation results...

Error: 0

Line: 67 Col: 16 Tab: 0 Line: 84 Length: 100% File: Done running in 0 seconds

2-

```
#include <stdio.h>

#include <stdarg.h>

#include <locale.h>

void myprintf(const char *format, ...) {
    va_list args;

    va_start(args, format);

    while (*format != '\0') {
        if (*format == '%') {
            format++;

            switch (*format) {
                case 'd':
                    printf("%d ", va_arg(args, int));
                    break;

                case 'f':
                    printf("%f ", va_arg(args, double));
                    break;

                case 's':
                    printf("%s ", va_arg(args, char *));
                    break;

                default:
                    putchar(*format);
            }
        } else {
            putchar(*format);
        }


        format++;
    }

    va_end(args);
}

int main() {
    setlocale(LC_ALL, "Turkish");

    myprintf("%d %f %s", 125, 526.14, "C++ Ileri konular");

    return 0;}
```

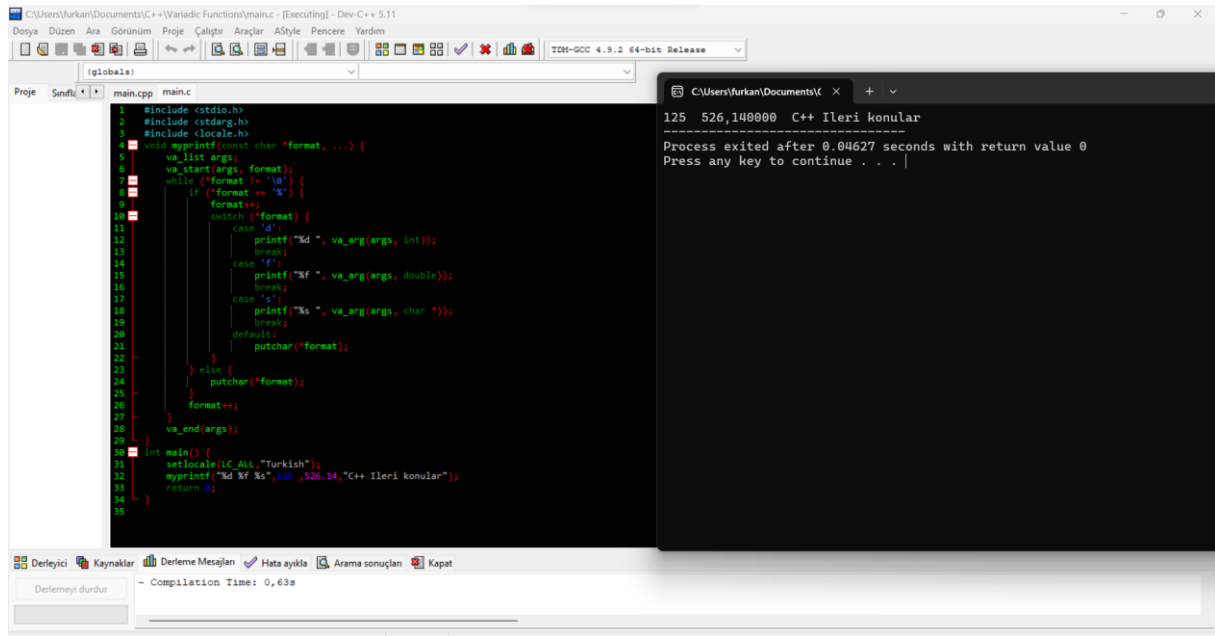

3-

```
#include <stdio.h>
```

```
#include <stdlib.h>
```

```
#include <locale.h>
```

```
char *aramafonk(char *a, char aranan);
```

```
int main() {
```

```
    setlocale(LC_ALL, "Turkish");
```

```
    char metin[100];
```

```
    printf("Metin girin: ");
```

```
    scanf("%s", metin);
```

```
    char aranan;
```

```
    printf("Aranacak karakteri girin: ");
```

```
    scanf(" %c", &aranan);
```

```
    char *sonuc = aramafonk(metin, aranan);
```

```
    if (sonuc != NULL) {
```

```
        printf("Karakter bulundu. Karakterin adresi: %p\n", (void*)sonuc);
```

```
    } else {
```

```
        printf("Karakter bulunamadı.\n");
```

```
    }
```

```
    return 0;
```

```
}
```

```
char *aramafonk(char *a, char aranan) {
```


```
    while (*a != '\0') {
```

```
        if (*a == aranan) {
```

```
        return a;
    }

    a++;
}

return NULL;
}
```

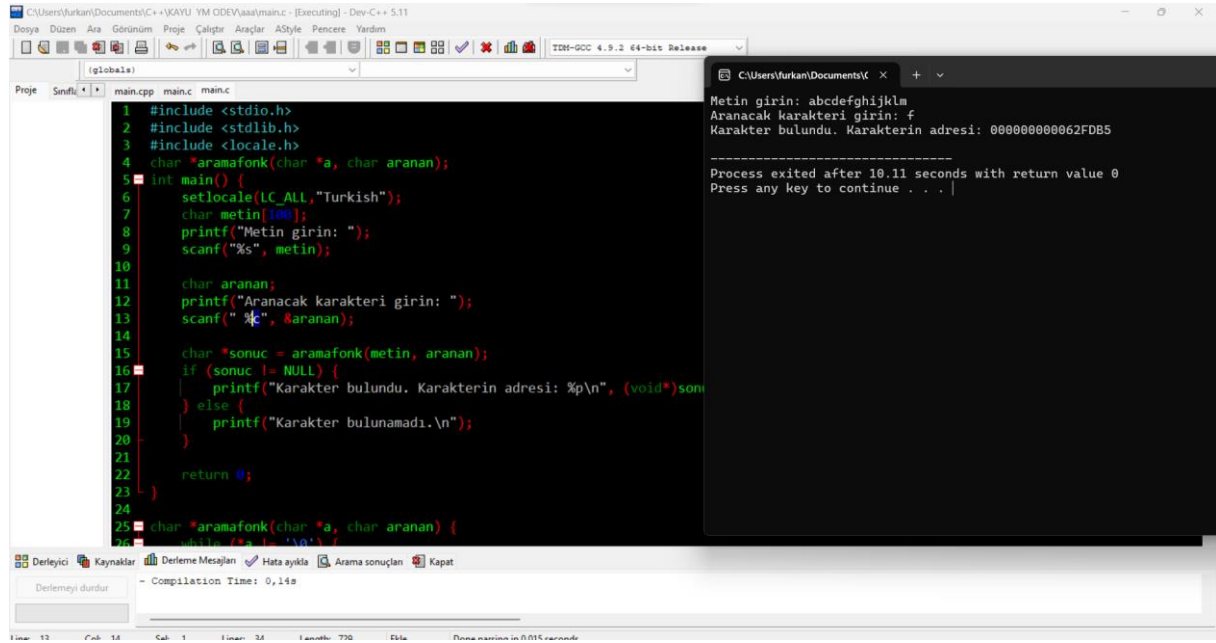

The screenshot shows the Dev-C++ IDE with a C program open in the editor and its execution output in the console window.

Source Code (main.c):

```
1 #include <stdio.h>
2 #include <stdlib.h>
3 #include <locale.h>
4 char *aramafonk(char *a, char aranan);
5 int main() {
6     setlocale(LC_ALL, "Turkish");
7     char metin[100];
8     printf("Metin girin: ");
9     scanf("%s", metin);
10
11     char aranan;
12     printf("Aranacak karakteri girin: ");
13     scanf("%c", &aranan);
14
15     char *sonuc = aramafonk(metin, aranan);
16     if (sonuc != NULL) {
17         printf("Karakter bulundu. Karakterin adresi: %p\n", (void*)sonuc);
18     } else {
19         printf("Karakter bulunamadı.\n");
20     }
21
22     return 0;
23 }
24
25 char *aramafonk(char *a, char aranan) {
26     while (*a != '\0') {
```

Execution Output:

```
Metin girin: abcdefghijklm
Aranacak karakteri girin: f
Karakter bulundu. Karakterin adresi: 00000000062FDB5

-----
Process exited after 10.11 seconds with return value 0
Press any key to continue . . .
```

The console window also shows a status bar at the bottom indicating "Derleme Mesajları" (Compilation Messages) with a message: "Derleme zamanı: 0,14s" (Compilation time: 0,14s).