operator overloading:

obj1 + obj2 (x) → allows us to define +, ==, ++, << with our class objects

Syntax

returntype operator<symbol> (parameter list)

↗ +|-|++ eg

{
.....
....
....
}

c = a + b → classes

↓


is same as saying a

a.operator+(b)

Creating a object inside the class

```
class complex {
    complex c3;
};
```

→ recursion

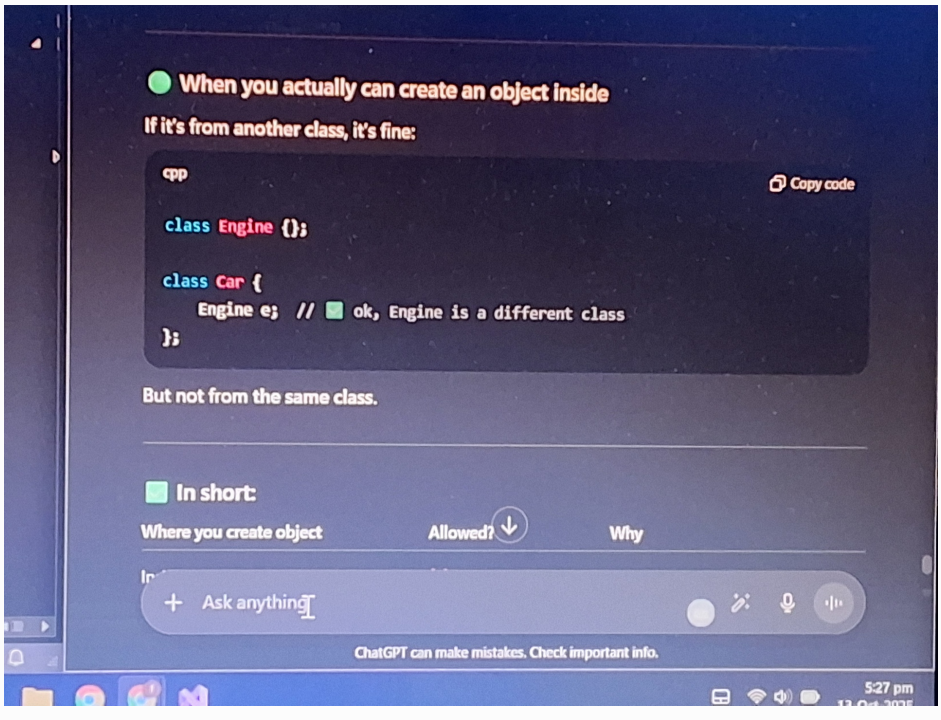

Big diff b/w creating a object inside a class and inside the class function.

To access a obj inside class use static obj, pointer

Note: No default parameters in operator functions

```
Complex operator+(Complex other = 5);
```
(X) not allowed

++ → unary operator (takes one operand)

+ → Binary operator (takes two operand)

P2 = p1 + 2 ✓ P2 = 2 + P2 ✗ order matters over here.

p1.operator+(2) 2.operator+(P2)(x)

overloading a operator means teaching C++ how to use a existing operator on your objects.

like (+)

---

x = 5

y = x++ → y = 5 x = 6

y = ++x → y = 6 x = 6