


Documentación: Pipeline Jenkins - StoreAPP-Fvazquezf03

1. Crear nuevo ítem en Jenkins

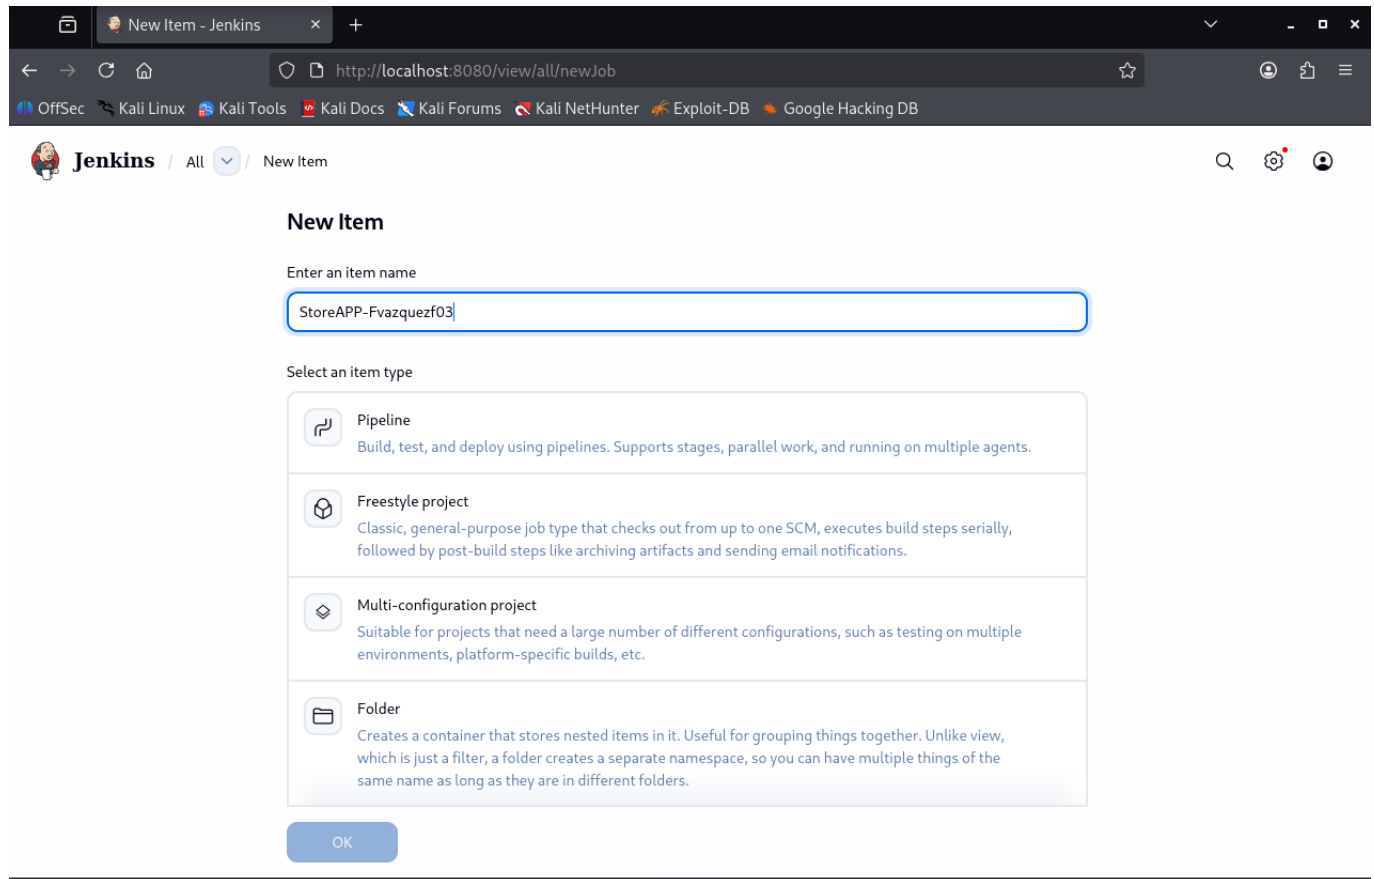

New Item - Jenkins

http://localhost:8080/view/all/newJob

OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB

Jenkins / All / New Item

New Item

Enter an item name

StoreAPP-Fvazquezf03

Select an item type

- Pipeline**
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.
- Freestyle project**
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Multi-configuration project**
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder**
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

OK

Se accede a **New Item** en Jenkins y se introduce el nombre del pipeline: **StoreAPP-Fvazquezf03**. Se muestran los tipos de proyecto disponibles (Pipeline, Freestyle, Multi-configuration, Folder).

2. Seleccionar tipo Pipeline

New Item

Enter an item name

StoreAPP-Fvazquezf03

Select an item type

- Pipeline**
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.
- Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.
- Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.
- Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

OK

Se selecciona el tipo **Pipeline** (resaltado en azul) para el nuevo ítem y se confirma con el botón **OK**.

3. Configurar el script del pipeline

Configure

- General
- Triggers
- Pipeline**
- Advanced

Script

```
1 pipeline {
2   agent any // Indica que Jenkins puede ejecutar este pipeline en cualquier nodo disp
3
4   stages { // Bloque que agrupa las distintas fases del proceso (pipeline)
5
6     stage('Clonar repositorio') { // Primera fase: descargar el código fuente
7       steps { // Conjunto de acciones que se ejecutan dentro de este stage
8
9         // Clona el repositorio Git especificado
10        // - branch: rama que se va a descargar
11        // - url: dirección del repositorio
12        git branch: 'main',
13          credentialsId: 'IDTOKEN', // Tu ID definido en Jenkins
14          url: 'https://github.com/fvazquezf03/store-app.git'
15      }
16    }
17  }
18 }
```

☒ Use Groovy Sandbox


Pipeline Syntax

Advanced

Save Apply

En la sección **Configure** → **Pipeline**, se define el script Groovy del pipeline. Se puede ver la primera parte del código: el agente (**agent any**), el bloque **stages** y el stage '**Clonar repositorio**', que hace un **git** checkout desde <https://github.com/fvazquezf03/store-appp.git> usando la credencial **IDTOKEN**.

4. Primera ejecución exitosa (Build #1)

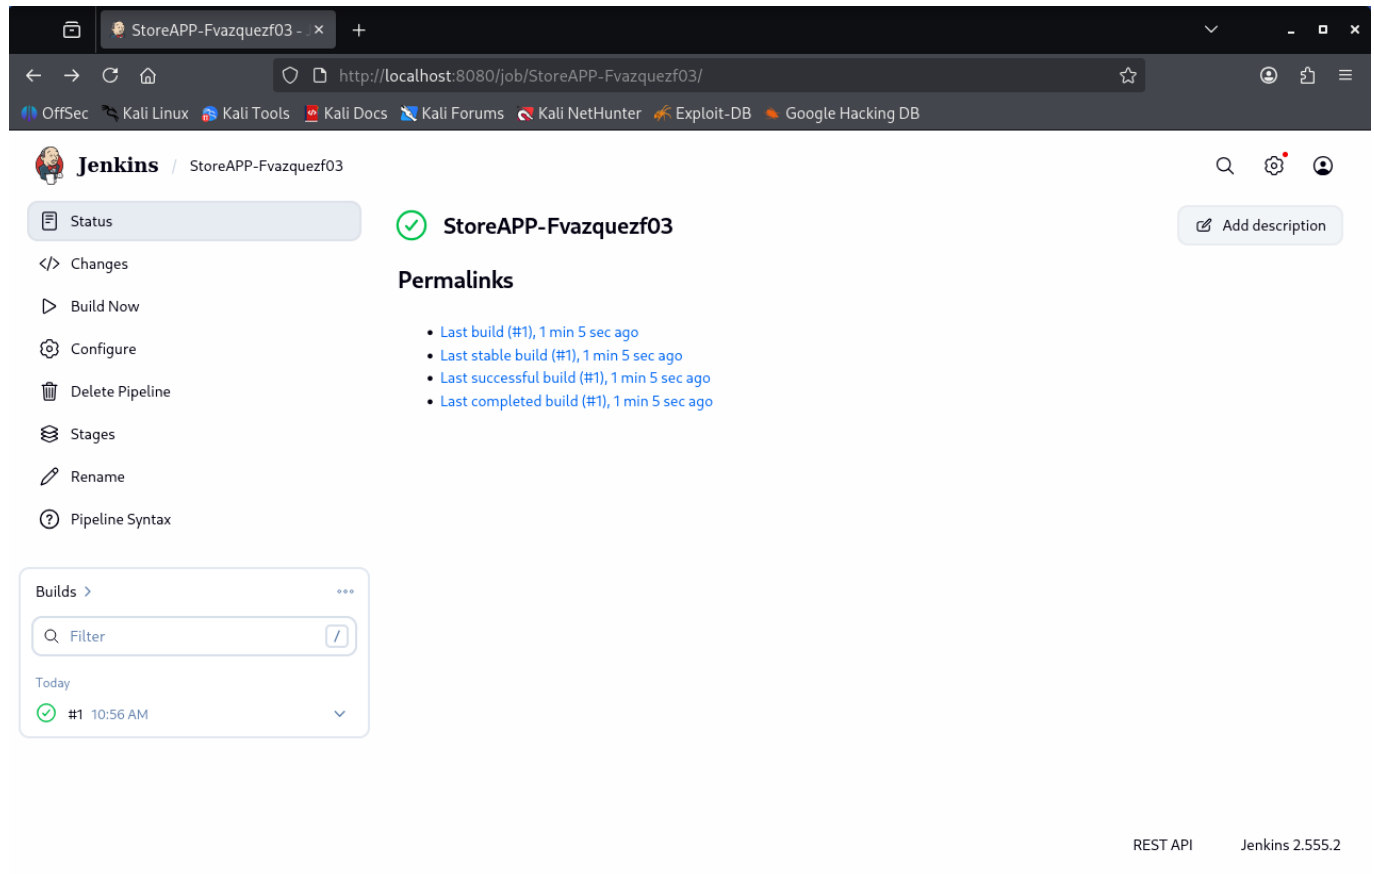

The screenshot shows the Jenkins web interface in a browser window. The address bar displays `http://localhost:8080/job/StoreAPP-Fvazquezf03/`. The page title is 'Jenkins / StoreAPP-Fvazquezf03'. On the left sidebar, the 'Status' tab is selected. The main content area shows a green checkmark icon and the pipeline name 'StoreAPP-Fvazquezf03'. Below this, there is a 'Permalinks' section with four links: 'Last build (#1), 1 min 5 sec ago', 'Last stable build (#1), 1 min 5 sec ago', 'Last successful build (#1), 1 min 5 sec ago', and 'Last completed build (#1), 1 min 5 sec ago'. At the bottom left, a 'Builds' dropdown menu is open, showing a filter input and a list of builds. The first build is '#1 10:56 AM' with a green checkmark icon. The bottom right corner of the page shows 'REST API' and 'Jenkins 2.555.2'.

La página de estado del pipeline muestra el **build #1** completado exitosamente hace 1 min 5 seg. Se listan los permalinks: último build, último estable, último exitoso y último completado.

5. Detalles del Build #1

StoreAPP-Fvazquezf03 # x +

← → ↻ ↗

http://localhost:8080/job/StoreAPP-Fvazquezf03/1/ ☆

OffSec Kali Linux Kali Tools Kali Docs Kali Forums Kali NetHunter Exploit-DB Google Hacking DB

Jenkins / StoreAPP-Fvazquezf03 #1

🔍 ⚙️ 👤

Status

</> Changes

📄 Console Output

📝 Edit Build Information

🗑️ Delete build '#1'

🕒 Timings

🔗 Git Build Data

🔗 Pipeline Overview

🔄 Restart from Stage

🔍 Replay

📋 Pipeline Steps

📁 Workspaces

✔️ #1 (May 16, 2026, 10:56:29 AM)

Add description

Keep this build forever

🕒 Started by user [francisco](#)

🕒 This run spent:

- 0.16 sec waiting;
- 14 sec build duration;
- 14 sec total from scheduled to completion.

🔗 git

Revision: [f9ac9c11f9d5c6f5e8913b1f62115b224c0f0a6d](#)
Repository: [https://github.com/fvazquezf03/store-app.git](#)

- refs/remotes/origin/main

</>

No changes.

Started 1 min 27 sec ago

Took [14 sec](#)


REST API

Jenkins 2.555.2

Vista detallada del **build #1** (16 de mayo de 2026, 10:56:29 AM). Fue iniciado por el usuario **francisco**, tardó **14 segundos**, y clonó el repositorio desde <https://github.com/fvazquezf03/store-app.git> en la rama [refs/remotes/origin/main](#). No hubo cambios detectados.

6. Console Output del Build #1

4 / 12

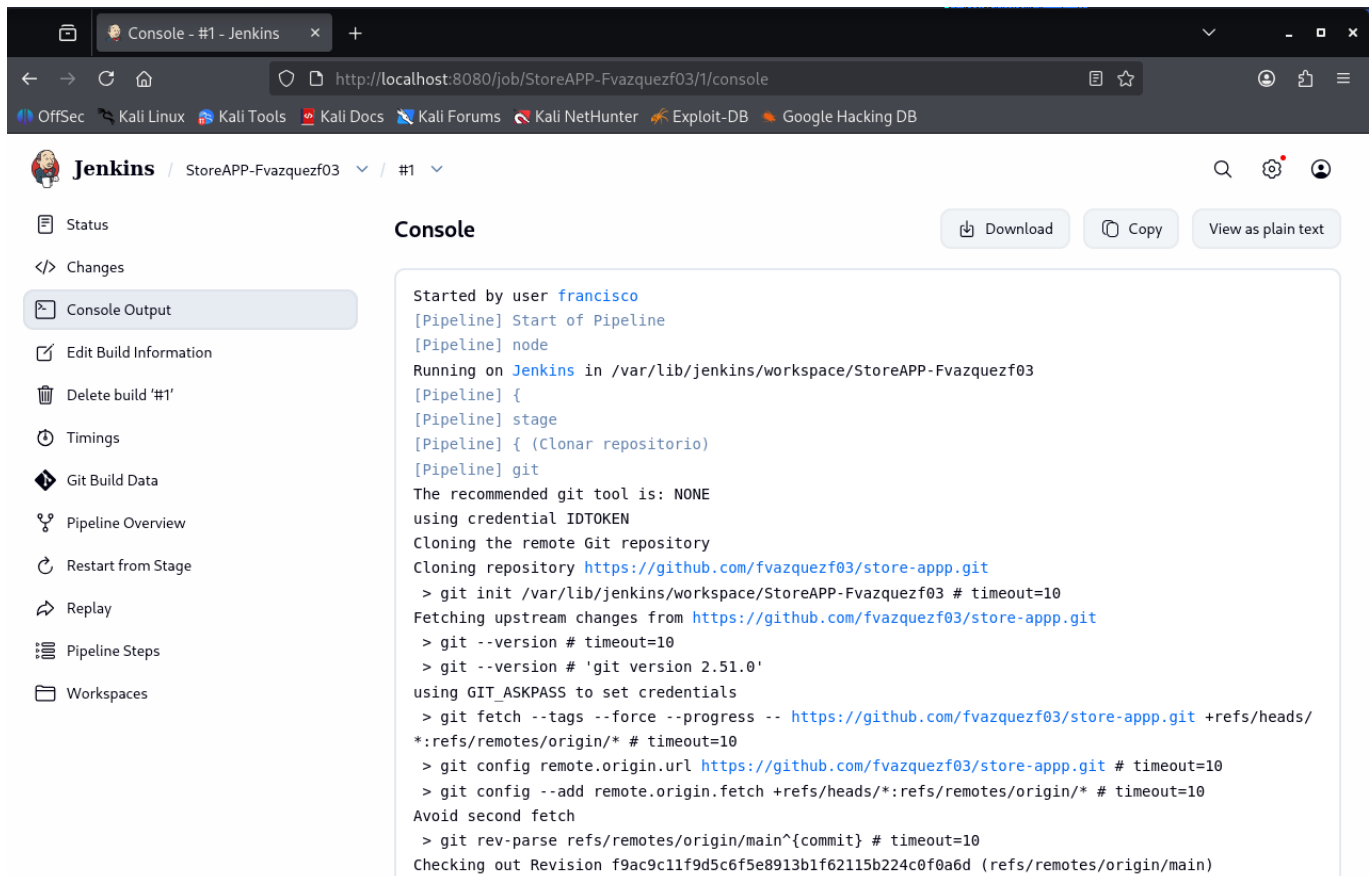

The screenshot shows the Jenkins web interface. On the left is a sidebar with navigation links: Status, Changes, Console Output (selected), Edit Build Information, Delete build '#1', Timings, Git Build Data, Pipeline Overview, Restart from Stage, Replay, Pipeline Steps, and Workspaces. The main area is titled 'Console' and displays the output of build #1. The output shows the pipeline starting, cloning a repository from GitHub, and checking out a specific commit.

```
Started by user francisco
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/lib/jenkins/workspace/StoreAPP-Fvazquezf03
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Clonar repositorio)
[Pipeline] git
The recommended git tool is: NONE
using credential IDTOKEN
Cloning the remote Git repository
Cloning repository https://github.com/fvazquezf03/store-app.git
> git init /var/lib/jenkins/workspace/StoreAPP-Fvazquezf03 # timeout=10
Fetching upstream changes from https://github.com/fvazquezf03/store-app.git
> git --version # timeout=10
> git --version # 'git version 2.51.0'
using GIT_ASKPASS to set credentials
> git fetch --tags --force --progress -- https://github.com/fvazquezf03/store-app.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git config remote.origin.url https://github.com/fvazquezf03/store-app.git # timeout=10
> git config --add remote.origin.fetch +refs/heads/*:refs/remotes/origin/* # timeout=10
Avoid second fetch
> git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision f9ac9c11f9d5c6f5e8913b1f62115b224c0f0a6d (refs/remotes/origin/main)
```

Se visualiza la salida de consola del **build #1**. Jenkins clona el repositorio Git usando la credencial **IDTOKEN**, ejecuta **git fetch**, revisa la rama **main** y hace checkout del commit **f9ac9c11f9d5c6f5e8913b1f62115b224c0f0a6d**.

7. Vista de Stages del Build #1


The screenshot shows the Jenkins web interface for a pipeline named 'StoreAPP-Fvazquezf03'. The pipeline has two stages: 'Clonar repositorio' (2s) and 'Verificar contenido' (1s). The 'Verificar contenido' stage is expanded, showing four steps: 'echo "Repositorio clonado correctamente"' (0.45s), 'pwd' (0.36s), 'ls -la' (0.36s), and 'git branch -a' (0.35s). The output of 'git branch -a' is shown as: 0 + git branch -a, 1 * main, 2 remotes/origin/main.

El **Pipeline Overview (Stages)** del build #1 muestra dos stages completados con éxito:

- **Clonar repositorio** (2s)
- **Verificar contenido** (1s)

Se visualiza el detalle del stage *Verificar contenido* con los pasos: `echo`, `pwd`, `ls -la` y `git branch -a`.

8. Stages Build #1 - Vista completa

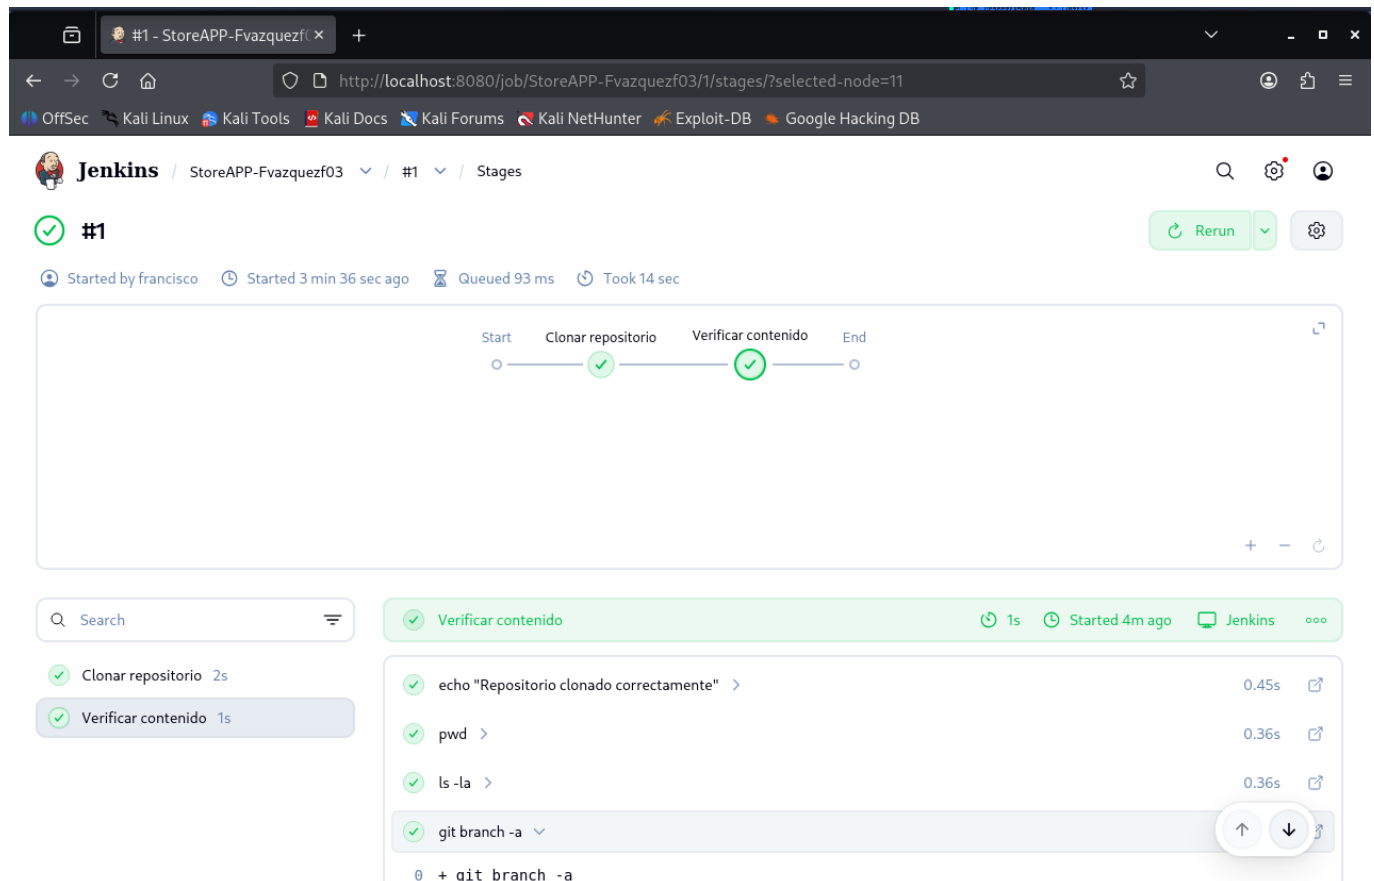

The screenshot shows the Jenkins web interface for a build named **#1** under the job **StoreAPP-Fvazquezf03**. The build status is **Completed**, indicated by a green checkmark. The build was started by **francisco** and took **14 seconds** to complete. The build process consists of three stages: **Start**, **Clonar repositorio**, and **Verificar contenido**, all of which are marked as successful with green checkmarks. The **Verificar contenido** stage is expanded, showing a list of commands and their execution times:


- Verificar contenido** (1s, Started 4m ago, Jenkins)
- echo "Repositorio clonado correctamente"** (0.45s)
- pwd** (0.36s)
- ls -la** (0.36s)
- git branch -a** (0.36s)

The output of the **git branch -a** command is shown as:

```
0 + git branch -a
```


Vista ampliada de los stages del **build #1** con el diagrama de flujo (Start → Clonar repositorio → Verificar contenido → End), todos completados. Se muestra la salida de **git branch -a**: rama activa *** main** y **remotes/origin/main**.

9. Restart from Stage

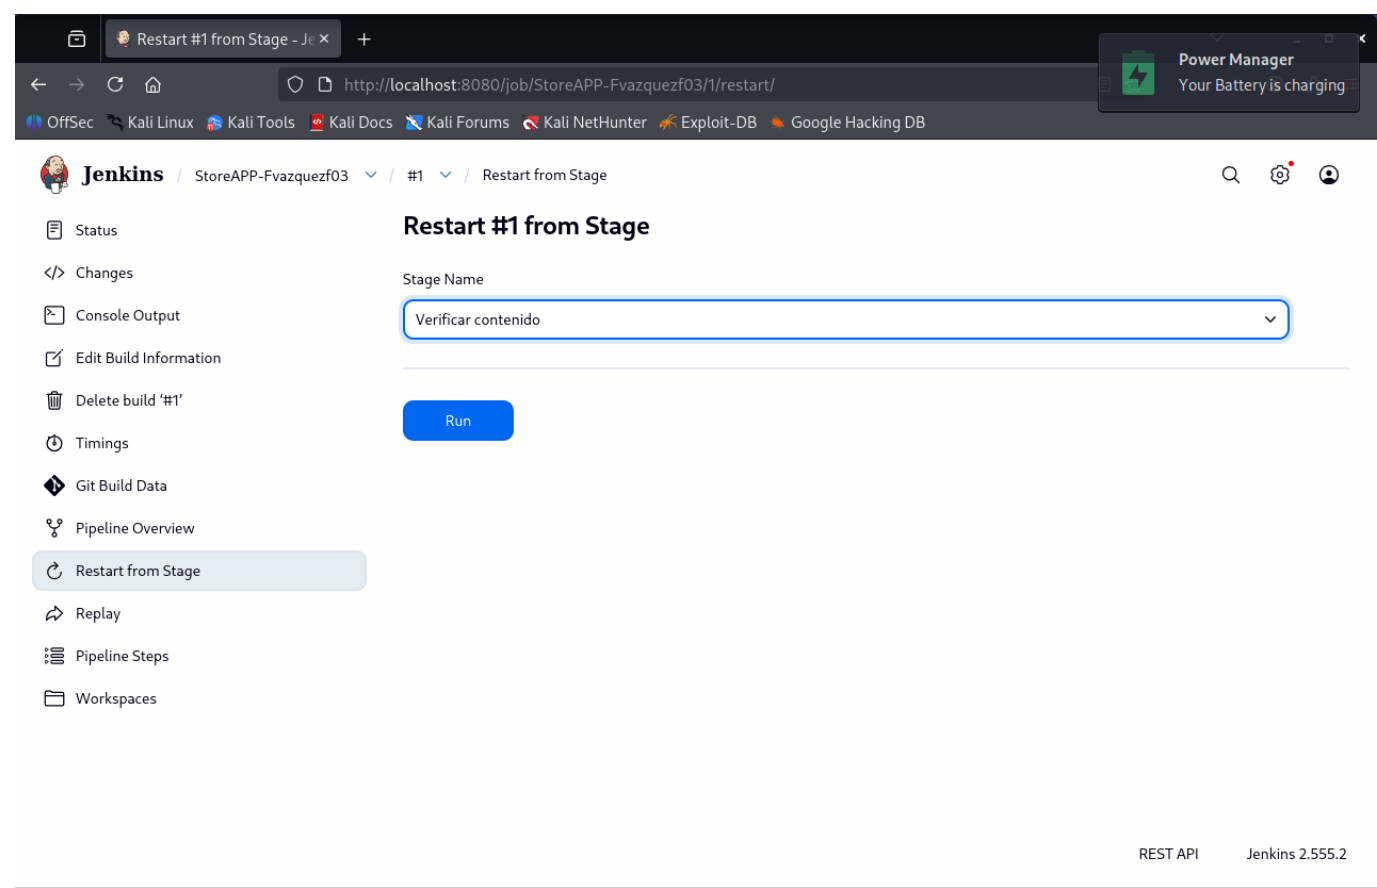


Se utiliza la opción **Restart from Stage** sobre el build #1. Se selecciona el stage **Verificar contenido** desde el menú desplegable y se puede relanzar solo desde ese punto sin repetir el clonado.

10. Pipeline Steps del Build #2

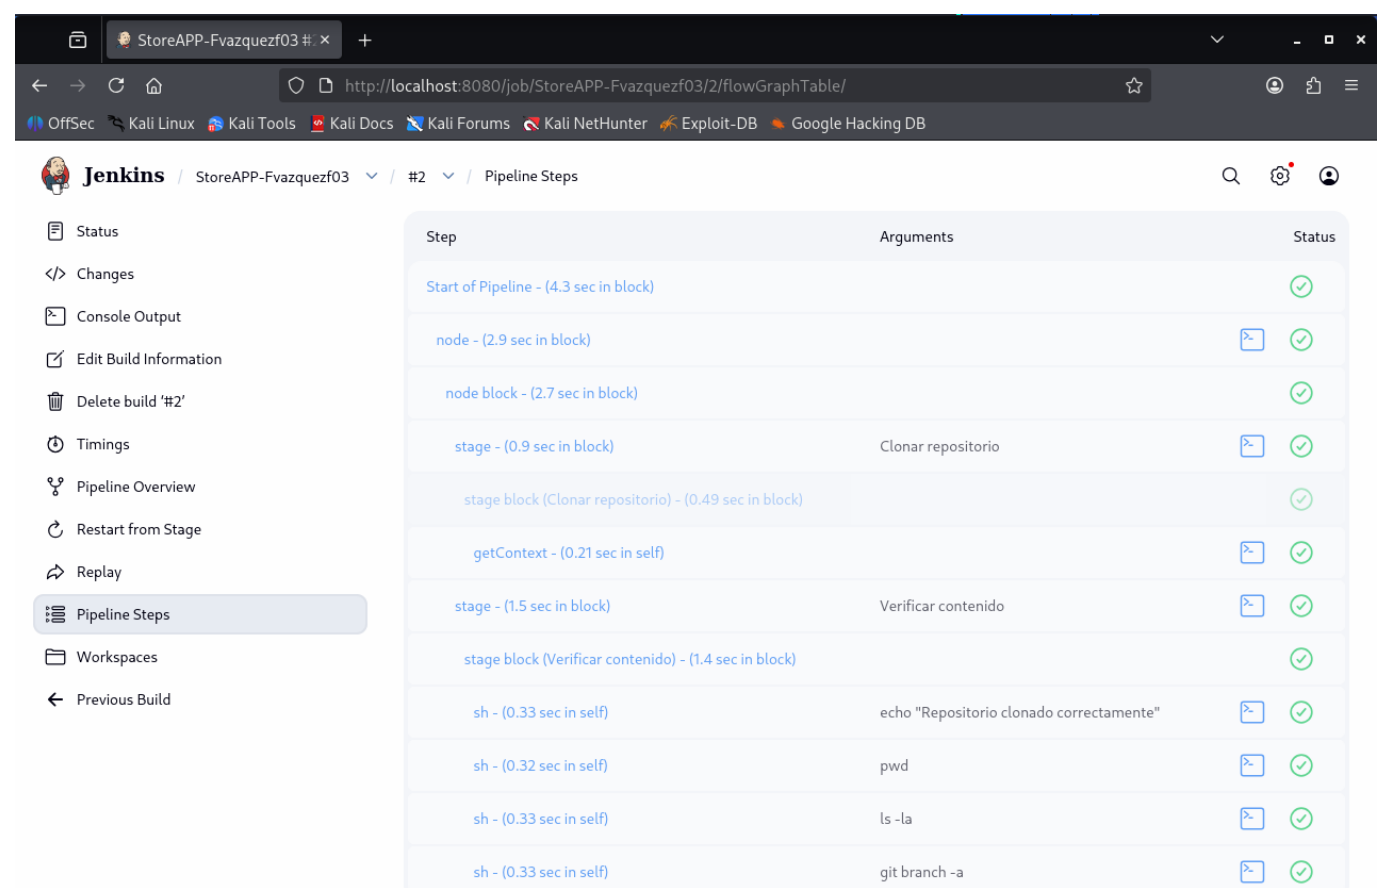

Vista de **Pipeline Steps** del **build #2**. Se listan todos los pasos ejecutados con su duración: **Start of Pipeline**, **node**, **stage** (**Clonar repositorio**), **stage** (**Verificar contenido**), y los comandos **sh** individuales (**echo**, **pwd**, **ls -la**, **git branch -a**), todos con estado exitoso.

11. Workspaces del Build #2

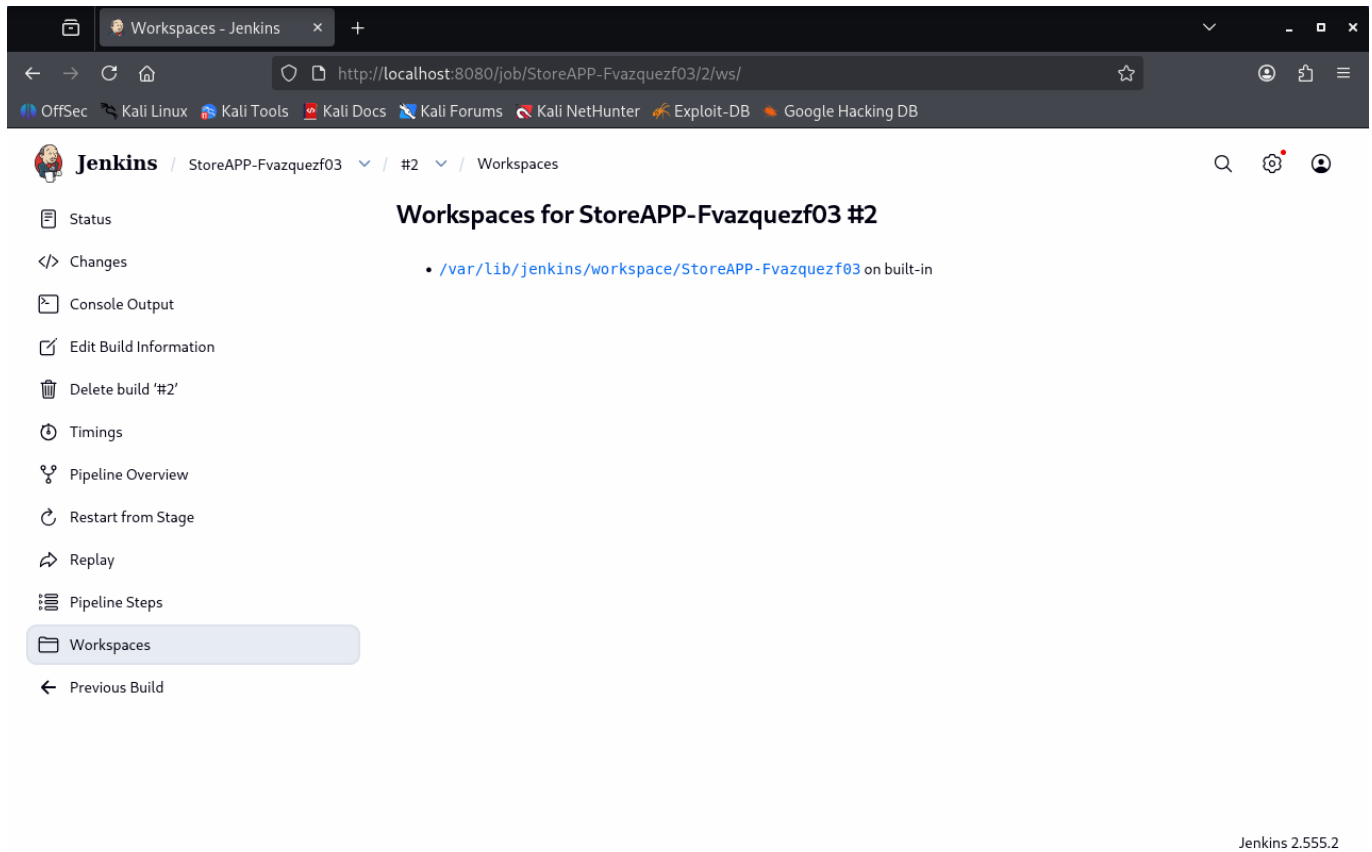

The screenshot shows the Jenkins web interface in a browser window. The address bar displays `http://localhost:8080/job/StoreAPP-Fvazquezf03/2/ws/`. The page title is "Workspaces - Jenkins". The breadcrumb navigation shows "StoreAPP-Fvazquezf03" > "#2" > "Workspaces". The left sidebar contains a list of links: Status, Changes, Console Output, Edit Build Information, Delete build '#2', Timings, Pipeline Overview, Restart from Stage, Replay, Pipeline Steps, Workspaces (highlighted), and Previous Build. The main content area is titled "Workspaces for StoreAPP-Fvazquezf03 #2" and displays a single workspace entry: `/var/lib/jenkins/workspace/StoreAPP-Fvazquezf03` on built-in. The bottom right corner of the page indicates "Jenkins 2.555.2".

Vista de **Workspaces** del build #2, mostrando la ruta del workspace en el agente built-in: `/var/lib/jenkins/workspace/StoreAPP-Fvazquezf03`.

12. Estado del pipeline con múltiples builds

The screenshot shows the Jenkins web interface for a pipeline named 'StoreAPP-Fvazquezf03'. The browser address bar shows 'http://localhost:8080/job/StoreAPP-Fvazquezf03/'. The interface includes a sidebar with links to Status, Changes, Build Now, Configure, Delete Pipeline, Stages, Rename, and Pipeline Syntax. The main area displays the pipeline status as 'StoreAPP-Fvazquezf03' with a green checkmark. Below this, there are 'Permalinks' for the last build, last stable build, last successful build, and last completed build, all pointing to build #2. A 'Builds' section shows a list of builds: #3 (failed at 11:04 AM), #2 (successful at 11:01 AM), and #1 (successful at 10:56 AM). The bottom right corner indicates 'REST API' and 'Jenkins 2.555.2'.

La página principal del pipeline muestra el historial de builds del día:

- **#3** ✗ fallido (11:04 AM)
- **#2** ✓ exitoso (11:01 AM)
- **#1** ✓ exitoso (10:56 AM)


Los permalinks apuntan al build #2 como último estable y exitoso.

13. Error en Build #4 - Syntax Error

The screenshot shows the Jenkins console output for Build #4. The browser address bar shows 'http://localhost:8080/job/StoreAPP-Fvazquezf03/4/console'. The console output displays a syntax error during the startup phase. The error message is: 'org.codehaus.groovy.control.MultipleCompilationErrorsException: startup failed: WorkflowScript: 27: unexpected token: } @ line 27, column 1.' The console output also shows the stack trace for the error, starting from 'org.codehaus.groovy.control.ErrorCollector.failIfErrors' and ending with 'PluginClassLoader for workflow-cps/org.jenkinsci.plugins.workflow.cps.CpsFlowExecution.start(CpsFlowExecution.java:616)'.

La consola del **build #4** muestra un error de compilación Groovy: **unexpected token: } @ line 27, column 1**. Se trata de un error de sintaxis en el script del pipeline (llave de cierre inesperada), lo que provoca el fallo inmediato del build.

14. Stages del Build #5 - Fallo en Clonar repositorio

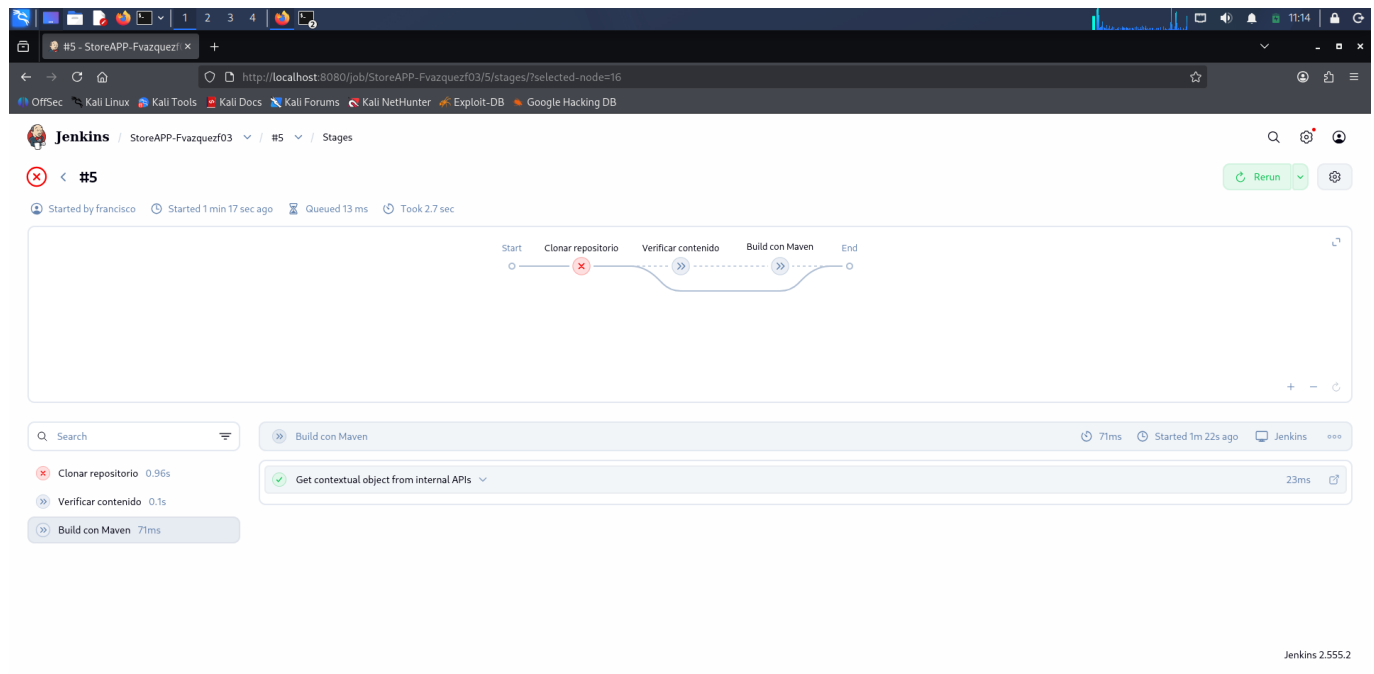

Jenkins / StoreAPP-Fvazquezf03 / #5 / Stages

Started by francisco · Started 1 min 17 sec ago · Queued 13 ms · Took 2.7 sec

Start → Clonar repositorio → Verificar contenido → Build con Maven → End

Build con Maven: 71ms, Started 1m 22s ago, Jenkins

Get contextual object from internal APIs: 23ms

Clonar repositorio: 0.96s (Failed)


Verificar contenido: 0.1s (Completed)

Build con Maven: 71ms (Completed)

Jenkins 2.555.2

El **build #5** falla en el stage **Clonar repositorio** (marcado con **X** en rojo). Los stages siguientes (**Verificar contenido**, **Build con Maven**) aparecen como no ejecutados. El build tardó 2.7 segundos en total.

15. Workspaces del Build #2 (vista alternativa)

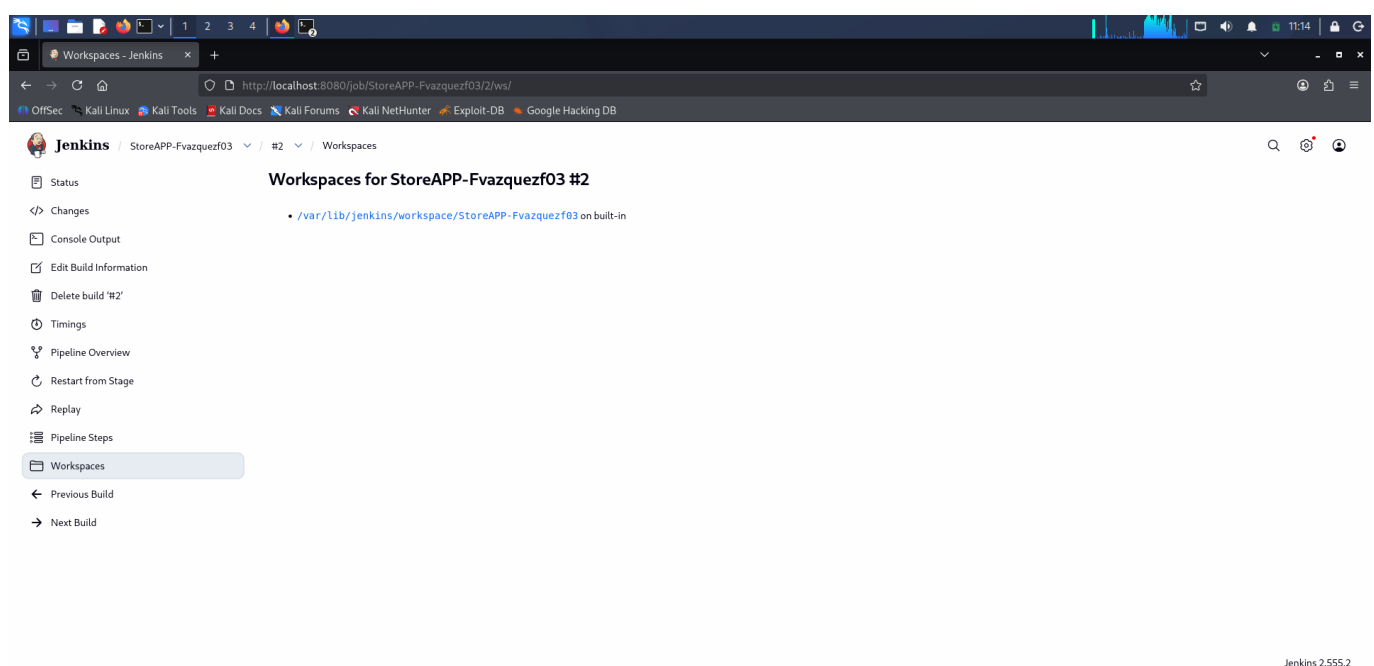

Jenkins / StoreAPP-Fvazquezf03 / #2 / Workspaces

Workspaces for StoreAPP-Fvazquezf03 #2


- /var/lib/jenkins/workspace/StoreAPP-Fvazquezf03 on built-in

Left sidebar: Status, Changes, Console Output, Edit Build Information, Delete build '#2', Timings, Pipeline Overview, Restart from Stage, Replay, Pipeline Steps, Workspaces, Previous Build, Next Build

Jenkins 2.555.2

Vista de **Workspaces** del build #2 desde una pantalla diferente, confirmando la ruta `/var/lib/jenkins/workspace/StoreAPP-Fvazquezf03` en el nodo built-in. Muestra también las opciones de navegación: Previous Build y Next Build.

16. Contenido del Workspace

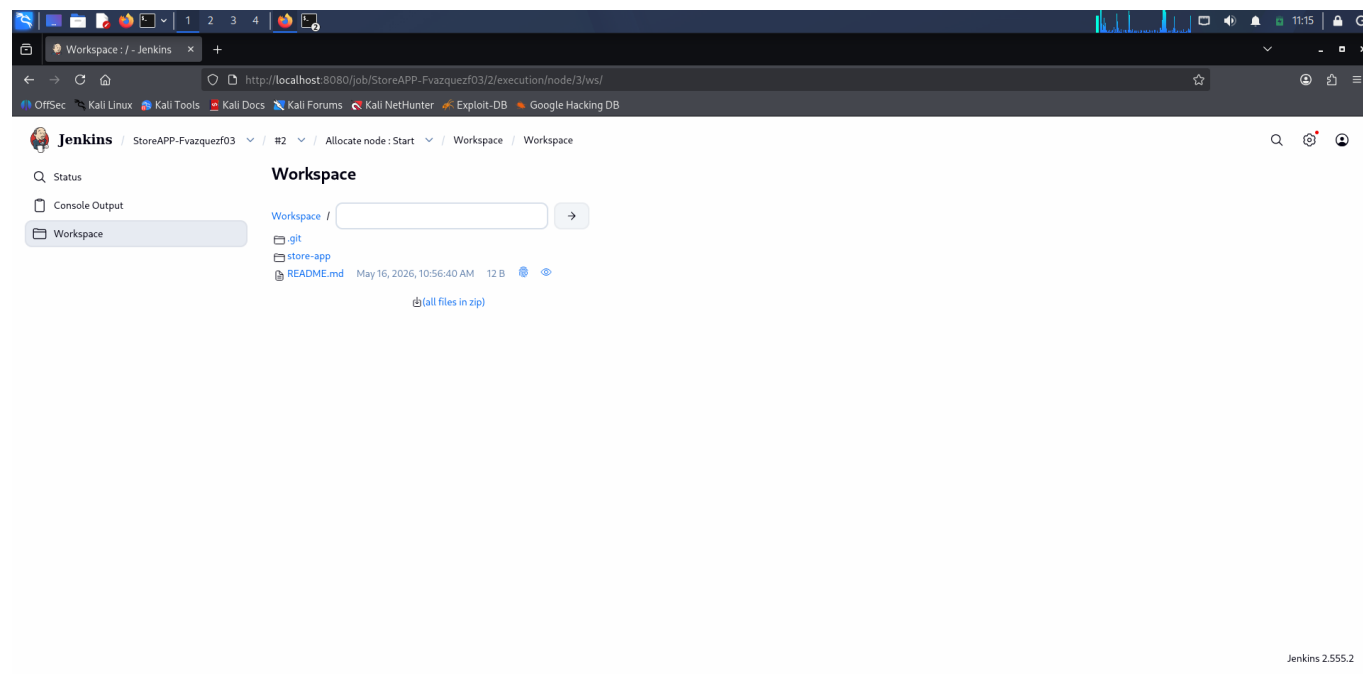

Explorador del **Workspace** del build #2 (accedido desde **Allocate node: Start**). Se visualizan los archivos clonados del repositorio:

- Carpeta **.git**
- Carpeta **store-app**
- Archivo **README.md** (12 B, creado el 16 de mayo de 2026 a las 10:56:40 AM)

También ofrece la opción de descargar todos los archivos en zip.