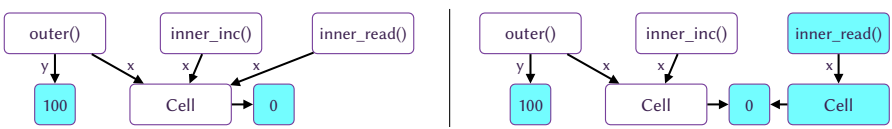

Fig. 13. A program with a function called `outer()` and two nested functions, called `inner_read()` and `inner_inc()`, which capture the value x from their outer scope. The left graph shows how functions capture variables in Python and share mutable state. The right graph shows how our solution freezes reachable objects but allows the reassignment in other scopes.