

# Orthogonal Gradient Boosting for Interpretable Additive Rule Ensembles

## Supplementary Information

Anonymous Author(s)

### ACM Reference Format:

Anonymous Author(s). 2023. Orthogonal Gradient Boosting for Interpretable Additive Rule Ensembles Supplementary Information. In *Proceedings of (KDD 2023)*. ACM, New York, NY, USA, 3 pages. <https://doi.org/XXXXXXX>. XXXXXXXX

### A PROOF OF THEOREM 4.3

The condition of Theorem 4.3 states that:

Let  $\mathbf{Q} \in \mathbb{R}^{n \times (t-1)}$  be the selected query matrix,  $\mathbf{g}$  the corresponding gradient vector after a full weight correction, and  $\mathbf{q}^*$  be a maximizer of the **orthogonal gradient boosting objective** function defined by

$$\text{obj}_{\text{ogb}}(q) = \frac{|\mathbf{g}^T \mathbf{q}|}{\|\mathbf{q}_{\perp}\| + \epsilon}$$

where  $\mathbf{q}_{\perp}$  is the projection of  $q$  onto the orthogonal complement of range  $\mathbf{Q}$ .

#### A.1 Property a

PROPOSITION A.1. For  $\epsilon \rightarrow 0$ ,  $[\mathbf{q}_1, \dots, \mathbf{q}_{t-1}, \mathbf{q}^*]$  is the best approximation to  $[\mathbf{q}_1, \dots, \mathbf{q}_{t-1}, \mathbf{g}]$ .

PROOF. If  $\epsilon \rightarrow 0$ , then  $\text{obj}_{\text{ogb}}(q) \rightarrow \frac{|\mathbf{g}^T \mathbf{q}|}{\|\mathbf{q}_{\perp}\|}$ . If  $\mathbf{q}^*$  is a maximizer of  $\text{obj}_{\text{ogb}}$ , then as shown in Lemma 4.1,  $\mathbf{q}^*$  minimises the minimum distance from all

$$\mathbf{f} \in \text{span}\{\mathbf{q}_1, \dots, \mathbf{q}_{t-1}, \mathbf{g}\}$$

to the subspace of

$$\text{span}\{\mathbf{q}_1, \dots, \mathbf{q}_{t-1}, \mathbf{q}^*\}.$$

Therefore, the subspace spanned by  $[\mathbf{q}_1, \dots, \mathbf{q}_{t-1}, \mathbf{q}^*]$  is the best approximation to the subspace spanned by  $[\mathbf{q}_1, \dots, \mathbf{q}_{t-1}, \mathbf{g}]$ .  $\square$

#### A.2 Property b

PROPOSITION A.2. For  $\epsilon \rightarrow \infty$ ,  $\mathbf{q}^*$  is also a maximizer of  $\text{obj}_{\text{gs}}$  and any maximizer of  $\text{obj}_{\text{gs}}$  is also a maximizer of  $\text{obj}_{\text{ogb}}$ .

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

KDD 2023, August 6-10, 2023, Long Beach, CA

© 2023 Association for Computing Machinery.

ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00

<https://doi.org/XXXXXXX.XXXXXXXX>

PROOF. Let  $q_1$  and  $q_2$  be any two queries and denote by  $\text{obj}_{\text{ogb}}^{(\epsilon)}(q)$  the  $\text{obj}_{\text{ogb}}$ -value of  $q$  for a specific  $\epsilon$ . Then

$$\begin{aligned} & \lim_{\epsilon \rightarrow \infty} \epsilon \left( \text{obj}_{\text{ogb}}^{(\epsilon)}(q_1) - \text{obj}_{\text{ogb}}^{(\epsilon)}(q_2) \right) \\ &= \lim_{\epsilon \rightarrow \infty} \epsilon \left( \frac{|\mathbf{g}^T \mathbf{q}_1|}{\|\mathbf{q}_1^{\perp}\| + \epsilon} - \frac{|\mathbf{g}^T \mathbf{q}_2|}{\|\mathbf{q}_2^{\perp}\| + \epsilon} \right) \\ &= \lim_{\epsilon \rightarrow \infty} \left( \frac{|\mathbf{g}^T \mathbf{q}_1|}{\|\mathbf{q}_1^{\perp}\|/\epsilon + 1} - \frac{|\mathbf{g}^T \mathbf{q}_2|}{\|\mathbf{q}_2^{\perp}\|/\epsilon + 1} \right) \\ &= |\mathbf{g}^T \mathbf{q}_1| - |\mathbf{g}^T \mathbf{q}_2| \\ &= \text{obj}_{\text{gs}}(q_1) - \text{obj}_{\text{gs}}(q_2) \end{aligned}$$

Thus for large enough  $\epsilon$ , the signs of  $\text{obj}_{\text{ogb}}^{(\epsilon)}(q_1) - \text{obj}_{\text{ogb}}^{(\epsilon)}(q_2)$  and  $\text{obj}_{\text{gs}}(q_1) - \text{obj}_{\text{gs}}(q_2)$  agree. Therefore, a query  $q$  is a  $\text{obj}_{\text{gs}}$ -maximizer, i.e.,  $\text{obj}_{\text{gs}}(q) \geq \text{obj}_{\text{gs}}(q')$  for all  $q' \in \mathbf{Q}$ , if and only if  $q$  is a  $\text{obj}_{\text{ogb}}$ -maximizer, i.e.,  $\text{obj}_{\text{ogb}}(q) \geq \text{obj}_{\text{ogb}}(q')$  for all  $q' \in \mathbf{Q}$ .  $\square$

#### A.3 Property c

PROPOSITION A.3. For  $\epsilon = 0$  and  $\|\mathbf{q}_{\perp}\| > 0$ , the ratio  $(\text{obj}_{\text{ogb}}(q)/\text{obj}_{\text{gb}}(q))^2$  is equal to  $1 + (\|\mathbf{q}_{\parallel}\|/\|\mathbf{q}_{\perp}\|)^2$ .

PROOF. If  $\epsilon = 0$  and  $\|\mathbf{q}_{\perp}\| > 0$ , then

$$\begin{aligned} \left( \frac{\text{obj}_{\text{ogb}}(q)}{\text{obj}_{\text{gb}}(q)} \right)^2 &= \frac{\frac{|\mathbf{g}^T \mathbf{q}|^2}{\|\mathbf{q}_{\perp}\|^2}}{\frac{|\mathbf{g}^T \mathbf{q}|^2}{\|\mathbf{q}\|^2}} = \frac{\|\mathbf{q}\|^2}{\|\mathbf{q}_{\perp}\|^2} \\ &= \frac{\|\mathbf{q}_{\parallel}\|^2 + \|\mathbf{q}_{\perp}\|^2}{\|\mathbf{q}_{\perp}\|^2} \\ &= 1 + \left( \frac{\|\mathbf{q}_{\parallel}\|}{\|\mathbf{q}_{\perp}\|} \right)^2 \end{aligned}$$

$\square$

#### A.4 Property d

PROPOSITION A.4. The objective value  $\text{obj}_{\text{ogb}}(q)$  is upper bounded by  $\|\mathbf{g}\|/(1 + \epsilon)$ .

PROOF. If we divide the numerator and denominator of  $\text{obj}_{\text{ogb}}(q)$  with  $\|\mathbf{q}_{\text{bot}}\|$ , then we can get

$$\begin{aligned} \text{obj}_{\text{ogb}}(\mathbf{q}) &= \frac{|\mathbf{g}^T \mathbf{q}|}{\|\mathbf{q}_{\perp}\| + \epsilon} \\ &= \frac{\frac{|\mathbf{g}^T \mathbf{q}_{\perp}|}{\|\mathbf{q}_{\perp}\|}}{1 + \frac{\epsilon}{\|\mathbf{q}_{\perp}\|}} \end{aligned}$$

because  $\frac{|\mathbf{g}^T \mathbf{q}|}{\|\mathbf{q}_\perp\|} = \frac{\|\mathbf{g}\| \|\mathbf{q}_\perp\| |\cos \langle \mathbf{g}, \mathbf{q}_\perp \rangle|}{\|\mathbf{q}_\perp\|} = \|\mathbf{g}\| |\cos \langle \mathbf{g}, \mathbf{q}_\perp \rangle|$  is always less than or equal to  $\|\mathbf{g}\|$ ,

$$\text{obj}_{\text{ogb}}(\mathbf{q}) \leq \frac{\|\mathbf{g}\|}{1 + \frac{\epsilon}{\|\mathbf{q}_\perp\|}}$$

as  $\|\mathbf{q}_\perp\|$  is upper bounded by the number of data points  $n$ ,

$$\text{obj}_{\text{ogb}}(\mathbf{q}) \leq \frac{\|\mathbf{g}\|}{1 + \frac{\epsilon}{n}}.$$

Let  $\epsilon' = \frac{\epsilon}{n}$ , then

$$\text{obj}_{\text{ogb}}(\mathbf{q}) \leq \frac{\|\mathbf{g}\|}{1 + \epsilon'}$$

□

## B GREEDY APPROXIMATION TO BOUNDARY FUNCTION

The branch-and-bound search described in Section 3.3 requires an efficient way of calculating the value of  $\text{bnd}(\mathbf{q}) = \max\{\text{obj}(\mathbf{q}') : \mathbf{q}' \leq \mathbf{q}, \mathbf{q}' \in \{0, 1\}^n\}$ .

A raw greedy approach can be adopted to approximate the maximum objective value of the subset of data points selected by  $\mathbf{q}$ , which is the bounding value  $\text{bnd}(\mathbf{q})$ . Given a query  $\mathbf{q}'^{(t-1)} \leq \mathbf{q}$ , we need to find the data point selected by  $\mathbf{q}$  which maximise the objective function, and use it with  $\mathbf{q}'^{(t-1)}$  to form a  $\mathbf{q}'^{(t)}$ .

$$i_*^{(t)} = \arg \max_{i \in I(\mathbf{q}) - I(\mathbf{q}'^{(t-1)})} \frac{\mathbf{g}^T (\mathbf{q}'^{(t-1)} + \mathbf{e}_i)}{\|(\mathbf{q}'^{(t-1)} + \mathbf{e}_i)_\perp\| + \epsilon}.$$

where  $I(\mathbf{q}) = \{i : \mathbf{q}(x_i) = 1, 1 \leq i \leq n\}$ ,  $0 \leq t \leq |I(\mathbf{q})|$ ,  $\mathbf{q}'^{(0)} = \mathbf{0}$  and  $\mathbf{q}'^{(t)} = \mathbf{q}'^{(t-1)} + \mathbf{e}_{i_*^{(t)}}$ . We use the maximum value of  $\text{obj}(\mathbf{q}'^{(t)})$  as the bounding value for query  $\mathbf{q}$ . The computation time complexity level of this approach is  $O(n^2)$  for each query, which is not as efficient as the presorting greedy approach described in Section 4.3.

The presorting greedy approach of solving the prefix optimization problem described in Section 4.3 leads to another approximation to the optimal objective function value for the queries which cover subsets of data points covered by  $\mathbf{q}$ . As proved in Theorem 4.4, this approach has a time complexity of  $O(tn)$ .

We test 2000 instances for different initial queries and initial gradient values to see the difference between the approximation of  $\text{bnd}(\mathbf{q})$  obtained by the raw greedy approach, the pre-sorting greedy approach, and the actual optimal objective values (obtained by a brute-force approach). We choose three different values of  $\epsilon$ : 0.001, 0.1 and 1.

Figure 6 compares the ratio between the approximations to  $\text{bnd}(\mathbf{q})$  obtained by the two greedy approaches and the true optimal objective value. The Y axis of Figure 6 represents the percentage of instances of different ratios.

According to the comparison, the raw greedy approach can approximate the true bounding function better than the presorting greedy approach. For smaller  $\epsilon$  values ( $\epsilon = 0.001$ ), there are 90% instances whose approximation values are more than 90% of the true bounding function values, while 96% of instances approximate more than 90% of the value of  $\text{bnd}(\mathbf{q})$  using the raw greedy approach. For  $\epsilon = 0.1$ , both algorithms have slight better (both 1% promotion) approximation than  $\epsilon = 0.001$ . It can be observed that for  $\epsilon = 1$ , both algorithms have more instances where the approximations are closed to the true bounding values. However, if the value of  $\epsilon$  is too large, then the calculated objective values cannot be accurate according to Theorem 4.3.

To approximate the true bounding function more efficiently and more accurate, we adopt the presorting greedy approach in this research.

## C COMPARISON OF TESTING RISKS

Table 2 compares the testing empirical risks of the same benchmark datasets in Section 5. Table 2 has the same format with Table 1 except that it does not contain the comparison of running times.

As discussed in Section 5, the test performance of these algorithms follows similar trends to the training performance.

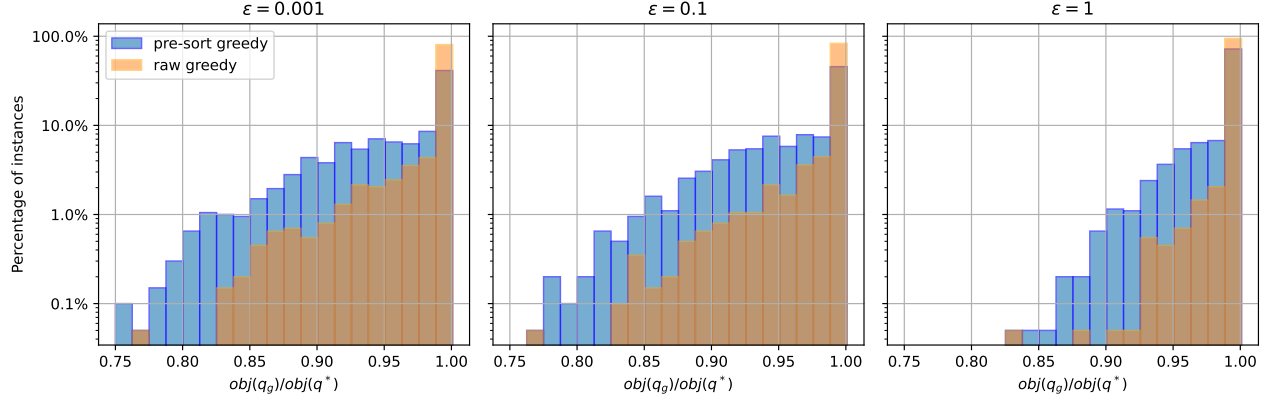


Figure 6: The number of instances of ratios between the best objective values obtained from the greedy search and the true optimal objective value.

Table 2: Comparison of Test Risks of Gradient Sum(S), Gradient boosting (G), XGBoost (X) and FCOGB (O) for benchmark datasets of classification (upper), regression (middle) and Poisson regression problems (lower).

DATASET	FEAT	ROW	$\bar{R}_O$	FCOGB vs. GS			FCOGB vs. GB			FCOGB vs XGBoost		
				$\Delta_{SO}^{bc}$	$\bar{\Delta}_{SO}$	$\Delta_{SO}^{wc}$	$\Delta_{GO}^{bc}$	$\bar{\Delta}_{GO}$	$\Delta_{GO}^{wc}$	$\Delta_{XO}^{bc}$	$\bar{\Delta}_{XO}$	$\Delta_{XO}^{wc}$
TITANIC	7	1043	.712	.074 (17.6)	.035	.000 (2.4)	.147 (2.4)	.025	-.025 (28.2)	.147 (2.4)	.022	-.015 (4.4)
TIC-TAC-TOE	27	958	.751	.174 (23.6)	.101	-.058 (1.4)	.111 (6.2)	.060	.000 (2.4)	.089 (16.8)	.030	-.013 (28.4)
IRIS	4	150	.552	.141 (5.8)	-.089	-.180 (7.2)	.149 (2.4)	-.083	-.294 (5)	.149 (2.4)	-.058	-.147 (25.8)
BREAST	30	569	.352	.024 (7.8)	-.055	-.229 (7)	.009 (7.8)	-.011	-.026 (26)	.100 (7.8)	.031	-.006 (20.2)
WINE	13	178	.368	.314 (2.4)	.020	-.270 (5.8)	.409 (6)	.135	.003 (4)	.433 (6)	.090	-.043 (27)
IBM HR	32	1470	.217	.019 (6.2)	.003	-.005 (8.2)	.034 (15.4)	.004	.000 (1.4)	.065 (4)	.012	.004 (1.4)
TELCO CHURN	18	7043	.688	.058 (2.4)	.005	-.159 (1.4)	.037 (23.4)	.019	-.032 (8.2)	.017 (9.4)	.006	-.009 (12.4)
GENDER	20	3168	.999	.003 (2.4)	.001	.002 (3.2)	.000 (4.2)	.000	.000 (2.4)	.003 (11.4)	.001	.000 (2.4)
BANKNOTE	4	1372	.355	.142 (19.6)	.055	-.075 (8.2)	.133 (19.6)	.024	-.079 (9.4)	.120 (19.6)	.049	-.049 (9.4)
LIVER	6	345	.999	-.012 (3.8)	-.093	-.195 (29.8)	.057 (3.8)	-.024	-.067 (15.4)	.057 (3.8)	-.066	-.164 (29.4)
MAGIC	10	19020	.710	.056 (8.2)	.018	-.037 (4.2)	.018 (15.4)	.007	.000 (5.2)	.017 (18.4)	.007	-.003 (25.4)
ADULT	11	30162	.619	.146 (2.4)	.007	-.191 (1.4)	.059 (10.4)	.018	.000 (2.4)	.058 (4.2)	.011	.004 (20.4)
DIGITS5	64	3915	.381	.030 (4.2)	.014	-.008 (3.2)	.009 (4.2)	-.031	-.058 (19.4)	.070 (4.2)	-.004	-.034 (19.4)
INSURANCE	6	1338	.163	.104 (7.2)	.017	-.567 (1.4)	.172 (4.2)	.018	-.011 (5.2)	.172 (4.2)	.020	-.011 (5.2)
FRIEDMAN1	10	2000	.083	.013 (4)	-.002	-.012 (3.2)	.025 (4)	.006	.000 (1.4)	.025 (4)	.005	.000 (1.4)
FRIEDMAN2	4	10000	.149	.165 (3.2)	-.021	-.612 (1.4)	.084 (10.4)	.019	-.068 (5.2)	.080 (8.2)	.016	-.068 (5.2)
FRIEDMAN3	4	5000	.060	.009 (4.6)	.003	-.012 (4)	.021 (4.6)	.002	.000 (1.4)	.021 (4.6)	.002	.000 (1.4)
WAGE	5	1379	.419	.017 (6.6)	-.021	-.048 (4.6)	.065 (6.6)	.000	-.027 (18.2)	.065 (6.6)	-.002	-.014 (21.4)
DEMOGRAPHICS	13	6876	.229	.011 (5.2)	.003	.000 (1.4)	.007 (3.2)	.002	.000 (1.4)	.007 (3.2)	.002	.000 (1.4)
GDP	1	35	.038	.003 (3.2)	.000	-.001 (5.2)	.003 (3.2)	.000	-.001 (5.2)	.003 (3.2)	.000	-.001 (5.2)
USED CARS	4	1770	.198	.178 (3.2)	-.019	-.549 (1.4)	.113 (14)	.055	.000 (3.2)	.089 (8.8)	.035	.000 (3.2)
DIABETES	10	442	.169	.026 (4.4)	-.004	-.033 (3.4)	.058 (4.4)	-.002	-.011 (29.8)	.058 (4.4)	.002	-.008 (29.4)
BOSTON	13	506	.097	.019 (4.4)	-.001	-.025 (3.8)	.044 (4.4)	.006	-.011 (8.6)	.044 (4.4)	.006	-.011 (9.2)
WORLD HAPPINESS	8	315	.051	.010 (5.2)	-.003	-.012 (3.8)	.013 (5.2)	.002	-.010 (4.4)	.023 (5.2)	.002	-.001 (23.6)
LIFE EXPECTANCY	21	1649	.041	.003 (4.2)	.000	-.001 (8.2)	.007 (4.2)	.001	.000 (20.4)	.007 (4.2)	.001	-.001 (26.4)
MOBILE PRICES	20	2000	.168	.168 (2.4)	-.008	-.648 (1.4)	.058 (3.2)	.002	-.004 (8.2)	.058 (3.2)	.004	.000 (4.2)
SUICIDE RATE	5	27820	.534	.081 (2.4)	.016	-.333 (1.4)	.018 (13.4)	.008	.000 (2.4)	.024 (11.4)	.009	.000 (2.4)
VIDEO GAMES	6	16327	.723	.000 (4.2)	.000	.000 (3.2)	.000 (10.4)	.000	.000 (3.2)	.000 (10.4)	.000	.000 (3.2)
RED WINE	11	1599	.048	.003 (4.2)	.000	-.002 (3.2)	.004 (4.2)	.001	.000 (1.4)	.004 (4.2)	.001	.000 (7.4)
COVID VIC	4	85	.185	.068 (3)	.030	-.062 (10)	.103 (10.6)	-.005	-.692 (2.8)	3.448 (3)	.418	.002 (25.8)
COVID	2	225	.515	.071 (6.8)	-.037	-.399 (3.2)	.279 (3.8)	.025	-.003 (27)	25.66 (6.8)	5.388	.290 (26.8)
BICYCLE	4	122	.505	.213 (7.8)	-.021	-.333 (4)	.054 (4.6)	-.035	-.337 (4)	.011 (7.8)	-.025	-.061 (22.2)
SHIPS	4	34	.338	.076 (3.2)	-.089	-.498 (2.4)	.160 (11)	.015	-.066 (23.2)	993.4 (3.2)	181.3	.605 (29.6)
SMOKING	2	36	.216	-.017 (16.6)	-.046	-.189 (6.6)	.075 (10.2)	.029	-.043 (4.2)	.950 (2.4)	.124	.035 (14.2)