


# MYSQL

## Exercice 1 (dans le fichier cours\_mysql\_n°1)

Exo 1 = (dans cours\_mysql\_n°1)

1) Définir le SQL de ce MCD

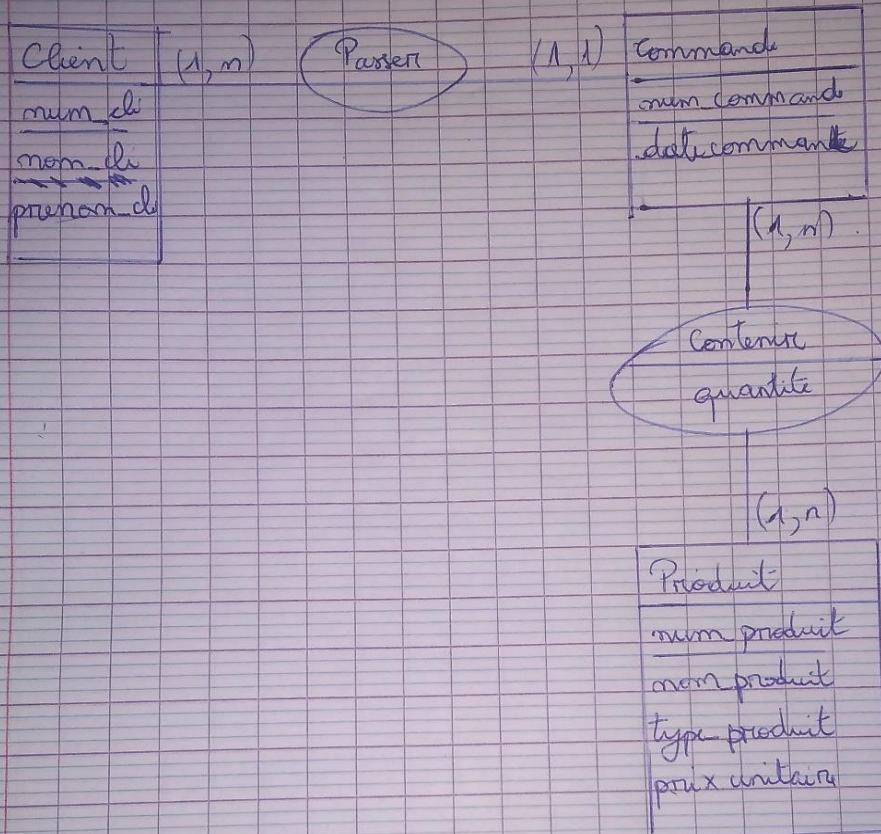

Create database commande produit;

Create table Client (num\_client int primary key, nom\_client varchar(25), prenom\_client varchar(20));

Create table Commande (num\_commande int primary key, date\_commande);

Create table Produit (num\_produit int primary key, nom\_produit varchar(15), type\_produit varchar(15), prix\_unitaire(10));



### Exercise 2 (cours\_mysql\_n°3)

```
Insert into Client (01, 'Rafenomanana', 'Thierry');
Insert into Client (02, 'Andriantohaina', 'Peno');
Insert into Client (03, 'Rakotonirazafy', 'Tiana');
Insert into Client (04, 'Zafianison', 'Niaina');
Insert into Client (05, 'Rakotoarumalala', 'Namy');

Insert into Product (001, 'lait', 'aliment', 15000);
Insert into Product (002, 'couteur', 'accessoire', 20000);
Insert into Product (003, 'tennis', 'chaussure', 55000);
Insert into Product (004, 'legume', 'aliment', 5000);
Insert into Product (005, 'riz', 'aliment', 1500);
```

```
Insert into Commande (101, '01/01/26', 01);
Insert into Commande (102, '12/4/26', 02);
Insert into Commande (103, '20/12/26', 03);
Insert into Commande (104, '26/10/26', 04);
Insert into Commande (105, '10/9/26', 05);
```

### Exercise 3(cours\_mysql\_n°4)

```
Select * from client;
Select * from commande;
Select nom_product, type_product from Product;
```

### Exercise 4

Alter table commande num\_cli  
 Add Foreign key (num\_cli)  
 References Client (num\_cli)  
  
 Create table Conteneur (num\_commande INT, num\_product int,  
 quantite int, primary key (num\_commande,  
 num\_product), foreign key (num\_commande  
 num\_commande) references commande(  
 num\_commande), foreign key (num\_product)  
 references Product (num\_product));

Select \* from commande where num\_cli = 101;  
 Select distinct num\_cli from client order by num\_cli;  
 Select \* from commande where date\_commande = 04;  
 Select \* from commande where num\_commande = 102;

#### Exercise 5

Select nom\_client from client where nom\_cli like 'A%';  
 Select \* from client where nom\_cli or prenom\_cli like  
 'RAKOTO%';  
 Select \* from client where prenom\_cli is Null;

#### Exercise 6



```

Select num_cli, count(*) as Nombre from Client;
Select * from Commande;
Select num_commande, sum(num_cli) from Commande;
group by num_commande;
Select sum(conteneur.quantite) as nombre_bouteille from
Conteneur Join Produit on conteneur.num_product =
Produit.num_product where conteneur.num_commande =
101 and Produit.type_product = 'biere';

```

#### Exercise 7

```

Select * from * from Client Ordered by num_cli;
Select * from Commande where date_commande = 04;
Select * from Commande Order by date_commande DESC;

```

#### Exercise 8

```

Delete from tab Client where num_cli = 01;
Delete from Client where num_cli = 04;

Update Produit
Set prix_unitaire = prix_unitaire * 10;
Where num_product = 001;

Update Produit
Set type_product = 'verre' 'ustensiles'
where num_product = 'économeur';

Update Produit
Set num_product = '001' '003'
Where num_product = 003;

```